



2


1




Limit Switch
(24VAC)



Pressure Switch
(24VAC)




Call For Heat
(24VAC)




Fan-only
(24VAC)

Direct Flame Spoofer

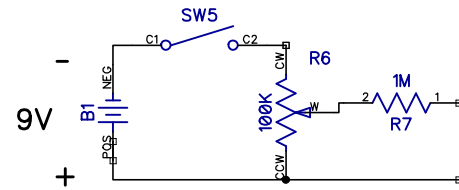

R32/C17


Circuit Ground
(From R44)

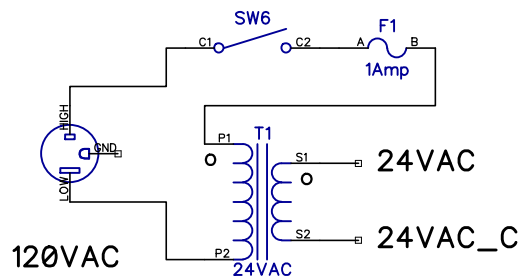

+12V ——— L1

0V ——— Neutral

P2-4



P2-6
(Neutral)

Inducer
(12VDC)


P2-1



P2-3
(Neutral)

Igniter
(12VDC)

HEAT
(Blade)



Neutral
(Blade)

Blower
(12VDC)


P1-4



P1-2
(24VAC_C)

Gas Valve
(24VAC)

FAN
(Blade)



Neutral
(Blade)

Fan-only
(12VDC)

Use Ultra Bright LEDs

Test Fixture for
RUUD 62-24084-82
and ICM-288
For Low Voltage
Testing

Jed Margolin
July 2013

2

1