

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address: COMMISSIONER FOR PATENTS P.O. Box 1450 Alexandria, Virginia 22313-1450

Alexandria, Virginia 22313-1450 www.uspto.gov

APPLICATION NO.	ISSUE DATE	PATENT NO.	ATTORNEY DOCKET NO.	CONFIRMATION NO.
11/736,356	09/16/2014	8838289		3649

17750,550

JED MARGOLIN 1981 EMPIRE ROAD RENO, NV 89521-7430

23497

ISSUE NOTIFICATION

The projected patent number and issue date are specified above.

08/27/2014

Determination of Patent Term Adjustment under 35 U.S.C. 154 (b)

(application filed on or after May 29, 2000)

The Patent Term Adjustment is 2419 day(s). Any patent to issue from the above-identified application will include an indication of the adjustment on the front page.

If a Continued Prosecution Application (CPA) was filed in the above-identified application, the filing date that determines Patent Term Adjustment is the filing date of the most recent CPA.

Applicant will be able to obtain more detailed information by accessing the Patent Application Information Retrieval (PAIR) WEB site (http://pair.uspto.gov).

Any questions regarding the Patent Term Extension or Adjustment determination should be directed to the Office of Patent Legal Administration at (571)-272-7702. Questions relating to issue and publication fee payments should be directed to the Application Assistance Unit (AAU) of the Office of Data Management (ODM) at (571)-272-4200.

APPLICANT(s) (Please see PAIR WEB site http://pair.uspto.gov for additional applicants):

Jed Margolin, VC Highlands, NV;

The United States represents the largest, most dynamic marketplace in the world and is an unparalleled location for business investment, innovation, and commercialization of new technologies. The USA offers tremendous resources and advantages for those who invest and manufacture goods here. Through SelectUSA, our nation works to encourage and facilitate business investment. To learn more about why the USA is the best country in the world to develop technology, manufacture products, and grow your business, visit <u>SelectUSA.gov</u>.

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address: COMMISSIONER FOR PATENTS P.O. Box 1450 Alexandria, Virginia 22313-1450

NOTICE OF ALLOWANCE AND FEE(S) DUE

23497 7590 JED MARGOLIN 1981 EMPIRE ROAD RENO, NV 89521-7430 08/13/2014

EXAMINER

MANCHO, RONNIE M

ART UNIT PAPER NUMBER

3664

DATE MAILED: 08/13/2014

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
11/736,356	04/17/2007	Jed Margolin		3649

TITLE OF INVENTION: System and Method For Safely Flying Unmanned Aerial Vehicles in Civilian Airspace

	APPLN. TYPE	ENTITY STATUS	ISSUE FEE DUE	PUBLICATION FEE DUE	PREV. PAID ISSUE FEE	TOTAL FEE(S) DUE	DATE DUE
nonprovisional		SMALL	\$480	\$0	\$0	\$480	11/13/2014

THE APPLICATION IDENTIFIED ABOVE HAS BEEN EXAMINED AND IS ALLOWED FOR ISSUANCE AS A PATENT. PROSECUTION ON THE MERITS IS CLOSED. THIS NOTICE OF ALLOWANCE IS NOT A GRANT OF PATENT RIGHTS. THIS APPLICATION IS SUBJECT TO WITHDRAWAL FROM ISSUE AT THE INITIATIVE OF THE OFFICE OR UPON PETITION BY THE APPLICANT. SEE 37 CFR 1.313 AND MPEP 1308.

THE ISSUE FEE AND PUBLICATION FEE (IF REQUIRED) MUST BE PAID WITHIN THREE MONTHS FROM THE MAILING DATE OF THIS NOTICE OR THIS APPLICATION SHALL BE REGARDED AS ABANDONED. THIS STATUTORY PERIOD CANNOT BE EXTENDED. SEE 35 U.S.C. 151. THE ISSUE FEE DUE INDICATED ABOVE DOES NOT REFLECT A CREDIT FOR ANY PREVIOUSLY PAID ISSUE FEE IN THIS APPLICATION. IF AN ISSUE FEE HAS PREVIOUSLY BEEN PAID IN THIS APPLICATION (AS SHOWN ABOVE), THE RETURN OF PART B OF THIS FORM WILL BE CONSIDERED A REQUEST TO REAPPLY THE PREVIOUSLY PAID ISSUE FEE TOWARD THE ISSUE FEE NOW DUE.

HOW TO REPLY TO THIS NOTICE:

I. Review the ENTITY STATUS shown above. If the ENTITY STATUS is shown as SMALL or MICRO, verify whether entitlement to that entity status still applies.

If the ENTITY STATUS is the same as shown above, pay the TOTAL FEE(S) DUE shown above.

If the ENTITY STATUS is changed from that shown above, on PART B - FEE(S) TRANSMITTAL, complete section number 5 titled "Change in Entity Status (from status indicated above)".

For purposes of this notice, small entity fees are 1/2 the amount of undiscounted fees, and micro entity fees are 1/2 the amount of small entity fees

II. PART B - FEE(S) TRANSMITTAL, or its equivalent, must be completed and returned to the United States Patent and Trademark Office (USPTO) with your ISSUE FEE and PUBLICATION FEE (if required). If you are charging the fee(s) to your deposit account, section "4b" of Part B - Fee(s) Transmittal should be completed and an extra copy of the form should be submitted. If an equivalent of Part B is filed, a request to reapply a previously paid issue fee must be clearly made, and delays in processing may occur due to the difficulty in recognizing the paper as an equivalent of Part B.

III. All communications regarding this application must give the application number. Please direct all communications prior to issuance to Mail Stop ISSUE FEE unless advised to the contrary.

IMPORTANT REMINDER: Utility patents issuing on applications filed on or after Dec. 12, 1980 may require payment of maintenance fees. It is patentee's responsibility to ensure timely payment of maintenance fees when due.

PART B - FEE(S) TRANSMITTAL

Complete and send this form, together with applicable fee(s), to: Mail

Mail Stop ISSUE FEE
Commissioner for Patents
P.O. Box 1450
Alexandria, Virginia 22313-1450
(571)-273-2885

appropriate. All further	correspondence includir ed below or directed otl	ig the	Patent, advance or	JE FEE and PUBLICAT rders and notification of a specifying a new corre	maintenance fees v	vill be	mailed to the current	correspondence addres	ss as
CURRENT CORRESPOND	ENCE ADDRESS (Note: Use B	ock 1 for	any change of address)	Fee	(s) Transmittal. Th ers. Each additiona	is certif Loaper	ficate cannot be used f	or domestic mailings of for any other accompany ent or formal drawing, r	ying
²³⁴⁹⁷ JED MARGOI 1981 EMPIRE F RENO, NV 895	LIN ROAD	/2014		I he Star add tran	Cereby certify that thes Postal Service versed to the Mainsmitted to the USP	tificate is Fee(vith suf I Stop TO (57	e of Mailing or Trans s) Transmittal is being ficient postage for fir ISSUE FEE address 1) 273-2885, on the day	mission g deposited with the Un st class mail in an enve above, or being facsi ate indicated below.	nited lope mile
KENO, INV 893.	21-7430							(Depositor's n	ame)
				<u> </u>				(Signa	ture)
								I)	Date)
APPLICATION NO.	FILING DATE			FIRST NAMED INVENTOR	<u> </u>	ATTO	RNEY DOCKET NO.	CONFIRMATION NO.	
11/736,356	04/17/2007			Jed Margolin		<u> </u>		3649	
FITLE OF INVENTION	I: System and Method Fo	r Safel	y Flying Unmanne	d Aerial Vehicles in Civil	ian Airspace				
	·				•				
APPLN. TYPE	ENTITY STATUS	IS	SUE FEE DUE	PUBLICATION FEE DUE	PREV. PAID ISSU	E FEE	TOTAL FEE(S) DUE	DATE DUE	
nonprovisional	SMALL		\$480	\$0	\$0		\$480	11/13/2014	
EXAM	IINER		ART UNIT	CLASS-SUBCLASS]				
MANCHO,	RONNIE M		3664	701-002000	_				
1. Change of correspond	ence address or indicatio	n of "F	ee Address" (37	2. For printing on the p	patent front page, li	st			—
CFR 1.363).	ondence address (or Cha	nge of	Correspondence	(1) The names of up to or agents OR, alternati		nt attori	neys 1		—
	oondence address (or Cha B/122) attached.			(2) The name of a sing	le firm (having as a	nemb	per a 2		
☐ "Fee Address" ind PTO/SB/47; Rev 03-0 Number is required.	lication (or "Fee Address 02 or more recent) attach	" Indica ed. Use	ation form e of a Customer	registered attorney or 2 registered patent atto- listed, no name will be	orneys or agents. If	es of u no nam	p to ne is 3		
3 ASSIGNEE NAME A	ND RESIDENCE DATA	A TO B	E PRINTED ON T	THE PATENT (print or ty	ne)				
				data will appear on the p T a substitute for filing an	. ,	ee is ic	dentified below, the d	ocument has been filed	l for
recordation as set fort (A) NAME OF ASSI		oletion	of this form is NO	T a substitute for filing an (B) RESIDENCE: (CITY	-				
(A) NAME OF ASSI	ONEE			(b) RESIDENCE. (CIT.	and STATE OR C	JOONI	.K1)		
Please check the appropr	riate assignee category or	catego	ries (will not be pr	inted on the patent): \Box	Individual 🖵 C	orporati	ion or other private gro	oup entity 📮 Governm	nent
4a. The following fee(s)	are submitted:		41:	o. Payment of Fee(s): (Plea	ase first reapply a	ny prev	viously paid issue fee	shown above)	
Issue Fee				A check is enclosed.					
	No small entity discount p of Copies			Payment by credit can The Director is hereby				eficiency or credits any	
Advance Order - #	of Copies			overpayment, to Depo	osit Account Numb	er	(enclose a	n extra copy of this form	n).
	tus (from status indicate ng micro entity status. Se			NOTE Almost a Plant		T	City of the Communication of the City of t	0/0D/15 A - 1 15D\ '	
_	· ·			NOTE: Absent a valid ce fee payment in the micro	entity amount will	not be	accepted at the risk of	application abandonme	ent.
☐ Applicant assertin	g small entity status. See	37 CF	R 1.27	NOTE: If the application to be a notification of los	was previously un s of entitlement to	der mic micro e	ero entity status, check entity status.	ing this box will be take	en
Applicant changin	ng to regular undiscounte	d fee st	atus.	NOTE: Checking this bo entity status, as applicable		e a noti	ification of loss of enti	tlement to small or mic	ro
NOTE: This form must b	be signed in accordance v	vith 37	CFR 1.31 and 1.33	3. See 37 CFR 1.4 for sign	ature requirements	and cer	rtifications.		_
Authorized Signature					Date				
Typed or printed nam	e				Registration N	No			

Page 2 of 3



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address: COMMISSIONER FOR PATENTS P.O. Boy 1450

P.O. Box 1450 Alexandria, Virginia 22313-1450 www.uspto.gov

DATE MAILED: 08/13/2014

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
11/736,356	04/17/2007	Jed Margolin		3649
23497 75	90 08/13/2014		EXAM	INER
JED MARGOLIN			MANCHO,	RONNIE M
1981 EMPIRE RO	AD			1
RENO, NV 89521-	7430		ART UNIT	PAPER NUMBER
			3664	

Determination of Patent Term Adjustment under 35 U.S.C. 154 (b)

(Applications filed on or after May 29, 2000)

The Office has discontinued providing a Patent Term Adjustment (PTA) calculation with the Notice of Allowance.

Section 1(h)(2) of the AIA Technical Corrections Act amended 35 U.S.C. 154(b)(3)(B)(i) to eliminate the requirement that the Office provide a patent term adjustment determination with the notice of allowance. See Revisions to Patent Term Adjustment, 78 Fed. Reg. 19416, 19417 (Apr. 1, 2013). Therefore, the Office is no longer providing an initial patent term adjustment determination with the notice of allowance. The Office will continue to provide a patent term adjustment determination with the Issue Notification Letter that is mailed to applicant approximately three weeks prior to the issue date of the patent, and will include the patent term adjustment on the patent. Any request for reconsideration of the patent term adjustment determination (or reinstatement of patent term adjustment) should follow the process outlined in 37 CFR 1.705.

Any questions regarding the Patent Term Extension or Adjustment determination should be directed to the Office of Patent Legal Administration at (571)-272-7702. Questions relating to issue and publication fee payments should be directed to the Customer Service Center of the Office of Patent Publication at 1-(888)-786-0101 or (571)-272-4200.

OMB Clearance and PRA Burden Statement for PTOL-85 Part B

The Paperwork Reduction Act (PRA) of 1995 requires Federal agencies to obtain Office of Management and Budget approval before requesting most types of information from the public. When OMB approves an agency request to collect information from the public, OMB (i) provides a valid OMB Control Number and expiration date for the agency to display on the instrument that will be used to collect the information and (ii) requires the agency to inform the public about the OMB Control Number's legal significance in accordance with 5 CFR 1320.5(b).

The information collected by PTOL-85 Part B is required by 37 CFR 1.311. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, Virginia 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, Virginia 22313-1450. Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Privacy Act Statement

The Privacy Act of 1974 (P.L. 93-579) requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

- 1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether disclosure of these records is required by the Freedom of Information Act.
- 2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
- 3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
- 4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
- 5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
- 6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
- 7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (i.e., GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
- 8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspection or an issued patent.
- 9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

	Application No. 11/736,356	Applicant(s	
Notice of Allowability	Examiner	Art Unit	AIA (First Inventor to
notice of rinewalanty	RONNIE MANCHO	3664	File) Status No
The MAILING DATE of this communication appear All claims being allowable, PROSECUTION ON THE MERITS IS (herewith (or previously mailed), a Notice of Allowance (PTOL-85) of NOTICE OF ALLOWABILITY IS NOT A GRANT OF PATENT RIC of the Office or upon petition by the applicant. See 37 CFR 1.313	OR REMAINS) CLOSED in this ap or other appropriate communicatio GHTS. This application is subject t	oplication. If no n will be mailed	ce address ot included d in due course. THIS
 This communication is responsive to <u>5/23/14</u>. A declaration(s)/affidavit(s) under 37 CFR 1.130(b) was/v 	were filed on		
2. \square An election was made by the applicant in response to a restr requirement and election have been incorporated into this ac		the interview o	n; the restriction
3. A The allowed claim(s) is/are 1.3-8 and 10-14. As a result of the Prosecution Highway program at a participating intellectual please see http://www.uspto.gov/patents/init_events/pph/indegetats	property office for the correspondi	ing application.	For more information,
 4. ☐ Acknowledgment is made of a claim for foreign priority under Certified copies: a) ☐ All b) ☐ Some *c) ☐ None of the: 1. ☐ Certified copies of the priority documents have 2. ☐ Certified copies of the priority documents have 3. ☐ Copies of the certified copies of the priority documents have International Bureau (PCT Rule 17.2(a)). * Certified copies not received: 	been received. been received in Application No	<u></u>	application from the
Applicant has THREE MONTHS FROM THE "MAILING DATE" on noted below. Failure to timely comply will result in ABANDONMETHIS THREE-MONTH PERIOD IS NOT EXTENDABLE.		complying with	h the requirements
5. \square CORRECTED DRAWINGS (as "replacement sheets") must	be submitted.		
including changes required by the attached Examiner's Paper No./Mail Date	Amendment / Comment or in the	Office action of	
Identifying indicia such as the application number (see 37 CFR 1.8 each sheet. Replacement sheet(s) should be labeled as such in the			(not the back) of
6. DEPOSIT OF and/or INFORMATION about the deposit of BI attached Examiner's comment regarding REQUIREMENT FO			the
Attachment(s) 1. Notice of References Cited (PTO-892) 2. Information Disclosure Statements (PTO/SB/08), Paper No./Mail Date 3. Examiner's Comment Regarding Requirement for Deposit of Biological Material 4. Interview Summary (PTO-413), Paper No./Mail Date .	5. ⊠ Examiner's Amend 6. ⊠ Examiner's Staten 7. □ Other		
/RONNIE MANCHO/ Primary Examiner, Art Unit 3664			

Application/Control Number: 11/736,356 Page 2

Art Unit: 3664

DETAILED ACTION

1. The present application is being examined under the pre-AIA first to invent provisions.

EXAMINER'S AMENDMENT

An examiner's amendment to the record appears below. Should the changes and/or additions be unacceptable to applicant, an amendment may be filed as provided by 37 CFR
 1.312. To ensure consideration of such an amendment, it MUST be submitted no later than the

The application has been amended as follows:

Please cancel claim 2.

payment of the issue fee.

Further please amend claim 1 as follows:

In claim 1 please replace the phrase, "autonomous control system" with

-- autonomous control system, wherein said selected phases of the flight of said

unmanned aerial vehicle comprise:

(a) when said unmanned aerial vehicle is within a selected range of an airport or other

designated location and is below a first specified altitude;

(b) when said unmanned aerial vehicle is outside said selected range of an airport or other

designated location and is below a second specified altitude.--

Further please cancel claim 9.

Further please amend claim 8 as follows:

In claim 8 please replace the phrase, "....this information to said remote pilot." with

-- this information to said remote pilot; wherein said selected phases of the flight of said unmanned aerial vehicle comprise:

- (a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;
- (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.--

Allowable Subject Matter

- 3. Claims 1, 3, 4, 5-7, 8, 10-14 are allowed.
- 4. The following is an examiner's statement of reasons for allowance:

Board's partial reversal.

This statement is not intended to necessarily state all the reasons for allowance or all the details why the claims are allowed and has not been written to specifically or impliedly state that all the reasons for allowance are set forth (MPEP 1302.14).

The dependent claims are allowed for depending on an allowed base claim.

Any comments considered necessary by applicant must be submitted no later than the payment of the issue fee and, to avoid processing delays, should preferably accompany the issue fee. Such submissions should be clearly labeled "Comments on Statement of Reasons for Allowance."

Application/Control Number: 11/736,356 Page 4

Art Unit: 3664

Communication

5. Any inquiry concerning this communication or earlier communications from the

examiner should be directed to RONNIE MANCHO whose telephone number is (571)272-6984.

The examiner can normally be reached on Mon-Thurs: 9-10.

If attempts to reach the examiner by telephone are unsuccessful, the examiner's

supervisor, Tran Khoi can be reached on 571-272-6919. The fax phone number for the

organization where this application or proceeding is assigned is 571-273-8300.

Information regarding the status of an application may be obtained from the Patent

Application Information Retrieval (PAIR) system. Status information for published applications

may be obtained from either Private PAIR or Public PAIR. Status information for unpublished

applications is available through Private PAIR only. For more information about the PAIR

system, see http://pair-direct.uspto.gov. Should you have questions on access to the Private PAIR

system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-free). If you would

like assistance from a USPTO Customer Service Representative or access to the automated

information system, call 800-786-9199 (IN USA OR CANADA) or 571-272-1000.

Ronnie Mancho Primary Examiner Art Unit 3664

/Ronnie Mancho/

Primary Examiner of Art Unit 3664

Issue Classification	n

Application/Control No.	Applicant(s)/Patent under Reexamination
11/736,356	MARGOLIN, JED
Examiner	Art Unit

19								1122	F C	ΙΔς	SIF	CAT		<u> </u>						
ORIGINAL								 		LAU	OII			REFERE	NCE/C	`				
	CL A		T		ACC	+	N ACC										^			
CLASS SUBCLASS CLASS							1 4				E SUBCLA	455 PE	R BLOCK	<u> </u>						
	70	1		2			3		4	1	1	14		36						
l II	NTEF	RNATIC	NAL C	LASSIFIC	CATION		244	15	8.1	18	9	190)							
G	0	6	F	19/	00															
						-														
				/		-							-		_					
				/																
				/																
				/																
						-									1				I	
																Total C	`laim	مالا ء	wed.	12
		/ A = =:	oto-t F	Examine	ر. ا)oto)										. O.u.	- IWIIII	J AIIO	., cu .	
\vdash		(ASSI	ыапт Е	xamme	i) (L	Oate)			/Ro	nnie I	Manc	ho/ 7	/28/	14			.G.			.G.
ĺ									, , , , ,	0		, ,	,			Print C		s)		t Fig.
	(Le	gal In	strume	nts Exai	miner)	(Date	∍)		(Pri	mary Exa	aminer)		(Date	e)				•		
	,					•	*										1			1
	-			_											I					
<u> </u> L	c	laims	renu	mbere	d in th	e sam	e orde	er as p	reser	ited by	/ appl	icant		PA		☐ T.D) <u>. </u>		□ R.	1.47
-	_	<u>a</u>		_	<u> </u>		_	<u> </u>		_	<u> </u>		_	<u> </u>		_	펼		-	<u> </u>
Ι.	Final	Original		Final	Original		Final	Original		Final	Original		Final	Original		Final	Original		Final	Original
'	_	ŏ		"	Ŏ		"	ŏ		"	Ò		ш	ŏ		"	δ		ш	ŏ
	1	1	1		31	i		61	i		91	-		121	ľ		151			181
		2	ĺ		32	İ		62	İ		92			122			152			182
	2	3]		33			63			93			123			153			183
	3	4]		34]		64]		94			124			154			184
	4	5	ļ		35			65			95	_		125			155			185
-	5	6	ļ		36			66			96	_		126			156			186
-	6	7	ł		37	-		67	-		97	_		127			157			187
\vdash	7	8 	-		38 39	{		68 69	{		98 99	1		128 129	ļ		158 159			188 189
\vdash	8	10	1		40	1		70	1		100	-		130	}		160			190
-	9	11	1		41	1		71	1		101	1		131	ŀ		161			191
	10	12	1		42	1		72	1		102	1		132	ŀ		162			192
-	11	13	1		43	Ī		73	Ī		103	1		133	ŀ		163			193
	12	14]		44]		74	j		104]		134			164			194
		15]		45]		75]		105			135			165			195
		16]		46			76	ļ		106]		136			166			196
		17	1		47			77]		107			137			167			197
<u> </u>		18	-		48			78	ļ		108	4		138			168			198
\vdash		19	-		49	-		79	-		109	-		139	,		169			199
\vdash		20	-		50	{		80	{		110	-		140			170			200
\vdash		21 22	-		51 52	{		81 82	{		111 112	-		141 142	ŀ		171 172			201 202
-		23	{		53	{		83	{		113	1		143	ŀ		172			202
\vdash		24	1		54	{		84	{		114	-		144			174			203
\vdash		25	1		55	1		85	1		115	1		145	ŀ		175			205
		26	1		56	1		86	f		116	1		146	ŀ		176			206
\vdash	-	07	1	\vdash	57	1	—	07	1	—	117	1		147	ŀ		177			007

RONNIE MANCHO

Search Notes

Application/Control No.	Applicant(s)/Pate Reexamination	ent under				
11/736,356	MARGOLIN, JED					
Examiner	Art Unit					
RONNIE MANCHO	3664					

SEARCHED									
Class	Subclass	Date	Examiner						
701	2	7/28/2014	RM						
	3	7/28/2014	RM						
	4	7/28/2014	RM						
	11	7/28/2014	RM						
	14	7/28/2014	RM						
	36	7/28/2014	RM						
	28	7/28/2014	RM						
	120	7/28/2014	RM						
244	158.1	7/28/2014	RM						
	189	7/28/2014	RM						
	190	7/28/2014	RM						

INTERFERENCE SEARCHED								
Class	Subclass	Date	Examiner					
701	2	7/28/2014	RM					
	3	7/28/2014	RM					
	4	7/28/2014	RM					
	, 14, 36 , 189, 190	7/28/2014	RM					

SEARC (INCLUDING SE	CH NOTES ARCH STRATEGY)
	DATE	EXMR
EAST	7/28/2014	RM

Index of Claims

App	licatio	n/Contro	l No.
-----	---------	----------	-------

11/736,356

Examiner

RONNIE MANCHO

Applicant(s)/Patent under Reexamination

MARGOLIN, JED

Art Unit

3664

 √	Rejected
_	Allowed

ı	(Through numeral) Cancelled
÷	Restricted

Z	Non-Elected
ı	Interference

A	Appeal
0	Objected

							ı			
Cla	im	Date							\neg	
	uill					Jale	,			러
<u></u>	Original	/14								
Final	rig	1/28								
		_								
1	1	=								Ц
	2									Щ
2 3	3	=								Щ
3	2 3 4 5 6	=				_				Ш
4 5	5	=				_				\vdash
5		=				_				Н
6 7	7 8	=		\vdash		_				\vdash
<u> </u>	9	=				_				Н
8	10	_								Н
9	11	Ε								H
10	12	=		\vdash		_		-		Н
11	12 13 14 15	-	\vdash	\vdash	\vdash	\vdash	H	\vdash	\vdash	Н
12	1/1	-								Н
 '-	15	⊢				\vdash				Н
\vdash	16	\vdash		\vdash		\vdash	Н			Н
	16 17	Н		\vdash		\vdash	H			Н
	18	H	H	\vdash		\vdash	H			H
	18 19	\vdash		\vdash		\vdash	Н			Н
	20									
	21									H
	22									
	23	Т								П
	24									
	20 21 22 23 24 25 26									
	26									
	27									
	28									
	29									
	30									П
	31									
	32									
	33									
	34									Ш
	35									Ш
	36									Ш
<u> </u>	37	_		_		_	Ш			Ш
<u> </u>	38	$ldsymbol{ldsymbol{ldsymbol{eta}}}$	_	$ldsymbol{ldsymbol{ldsymbol{eta}}}$	_	<u> </u>	Ш		<u> </u>	Щ
	39		_	\vdash	_	<u> </u>	Ш	_	_	Щ
	40		_	$ldsymbol{ldsymbol{ldsymbol{eta}}}$	_	<u> </u>			<u> </u>	Щ
	41	_		\vdash		<u> </u>	Ш	_		Щ
	42	\vdash	_	\vdash	_	<u> </u>	Ш	_		Щ
<u> </u>	43	H		\vdash		<u> </u>		_		Щ
	44			_		_		_		Щ
	45	\vdash		\vdash		<u> </u>		_		Щ
	46	L	<u> </u>	<u> </u>	<u> </u>	_				Щ
<u> </u>	47	H	_	\vdash		<u> </u>		_	<u> </u>	Щ
<u> </u>	48	\vdash	<u> </u>	\vdash	<u> </u>	\vdash	H	<u> </u>	<u> </u>	Н
<u> </u>	49	\vdash	<u> </u>	\vdash	ļ	<u> </u>	\vdash	<u> </u>	<u> </u>	Щ
[50	ı	ĺ	ı	ĺ	ı	1	1	ĺ	ıl

Cla	Claim		Date							
<u></u>	Original									
Final	<u> </u>									
"	Ō									
	51 52 53	H		\vdash		_		_		_
	52	\vdash		\vdash						
	53									
	54 55	H		H		_		_		
	55	\vdash		\vdash				_		
	56									
	57 58	L		L				_		
	58									
	59									
	60									
	61									
	62									
	63			$ldsymbol{le}}}}}}$						
	64 65 66									
	65	oxdot		L				L		
	66									
	67									
	68									
	68 69	Г		Г						
	70									
	71									
	72	Н		Н						
	71 72 73									
	74									
	74 75									
	76									
	76 77									
	78	\vdash		\vdash						
	79	\vdash		\vdash						
	80	H		\vdash						
	81									
	82	\vdash		\vdash		_		\vdash		
	02									
-	83	\vdash		\vdash				\vdash		
	84 85	\vdash	_	\vdash		_		\vdash		
-	85	\vdash	-	\vdash	H	<u> </u>	-	\vdash	-	
	86	\vdash		\vdash	Н	_		_		
<u> </u>	87	\vdash	_	\vdash	Н	_		\vdash	_	
	88	\vdash		\vdash	Ш	_		<u> </u>	<u> </u>	
ļ	89	\vdash		\vdash				_		
	90									
	91	\vdash		\vdash				_		
	92	$ldsymbol{ldsymbol{ldsymbol{eta}}}$		$ldsymbol{ldsymbol{ldsymbol{eta}}}$				_		
	93	$oxed{oxed}$		$oxed{oxed}$	Ш					
	94									
	95									
	96									
	97									
	98									
	99									

									l	
Cla	aim	L			_ [Date	9			_
Final	Original									
	101									
	101 102									
	103									
	103 104									
	105									
	106									
	107									
	108									
	109									
	110									
	111 112	\vdash	<u> </u>	H		<u> </u>			-	\vdash
	113	\vdash				_				
	11/	\vdash								\vdash
	114 115	\vdash		H				_		\vdash
	116									
	117									
	112									
	119									
	120									
	119 120 121									
	122 123									
	123									
	124 125 126									
	125									
	127	H								
	127 128	\vdash								
	129	Н								
	130									
	130 131									
	132									
	133									
	134									
	135	\vdash	_							Щ
	136	H								Щ
	137	\vdash	-	H		_	\vdash		-	\vdash
	138 139	\vdash	_	H					_	\vdash
	140	\vdash								\vdash
	141	H								\vdash
	142	Г								\square
	143									
	144									
	145									
	146	$oxed{\Box}$								Ш
	147									
	148	L								\square
	149	\vdash	_							Ш
	150					<u> </u>				



UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address: COMMISSIONER FOR PATENTS P.O. Box 1450 Alexandria, Virginia 22313-1450 www.uspto.gov

BIB DATA SHEET

CONFIRMATION NO. 3649

SERIAL NUM	BER	FILING O	r 371(c)		CLASS	GROUP ART	UNIT	ATTO	DRNEY DOCKET NO.	
11/736,35	6	04/17/2	_		701	3664				
		RUL	E							
APPLICANTS	S									
INVENTORS Jed Marg	INVENTORS Jed Margolin, VC Highlands, NV;									
	** CONTINUING DATA ***********************************									
** FOREIGN AF	PPLICA	ATIONS *****	******	*****	*					
** IF REQUIRE 02/05/200		REIGN FILING	G LICENS	E GRA	NTED ** ** SMA	LL ENTITY **				
Foreign Priority claime		Yes No	 	ter	STATE OR COUNTRY	SHEETS DRAWINGS	TOT		INDEPENDENT	
	RONNIE N	Л	Allowa RM	ince			CLAII		CLAIMS	
	MANCHO/ Examiner's		Initials		NV	4	14	-	4	
ADDRESS										
JED MAR 1981 EMF RENO, N UNITED S	PIRE R V 8952	OAD 1-7430								
TITLE										
System a	nd Meth	hod For Safe	ly Flying U	nmanr	ned Aerial Vehicle	es in Civilian A	irspace			
						☐ All Fe	es			
	0	A the State of	h	! . D		1.16	ees (Fil	ing)		
		Authority has	-		•	NT 1.171	ees (Pr	ocess	ing Ext. of time)	
	ECEIVED INO to charge/death DET OSH ACCOUNT									
						☐ Other				
						☐ Credi	t			

PART B - FEE(S) TRANSMITTAL

Complete and send this form, together with applicable fee(s), to: Mail Mail Stop ISSUE FEE

RENO, NV 89521-7430

Commissioner for Patents P.O. Box 1450 Alexandria, Virginia 22313-1450

(Depositor's name

or Fax (571)-273-2885

INSTRUCTIONS: This form should be used for transmitting the ISSUE FEE and PUBLICATION FEE (if required). Blocks 1 through 5 should be completed where appropriate. All further correspondence including the Patent, advance orders and notification of maintenance fees will be mailed to the current correspondence address as indicated unless corrected below or directed otherwise in Block 1, by (a) specifying a new correspondence address; and/or (b) indicating a separate "FEE ADDRESS" for maintenance fees will be mailed to the current correspondence address; and/or (b) indicating a separate "FEE ADDRESS" for maintenance fee notifications.

Note: A certificate of mailing can only be used for domestic mailings of the Fee(s) Transmittal. This certificate cannot be used for any other accompanying papers. Each additional paper, such as an assignment or formal drawing, must have its own certificate of mailing or transmission. CURRENT CORRESPONDENCE ADDRESS (Note: Use Block 1 for any change of address) Certificate of Mailing or Transmission 23497 7590 08/13/2014 I hereby certify that this Fee(s) Transmittal is being deposited with the United States Postal Service with sufficient postage for first class mail in an envelope addressed to the Mail Stop ISSUE FEE address above, or being facsimile transmitted to the USPTO (571) 273-2885, on the date indicated below. JED MARGOLIN 1981 EMPIRE ROAD

					- ··	(Signature			
						(Date			
APPLICATION NO.	FILING DATE	, , , , , , , , , , , , , , , , , , ,	FIRST NAMED INVENTOR	. A	TTORNEY DOCKET NO.	CONFIRMATION NO.			
11/736,356	04/17/2007		Jed Margolin			3649			
TITLE OF INVENTION	N: System and Method Fo	or Safely Flying Unmanne	ed Aerial Vehicles in Civili	an Aircnace		3017			
	oj olom wilo modioo i	z oatory 11ymg omname	a richar venicles in Civin	an Arrispace					
APPLN. TYPE	ENTITY STATUS	ISSUE FEE DUE	PUBLICATION FEE DUE	PREV. PAID ISSUE FI	EE TOTAL FEE(S) DUE	DATE DUE			
nonprovisional	SMALL	\$480	\$0	\$0	\$480	11/13/2014			
EXAM	MINER	ART UNIT	CLASS-SUBCLASS]					
MANCHO,	RONNIE M	3664	701-002000	•					
1. Change of correspond CFR 1.363).	lence address or indication	n of "Fee Address" (37	2. For printing on the patent front page, list						
Change of corresp	oondence address (or Cha B/122) attached.	inge of Correspondence	(1) The names of up to 3 registered patent attorneys or agents OR, alternatively,						
PTO/SB/47; Rev 03-	dication (or "Fee Address 02 or more recent) attach	" Indication form ed. Use of a Customer	registered attorney or agent) and the names of up to 2 registered patent attorneys or agents. If no name is 3						
Number is required			listed, no name will be	printed.					
3. ASSIGNEE NAME A	AND RESIDENCE DATA	A TO BE PRINTED ON	THE PATENT (print or typ	pe)					
PLEASE NOTE: Un	lless an assignee is ident	ified below, no assignee	data will appear on the part a substitute for filing an	atent. If an assignee i	s identified below, the de	ocument has been filed fo			
(A) NAME OF ASSI		pletion of this form is NO	(B) RESIDENCE: (CITY						
(H) WALKING OF ABBI	CIVEL		(B) KISIDIAYCIS, (CIT I	and STATE OR COC	MIKI)				
Please check the appropr	riate assignee category or	categories (will not be pr	inted on the patent):	Individual Corpo	oration or other private gro	oup entity Governmen			
4a. The following fee(s)	are submitted:	41	o. Payment of Fee(s): (Plea	se first reapply any p	reviously paid issue fee:	shown above)			
Issue Fee			A check is enclosed.		- · · · ·				
Publication Fee (1	No small entity discount p	permitted)	Payment by credit car	d. Form PTO-2038 is a	ուսոշիշվ. Paid throւ	ıgh EFS			

Applicant changing to regular undiscounted fee status.	NOTE: Checking this box will be taken to be a notification of loss of entitlement to small or micro entity status, as applicable.			
NOTE: This form must be signed in accordance with 37 CFR 1.31 ar	nd 1.33. See 37 CFR 1.4 for signature requirements and certifications.			
Authorized Signature <u>Jed Margelin</u> Typed or printed name <u>Jed Margolin</u>	Date 8/13/2014			
Typed or printed name Jed Margolin	Registration No.			

Advance Order - # of Copies _

5. Change in Entity Status (from status indicated above)

☐ Applicant certifying micro entity status. See 37 CFR 1.29 Applicant asserting small entity status. See 37 CFR 1.27

(enclose an extra copy of this form).

The Director is hereby authorized to charge the required fee(s), any deficiency, or credits any overpayment, to Deposit Account Number ______(enclose an extra copy of this form

NOTE: Absent a valid certification of Micro Entity Status (see forms PTO/SB/15A and 15B), issue fee payment in the micro entity amount will not be accepted at the risk of application abandonment.

NOTE: If the application was previously under micro entity status, checking this box will be taken

Electronic Patent Application Fee Transmittal						
Application Number:	11736356					
Filing Date:	17-	Apr-2007				
Title of Invention:	System and Method For Safely Flying Unmanned Aerial Vehicles in Civilian Airspace					
First Named Inventor/Applicant Name:	Jed Margolin					
Filer:	Jec	l Margolin				
Attorney Docket Number:						
Filed as Small Entity						
Utility under 35 USC 111(a) Filing Fees						
Description		Fee Code	Quantity	Amount	Sub-Total in USD(\$)	
Basic Filing:						
Pages:						
Claims:						
Miscellaneous-Filing:						
Petition:						
Patent-Appeals-and-Interference:						
Post-Allowance-and-Post-Issuance:						
Utility Appl Issue Fee		2501	1	480	480	
Extension-of-Time:						

Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Miscellaneous:				
Printed Copy of Patent - No Color	8001	5	3	15
	Total in USD (\$)			495

Electronic Acknowledgement Receipt				
EFS ID:	19859944			
Application Number:	11736356			
International Application Number:				
Confirmation Number:	3649			
Title of Invention:	System and Method For Safely Flying Unmanned Aerial Vehicles in Civilian Airspace			
First Named Inventor/Applicant Name:	Jed Margolin			
Customer Number:	23497			
Filer:	Jed Margolin			
Filer Authorized By:				
Attorney Docket Number:				
Receipt Date:	13-AUG-2014			
Filing Date:	17-APR-2007			
Time Stamp:	18:11:31			
Application Type:	Utility under 35 USC 111(a)			
Payment information:				

Submitted with Payment	yes
Payment Type	Credit Card
Payment was successfully received in RAM	\$495
RAM confirmation Number	4527
Deposit Account	
Authorized User	

File Listing:

Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
----------------------	-----------	-------------------------------------	---------------------	---------------------

1	Issue Fee Payment (PTO-85B)	rpv2_noa_PartB.pdf	106091	no	1
	issue ree rayillelit (r10-63b)		7143456f19ebf8020f6f1438362e5204f7645 152		
Warnings:					
Information:					
2 Fee Worksheet (SB06)	Fee Worksheet (SB06)	fee-info.pdf	31252	no	2
		7c65050dd11dbe7b4e6dcabe9a3d5c2092 4c9a71			
Warnings:					
Information:	}				
		Total Files Size (in bytes):	1:	37343	

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address: COMMISSIONER FOR PATENTS P.O. Box 1450 Alexandria, Virginia 22313-1450 www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
11/736,356	04/17/2007 Jed Margolin			3649
23497 JED MARGOL	7590 05/23/201 JN	EXAMINER		
1981 EMPIRE ROAD RENO, NV 89521-7430		MANCHO, RONNIE M		
			ART UNIT	PAPER NUMBER
			3664	
			MAIL DATE	DELIVERY MODE
			05/23/2014	PAPER

Please find below and/or attached an Office communication concerning this application or proceeding.

The time period for reply, if any, is set in the attached communication.

UNITED STATES PATENT AND TRADEMARK OFFICE

BEFORE THE PATENT TRIAL AND APPEAL BOARD

Ex parte JED MARGOLIN

Application 11/736,356 Technology Center 3600

Before WILLIAM A. CAPP, NEIL T. POWELL, and BART A. GERSTENBLITH, *Administrative Patent Judges*.

Opinion for the Board filed by *Administrative Patent Judge* GERSTENBLITH.

Opinion Dissenting-in-Part filed by Administrative Patent Judge CAPP.

GERSTENBLITH, Administrative Patent Judge.

DECISION ON APPEAL

STATEMENT OF THE CASE

Jed Margolin ("Appellant") appeals under 35 U.S.C. § 134 from the Examiner's decision rejecting claims 1-14. We have jurisdiction under 35 U.S.C. § 6(b).

Claimed Subject Matter

Claims 1, 5, 8, and 12 are the independent claims on appeal. Claim 1 is illustrative of the claimed subject matter and is reproduced below.

- 1. A system for safely flying an unmanned aerial vehicle in civilian airspace comprising:
- (a) a ground station equipped with a synthetic vision system;
- (b) an unmanned aerial vehicle capable of supporting said synthetic vision system;
 - (c) a remote pilot operating said ground station;
- (d) a communications link between said unmanned aerial vehicle and said ground station;
- (e) a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot;

whereas said remote pilot uses said synthetic vision system to control said unmanned aerial vehicle during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system.

App. Br. 55, Claims App'x.

References

The Examiner relies upon the following prior art references:

Margolin US 5,904,724 May 18, 1999 Duggan US 2005/0004723 A1 Jan. 6, 2005

Rejection

Appellant seeks review of the following rejection:

Claims 1-14 are rejected under 35 U.S.C. § 103(a) as unpatentable over Margolin and Duggan.

SUMMARY OF DECISION

We AFFIRM-IN-PART.

OPINION

The Examiner concludes that the combination of Margolin and Duggan would have rendered obvious the subject matter of claims 1-14 to one of ordinary skill in the art at the time of invention. Ans. 4-13. The Examiner finds that Margolin discloses the elements of claim 1, except that it does not disclose "that the vehicle is flown using an autonomous control system (e.g., autopilot)." *Id.* at 5 (emphasis omitted). The Examiner finds that Duggan discloses:

a system for safely flying an unmanned aerial vehicle in civilian airspace comprising: a ground station controlling an unmanned aerial vehicle . . . wherein during phases of a flight of an unmanned aerial vehicle . . . when a synthetic vision [system] . . . is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system.

Id. at 5-6 (emphasis omitted). The Examiner concludes that it would have been obvious to one of ordinary skill in the art to modify the system of Margolin to "incorporat[e] an autopilot to ensure smooth transitions" as taught by Duggan. *Id.* at 6 (emphasis omitted).

Claims 1, 3, 4, 8, 10, and 11¹

Appellant raises several arguments in response to this rejection. We address each.

First, Appellant asserts that neither Margolin nor Duggan teaches whereas said remote pilot uses said synthetic vision system to control said unmanned aerial vehicle during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system.

App. Br. 15-22; see Reply Br. 5-6.

The Examiner relies upon a combination of Margolin and Duggan as disclosing these elements of the claim 1. Thus, the failure of any one of the references to disclose these elements is inapposite where a second reference discloses the missing elements. *See In re Keller*, 642 F.2d 413, 426 (CCPA 1981) ("one cannot show non-obviousness by attacking references individually where, as here, the rejections are based on combinations of references"); *see also In re Merck & Co.*, 800 F.2d 1091, 1097 (Fed. Cir. 1986) (same); *In re Young*, 927 F.2d 588, 591 (Fed. Cir. 1991) ("The test for obviousness is what the combined teachings of the references would have suggested to one of ordinary skill in the art.").

_

Appellant does not separately argue claims 1, 3, 4, 10, and 11. *See* App. Br. 14-54. Appellant raises a separate argument with respect to claim 8 (*see* App. Br. 34), but the elements argued are actually recited in claim 9, not claim 8 (*see id.* at 57). Thus, Appellant has not raised a separate argument with respect to the elements of claim 8. Accordingly, we select claim 1 as representative, and claims 3, 4, 8, 10, and 11 stand or fall with claim 1. *See* 37 C.F.R. § 41.37(c)(1)(vii) (2011); *see also In re Lovin*, 652 F.3d 1349, 1351 (Fed. Cir. 2011).

Additionally, Appellant acknowledges that Margolin and Duggan each disclose the use of a synthetic vision system for flying an unmanned aerial vehicle. *See*, *e.g.*, Reply Br. 4-5 (identifying elements (a)-(e) of claim 1 as disclosed by Margolin), 6 (quoting Duggan, paras. [0356], [0388]). The Examiner relied upon Duggan, not Margolin, as disclosing the use of an autonomous control system to fly an unmanned aerial vehicle. *See id.* at 5-6. And the Examiner provides a specific reason with rational underpinning as to why one of ordinary skill in the art at the time of invention would have been prompted to combine these disclosures, i.e., "for the purpose of incorporating an autopilot to ensure smooth transitions (Duggan abstract, sec 0014, 0085, 0086)." Ans. 6 (emphasis omitted).

Accordingly, Appellant's argument is not persuasive.

Second, Appellant contends that Margolin does not support the Examiner's assertion that it "shows 'whereas said remote pilot uses said synthetic vision system (305, 306, 307, 311 on aircraft) to control said unmanned aerial vehicle 300 during at least selected phases of the flight of said unmanned aerial vehicle." App. Br. 16-17. Appellant's dispute centers on the Examiner's assertion that "selected phases implies some or all phases during flight." *Id.* at 22; *see* Ans. 5. Specifically, Appellant asserts that he "intended that the phases be selected." App. Br. 22. Appellant contends that the Examiner's interpretation that "at least selected phases of the flight" includes "some or all phases" is broader than the interpretation he intended. *Id.*

Claim 1 (and independent claims 5, 8, and 12) utilizes the open-ended transition term "comprising." App. Br. 55, Claims App'x. "Comprising' is a term of art used in claim language which means that the named elements

are essential, but other elements may be added and still form a construct within the scope of the claim." *Genentech, Inc. v. Chiron Corp.*, 112 F.3d 495, 501 (Fed. Cir. 1997) (citation omitted). "The word 'comprising' transitioning from the preamble to the body signals that the entire claim is presumptively open-ended." *Gillette Co. v. Energizer Holdings Inc.*, 405 F.3d 1367, 1371 (Fed. Cir. 2005).

Claim 1 (and independent claims 5, 8, and 12) further recites the phrase "during *at least* selected phases of the flight of said unmanned aerial vehicle." App. Br. 55, Claims App'x (emphasis added). Nothing in the claim restricts "selected phases" to less than any or all phases of the flight. Accordingly, Appellant's argument that the Examiner erred in finding that "selected phases" is broad enough to include some or all phases during flight is not persuasive.

Third, Appellant asserts that "[a]n autonomous control system is much more than an autopilot. [Appellant] does not equate the two." App. Br. 22.

Appellant's argument does not specifically explain what features of an autonomous control system are not disclosed by an autopilot system.

Appellant's contention is thus unsupported by any evidence and does not apprise us of error by the Examiner.

Additionally, we agree with the Examiner that Duggan's system is described as providing autonomous control. *See, e.g.*, Duggan at para. [0390] ("[A]n operator can maintain a variable level of control over a UAV, from fully manual to fully autonomous, with simple user-friendly inputs."); *see* Ans. 6.

Fourth, Appellant contends that the Examiner erred by not relying on the ordinary and customary meaning of the phrase "civilian airspace" and by interpreting the prior art too broadly in finding that it discloses this element of the claims. *See* App. Br. 41-46; Reply Br. 7-8. Appellants' argument focuses on the distinction between "civilian airspace" and "military airspace." App. Br. 43-45.

The Examiner relied upon Margolin's disclosure of remote aircraft flown by a recreational enthusiast as disclosing that the airspace discussed therein is a "civilian airspace." Ans. 4-5, 14-15.

Claim 1 is directed to "[a] system for safely flying an unmanned aerial vehicle in civilian airspace." App. Br. 55, Claims App'x.² The phrase "for safely flying an unmanned aerial vehicle in civilian airspace" does not appear to warrant significant patentable weight because it merely recites a purpose or an intended use of the system. *See, e.g., Pitney Bowes, Inc. v. Hewlett-Packard Co.*, 182 F.3d 1298, 1305 (Fed. Cir. 1999) (explaining that if "the body of the claim fully and intrinsically sets forth the complete invention, including all of its limitations, and the preamble offers no distinct definition of any of the claimed invention's limitations, but rather merely states, for example, the purpose or intended use of the invention, then the preamble is of no significance to claim construction because it cannot be said to constitute or explain a claim limitation" (citations omitted)).

Even assuming that the phrase limits the claim, the most Appellant has offered by way of an ordinary and customary meaning of the phrase is that it is distinguishable from "military airspace." *See* App. Br. 42-45. In other words, "civilian airspace" is non-military airspace. As found by the Examiner, Margolin discloses an embodiment in which "the Remote Aircraft

² The phrase "civilian airspace" only appears in the preamble of each independent claim. App. Br. 55-58, Claims App'x.

103 is a remote controlled plane or helicopter *used for recreational* purposes." Margolin, col. 3, ll. 50-51 (emphasis added); see Ans. 5. Based on the disclosure of using the aircraft for recreational purposes, the Examiner's finding that Margolin discloses using the aircraft in civilian airspace is consistent with Appellant's argument as to civilian airspace's ordinary and customary meaning—non-military airspace—because it is more likely than not that recreational use is undertaken in non-military airspace. Accordingly, Appellant's arguments are not persuasive.

Fifth, Appellant contends that the Examiner erred in interpreting the term "safety" and that the Specification defines "the particular level of safety." App. Br. 46-48 (quoting Spec. 4, Il. 24-26); Reply Br. 7-11.

As reflected above, the preamble of claim 1 does not appear to warrant significant patentable weight because it merely recites a purpose or an intended use of the system. *See, e.g., Pitney Bowes, Inc,* 182 F.3d at 1298.

Further, even if we were to consider the term, Appellant's assertion that the Specification defines the term "safely" focuses entirely on paragraph 10, which states:

It is important when flying a UAV in an airspace shared with other aircraft, both civilian and military, that collisions during all phases of the flight (including taking off and landing) not happen. The current method for accomplishing this is to place restrictions on all other traffic in an air corridor representing the path of the intended flight of the UAV, thereby inconveniencing other traffic and disrupting the National Airspace System.

8

³ We understand Appellant's arguments to refer to the claim term "safely."

We agree with the Examiner that this paragraph does not recite the term "safely," does not expressly define the term, and does not provide any particular level of safety that would be considered safe. *See* Ans. 16. Further, we agree with the Examiner's finding that it is more likely than not that flying safely is at least suggested by Margolin's "simulated remote aircraft used for training remote pilots." *See, e.g.*, Margolin, col. 9, ll. 33-53; *see also* Ans. 16. Accordingly, Appellant's arguments directed to the term "safely" in the preamble of claim 1 are not persuasive.

Claims 2, 5, 8, and 12

Appellant contends that the Examiner failed to point to any specific portion of Margolin or Duggan as teaching the following limitations of claim 5:

whereas the selected phases of the flight of said unmanned aerial vehicle comprise:

- (a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;
- (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

App. Br. 28.

Claim 5, which is similar to claim 1, is directed to "[a] system for safely flying an unmanned aerial vehicle in civilian airspace," but unlike claim 1, claim 5 specifically recites two of the selected phases of the flight as elements (a) and (b) shown above. App. Br. 56, Claims App'x. Even though claim 5 recites that the "remote pilot uses said synthetic vision system to control said unmanned aerial vehicle during *at least* selected phases of the flight" (*id.* (emphasis added)), and thus permits the use of

synthetic vision for all of the phases of flight, the Examiner must at least identify where the two recited phases are disclosed by or would have been obvious in light of the recited prior art.

Here, the Examiner's rejection and response to Appellant's argument do not identify where Margolin or Duggan discloses these two recited phases. *See* Ans. 7-8, 13-16. Accordingly, because the Examiner did not address each and every element of claim 5, the Examiner did not establish a *prima facie* case of obviousness of claim 5, or claims 6 and 7, which depend therefrom.

Claim 2 depends from claim 1, but, similar to claim 5, recites two specific selected phases of the flight. App. Br. 55, Claims App'x. Claim 9 depends from claim 8, but, also similar to claims 2 and 5, recites two specific selected phases of the flight. *Id.* at 57. Claim 12, from which claims 13 and 14 depend, is directed to "[a] method for safely flying an unmanned aerial vehicle" and, similar to claim 5, recites two specific selected phases of the flight. *Id.* at 58. Accordingly, for the same reasons discussed with respect to claim 5, the Examiner did not establish a *prima facie* case of obviousness with respect to claims 2, 9, and 12-14.

Thus, we do not sustain the rejection of claims 2, 5-7, 9, and 12-14.⁴

_

⁴ The dissent-in-part spends nearly three pages attempting to explain why one of ordinary skill in the art would understand Margolin to disclose these elements of the claims. Had the Examiner provided such an explanation for the rejection, we would have had something specific to review. Here, however, the Examiner's entire rejection repeats the language of the claims and simply adds a citation to "Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67)" without more. *See, e.g.*, Ans. 6. Nothing about our reversal requires an *ipsissimis verbis* test as the dissent-in-part alleges; rather, our reversal simply requires some explanation

Secondary Considerations

In his Reply Brief, Appellant raises a potential argument regarding the non-obviousness of the claims, stating that the invention is directed to "safely flying UAVs in civilian airspace because safely flying UAVs in civilian airspace (which includes safely sharing civilian airspace with other aircraft) was a long unmet need at the time [Appellant] made his invention, and it is still an unmet need as of the date of this Reply." Reply Br. 8. Appellant further contends that the present application "claims priority from a Provisional Application filed April 19, 2006. At the time, [Appellant's] invention filled a long unmet need. As of FAA Administrator Babbitt's speech in 2009 the need was still unmet." *Id.* at 10.

Establishing long-felt need requires objective evidence that an art-recognized problem existed in the art for a long period of time without solution. *Newell Companies, Inc. v. Kenney Mfg. Co.*, 864 F.2d 757, 768 (Fed. Cir. 1988). "[L]ong-felt need is analyzed as of the date of an articulated identified problem and evidence of efforts to solve that problem." *Texas Instruments, Inc. v. U.S. Int'l Trade Comm'n*, 988 F.2d 1165, 1178 (Fed. Cir. 1993). Establishing long-felt need also requires objective evidence that the invention satisfies the long-felt need. *In re Cavanagh*, 436 F.2d 491, 496 (CCPA 1971). This can be demonstrated, for example,

or indication by the Examiner as to how the reference discloses the elements of the claims such that we may review adequately each issue on appeal before us. Here, the Examiner's citation to all seven figures of Margolin and nearly three columns worth of text, unaccompanied by *any* explanation or indication as to how the elements of the claims are taught therein, failed to do so. Unlike the approach taken in the dissent-in-part, we are not inclined to substitute our view for what the Examiner *might* have intended absent some indication in the rejection.

by evidence establishing commercial success and that the industry purchased the claimed invention because it satisfied the long-felt need. *See W.L. Gore & Assocs., Inc. v. Garlock, Inc.*, 721 F.2d 1540, 1555 (Fed. Cir. 1983).

Here, even assuming that there was a long-felt need, Appellant has not submitted any objective evidence that the invention satisfies the long-felt need. Accordingly, having fully considered and weighed the evidence presented, we conclude that the Examiner's evidence of obviousness outweighs Appellant's evidence of non-obviousness and we thus sustain the rejection of claims 1, 3, 4, 8, 10, and 11.

DECISION

We AFFIRM the Examiner's decision rejecting claims 1, 3, 4, 8, 10, and 11.

We REVERSE the Examiner's decision rejecting claims 2, 5-7, 9, and 12-14.

No time period for taking any subsequent action in connection with this appeal may be extended under 37 C.F.R. § 1.136(a). *See* 37 C.F.R. § 1.136(a)(1)(iv).

AFFIRMED-IN-PART

CAPP, Administrative Patent Judge, dissenting-in-part.

I agree in the decision to affirm the rejection of claims 1, 3, 4, 8, 10, and 11. However, I respectfully disagree with my colleagues' decision to reverse the Examiner's rejection of claims 2, 5-7, 9, and 12-14, which are the claims related to using a synthetic vision system during altitude operation of the claimed unmanned aerial vehicle ("UAV").

The ostensible reason for the majority's decision to reverse the Examiner is that the Examiner did not adequately specify where Margolin discloses a synthetic vision system for controlling the UAV during low altitude phases of flight. I disagree that the Examiner did not adequately specify that Margolin discloses the limitations at issue. Furthermore, I disagree that the Examiner should have been required to identify where Margolin discloses these limitations with more specificity.

In rejecting claim 1, the Examiner cited to col. 5, 1l. 50-60 of Margolin for disclosure of a synthetic vision system to control the aircraft at selected phases of flight. Ans. 5. In rejecting claim 2, the Examiner also cited to the following passages of Margolin: Abstract; Figs. 1-7; col. 3, 1l. 8-67; col. 4, 1l. 1-67; col. 5, 1l. 1-67. Ans. 6.

Figure 7 of Margolin is described as an example of a three dimensional image presented to a remote pilot by a remote pilot station. Margolin, col. 2, 11. 65-66. The three dimensional image of Fig. 7 is later described in considerable detail as a synthetic representation of terrain. *Id.* at col. 9, 1. 66 – col. 10, 1. 50. Furthermore, Margolin discloses that:

Computer **405** performs the mathematical operations to transform and project the three dimensional data to generate video data representing a synthesized three-dimensional projected view of the terrain (and, if desired, manmade

structures) in the vicinity of the environment of Remote Aircraft **103**. This video data is transmitted to Graphics System **406**, which displays the synthesized three-dimensional projected view on Video Display **407**.

Margolin, col. 5, ll. 46-55 (emphasis added). Someone of ordinary skill in the art of aviation systems would immediately recognize and understand from the above quoted disclosure that a visual display of the terrain was being provided to the pilot/operator so that the pilot/operator would be able to see and avoid terrain based obstacles or, in other words, so that the pilot/operator would not crash the UAV into the terrain (or terrain based obstacles such as buildings, towers, etc.). As a matter of common sense, someone of ordinary skill in the art of aviation systems intuitively understands that, in contrast to high altitude phases of flight, terrain avoidance is paramount at low altitude, or, to parrot the language of claim 2 - "below a ... specified altitude."

I cannot agree with my colleagues that the Examiner failed to make out a prima facie case of obviousness because the Examiner failed to cite specific verbiage from Margolin reciting the disputed claim language. We have never held Examiners and their applied references to an *ipsissimis* verbis test and there is no reason to do so in this case. See In re Gleave, 560 F.3d 1331, 1334 (Fed. Cir. 2009) (a reference need not satisfy an *ipsissimis* verbis test). Here, the Examiner cited relevant prior art and made fact findings on the basis of such art. Those fact findings, in my opinion, are correct.

In my opinion, the Examiner made out a prima facie of obviousness under applicable law. *See In re Oetiker*, 977 F.2d 1442, 1445 (Fed. Cir. 1992). Under *Oetiker*, the burden shifted to Appellant to rebut the

Examiner's case with evidence or argument. *Id.* Here, Appellant essentially did nothing to rebut the Examiner's case beyond faulting the Examiner for failing to find *ipsissimis verbis* disclosure of the low altitude limitations of claim 2 in Margolin. To rebut the Examiner's prima facie case, the majority should have required Appellant to demonstrate why the synthetic terrain display in Margolin was intended for a phase of flight that excluded low altitude flight operations. This, Appellant did not do. Thus, in my opinion, the Examiner's rejection of claims 2, 5-7, 9, and 12-14 should have been affirmed.

The bottom line here is that the dependent limitations of claim 2 do not distinguish over Margolin. Anyone of only ordinary skill in aviation would understand that Margolin discloses the use of a synthetic vision system, among other things, to assist in terrain avoidance when flying at low altitude. In my opinion, Margolin clearly discloses use of a synthetic vision system at low altitude phases of flight and the Examiner adequately articulated such in the Answer.

For the foregoing reasons, I respectfully dissent.

⁵ The two dependent limitations of claim 2, collectively, encompass the entire surface of planet Earth (i.e., within and outside of airport zones). Thus, the limitations cannot distinguish over the prior art based on the scope of geographic limitations.

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address: COMMISSIONER FOR PATENTS P.O. Box 1450 Alexandria, Virginia 22313-1450 www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
11/736,356	736,356 04/17/2007 Jed Margolin			3649
23497 JED MARGOL	7590 01/13/201 IN	EXAMINER		
1981 EMPIRE	ROAD	MANCHO, RONNIE M		
RENO, NV 89521-7430			ART UNIT	PAPER NUMBER
			3664	
			MAIL DATE	DELIVERY MODE
			01/13/2012	PAPER

Please find below and/or attached an Office communication concerning this application or proceeding.

The time period for reply, if any, is set in the attached communication.



United States Patent and Trademark Office

Under Secretary of Commerce for Intellectual Property and Director of the United States Patent and Trademark Office P.O. Box 1450 Alexandria, Virginia 22313-1450 www.uspto.gov

JED MARGOLIN 1981 EMPIRE ROAD RENO, NV 89521-7430 Appeal No: 2012-003538 Application: 11/736,356 Appellant: Jed Margolin

Board of Patent Appeals and Interferences Docketing Notice

Application 11/736,356 was received from the Technology Center at the Board on January 09, 2012 and has been assigned Appeal No: 2012-003538.

In all future communications regarding this appeal, please include both the application number and the appeal number.

The mailing address for the Board is:

BOARD OF PATENT APPEALS AND INTERFERENCES UNITED STATES PATENT AND TRADEMARK OFFICE P.O. BOX 1450 ALEXANDRIA, VIRGINIA 22313-1450

The facsimile number of the Board is 571-273-0052. Because of the heightened security in the Washington D.C. area, facsimile communications are recommended. Telephone inquiries can be made by calling 571-272-9797 and referencing the appeal number listed above.

By order of the Board of Patent Appeals and Interferences.

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address: COMMISSIONER FOR PATENTS P.O. Box 1450 Alexandria, Virginia 22313-1450 www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
11/736,356 04/17/2007		Jed Margolin		3649
23497 JED MARGOL	7590 12/29/201 IN	1	EXAM	IINER
1981 EMPIRE	ROAD		MANCHO,	RONNIE M
RENO, NV 89521-7430			ART UNIT	PAPER NUMBER
			3664	
			MAIL DATE	DELIVERY MODE
			12/29/2011	PAPER

Please find below and/or attached an Office communication concerning this application or proceeding.

The time period for reply, if any, is set in the attached communication.



UNITED STATES DEPARTMENT OF COMMERCE **U.S. Patent and Trademark Office**

Address: COMMISSIONER FOR PATENTS P.O. Box 1450 Alexandria, Virginia 22313-1450

APPLICATION NO./ CONTROL NO.	FILING DATE	FIRST NAMED INVENTOR / PATENT IN REEXAMINATION	A	TTORNEY DOCKET NO.
11/736,356	17 April, 2007	MARGOLIN, JED		
			E	XAMINER
JED MARGOLIN 1981 EMPIRE ROAD			RONN	NIE MANCHO
RENO, NV 89521-7430			ART UNIT	PAPER
			3664	20111228

DATE MAILED:

Please find below and/or attached an Office communication concerning this application or proceeding.

Appellant's reply brief submitted 10/21/11 has been received and entered on file.

Commissioner for Patents

Apellant's remarks and arguments have been reviewed, but they are not convincing since appellants appears to require that that the prior art must recite the exact same terminologies in the claims.	
It is believed that the prior art still reads on the claims.	
The case has been forwarded to the Board of Patent Appeals.	
	/Ronnie Mancho/ Primary Examiner of Art Unit 3663
PTO-90C (Rev.04-03)	

1	
2	IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
3	
4 5	Application Serial No. 11/736,356
6 7	Filed: 04/17/2007
8 9 10	For: SYSTEM AND METHOD FOR SAFELY FLYING UNMANNED AERIAL VEHICLES IN CIVILIAN AIRSPACE
11 12	Examiner: Ronnie M. Mancho Art Unit: 3664
13 14 15	In re Application of: Jed Margolin
16 17 18 19 20	Mail Stop Appeal Brief - Patents Commissioner for Patents P.O. Box 1450 Alexandria, VA 22313-1450
21	Sir,
22	Reply Brief to Examiner's Answer
23	
24	Appellant ("Margolin") files his Reply Brief to Examiner's Answer to Margolin's Appeal
25	Brief. This Reply is timely filed within two months of the September 14, 2011 mailing date of
26	Examiner's Answer. In this Reply the term "Margolin" refers to the Appellant. The term
27	"Margolin '724" refers to U.S. Patent 5,904,724 Method and apparatus for remotely piloting
28	an aircraft issued May 18, 1999 to Margolin. (In his Answer the Examiner uses the term
29	"Margolin" to refer to Margolin '724, which is confusing.) The term "Duggan" refers to U. S.
30	Patent Application 20050004723, Duggan et al. inventors, published January 6, 2005.
31	

1	I. Status of Claims
2	
3	The Application as filed included claims 1-14.
4	
5	Claims 1-14 have been twice-rejected in the Office Action of February 15, 2011. Claims
6	1-14 are being appealed.
7	

II. Grounds of Rejection to be Reviewed on Appeal A. Claims 1-14 stand rejected under 35 U.S.C § 103(a) as being unpatentable over U.S. Patent 5,904,724 ('724) to Margolin (the same Margolin as the Appellant) in view of Patent Publication US 2005004723 to Duggan. **B.** Whether Margolin had a duty to define the term "civilian airspace" or whether he was entitled to use the common meaning of the term. C. Whether Margolin had a duty to define "safety" or whether he was entitled to use the common meaning of the term; and whether Margolin defined a particular level of safety. **<u>D.</u>** Whether the Examiner's assertion that "It is believed that the aircraft flown in the prior art is flown safely ..." is proper.

1 III. Argument 2 3 Margolin's Reply 4 5 **A.** The Examiner has set up a *pro se* Straw Man, and then knocked him down. The Examiner's Straw Man is ignorant of (or confused by) Patent Law and USPTO Rules. The Examiner's Straw 6 7 Man has also ignored the Examiner's wise and patient guidance. 8 9 The Examiner spent so much time on his Straw Man that he either forgot to discuss the real 10 issues or he carelessly (or deliberately) mischaracterized them. 11 12 From Margolin's Appeal Brief Page 15, lines 4-5: 13 The current invention is a new and unobvious use for U.S. Patent 5,904,724 Method and 14 apparatus for remotely piloting an aircraft issued May 18, 1999 to Margolin. 15 16 The central issue is whether Margolin has the right to improve his own invention. 17 18 19 **B.** Claims 1-14 stand rejected under 35 U.S.C § 103(a) as being unpatentable over Margolin 20 '724 in view of Duggan. 21 22 The following is a quotation of 35 U.S.C § 103(a): 23 (a) A patent may not be obtained though the invention is not identically disclosed or 24 described as set forth in section 102 of this title, if the differences between the subject matter 25 sought to be patented and the prior art are such that the subject matter as a whole would 26 have been obvious at the time the invention was made to a person having ordinary skill in 27 the art to which said subject matter pertains. Patentability shall not be negatived by the 28 manner in which the invention was made. 29 30 In order for the Examiner to make a prima facie case of obviousness he must find all of the 31 elements in a claim in either one reference or the other. 32 33 Margolin will present two examples here, but having argued all of the claims separately in his 34 Appeal Brief, does not waive the right to present additional examples in the event it becomes 35 necessary to file a 145 action in U.S. District Court (now the Eastern District of Virginia) and/or 36 to go to the Court of Appeals for the Federal Circuit. 37 38 Margolin's Claim 1 starts by describing a synthetic vision system such as the one taught by 39 Margolin '724: 40

1	1. A system for safely flying an unmanned aerial vehicle in civilian airspace comprising:
2	(a) a ground station equipped with a synthetic vision system;
3	(b) an unmanned aerial vehicle capable of supporting said synthetic vision system;
4	(c) a remote pilot operating said ground station;
5	(d) a communications link between said unmanned aerial vehicle and said ground
6	station;
7	(e) a system onboard said unmanned aerial vehicle for detecting the presence and
8	position of nearby aircraft and communicating this information to said remote pilot;
9 10 11	And then adds the element:
12	whereas said remote pilot uses said synthetic vision system to control said unmanned aerial
13	vehicle during at least selected phases of the flight of said unmanned aerial vehicle, and
14	during those phases of the flight of said unmanned aerial vehicle when said synthetic vision
15	system is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is
16	flown using an autonomous control system.
17 18 19	Margolin's Claim 5 further limits the selected phases in which synthetic vision is to be used.
20	5. A system for safely flying an unmanned aerial vehicle in civilian airspace comprising:
21	(a) a ground station equipped with a synthetic vision system;
22	(b) an unmanned aerial vehicle capable of supporting said synthetic vision system;
23	(c) a remote pilot operating said ground station;
24	(d) a communications link between said unmanned aerial vehicle and said ground
25	station;
26	(e) a system onboard said unmanned aerial vehicle for detecting the presence and
27	position of nearby aircraft and communicating this information to said remote pilot;
28 29	whereas said remote pilot uses said synthetic vision system to control said unmanned
30	aerial vehicle during at least selected phases of the flight of said unmanned aerial
31	vehicle, and during those phases of the flight of said unmanned aerial vehicle when said
32	synthetic vision system is not used to control said unmanned aerial vehicle said
33	unmanned aerial vehicle is flown using an autonomous control system, and
34 35	whereas the selected phases of the flight of said unmanned aerial vehicle comprise:

1	(a) when said unmanned aerial vehicle is within a selected range of an airport or other
2	designated location and is below a first specified altitude;
3	(b) when said unmanned aerial vehicle is outside said selected range of an airport or
4	other designated location and is below a second specified altitude.
5	The Examiner asserts he found the new elements (in Claim 1 and Claim 5 respectively) in both
6	Margolin '724 and Duggan. Margolin believes he has successfully refuted the Examiner's
7	assertion in Margolin's Appeal Brief. For Claim 1 see page 15, line 13 - page 22, line 12. For
8	Claim 5 see Margolin Appeal Brief page 23, line 13 - page 28, line 41.
9 10	In brief, the Examiner asserted he found the new elements in the current invention in a Margolin
11	'724 drawing showing the synthetic vision system. He asserts he found the new elements in
12	Duggan by citing impossibly long passages. The only passages in Duggan that are even remotely
13	relevant are the ones that relate to synthetic vision:
14 15 16 17 18 19 20 21	[0388] In one aspect of the present invention, synthetic vision display technical approach of the present invention is based upon integrating advanced simulated visuals, originally developed for training purposes, into UAV operational systems. In accordance with one embodiment, the simulated visuals are integrated with data derived from the ground control station during flight to enable real-time synthetic visuals.
22	None of the Duggan passages cited by the Examiner teaches the Margolin limitation(s).
23	
24	In the Examiner's Answer he accuses Margolin of trying to separate the Examiner's 103
25	rejection into two 102 rejections. (Examiner's Answer page 13, second full paragraph.) No,
26	Margolin is not doing that. Margolin is objecting to the Examiner's tactic that somehow, by
27	combining the two references, an element that appears in neither one is magically brought into
28	existence. If Margolin failed to contest the motivation to combine the two references it is because
29	neither reference teaches the element(s) described above, so that combining the two references is
30	irrelevant. See, for example, Margolin Appeal: Page 15, line 13 - Page 21 line 33; Page 24, line
31	1 - Page 28, line 41; Page 29, line 13 - Page 34, line 13; Page 35, line 1 - Page 39, line 44.
32	

7 1 The Examiner further states in his Answer (Page 14, first full paragraph): 2 Further, the appellant makes statements such as, "They certainly fail to make a 3 primafacie case for rejection" instead of -- They certainly fail to make a primafacie case of 4 obviousness rejection--. Thus it is respectfully submitted that appellant is arguing a 102 5 rejection, which 102 rejection is not in the final office action under appeal. 6 7 Margolin responds: 8 1. Margolin was referring to the Examiner's rejection, which was a 103 obviousness rejection; 9 2. In another place Margolin did use the Examiner's preferred magic phrase. See Margolin 10 Appeal Brief Page 14, lines 31-32: "In the Examiner's 35 U.S.C. § 103(a) rejection he failed to 11 make a prima facie case of obviousness." 12 13 14 C. The Examiner asserts (Examiner's Answer Page 13, second line from the bottom to Page 14, 15 line 4): 16 As such the basis of the argument is not understood since appellant does not contest the motivation to combine references, but only insist that both US (5904724) and (US 17 2005004723) have been inappropriately used beyond the broadest possible interpretation. 18 19 Appellant fails to provide any reason to support the statement that prior arts have been used 20 beyond the broadest possible interpretation. At best the examiner can only assume that the 21 appellant is making conclusory statements with no support. 22 23 {Emphasis added. The argument that the Examiner is referring to is his assertion that Margolin is 24 attempting to divide the Examiner's 103 rejection into two 102 rejections. 25 26 Yes, the Examiner has used Margolin '724 and Duggan way beyond their broadest possible 27 interpretation. He did this by denying Margolin the right to use the terms "civilian airspace" and "safety" as they are commonly used in the aerospace community. Margolin addressed this issue 29 in his Appeal Brief on Page 41, line 1 - Page 46, line 18; and Page 46, line 21 - Page 48, line 15. 30 In brief, the Examiner waited until his second rejection to proclaim that Margolin had not

28

31 defined the term "civilian airspace" or "safety" or a "particular level of safety." As a result he

32 defined the terms himself as meaning anything he wanted them to mean, which is why he

33 asserted he had found them in both Margolin '724 and Duggan. Margolin pointed out in his

34 Appeal Brief that the significance of the Examiner's strategy in denying Margolin the common

¹ This statement comes from an Examiner whose grammatical, spelling, and typographical errors have sometimes made it difficult to determine what, exactly, he was trying to say.

use of the terms can be found in Ex parte MAURICE GIVENS Appeal 2009-003414, BPAI Informative Decision, Decided August 6, 2009. In other words, the Examiner was trying to get around ex parte MAURICE GIVENS. The Examiner's response to Margolin's argument was, only by indirectly and non-responsively saying, "At best the examiner can only assume that the appellant is making conclusory statements with no support." Margolin will note that the Examiner made the second rejection final and refused to allow Margolin the opportunity to respond to it. Margolin did not have the opportunity to respond to these new grounds for rejection until his Appeal Brief. **D.** The Examiner makes the statement (Examiner's Response, starting at Page 14, last paragraph): The examiner respectfully asserts that since the airspace in the prior art is referred to as any environment which the prior art aircraft can fly it implies that the prior art airspace is not restricted to any particular airspace. As such the prior art at least contemplates a civilian airspace as claimed. In addition, since the prior art indicates that the remote aircraft can be of any type e.g. flown by a RECREATIONAL ETHUSIAST the prior at least contemplates that the remote aircraft if flown in a civilian space. Having failed to deny Margolin the meaning of the term "civilian airspace" as it is commonly understood in the aerospace community the Examiner is attempting to muddy the waters (or meant "Recreational Enthusiast." In any event, it is irrelevant. If the military wants to use

Having failed to deny Margolin the meaning of the term "civilian airspace" as it is commonly understood in the aerospace community the Examiner is attempting to muddy the waters (or pollute the air) by using the term "RECREATIONAL ETHUSIAST." Presumably, the Examiner meant "Recreational Enthusiast." In any event, it is irrelevant. If the military wants to use Margolin's invention to safely fly their UAVs in their own (military) airspace they are free to do so. Margolin's invention is directed to safely flying UAVs in civilian airspace because safely flying UAVs in civilian airspace (which includes safely sharing civilian airspace with other aircraft) was a long unmet need at the time Margolin made his invention, and it is still an unmet need as of the date of this Reply.

1 **E.** The Examiner makes the statement (Examiner's Answer, Page 15, first full paragraph):

The examiner further respectfully asserts that a "synthetic vision system" has been interpreted as used in appellant's specification to refer to a 3-D vision system (appellants specification filed 4/17/2007, section 002). Appellant specification section 003 even admits that the prior art of record US (5904724) discloses a synthetic vision system as claimed.

5 6

2

3

4

- 7 The Examiner is attempting to create a controversy where none exists. Margolin's current
- 8 invention uses synthetic vision. He explicitly states in his application (Paragraph 002,
- 9 Background of the Invention):

10 "Synthetic Vision" is the current term for three dimensional projected image data presented to the pilot or other observer.

11 12

- 13 Margolin also incorporates by reference his own patent (U.S. Patent 5,904,724) in Margolin
- 14 Application Paragraph 003.

15 16

This is simply another attempt by the Examiner to avoid the real issues in this case.

17 18

19

20

21

22

23

24

25

26

27

F. The Examiner makes the statement (Examiner's Answer, Page 16, first full paragraph):

Some of appellant's remarks are that the prior art do not recite the phrase, "safely flying an unmanned aerial vehicle in civilian airspace comprising: ...". Appellant thus insists that the rejection is conclusory. The examiner disagrees and notes that any particular level of safety is not described or disclosed in the specification nor is there any meaning provided for "safety". It is believed that the aircraft flown in the prior art is flown with at least some safely since the pilot is required to practice flying the aircraft using a simulation 609. All aircraft pilots must go to school and practice before they are licensed to fly any aircraft be it civilian or military. In addition, the aircraft of the prior art at least anticipates the structure and operation of aircraft in the invention.

28 29

30

31

- 1. The Examiner simply repeats his mantra,
 - The examiner disagrees and notes that any particular level of safety is not described or disclosed in the specification nor is there any meaning provided for "safety".

32 33 34

which is non-responsive to Margolin's Appeal Brief (Page 46, line 21 - Page 48, line 15).

35 36

37

38

39

- 2. The Examiner makes the extraordinary statement:
- It is believed that the aircraft flown in the prior art is flown with at least some safely since the pilot is required to practice flying the aircraft using a simulation 609. All aircraft pilots must go to school and practice before they are licensed to fly any aircraft be it civilian or military.

- 1 The Examiner's argument is nonsense. Practicing in a simulator does not guaranty safety in the
- 2 real world. Would any member of this Board want to fly in a Boeing 747 whose pilots (all of the
- 3 pilots), after extensive practice in a simulator, are making their first ever flight in an actual
- 4 aircraft? Margolin wouldn't.²

5

- 6 The Examiner has chosen to ignore the evidence. In Margolin's Appeal Brief he quotes from a
- 7 speech given by FAA Administrator Babbit in November 2009. From Margolin Appeal Brief,
- 8 page 44, lines 24-32:

So if we are direct with ourselves here, as of today, unmanned aircraft systems are not ready for seamless or routine use yet in civilian airspace. The idea of pilots flying remotely has been around for a long time. And it is, I truly believe, the way of the future. But where we are, on numerous fronts, they're not ready for open access to the NAS and we can't give you the thumbs up.

14

- 15 Margolin's definition of safety is consistent with the FAA Administrator's definition, only the
- 16 FAA Administrator's definition is more eloquent.

17

19

20

- 18 From Margolin's Application, paragraph 10:
 - [010] It is important when flying a UAV in an airspace shared with other aircraft, both civilian and military, that collisions during all phases of flight (including taking off and landing) not happen.

21 22

25

26

27

28

29

30

- FAA Administrator Babbitt's definition is (Margolin Appeal Brief, Page 47, line 31 Page 38,
- 24 line 6):

Good afternoon, and thank you, John [Langford, Chairman & President, Aurora Flight Sciences]. It's an exciting time in aviation and to be involved with introducing new technology into the National Airspace System. It's also a good time to be thinking and talking about personal and professional responsibility — something I have unfortunately had to do too much of lately. But we all — every professional in aviation — have a shared responsibility to make this system as absolutely as safe as it can be, and never to just a level where we would ever say, "We could do more, but this is safe enough".

31 32 33

{Emphasis added}

- 35 Margolin's Application claims priority from a Provisional Application filed April 19, 2006. At
- 36 the time, Margolin's invention filled a long unmet need. As of FAA Administrator Babbitt's
- 37 speech in 2009 the need was still unmet.

² Even experience in the real world does not guaranty safety. There are still aircraft accidents, both civilian and military, when the aircraft are flown by experienced pilots.

11 1 **G.** The Examiner is attempting to mislead the Board into believing that Margolin agrees that the 2 sections cited by the Examiner read on Margolin's claims. From Examiner's Answer, starting at 3 page 15 last paragraph: 4 The examiner believes that appellant's claims were all addressed. Some of the claims are 5 have similar limitations only that the wording in some of the claims is different. As such the 6 examiner refers the appellant back to the rejection of the claims that are similar. Appellant 7 took on this position to indicate that the claims were ignored. The examiner respectfully 8 does not acquiesce to the allegations since the sections cited and quoted by appellant are 9 believed to read on the claims. As such appellant's remarks citing MPEP 2143.03 is 10 controversial since appellant has concurred that the examiner has cited sections that 11 are believed the read on the claims. As such it is respectfully submitted that all claim 12 limitations were considered. 13 14 {Emphasis added} 15 16 While the **Examiner** may believe that the sections he cited read on Margolin's claims anyone 17 who reads Margolin's Response to the FOAM, Margolin's Appeal Brief, or this Reply would 18 know that Margolin does not agree with the Examiner. The Examiner's attempt to mislead the 19 Board into believing otherwise is desperate and offensive. 20 21 22 **H.** The Examiner makes the statement (Examiner's Answer, Page 16, second full paragraph): 23 Now appellant's appeal brief is 506 pages long. Most of the material submitted by 24 appellant is irrelevant to the appeal to the board because the material was not 25 provided to the examiner for consideration during prosecution of the case. Appellant is 26 making remarks relying on documents that the examiner was never given an 27 opportunity to review during prosecution of the case. As such the examiner 28 respectfully submits that comments about such arguments related to the such 29 documents are irrelevant to the appeal brief to the Board. 30 31 {Emphasis added} 32 33 The body of Margolin's Appeal Brief is approximately 59 pages including the required Claims 34 Appendix as well as an index of the Evidence Appendix. The Evidence Appendix contains 15 35 Exhibits taking an additional 446 pages. 36 37 Exhibit 1 - Exhibit 12 come from the Image File Wrapper, with the exception of Exhibit 2 (a

reproduction of Margolin '724) and Exhibit 4 (a reproduction of Duggan), both cited by the

Examiner. The index of Exhibit 1 - Exhibit 12 is reproduced here:

40

38

I	Exhibit I	Patent Application as filed	
2	Exhibit 2	U.S. Patent 5,904,724	
3	Exhibit 3	First Office Action on the Merits	
4	Exhibit 4	U. S. Patent Application 20050004723 (Duggan)	
5	Exhibit 5	Applicant's Response to First Office Action	
6	Exhibit 6	Second Office Action	
7	Exhibit 7	Applicant's Summary of Telephone Interview with Examiner	
8	Exhibit 8	Applicant's Summary of Telephone Interview with Examiner's SPE 457	
9	Exhibit 9	IDS References Considered by Examiner	
10	Exhibit 10	Sensing Requirements for Unmanned Air Vehicles, AFRL Air Vehicles	
11		Directorate	
12	Exhibit 11	Developing Sense and Avoid Requirements for Meeting An Equivalent	
13		Level of Safety, Russel Wolfe	
14	Exhibit 12	Article - Lockheed's Polecat UCAV Demonstrator Crashes, Aviation	
15		Week & Space Technology, by Amy Butler, 03/19/2007, page 44 489	
16	3 A 1'		
17	Margolin reproduced these exhibits in his Appeal Brief in order to satisfy the requirement of 37		
18	CFR 41.37(c)(1)(ix):		
19 20	(ix) Evidence appendix. An appendix containing copies of any evidence submitted pursuant to §§ 1.130, 1.131, or 1.132 of this title or of any other evidence entered by the examiner		
21	and relied upon by appellant in the appeal, along with a statement setting forth where in the		
22 23	record that evidence was entered in the record by the examiner. Reference to unentered evidence is not permitted in the brief. See § 41.33 for treatment of evidence submitted after		
23 24	appeal. This appendix may also include copies of the evidence relied upon by the examiner		
25	as to grounds of rejection to be reviewed on appeal.		
26 27			
27			
28	time looking for	tuem.	
29 30	Exhibit 1 - Exhi	bit 12 occupy approximately 431 pages of the 446 page Evidence Appendix.	
31	That leaves 15 pages in Exhibit 13 - Exhibit 15, which will be discussed shortly. Yet the		
32	Examiner asserts:		
33			
34		I was not provided to the examiner for consideration during prosecution of the	
35 36	case. Appellant is making remarks relying on documents that the examiner was never given an opportunity to review during prosecution of the case.		
30 37	an opportui	ity to feview during prosecution of the case.	

- Fifteen pages (Exhibit 13 Exhibit 15) divided by 446 pages equals approximately 3.36% of the
- 2 total number of pages in the Evidence Appendix.³ The Examiner has exaggerated 3.36% as
- 3 being "Most of the material" which was not provided to him until Margolin's Appeal Brief.⁴

4

- 5 There is a very good reason that Exhibit 13 Exhibit 15 were not introduced until Margolin's
- 6 Appeal Brief. In the Second Office Action (February 15, 2011) the Examiner expanded his
- 7 grounds for rejection (constructively introducing additional grounds for rejection) and made the
- 8 rejection final. In Margolin's telephone interview with the Examiner, Margolin asked the
- 9 Examiner to withdraw making the Office Action final so he could respond to the new grounds
- 10 for rejection. The Examiner refused. Margolin discussed the situation with the Examiner's SPE
- and was also refused.

12

- 13 In his Answer the Examiner failed to state which documents were new. His statement "Most of
- the material" is a gross untruth. He denied Margolin the opportunity to respond to the additional
- 15 grounds for rejection he made in the Second Office Action and now that Margolin has had the
- opportunity to respond, the Examiner, instead of responding to the evidence, is asking the Board
- 17 to ignore it.

18

- Margolin is grateful to the Board for being allowed to respond to the Examiner's new grounds
- 20 for rejection by introducing Exhibit 13 Exhibit 15.

21

- However, if the Board changes its mind and decides to ignore Margolin's new evidence then the
- Board must also strike all of the Examiner's grounds for rejection and associated arguments and
- comments that made Exhibit 13 Exhibit 15 necessary.

2526

<u>I.</u> The Examiner states (Examiner's Answer, Page 15, second full paragraph):

2728

29

30

The appellant is a pro se and the office tried to help the appellant to explain how MPEP was interpreted to reject the claims. However, appellant in the reply to the first office action dated 9/01/2010 furnished a response that was 75 pages (see appellant's response dated

- 11/29/2010). When asked why he submitted such a large swath of pages that mostly were
- 31 about appellants personal papers referring to appellant's rents, taxes, personal contracts, etc
- about appearance personal papers referring to appearance rents, taxes, personal conducts, et
- appellant responded that he is trying to be diplomatic by submitted such large swaths of
- irrelevant documents even though appellant's specification is only 16 pages.

³ Since the Examiner is obsessed with page counts Margolin will respond with page counts.

⁴ While the Examiner might not have read Margolin's Application and Margolin's Response to the FOAM, they **were** provided to him.

1	Let's take the first part:
2 3 4	The appellant is a pro se and the office tried to help the appellant to explain how MPEP was interpreted to reject the claims.
5	By the "office" Margolin assumes the Examiner means himself and his SPE.
6 7	The Examiner's explanation of MPEP was as clear and reasonable as how 3.36% of the material
8	became "Most of the material." supra.
9 10	MPEP 1207.02 Contents of Examiner's Answer states:
11 12 13	The examiner should furnish the appellant with a written statement in answer to the appellant's brief within 2 months after the receipt of the brief by the examiner.
14	Margolin's Appeal Brief was forwarded to the Examiner on 6/28/2011. Two months from
15	6/28/2011 is 8/28/2011. The mailing date of the Examiner's Answer is not until 9/14/2011.
16	Either the Examiner's understanding of MPEP is deficient or he thinks the rules don't apply to
17	him.
18	
19	And now the second part, where the Examiner's Straw Man is obviously a lunatic.
20 21 22 23 24 25 26	However, appellant in the reply to the first office action dated 9/01/2010 furnished a response that was 75 pages (see appellant's response dated 11/29/2010). When asked why he submitted such a large swath of pages that mostly were about appellants personal papers referring to appellant's rents, taxes, personal contracts, etc appellant responded that he is trying to be diplomatic by submitted such large swaths of irrelevant documents even though appellant's specification is only 16 pages. ⁵
27	This goes beyond a mischaracterization of Margolin. Or even a gross mischaracterization. It is a
28	mixture of outright, subtle, and prejudicial lies.
29 30	In Margolin's Summary of Telephone Interview with the Examiner (Margolin Appeal Brief
31	Exhibit 7, starting at 454, last paragraph) Margolin stated:
32 33 34 35 36 37 38	We moved on. I explained why I had discussed the Duggan application in such detail, starting with the fact that it had issued as a patent (U.S. Patent 7,343,232 Vehicle control system including related methods and components) on March 11, 2008, before the First Office Action. I also explained why I had introduced the extensive exhibit concerning the financial problems experienced by the Duggan Examiner. I explained that when I stated in my Response to the First Office Action that "Perhaps the Duggan Examiner was preoccupied with financial problems" I was being diplomatic. In fact, the evidence shows

⁵ Again, the Examiner's obsession with counting pages.

that the Duggan Examiner was either incompetent or may have committed misconduct. I 1 2 explained to the Examiner that my reason for bringing up the subject was to show that the 3 USPTO Office discriminates against pro se inventors. Aerospace Companies with expensive 4 Law Firms are given a free pass, while pro se inventors get kicked in the head. I was not 5 asking for a free pass, only to be treated fairly. 6 7 The documents of rents and taxes are not Margolin's ("Appellant's"). They are the rents and 8 taxes of the Duggan Examiner. They show that the Duggan Examiner was experiencing 9 substantial financial difficulties. The characterization of these documents as "irrelevant" was 10 made by the Examiner, not by Margolin. 11 12 Let's start at the beginning. 13 14 Margolin was already well familiar with the Duggan Application before the Examiner cited it in 15 his First Office Action.⁶ 16 17 In brief, Margolin discovered the Duggan Application not long after it was published. The 18 claims, as filed, had substantial problems. For example, in Duggan claim 1 a term not only 19 lacked an antecedent, the term was not defined in the Specification and did not have a commonly 20 understood meaning. Duggan claim 31 contained two periods. 21 22 Margolin brought this to the attention of the small patent licensing company which was then 23 representing Margolin's patents. 24 25 The small patent licensing company brought it to the attention of Geneva Aerospace, the 26 Assignee of the Duggan Application. One of the results was that Geneva Aerospace licensed 27 Margolin '724 as well as U.S. Patent 5,566,073 Pilot Aid Using A Synthetic Environment also 28 issued to Margolin. Margolin reproduced the license agreement ("personal contract") in his 29 Response to the First Office Action as evidence. 30 31 The Duggan Application was allowed as filed in its First Office Action, including the defective 32 claims. The Duggan attorney had to ask the Duggan Examiner to use an Examiner's Amendment 33 to correct the punctuation in Duggan Claim 31.

⁶ Margolin's discussion of Duggan is contained in Margolin's Response to the First Office Action reproduced in Margolin's Appeal Brief Evidence Appendix Exhibit 5 starting at page 260.

1	Thus, Geneva Aerospace got a Tree pass for its patent application. (Margolin's Examiner cited
2	the Duggan Application even though the Duggan patent had been issued March 11, 2008 as U.S.
3	Patent 7,343,232 Vehicle control system including related methods and components.)
4	
5	Subsequently, Margolin discovered evidence that the material in the Duggan disclosure, as well
6	as products based on the Duggan disclosure, had been publicly available for several years before
7	the Duggan Application had been filed. See Margolin Appeal Brief Evidence Appendix Exhibit 5
8	starting at page 263, line 30.
9 10	To put it bluntly, in the current case the Examiner's rejection in the First Office Action was a <i>pro</i>
11	forma specious rejection of the kind frequently given to pro se applicants. Margolin had hoped
12	that by discussing in detail the defects in the Duggan Application (and later patent) the Examiner
13	would rethink his strategy and give Margolin's application the fair and honest examination the
14	Examiner is legally required to perform.
15 16	Instead, the Examiner has dug in his heels and is continuing to play the "pro se Bad" card and,
17	unable to argue the case on its merits, is trying to persuade the Board that Margolin is a lunatic.
18 19	In addition, the Examiner and his SPE have shown no knowledge of the real aerospace world and
20	should be removed from the case.
21	
22	<u>Conclusion</u>
23 24	For the reasons stated above, Margolin respectfully requests that the final rejection by the
25	Examiner be reversed and that the Examiner be instructed to issue a Notice of Allowance of all
26	claims.
27	
28	Respectfully submitted,
29 30 31	/Jed Margolin/
32	Jed Margolin
33 34	pro se inventor October 21, 2011
35	(775) 847-7845
36	

1 2				
3	I hereb	by certify that this correspon	ndence is being filed through the	USPTO's Electronic Filing
4	System	1.		
5	D .	0 + 1 21 2011	T () C' (/T 13/L 1' /
6	Date:	October 21, 2011	Inventor's Signature:	/Jed Margolin/
8				Jed Margolin
O				Jou Margonni
9				

Electronic Acknowledgement Receipt		
EFS ID:	11238507	
Application Number:	11736356	
International Application Number:		
Confirmation Number:	3649	
Title of Invention:	System and Method For Safely Flying Unmanned Aerial Vehicles in Civilian Airspace	
First Named Inventor/Applicant Name:	Jed Margolin	
Customer Number:	23497	
Filer:	Jed Margolin	
Filer Authorized By:		
Attorney Docket Number:		
Receipt Date:	21-OCT-2011	
Filing Date:	17-APR-2007	
Time Stamp:	14:01:11	
Application Type:	Utility under 35 USC 111(a)	

Payment information:

Submitted with Payment	no
------------------------	----

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Reply Brief Filed	jm_replybrief.pdf	94269	no	17
·) <u>-</u>	c9135f026d444d7d8ef756561fc6d4443019 68be		

Warnings:

Information:

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address: COMMISSIONER FOR PATENTS P.O. Box 1450 Alexandria, Virginia 22313-1450 www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
11/736,356	04/17/2007	Jed Margolin		3649
23497 JED MARGOL	7590 09/14/201 J N	EXAMINER		
1981 EMPIRE ROAD			MANCHO, RONNIE M	
RENO, NV 89521-7430			ART UNIT	PAPER NUMBER
			3664	
			MAIL DATE	DELIVERY MODE
			09/14/2011	PAPER

Please find below and/or attached an Office communication concerning this application or proceeding.

The time period for reply, if any, is set in the attached communication.



Commissioner for Patents United States Patent and Trademark Office P.O. Box 1450 Alexandria, VA 22313-1450 www.uspto.gov

BEFORE THE BOARD OF PATENT APPEALS AND INTERFERENCES

Application Number: 11/736,356

Filing Date: April 17, 2007

Appellant(s): MARGOLIN, JED

Jed Margolin

For Appellant

EXAMINER'S ANSWER

This is in response to the appeal brief filed 6/16/2011 appealing from the Office action mailed 2/15/2011

(1) Real Party in Interest

The examiner has no comment on the statement, or lack of statement, identifying by name the real party in interest in the brief.

(2) Related Appeals and Interferences

The examiner is not aware of any related appeals, interferences, or judicial proceedings which will directly affect or be directly affected by or have a bearing on the Board's decision in the pending appeal.

(3) Status of Claims

The following is a list of claims that are rejected and pending in the application:

1-14.

(4) Status of Amendments After Final

The examiner has no comment on the appellant's statement of the status of amendments after final rejection contained in the brief.

(5) Summary of Claimed Subject Matter

The examiner has no comment on the summary of claimed subject matter contained in the brief.

(6) Grounds of Rejection to be Reviewed on Appeal

The examiner has no comment on the appellant's statement of the grounds of rejection to be reviewed on appeal. Every ground of rejection set forth in the Office action from which the appeal is taken (as modified by any advisory actions) is being maintained by the examiner except for the grounds of rejection (if any) listed under the subheading "WITHDRAWN"

Application/Control Number: 11/736,356 Page 4

Art Unit: 3664

REJECTIONS." New grounds of rejection (if any) are provided under the subheading "NEW GROUNDS OF REJECTION."

(7) Claims Appendix

The examiner has no comment on the copy of the appealed claims contained in the Appendix to the appellant's brief.

(8) Evidence Relied Upon

5904724	Margolin	5-1999
20050004723	Duggan et al	01-2005

(9) Grounds of Rejection

The following ground(s) of rejection are applicable to the appealed claims:

Claim Rejections - 35 USC § 103

- i). The following is a quotation of 35 U.S.C. 103(a) which forms the basis for all obviousness rejections set forth in this Office action:
 - (a) A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subject matter sought to be patented and the prior art are such that the subject matter as a whole would have been obvious at the time the invention was made to a person having ordinary skill in the art to which said subject matter pertains. Patentability shall not be negatived by the manner in which the invention was made.
- ii). Claims 1-14 are rejected under 35 U.S.C. 103(a) as being unpatentable over Margolin (5904724) in view of Duggan et al (US 2005004723).

Regarding claim 1, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) discloses a system for safely flying an unmanned aerial vehicle in civilian airspace

Art Unit: 3664

(see for e.g. any type of remote aircraft used by recreational enthusiast; col. 3, 16-19, lines 50, 51; col. 5, lines 65-6. These at least indicate that the airspace is a civilian airspace) comprising:

- (a) a ground station 400 (fig. 1&4) equipped with a synthetic vision system (figs. 1&3; col. 5, lines 50-60; col. 4, lines 1 to col. 5, lines 67);
- (b) an unmanned aerial vehicle 300 (figs. 1&3) capable of supporting said synthetic vision system (305, 306, 307, 311 on aircraft; col. 5, lines 50-60; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67);
- (c) a remote pilot 102 operating said ground station 400 (figs. 1&4; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67);
- (d) a communications link between said unmanned aerial vehicle 300 and said ground station 400;
- e) a system onboard said unmanned aerial vehicle 300 for detecting the presence and position of nearby aircraft (305, 306, 307, 311 on aircraft) and communicating this information to said remote pilot 102 (col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67);

whereas said remote pilot uses said synthetic vision system (305, 306, 307, 311 on aircraft; col. 5, lines 50-60) to control said unmanned aerial vehicle 300 during at least selected phases of the flight of said unmanned aerial vehicle (selected phases implies some or all phases during flight).

Margolin did not disclose that the vehicle is flown using an autonomous control system (e.g. autopilot). However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0392).

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggan abstract, sec 0014, 0085, 0086).

The examiner respectfully asserts that since the airspace in the prior art is referred to as any environment which the prior art aircraft can fly it implies that the prior art airspace is not restricted to any particular airspace. As such the prior art at least contemplates a civilian airspace as claimed. In addition, since the prior art indicates that the remote aircraft can be of any type e.g. flown by a RECREATIONAL ETHUSIAST the prior at least contemplates that the remote aircraft if flown in a civilian space.

The examiner further respectfully asserts that a "synthetic vision system" has been interpreted as used in appellant's specification to refer to a 3-D vision system (appellants specification filed 4/17/2007, section 002). Appellant specification section 003 even admits that the prior art of record US (5904724) discloses a synthetic vision system as claimed.

Regarding claim 2, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the system of claim 1 whereby said selected phases of the flight of said unmanned aerial vehicle comprise:

Application/Control Number: 11/736,356

Art Unit: 3664

Page 7

(a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;

(b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

Regarding claim 3, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the system of claim 1 further comprising a system onboard said unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and bearing of said unmanned aerial vehicle.

Regarding claim 4, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the system of claim 1 further comprising a system onboard said unmanned aerial vehicle for providing a communications channel for Air Traffic Control and the pilots of other aircraft to communicate directly with said remote pilot.

Regarding claim 5, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

- (a) a ground station equipped with a synthetic vision system;
- (b) an unmanned aerial vehicle capable of supporting said synthetic vision system;
- (c) a remote pilot operating said ground station;
- (d) a communications link between said unmanned aerial vehicle and said ground station;
- e) a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot;

Art Unit: 3664

whereas said remote pilot uses said synthetic vision system to control said unmanned aerial vehicle during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system, and

whereas the selected phases of the flight of said unmanned aerial vehicle comprise:

- (a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;
- (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

Margolin did not disclose that the vehicle is flown using an autonomous control system.

However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0329).

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggan abstract, sec 0014, 0085, 0086).

Art Unit: 3664

The different embodiments in both prior arts are combinable as it would be obvious to ne having ordinary skill in the art.

Regarding claim 6, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the system of claim 5 further comprising a system onboard said unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and bearing of said unmanned aerial vehicle.

Regarding claim 7, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the system of claim 5 further comprising a system onboard said unmanned aerial vehicle for providing a communications channel for Air Traffic Control and the pilots of other aircraft to communicate directly with said remote pilot.

Regarding claim 8, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose a method for safely flying an unmanned aerial vehicle as part of a unmanned aerial system equipped with a synthetic vision system in civilian airspace comprising the steps of:

- (a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle an autonomous control system is used to fly said unmanned aerial vehicle;
- (b) providing a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot.

Margolin did not disclose that the vehicle is flown using an autonomous control system.

However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0392).

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggan abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne having ordinary skill in the art.

Regarding claim 9, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the method of claim 8 whereby said selected phases of the flight of said unmanned aerial vehicle comprise:

- (a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;
- (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

Regarding claim 10, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the method of claim 8 further comprising the step

Application/Control Number: 11/736,356

Art Unit: 3664

Page 11

of providing a system onboard said unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and bearing of said unmanned aerial vehicle.

Regarding claim 11, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the method of claim 8 further comprising the step of providing a system onboard said unmanned aerial vehicle for providing a communications channel for Air Traffic Control and the pilots of other aircraft to communicate directly with said remote pilot.

Regarding claim 12, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose a method for safely flying an unmanned aerial vehicle as part of a unmanned aerial system equipped with a synthetic vision system in civilian airspace comprising the steps of:

- (a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle an autonomous control system is used to fly said unmanned aerial vehicle;
- (b) providing a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot;

whereas said selected phases of the flight of said unmanned aerial vehicle comprise:

(a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;

Art Unit: 3664

(b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

Margolin did not disclose that the vehicle is flown using an autonomous control system. However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0392).

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggna abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne having ordinary skill in the art.

Regarding claim 13, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the method of claim 12 further comprising the step of providing a system onboard said unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and bearing of said unmanned aerial vehicle.

Regarding claim 14, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the method of claim 12 further comprising the step of providing a system onboard said unmanned aerial vehicle for providing a communications

Application/Control Number: 11/736,356

Art Unit: 3664

channel for Air Traffic Control and the pilots of other aircraft to communicate directly with said remote pilot.

Page 13

(10) Response to Argument

At page 15 of the brief appellant alleges that the examiner is not aware that Margolin (appellant) is the same person as the Margolin disclosed in the prior art of record during a telephone interview. The examiner does not recall any interview in which Margolin was debated as being the inventor or not. The examiner further respectfully submits that the argument is irrelevant to the appeal brief.

Appellant appears to misinterpret the final rejection at page 15 of the brief. The examiner did not say that the prior art, US (5904724) discloses all of the limitation "whereas said remote pilot uses said synthetic vision system to control said unmanned aerial vehicle during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system". The examiner used a combination of two prior arts in a 35 USC 103 (a) combination to reject the cited limitation. It appears that appellant is separating the prior arts to make an argument based on a 102 rejection. However, there is no 102 rejection in the final office action. Appellant in the abstract of their specification admits that the prior art US (5904724) anticipates the limitation, "said remote pilot uses said synthetic vision system (305,306, 307, 311 on aircraft) to control said unmanned aerial vehicle 300 during at least selected phases of the flight of said unmanned aerial vehicle". As such the basis of the argument is not understood since appellant does not contest the motivation to combine references, but only insist that both US (5904724)

and (US 2005004723) have been inappropriately used beyond the broadest possible interpretation. Appellant fails to provide any reason to support the statement that prior arts have been used beyond the broadest possible interpretation. At best the examiner can only assume that the appellant is making conclusory statements with no support.

Further, the appellant makes statements such as, "They certainly fail to make a *primafacie* case for rejection" instead of --They certainly fail to make a *primafacie* case of obviousness rejection--. Thus it is respectfully submitted that appellant is arguing a 102 rejection, which 102 rejection is not in the final office action under appeal.

The prior art Margolin, US (5904724) discloses a similar invention to that of the appellant. However, Margolin did not disclose that the aircraft is flown using an autonomous control system (e.g. autopilot). However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0392).

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggan abstract, sec 0014, 0085, 0086).

The examiner respectfully asserts that since the airspace in the prior art is referred to as any environment which the prior art aircraft can fly it implies that the prior art airspace is not

Art Unit: 3664

restricted to any particular airspace. As such the prior art at least contemplates a civilian airspace as claimed. In addition, since the prior art indicates that the remote aircraft can be of any type e.g. flown by a RECREATIONAL ETHUSIAST the prior at least contemplates that the remote aircraft if flown in a civilian space.

The examiner further respectfully asserts that a "synthetic vision system" has been interpreted as used in appellant's specification to refer to a 3-D vision system (appellants specification filed 4/17/2007, section 002). Appellant specification section 003 even admits that the prior art of record US (5904724) discloses a synthetic vision system as claimed.

The appellant is a pro se and the office tried to help the appellant to explain how MPEP was interpreted to reject the claims. However, appellant in the reply to the first office action dated 9/01/2010 furnished a response that was 75 pages (see appellant's response dated 11/29/2010). When asked why he submitted such a large swath of pages that mostly were about appellants personal papers referring to appellant's rents, taxes, personal contracts, etc appellant responded that he is trying to be diplomatic by submitted such large swaths of irrelevant documents even though appellant's specification is only 16 pages.

The examiner believes that appellant's claims were all addressed. Some of the claims are have similar limitations only that the wording in some of the claims is different. As such the examiner refers the appellant back to the rejection of the claims that are similar. Appellant took on this position to indicate that the claims were ignored. The examiner respectfully does not acquiesce to the allegations since the sections cited and quoted by appellant are believed to read on the claims. As such appellant's remarks citing MPEP 2143.03 is controversial since appellant

has concurred that the examiner has cited sections that are believed the read on the claims. As such it is respectfully submitted that all claim limitations were considered.

Some of appellant's remarks are that the prior art do not recite the phrase, "safely flying an unmanned aerial vehicle in civilian airspace comprising: ...". Appellant thus insists that the rejection is conclusory. The examiner disagrees and notes that any particular level of safety is not described or disclosed in the specification nor is there any meaning provided for "safety". It is believed that the aircraft flown in the prior art is flown with at least some safely since the pilot is required to practice flying the aircraft using a simulation 609. All aircraft pilots must go to school and practice before they are licensed to fly any aircraft be it civilian or military. In addition, the aircraft of the prior art at least anticipates the structure and operation of aircraft in the invention.

Now appellant's appeal brief is 506 pages long. Most of the material submitted by appellant is irrelevant to the appeal to the board because the material was not provided to the examiner for consideration during prosecution of the case. Appellant is making remarks relying on documents that the examiner was never given an opportunity to review during prosecution of the case. As such the examiner respectfully submits that comments about such arguments related to the such documents are irrelevant to the appeal brief to the Board.

(11) Related Proceeding(s) Appendix

No decision rendered by a court or the Board is identified by the examiner in the Related Appeals and Interferences section of this examiner's answer.

For the above reasons, it is believed that the rejections should be sustained.

Application/Control Number: 11/736,356 Page 17

Art Unit: 3664

Respectfully submitted,

/Ronnie Mancho/

Acting Examiner of Art Unit 3663

Conferees:

Ronnie Mancho /Ronnie Mancho/

/KHOI TRAN/

Supervisory Patent Examiner, Art Unit 3664

Brian K. Green /BKG/

1	IN THE UNITED STATES PATENT AND TRADEMARK OFFICE		
2			
3 4	Application Serial No. 11/736,356		
5 6	Filed: 04/17/2007		
7 8 9	For: SYSTEM AND METHOD FOR SAFELY FLYING UNMANNED AERIAL VEHICLES IN CIVILIAN AIRSPACE		
10 11	Examiner: Ronnie M. Mancho Art Unit: 3664		
12 13 14	In re Application of: Jed Margolin		
15 16 17 18 19	Mail Stop Appeal Brief - Patents Commissioner for Patents P.O. Box 1450 Alexandria, VA 22313-1450		
20	Sir,		
21	Appeal Brief		
22			
23	This is an appeal of the Rejection dated February 15, 2011 of twice-rejected claims 1-14.		
24	A Notice of Appeal was timely filed April 17, 2011. This Appeal Brief is timely filed within two		
25	months of that date. Pro se Appellant ("Margolin") claims Small Entity Status. The filing fee of		
26	\$270 is being paid through the USPTO's Electronic Filing System.		
27			

1		Table of Contents		
2				
3	This brief contains items under the following headings as required by 37 C.F.R. § 41.37			
4	and M	I.P.E.P. § 1206	:	
5				
6	I.	Real Party In	Interest	
7	II.	Related Appe	eals and Interferences	
8	III.	Status of Cla	ims	
9	IV.	Status of Am	endments	
10	V.	Summary of	Claimed Subject Matter	
11	VI.	Grounds of R	Rejection to be Reviewed on Appeal	
12	VII.	Argument		
13	VIII.	Claims Appe	ndix	
14	IX.	Evidence Ap	pendix	
15		Exhibit 1	Patent Application as filed	
16		Exhibit 2	U.S. Patent 5,904,724 (Margolin)	
17		Exhibit 3	First Office Action on the Merits	
18		Exhibit 4	U. S. Patent Application 20050004723 (Duggan)	
19		Exhibit 5	Applicant's Response to First Office Action	
20		Exhibit 6	Second Office Action	
21		Exhibit 7	Applicant's Summary of Telephone Interview with	
22			Examiner	
23		Exhibit 8	Applicant's Summary of Telephone Interview with	
24			Examiner's SPE	
25		Exhibit 9	IDS References Considered by Examiner	
26		Exhibit 10	Sensing Requirements for Unmanned Air Vehicles,	
27			AFRL Air Vehicles Directorate	
28		Exhibit 11	Developing Sense and Avoid Requirements for Meeting	
29			An Equivalent Level of Safety, Russel Wolfe	
30				

1		Exhibit 12	Article - Lockheed's Polecat UCAV Demonstrator Crashes,
2			Aviation Week & Space Technology, by Amy Butler, 03/19/2007,
3			page 44
4			
5		Exhibit 13	Ex parte MAURICE GIVENS Appeal 2009-003414
6			BPAI Informative Decision, Decided: August 6, 2009 493
7			
8		Exhibit 14	Speech - "Safety Must Come First"; J. Randolph Babbitt,
9			FAA Administrator; November 18, 2009, FAA Web site 498
10			
11		Exhibit 15	Article - Pentagon Accident Reports Suggest Military's
12			Drone Aircraft Plagued With Problems, by David Zucchino, from
13			The Ledger.com, July 6, 2010.
14			http://www.theledger.com/article/20100706/NEWS/7065101 502
15			
16			
17	X.	Related Proce	eedings Appendix
18			

1	I. REAL PARTY IN INTEREST
2 3 4 5 6 7 8	The real party in interest for this appeal is the <i>pro se</i> appellant: Jed Margolin 1981 Empire Rd. Reno, NV 89521-7430
9	
10	II. RELATED APPEALS, INTERFERENCES, AND JUDICIAL PROCEEDINGS
11 12	There are no other appeals, interferences, or judicial proceedings which will directly
13	affect or be directly affected by or have a bearing on the Board's decision in this appeal.
14	
15	
16	III. STATUS OF CLAIMS
17 18	The Application as filed included claims 1-14.
19 20	Claims 1-14 have been twice-rejected in the Office Action of February 15, 2011. Claims
21	1-14 are being appealed.
22	
23	
24	IV. STATUS OF AMENDMENTS
25 26	In response to the Final Office Action of February 15, 2011, a Notice of Appeal was
27	filed on April 17, 2011. No formal amendments were filed either before or after the issuance of
28	the Final Office Action of February 15, 2011.
29	

V. SUMMARY OF CLAIMED SUBJECT MATTER

2

1

3 Margolin's current invention is a system and method for safely flying an unmanned aerial 4 vehicle (UAV), unmanned combat aerial vehicle (UCAV), or remotely piloted vehicle (RPV) in 5 civilian airspace by using a remotely located pilot to control the aircraft using a synthetic vision 6 system during at least selected phases of the flight such as during take-offs and landings. The 7 current invention is a new and unobvious use for U.S. Patent 5,904,724 Method and apparatus 8 for remotely piloting an aircraft issued May 18, 1999 to Margolin. Appellant Margolin is the 9 same Margolin named as the inventor in 5,904,724 ('724) which was incorporated by reference 10 in the present application. (See Application Spec. page 2, lines 6 -19) The current application 11 solves a long unmet need, namely the ability to safely fly unmanned aerial vehicles in civilian

1213

airspace.

Independent Claim 1	References
A system for safely flying an unmanned aerial vehicle in civilian airspace comprising:	
(a) a ground station equipped with a synthetic vision system;	Spec. page 1, line 19 - page 2, line 19; '724 Spec. Column 3, lines 28-49; '724 Figures 4 and 5.
(b) an unmanned aerial vehicle capable of supporting said synthetic vision system;	Spec. page 1, line 19 - page 2, line 19; '724 Spec. Column 4, lines 1-16; '724 Figure 3.
(c) a remote pilot operating said ground station;	Spec. page 2, lines 6-19; '724 Figure 1 #102.
(d) a communications link between said unmanned aerial vehicle and said ground station;	'724 Column 3, lines 59-67; '724 Figure 1 #104, 105, 106.

(e) a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot;

Spec. page 5, lines 20-21;Spec. page 15, lines 23-27;'724 Column 4, line 66 - Column 5, line 5;'724 Figure 3 #307.

whereas said remote pilot uses said synthetic vision system to control said unmanned aerial vehicle during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system.

Spec. page 4, line 32 - page 5, line 3; Spec. page 5, lines 13-15.

2. The system of claim 1 whereby said selected phases of the flight of said unmanned aerial vehicle comprise: (a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude; (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude. References Spec. page 5, lines 5-7; Figures 1 and 2. Figures 1 and 2.

Dependent Claim 3	References
3. The system of claim 1 further comprising a system	Spec. page 5, lines 17-19.
onboard said unmanned aerial vehicle for periodically	
transmitting the identification, location, altitude, and	
bearing of said unmanned aerial vehicle.	

Dependent Claim 4	References
4. The system of claim 1 further comprising a system	Spec. page 5, lines 22-23;
onboard said unmanned aerial vehicle for providing a	Spec. page 16, lines 1-4.
communications channel for Air Traffic Control and the	
pilots of other aircraft to communicate directly with said	
remote pilot.	

Independent Claim 5	References
5. A system for safely flying an unmanned aerial vehicle in civilian airspace comprising:	
(a) a ground station equipped with a synthetic vision system;	Spec. page 1, line 19 - page 2, line 19; '724 Spec. Column 3, lines 28-49; '724 Figures 4 and 5.
(b) an unmanned aerial vehicle capable of supporting said synthetic vision system;	Spec. page 1, lines 19 - page 2, line 19; '724 Spec. Column 4, lines 1-16; '724 Figure 3.
(c) a remote pilot operating said ground station;	Spec. page 2, lines 6-19;

(d) a communications link between said unmanned aerial vehicle and said ground station;

'724 Column 3, lines 59-67;

'724 Figure 1 #104, 105, 106;

'724 Figure 1 #102.

(e) a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot;

Spec. page 5, lines 20-21;Spec. page 15, lines 23-27;'724 Column 4, line 66 - Column 5, line 5;'724 Figure 3 #307.

whereas said remote pilot uses said synthetic vision system to control said unmanned aerial vehicle during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system, and

Spec. page 4, line 32 - page 5, line 3; Spec. page 5, lines 13-15.

whereas the selected phases of the flight of said unmanned aerial vehicle comprise:

(a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;

Spec. page 5, lines 5-7; Figures 1 and 2.

(b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

Spec. page 5, lines 8-9; Figures 1 and 2.

Dependent Claim 6	References
6. The system of claim 5 further comprising a system	Spec. page 5, lines 17-19.
onboard said unmanned aerial vehicle for periodically	
transmitting the identification, location, altitude, and bearing	
of said unmanned aerial vehicle.	

Dependent Claim 7	Reference
7. The system of claim 5 further comprising a system	Spec. page 5, lines 22-23;
onboard said unmanned aerial vehicle for providing a	Spec. page 16, lines 1-4.
communications channel for Air Traffic Control and the	
pilots of other aircraft to communicate directly with said	
remote pilot.	

Independent Claim 8	References
8. A method for safely flying an unmanned aerial	
vehicle as part of a unmanned aerial system equipped	
with a synthetic vision system in civilian airspace	
comprising the steps of:	
(a) using a remote pilot to fly said unmanned aerial	Spec. page 1, lines 19 - page 2, line 19;
vehicle using synthetic vision during at least selected	Spec. page 4, lines 32-34;
phases of the flight of said unmanned aerial vehicle,	Spec. page 5, lines 1-3;
and during those phases of the flight of said unmanned	Spec. page 5, lines 13-15.
aerial vehicle when said synthetic vision system is not	
used to control said unmanned aerial vehicle an	
autonomous control system is used to fly said	

unmanned aerial vehicle;

(b) providing a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot.

Spec. page 5, lines 20-21;Spec. page 15, lines 23-27;'724 Column 4, line 66 - Column 5, line 5;'724 Figure 3 #307.

1

References
C 5.1: 5.7
Spec. page 5, lines 5-7;
Figures 1 and 2.
Spec. page 5, lines 8-9;
Figures 1 and 2.

Dependent Claim 10	References
10. The method of claim 8 further comprising the step of	Spec. page 5, lines 17-19.
providing a system onboard said unmanned aerial vehicle	
for periodically transmitting the identification, location,	
altitude, and bearing of said unmanned aerial vehicle.	

Dependent Claim 11	References
11. The method of claim 8 further comprising the step of	Spec. page 5, lines 22-23;
providing a system onboard said unmanned aerial vehicle	Spec. page 16, lines 1-4.
for providing a communications channel for Air Traffic	
Control and the pilots of other aircraft to communicate	
directly with said remote pilot.	

Independent Claim 12	References
12. A method for safely flying an unmanned aerial	
vehicle as part of a unmanned aerial system equipped	
with a synthetic vision system in civilian airspace	
comprising the steps of:	
(a) using a remote pilot to fly said unmanned aerial	Spec. page 1, lines 19 - page 2, line 19;
vehicle using synthetic vision during at least selected	Spec. page 4, lines 32-34;
phases of the flight of said unmanned aerial vehicle,	Spec. page 5, lines 1-3;
and during those phases of the flight of said unmanned	Spec. page 5, lines 13-15.
aerial vehicle when said synthetic vision system is not	
used to control said unmanned aerial vehicle an	
autonomous control system is used to fly said	
unmanned aerial vehicle;	
(b) providing a system onboard said unmanned aerial	Spec. page 5, lines 20-21;
vehicle for detecting the presence and position of	Spec. page 15, lines 23-27;
nearby aircraft and communicating this information to	'724 Column 4, line 66 - Column 5,
said remote pilot;	line 5;
	'724 Figure 3 #307.

whereas said selected phases of the flight of said	
unmanned aerial vehicle comprise:	
(a) when said unmanned aerial vehicle is within a	Spec. page 5, lines 5-7;
selected range of an airport or other designated	Figures 1 and 2.
location and is below a first specified altitude;	
(b) when said unmanned aerial vehicle is outside said	Spec. page 5, lines 8-9;
selected range of an airport or other designated	Figures 1 and 2.
location and is below a second specified altitude.	

Dependent Claim 13	References
13. The method of claim 12 further comprising the step of	Spec. page 5, lines 17-19.
providing a system onboard said unmanned aerial vehicle	
for periodically transmitting the identification, location,	
altitude, and bearing of said unmanned aerial vehicle.	

Dependent Claim 14	References
14. The method of claim 12 further comprising the step of	Spec. page 5, lines 22-23;
providing a system onboard said unmanned aerial vehicle	Spec. page 16, lines 1-4.
for providing a communications channel for Air Traffic	
Control and the pilots of other aircraft to communicate	
directly with said remote pilot.	

GROUNDS OF REJECTION TO BE REVIEWED ON APPEAL

VI.

1

15

2 3 A. Claims 1-14 stand rejected under 35 U.S.C § 103(a) as being unpatentable over U.S. Patent 4 5,904,724 ('724) to Margolin (the same Margolin as the Appellant) in view of Patent Publication 5 US 2005004723 to Duggan. 6 7 B. Whether Margolin had a duty to define the term "civilian airspace" or whether he was 8 entitled to use the common meaning of the term. 9 10 C. Whether Margolin had a duty to define "safety" or whether he was entitled to use the 11 common meaning of the term; and whether Margolin defined a particular level of safety. 12 13 D. Whether the Examiner's assertion that "It is believed that the aircraft flown in the prior art is flown safely ..." (and which is asserted without evidence) is proper. 14

Ground A Claims 1-14 stand rejected under 35 U.S.C § 103(a) as being unpatentable over U.S. Pate 5,904,724 (*724) to Margolin (the same Margolin as the Appellant) in view of Patent Pul US 2005004723 to Duggan. The following is a quotation of 35 U.S.C § 103(a): (a) A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subje sought to be patented and the prior art are such that the subject matter as a whole we have been obvious at the time the invention was made to a person having ordinary state art to which said subject matter pertains. Patentability shall not be negatived by manner in which the invention was made. MPEP § 2142 states under the heading ESTABLISHING A PRIMA FACIE CASE Of OBVIOUSNESS: a. **>The key to supporting any rejection under 35 U.S.C. 103 is the clear artion of the reason(s) why the claimed invention would have been obvious. The Supre Court in KSR International Co. v. Teleflex Inc., 550 U.S,, 82 USPQ2d 138 (2007) noted that the analysis supporting a rejection under 35 U.S.C. 103 should be explicit. The Federal Circuit has stated that "rejections on obviousness cannot be sustained with mere conclusory statements; instead, there must be some articul	blication
Claims 1-14 stand rejected under 35 U.S.C § 103(a) as being unpatentable over U.S. Pate 5,904,724 ('724) to Margolin (the same Margolin as the Appellant) in view of Patent Pul US 2005004723 to Duggan. The following is a quotation of 35 U.S.C § 103(a): (a) A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subje sought to be patented and the prior art are such that the subject matter as a whole we have been obvious at the time the invention was made to a person having ordinary si the art to which said subject matter pertains. Patentability shall not be negatived by manner in which the invention was made. MPEP § 2142 states under the heading ESTABLISHING A PRIMA FACIE CASE Of OBVIOUSNESS: a. **>The key to supporting any rejection under 35 U.S.C. 103 is the clear art of the reason(s) why the claimed invention would have been obvious. The Supre Court in KSR International Co. v. Teleflex Inc., 550 U.S,, 82 USPQ2d 138 (2007) noted that the analysis supporting a rejection under 35 U.S.C. 103 should be explicit. The Federal Circuit has stated that "rejections on obviousness cannot be sustained with mere conclusory statements; instead, there must be some articul	blication
Claims 1-14 stand rejected under 35 U.S.C § 103(a) as being unpatentable over U.S. Pate 5,904,724 (*724) to Margolin (the same Margolin as the Appellant) in view of Patent Pul US 2005004723 to Duggan. The following is a quotation of 35 U.S.C § 103(a): (a) A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subje sought to be patented and the prior art are such that the subject matter as a whole we have been obvious at the time the invention was made to a person having ordinary state art to which said subject matter pertains. Patentability shall not be negatived by manner in which the invention was made. MPEP § 2142 states under the heading ESTABLISHING A PRIMA FACIE CASE Of OBVIOUSNESS: a. **>The key to supporting any rejection under 35 U.S.C. 103 is the clear art of the reason(s) why the claimed invention would have been obvious. The Supre Court in KSR International Co. v. Teleflex Inc., 550 U.S,, 82 USPQ2d 138 (2007) noted that the analysis supporting a rejection under 35 U.S.C. 103 should be explicit. The Federal Circuit has stated that "rejections on obviousness cannot be sustained with mere conclusory statements; instead, there must be some articul	blication
5,904,724 ('724) to Margolin (the same Margolin as the Appellant) in view of Patent Pull US 2005004723 to Duggan. The following is a quotation of 35 U.S.C § 103(a): (a) A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subject sought to be patented and the prior art are such that the subject matter as a whole we have been obvious at the time the invention was made to a person having ordinary state the art to which said subject matter pertains. Patentability shall not be negatived by manner in which the invention was made. MPEP § 2142 states under the heading ESTABLISHING A PRIMA FACIE CASE Of OBVIOUSNESS: a. **>The key to supporting any rejection under 35 U.S.C. 103 is the clear artion of the reason(s) why the claimed invention would have been obvious. The Supre Court in KSR International Co. v. Teleflex Inc., 550 U.S,, 82 USPQ2d 138 (2007) noted that the analysis supporting a rejection under 35 U.S.C. 103 should be explicit. The Federal Circuit has stated that "rejections on obviousness cannot be sustained with mere conclusory statements; instead, there must be some articul	blication
The following is a quotation of 35 U.S.C § 103(a): (a) A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subje sought to be patented and the prior art are such that the subject matter as a whole we have been obvious at the time the invention was made to a person having ordinary set the art to which said subject matter pertains. Patentability shall not be negatived by manner in which the invention was made. MPEP § 2142 states under the heading ESTABLISHING A PRIMA FACIE CASE Of OBVIOUSNESS: a. **>The key to supporting any rejection under 35 U.S.C. 103 is the clear artifulation of the reason(s) why the claimed invention would have been obvious. The Supre Court in KSR International Co. v. Teleflex Inc., 550 U.S,, 82 USPQ2d 138 (2007) noted that the analysis supporting a rejection under 35 U.S.C. 103 should be explicit. The Federal Circuit has stated that "rejections on obviousness cannot be sustained with mere conclusory statements; instead, there must be some articular to the support of the support of the reason of the properties of the reason of the properties of the proper	
The following is a quotation of 35 U.S.C § 103(a): (a) A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subjet sought to be patented and the prior art are such that the subject matter as a whole we have been obvious at the time the invention was made to a person having ordinary state art to which said subject matter pertains. Patentability shall not be negatived by manner in which the invention was made. MPEP § 2142 states under the heading ESTABLISHING A PRIMA FACIE CASE Of OBVIOUSNESS: a. **>The key to supporting any rejection under 35 U.S.C. 103 is the clear artion of the reason(s) why the claimed invention would have been obvious. The Supre Court in KSR International Co. v. Teleflex Inc., 550 U.S,, 82 USPQ2d 138 (2007) noted that the analysis supporting a rejection under 35 U.S.C. 103 should be explicit. The Federal Circuit has stated that "rejections on obviousness cannot be sustained with mere conclusory statements; instead, there must be some articular to the support of the support of the reason of	
(a) A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subjet sought to be patented and the prior art are such that the subject matter as a whole we have been obvious at the time the invention was made to a person having ordinary state art to which said subject matter pertains. Patentability shall not be negatived by manner in which the invention was made. MPEP § 2142 states under the heading ESTABLISHING A PRIMA FACIE CASE Of OBVIOUSNESS: a. **>The key to supporting any rejection under 35 U.S.C. 103 is the clear artiful of the reason(s) why the claimed invention would have been obvious. The Supre Court in KSR International Co. v. Teleflex Inc., 550 U.S,, 82 USPQ2d 138 (2007) noted that the analysis supporting a rejection under 35 U.S.C. 103 should be explicit. The Federal Circuit has stated that "rejections on obviousness cannot be sustained with mere conclusory statements; instead, there must be some articul	
described as set forth in section 102 of this title, if the differences between the subjet sought to be patented and the prior art are such that the subject matter as a whole we have been obvious at the time the invention was made to a person having ordinary sittle art to which said subject matter pertains. Patentability shall not be negatived by manner in which the invention was made. MPEP § 2142 states under the heading ESTABLISHING A PRIMA FACIE CASE Of OBVIOUSNESS: a. **>The key to supporting any rejection under 35 U.S.C. 103 is the clear artiful of the reason(s) why the claimed invention would have been obvious. The Supre Court in KSR International Co. v. Teleflex Inc., 550 U.S,, 82 USPQ2d 138 (2007) noted that the analysis supporting a rejection under 35 U.S.C. 103 should be explicit. The Federal Circuit has stated that "rejections on obviousness cannot be sustained with mere conclusory statements; instead, there must be some articular to be sustained with mere conclusory statements; instead, there must be some articular to be sustained with mere conclusory statements; instead, there must be some articular to be sustained with mere conclusory statements; instead, there must be some articular to be sustained with mere conclusory statements; instead, there must be some articular to be sustained with mere conclusory statements; instead, there must be some articular to be sustained with mere conclusory statements.	
a. **>The key to supporting any rejection under 35 U.S.C. 103 is the clear artion of the reason(s) why the claimed invention would have been obvious. The Supre Court in KSR International Co. v. Teleflex Inc., 550 U.S,, 82 USPQ2d 138 (2007) noted that the analysis supporting a rejection under 35 U.S.C. 103 should be explicit. The Federal Circuit has stated that "rejections on obviousness cannot be sustained with mere conclusory statements; instead, there must be some articular to support the support of the reason(s) why the claimed invention would have been obvious. The Supre Court in KSR International Co. v. Teleflex Inc., 550 U.S,, 82 USPQ2d 138 (2007) noted that the analysis supporting a rejection under 35 U.S.C. 103 should be explicit. The Federal Circuit has stated that "rejections on obviousness cannot be sustained with mere conclusory statements; instead, there must be some articular to support the support of the reason(s) why the claimed invention would have been obvious. The Supre Court in KSR International Co. v. Teleflex Inc., 550 U.S,, 82 USPQ2d 138 (2007) noted that the analysis supporting a rejections on obviousness cannot be sustained with mere conclusory statements; instead, there must be some articular to support the supre of the reason(s) why the claimed invention would have been obvious.	ct matter ould kill in
of the reason(s) why the claimed invention would have been obvious. The Supre Court in KSR International Co. v. Teleflex Inc., 550 U.S,, 82 USPQ2d 138 (2007) noted that the analysis supporting a rejection under 35 U.S.C. 103 should be explicit. The Federal Circuit has stated that "rejections on obviousness cannot be sustained with mere conclusory statements; instead, there must be some articular of the reason(s) why the claimed invention would have been obvious. The Supre Court in KSR International Co. v. Teleflex Inc., 550 U.S,, 82 USPQ2d 138 (2007) noted that the analysis supporting a rejection under 35 U.S.C. 103 should be explicit. The Federal Circuit has stated that "rejections on obviousness cannot be sustained with mere conclusory statements; instead, there must be some articular or the conclusion of	F
reasoning with some rational underpinning to support the legal conclusion of obviousness." In re Kahn, 441 F.3d 977, 988, 78 USPQ2d 1329, 1336 (Fed. Cir. 200 also KSR, 550 U.S. at, 82 USPQ2d at 1396 (quoting Federal Circuit statement approval). <	me 35, 1396 made ated
29 {Emphasis added}	
30	
In the Examiner's 35 U.S.C. § 103(a) rejection he failed to make a prima facie case of	
32 obviousness.	
Margolin's current invention is a system and method for safely flying an unmanned aeria vehicle (UAV), unmanned combat aerial vehicle (UCAV), or remotely piloted vehicle (F	ıl

1 civilian airspace by using a remotely located pilot to control the aircraft using a synthetic vision 2 system during at least selected phases of the flight such as during take-offs and landings. 3 4 The current invention is a new and unobvious use for U.S. Patent 5,904,724 Method and 5 apparatus for remotely piloting an aircraft issued May 18, 1999 to Margolin. 6 Applicant/Appellant Margolin is the same Margolin named as the inventor in 5,904,724 ('724) 7 which was incorporated by reference in the present application. From Application Spec. page 2, 8 lines 6 -19: 9 [003] The use of Synthetic Vision in flying a UAV is taught by U.S. Patent 5,904,724 10 Method and apparatus for remotely piloting an aircraft issued May 18, 1999 to 11 Margolin (the present Applicant) which is hereby incorporated by reference.¹ 12 13 **Claim 1 (Independent)** 14 15 In claim 1, the new and unobvious use for '724 is in using synthetic vision during selected 16 phases of the flight and during those phases of the flight where synthetic vision is not used, an 17 autonomous control system is used. In claim 1 this element is: 18 whereas said remote pilot uses said synthetic vision system to control said unmanned aerial 19 vehicle during at least selected phases of the flight of said unmanned aerial vehicle, and 20 during those phases of the flight of said unmanned aerial vehicle when said synthetic vision 21 system is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is 22 flown using an autonomous control system. 23 24 The Examiner asserts that he found this element in '724 as follows, from Office Action dated 25 September 1, 2010, page 3, second paragraph (Evidence Appendix Exhibit 3 at 105) and Office Action dated February 15, 2011, page 3, second paragraph (Evidence Appendix Exhibit 6 at 26 27 438):

In Margolin's telephone interview with the Examiner, the Examiner was unaware that Margolin (the current Applicant) is the same Margolin named as the inventor in '724. At one point during the interview the Examiner was confused as to whether Margolin was Margolin or Duggan. (See Summary of Telephone Interview with the Examiner, Evidence Appendix, Exhibit 7 at 452.)

whereas said remote pilot uses said synthetic vision system (305, 306, 307, 311 on aircraft)

to control said unmanned aerial vehicle 300 during at least selected phases of the flight of

28

29

30


said unmanned aerial vehicle.

- 1 He also finds it in Duggan, in Office Action dated September 1, 2010, page 3 (Evidence
- 2 Appendix Exhibit 3 at 105) and Office Action dated February 15, 2011, page 3 (Evidence
- 3 Appendix Exhibit 6 at 438):

Margolin did not disclose that the vehicle is flown using an autonomous control system. However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0329).

- 14 The Examiner's references to '724 are references in the figures, namely Figure 3. '724 Figure 3
- is reproduced here:

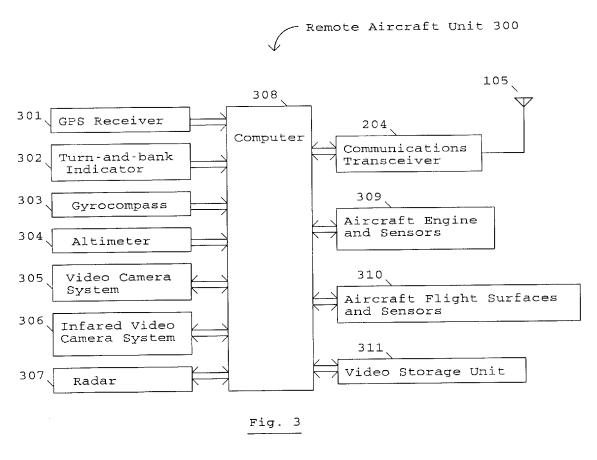

The Examiner's assertion that this shows "whereas said remote pilot uses said synthetic vision system (305, 306, 307, 311 on aircraft) to control said unmanned aerial vehicle 300 during at

- least selected phases of the flight of said unmanned aerial vehicle" goes beyond a broadest
- 2 reasonable interpretation. It goes beyond even a broadest possible interpretation.

The same is true of the Duggan references cited by the Examiner:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0329).

Duggan:

[0352] In one aspect of the present invention, an operator station (also referred to as the ground control station or GCS) is designed to accommodate command and control of multiple vehicles or a single vehicle by a single operator. In accordance with one embodiment, the ground control station is platform independent and implements an application program interface that provides windowing and communications interfaces (e.g., the platform is implemented in Open Source wxWindows API). The underlying operating system is illustratively masked and enables a developer to code in a high level environment.

[0353] In one embodiment, the ground control station incorporates several specialized user interface concepts designed to effectively support a single operator tasked to control multiple vehicles. The GCS also illustratively supports manual control and sensor steering modes. In the manual control mode, the operator can assume control authority of the vehicles individually from the ground control station at any time in flight. In the sensor steering mode, a vehicle will autonomously fly in the direction the operator is manually pointing the on-board imaging sensor (e.g., operator views video output from a digital camera on a TV interface, computer screen display, etc.). A custom data link is illustratively, utilized to support a two-way transfer of data between the ground control station and the UAV's. These design concepts together provide a flexible, multiple vehicle control system. The details of the concepts are discussed below.

[0318] If the pilot chooses a surveillance location outside the total FOV, then the outer loop guidance will illustratively follow a command-to-LOS mode guide law until the UAV flight path points toward the target. Once the desired staring-point comes within a minimum range threshold, the guidance automatically trips into a loiter pattern (either constant-radius or elliptical) to maintain a station with a single key-click while he/she conducts other activities. FIGS. 22A & 22B together demonstrate the surveillance-point approach scenario.

[0322] In accordance with one aspect of the present invention, sensor-slave mode commands are generated by an autonomous line-of-sight driven function, in which the command objectives are generated by the necessities of the function rather than by an operator. For example, a function designed to command a raster-scan of a particular surveillance area, or a function designed to scan a long a roadway could be used to generate sensor slave

commands. Another example is a function designed to generate line-of-sight commands for UAV-to-UAV rendezvous formation flying.

[0353] In one embodiment, the ground control station incorporates several specialized user interface concepts designed to effectively support a single operator tasked to control multiple vehicles. The GCS also illustratively supports manual control and sensor steering modes. In the manual control mode, the operator can assume control authority of the vehicles individually from the ground control station at any time in flight. In the sensor steering mode, a vehicle will autonomously fly in the direction the operator is manually pointing the on-board imaging sensor (e.g., operator views video output from a digital camera on a TV interface, computer screen display, etc.). A custom data link is illustratively, utilized to support a two-way transfer of data between the ground control station and the UAV's. These design concepts together provide a flexible, multiple vehicle control system. The details of the concepts are discussed below.

[0356] a synthetic vision display

[0365] The two video monitors are illustratively used to display real-time data linked camera imagery from two air vehicles having cameras (of course, fewer, more or none of the vehicles might have cameras and the number of monitor displays can be altered accordingly). In accordance with one embodiment, camera imagery is recorded on videotapes during a mission. In accordance with one embodiment, the two repeater displays are used to provide redundant views of the GUI and synthetic vision display. The laptop illustratively serves as a GUI backup in the event that the main GUI fails.

[0388] In one aspect of the present invention, synthetic vision display technical approach of the present invention is based upon integrating advanced simulated visuals, originally developed for training purposes, into UAV operational systems. In accordance with one embodiment, the simulated visuals are integrated with data derived from the ground control station during flight to enable real-time synthetic visuals.

[0390] In one aspect of the present invention, through GUI display 2622, an operator can maintain a variable level of control over a UAV, from fully manual to fully autonomous, with simple user-friendly inputs. For example, if an operator decides to divert a UAV to a new route, the operator has a plurality of options to select from. The following are examples of some of the options that an operator has. Those skilled in the art should recognize that this is not an exhaustive list. In one embodiment, the operator could graphically edit the existing route on mission situation display 2629 by adding a waypoint or orbit pattern in the vicinity of a desired target region. Prior to accepting the edited route, the control system evaluates the revised route against the vehicle performance capability as well as terrain obstructions. If the route is within acceptable bounds, the control system registers the modified route and maneuvers the vehicle accordingly. In another embodiment, the operator could select a park mode on selections pane 2630. After selected, the control system queues the operator to click the location of and graphical size (via a mouse) the desired orbit pattern in which the vehicle will fly while "parked" over a desired target. In another embodiment, the operator can select a manual control mode on selections pane 2630. By selecting RDC

(remote directional command), for example, the control system controls the UAV into a constant altitude, heading and speed flight until the operator instructs a maneuver. While in RDC mode, the operator can either pseudo-manually direct the UAV using the control stick (e.g. joystick) or the operator can program a fixed heading, altitude and speed using the control options provided in selections pane 2630.

[0346] In accordance with one embodiment, an exemplary translation layer implementation will now be provided. After the guidance algorithms execute, the outputs are translated to the native vehicle autopilot commands. The equations below provide example kinematic translations from the guidance acceleration commands to native vehicle autopilot commands. These equations demonstrate the principal that vehicle motion is activated through acceleration. The methods that various vehicles employ to generate acceleration are numerous (bank angle autopilot, acceleration autopilot, heading control autopilot, altitude control autopilot, etc). Since the control algorithms described herein generate acceleration commands that can be kinematically translated into any of these native autopilot commands, the guidance algorithms truly provide a generalized library of control laws that can control any vehicle through that vehicle's native atomic functions. Ubiquitous acceleration control techniques enable VACS to synthesize control commands for any vehicle, including air, ground, or sea-based. 35 a v = vertical plane acceleration command a <math>h = horizontal planeacceleration command = $\tan - 1$ (a h a v) = $\tan 2$ angle command a T = a v 2 + a h 2 = $\cot 2$ body acceleration command $\cdot = a h V = turn rate command i = i - 1 + . t = heading command$ i = (a v - g) V = flight path rate command i = i - 1 + i = flight path angle command h = V $\sin () = \text{climb rate command h i} = \text{h i} = 1 + \text{h}$. t = altitude command Eq. 57

[0347] Additional functionality that can be enabled in a translation layer is means for discouraging or preventing an operator (e.g., the human or non-human operator interfacing the VACS architecture) from overdriving, stalling, or spinning the vehicle frame. This being said, limiting algorithms can also be employed in the guidance or autopilot functions.

[0348] X. Autopilot

[0349] As has been addressed, the present invention is not limited to, and does not require, a particular autopilot system. The control system and architecture embodiments of the present invention can be adapted to accommodate virtually any autopilot system.

[0350] For the purpose of providing an example, an illustrative suitable autopilot software system will now be described. The illustrative autopilot system incorporates a three-axis design (pitch and yaw with an attitude control loop in the roll axis) for vehicle stabilization and guidance command tracking. The autopilot software design incorporates flight control techniques, which allow vehicle control algorithms to dynamically adjust airframe stabilization parameters in real-time during flight. The flight computer is programmed directly with the airframe physical properties, so that it can automatically adjust its settings with changes in airframe configuration, aerodynamic properties, and/or flight state. This provides for a simple and versatile design, and possesses the critical flexibility needed when adjustments to the airframe configuration become necessary. The three-loop design includes angular rate feedback for stability augmentation, attitude feedback for closed-loop stiffness,

and acceleration feedback for command tracking. In addition, an integral controller in the forward loop illustratively provides enhanced command tracking, low frequency disturbance rejection and an automatic trim capability.

3 4 5

6

7

8

1

2

- The Examiner then refers to the range 0390-0329. In Margolin's Response to the First Office Action of September 1, 2010 he pointed out that this range did not make sense. From Evidence Appendix Exhibit 5 at 205:
 - {The Examiner may have meant 0390-0392. Otherwise the range is not credible}

9

Margolin assumed (and still assumes) that the Examiner meant 0390-0392.

11

- And yet, in the Second Office Action (February 15, 2011), the Examiner makes the same
- mistake. See Evidence Appendix Exhibit 6 at 438. This calls into question the Examiner's
- statement that "Applicant's arguments filed 11/29/10 have been fully considered but they are not
- persuasive." (See Evidence Appendix Exhibit 6 at 445.) The real reason that the Examiner did
- not find Margolin's arguments persuasive is because he did not read them. He also did not read
- 17 the Specification in the Application or he would have known that Applicant (and now Appellant)
- 18 Margolin is also the Margolin in '724.

1920

21

22

23

2425

26

27

28

29

30

31

32

33

34

35

36

37

38

Here is Duggan 0390-0392:

[0390] In one aspect of the present invention, through GUI display 2622, an operator can maintain a variable level of control over a UAV, from fully manual to fully autonomous, with simple user-friendly inputs. For example, if an operator decides to divert a UAV to a new route, the operator has a plurality of options to select from. The following are examples of some of the options that an operator has. Those skilled in the art should recognize that this is not an exhaustive list. In one embodiment, the operator could graphically edit the existing route on mission situation display 2629 by adding a waypoint or orbit pattern in the vicinity of a desired target region. Prior to accepting the edited route, the control system evaluates the revised route against the vehicle performance capability as well as terrain obstructions. If the route is within acceptable bounds, the control system registers the modified route and maneuvers the vehicle accordingly. In another embodiment, the operator could select a park mode on selections pane 2630. After selected, the control system queues the operator to click the location of and graphical size (via a mouse) the desired orbit pattern in which the vehicle will fly while "parked" over a desired target. In another embodiment, the operator can select a manual control mode on selections pane 2630. By selecting RDC (remote directional command), for example, the control system controls the UAV into a constant altitude, heading and speed flight until the operator instructs a maneuver. While in RDC mode, the operator can either pseudo-manually direct the UAV using the control stick

(e.g. joystick) or the operator can program a fixed heading, altitude and speed using the control options provided in selections pane 2630.

2 3 4

5

6

7

8

9

10

1

[0391] The described Intelligent displays with smart variables represent an effective approach to actively displaying information for different types of vehicles. However, a problem can arise when a new vehicle is integrated into the ground control station with a completely foreign command and control interface. Under these circumstances, the ground control station is not concerned about displaying data, but is tasked to provide a command and control interface for the operator to perform the required operations. This conundrum is the motivation for another embodiment of the present invention, namely, the integration of vehicle specific panels in the ground control station.

11 12 13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

[0392] In one embodiment, a generic vehicle class (GVC) is illustratively a software component that provides a rapid development environment API to add new vehicle classes and types to the ground control station. The GVC also illustratively serves as a software construct that allows the inclusion of multiple vehicles within the ground control station framework. One of the variables in the application is a vector of pointers to a generic vehicle class. This list is constructed by allocating new specific vehicles and returning a type case to the base generic vehicle class. When a new vehicle is integrated into the ground control station, the generic vehicle class provides all of the virtual functions to integrate with system control components (e.g., to integrate with a map display, a communications package, PCIG imagery and/or appropriate display windows). An important object in the application framework is illustratively a pointer to the current vehicle generic class. When the user switches vehicles, this pointer is updated and all displays grab the appropriate smart variables from the pointer to the new base class. This is the mechanism by which windows immediately update to the current vehicle information whenever the user switches vehicles. The default windows use the pointer to the current vehicle to grab information. In this manner, if the user switches to a new vehicle with a different set of datalink variables, that fact is immediately apparent on the display windows.

3031

32

33

Not only do the Duggan citations fail to support a broadest reasonable interpretation (or even a broadest possible interpretation) for the Examiner's assertion, they amount to a series of non sequiturs.

34 35

They certainly fail to make a *prima facie* case for rejection.

- 37 In addition, although the Examiner's rejection of claim 1 in both the Office Action of September
- 38 1, 2010 (Evidence Appendix Exhibit 3 at 102) and in February 15, 2011 (Evidence Appendix
- Exhibit 6 at 435) are almost identical, the Examiner added some language to the February 15,
- 40 2011 rejection.

The September 1, 2010 rejection, page 3; Evidence Appendix Exhibit 3 at 105:	February 15, 2011 rejection, page 3; Evidence Appendix Exhibit 6 at 438:
whereas said remote pilot uses said synthetic vision system (305, 306, 307, 311 on aircraft) to control said unmanned aerial vehicle 300 during at least selected phases of the flight of said unmanned aerial vehicle. Margolin did not disclose that the vehicle is	whereas said remote pilot uses said synthetic vision system (305, 306, 307, 311 on aircraft; col. 5, lines 50-60) to control said unmanned aerial vehicle 300 during at least selected phases of the flight of said unmanned aerial vehicle (selected phases implies some or all phases during flight).
flown using an autonomous control system. However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:	Margolin did not disclose that the vehicle is flown using an autonomous control system (e.g. autopilot). However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:
The added language (selected phases implies so benign addition but probably isn't. Otherwise the intended that the phases be selected. The phrase "all phases" which is clearly not Margolin's intended that the phases into the phases of the phrase and phases in the phases implies the phase implies the phase impl	e Examiner would not have added it. Margolin s "some or all phases" is broader and includes

The added language (**e.g. autopilot**) is definitely not benign. An autonomous control system is much more than an autopilot. Margolin does not equate the two.

Claim 2 (Dependent)

respond to these additions to the second rejection.

17 Claim 2 is a dependent claim, dependent on Claim 1. Margolin has shown that Claim 1 is

nonobvious. Therefore, under **2143.03 All Claim Limitations Must Be Considered**, Claim 2 is non-obvious.

By making the second rejection final the Examiner has denied Margolin the opportunity to

2143.03 All Claim Limitations Must Be **>Considered< [R-6]

- ** "All words in a claim must be considered in judging the patentability of that claim against the prior art." *In re Wilson*, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970).
- If an independent claim is nonobvious under 35 U.S.C. 103, then any claim depending therefrom is nonobvious. *In re Fine*, 837 F.2d 1071, 5 USPQ2d 1596 (Fed. Cir. 1988).

Claim 3 (Dependent) 1 2 3 Claim 3 is a dependent claim, dependent on Claim 1. Margolin has shown that Claim 1 is 4 nonobvious. Therefore, under 2143.03 All Claim Limitations Must Be Considered, Claim 3 is 5 non-obvious. 6 7 **Claim 4 (Dependent)** 8 9 Claim 4 is a dependent claim, dependent on Claim 1. Margolin has shown that Claim 1 is 10 nonobvious. Therefore, under 2143.03 All Claim Limitations Must Be Considered, Claim 4 is 11 non-obvious. 12 Claim 5 (Independent) 13 14 15 In claim 5, the new and unobvious use for '724 is in using synthetic vision during selected 16 phases of the flight and during those phases of the flight where synthetic vision is not used, an 17 autonomous control system is used, and further, that the selected phases comprise (a) when the 18 unmanned aerial vehicle is within a selected range of an airport or other designated location and 19 is below a first specified altitude, and (b) when said unmanned aerial vehicle is outside said 20 selected range of an airport or other designated location and is below a second specified altitude. 21 22 In claim 5 this element is: 23 whereas said remote pilot uses said synthetic vision system to control said unmanned aerial 24 vehicle during at least selected phases of the flight of said unmanned aerial vehicle, and 25 during those phases of the flight of said unmanned aerial vehicle when said synthetic vision 26 system is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is 27 flown using an autonomous control system, and 28 29 whereas the selected phases of the flight of said unmanned aerial vehicle comprise: 30 31 (a) when said unmanned aerial vehicle is within a selected range of an airport or other 32 designated location and is below a first specified altitude; 33

(b) when said unmanned aerial vehicle is outside said selected range of an airport or other

designated location and is below a second specified altitude.

35 36

- 1 However, whereas in the Examiner's rejection of claim 1 he made at least some attempt to
- 2 indentify the different elements in '724, in his rejection of claim 5 he simply cited the following:
- 3 abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67. See Office Action dated
- 4 September 1, 2010, page 4, last paragraph (Evidence Appendix Exhibit 3 at 106) and Office
- 5 Action dated February 15, 2011, page 4, last paragraph (Evidence Appendix Exhibit 6 at 439).

- 7 The three passages cited in '724 (Column 3, lines 8-67; Column 4, lines 1-67; and Column 5,
- 8 lines 1-67) form a continuous passage from Column 3, line 8 to Column 5, line 67. This passage
- 9 of approximately 1619 words forms the core of the '724 DETAILED DESCRIPTION. The
- Examiner also cited all of the drawings and the abstract.

11

- 12 Breaking the long contiguous passage of approximately 1619 words into three sections is
- misleading. By doing this the Examiner shows awareness of his failure to make a prima facie
- case for rejection. Or, perhaps it was simply laziness.

15

- 16 The Examiner did cite Duggan in one of the elements, but only one:
- a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during
- phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a
- synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial
- vehicle said unmanned aerial vehicle is flown using an autonomous control system
- 21 (autopilot, sec 0346 to 0350, 0390-0329).

22

- As with claim 1, the Duggan references are irrelevant. And again, the Examiner repeats the
- 24 mistake of referring to 0390-0329.
- 25 Duggan:
- 26 [0352] In one aspect of the present invention, an operator station (also referred to as the
- 27 ground control station or GCS) is designed to accommodate command and control of
- multiple vehicles or a single vehicle by a single operator. In accordance with one
- embodiment, the ground control station is platform independent and implements an
- application program interface that provides windowing and communications interfaces (e.g.,
- 31 the platform is implemented in Open Source wxWindows API). The underlying operating
- 32 system is illustratively masked and enables a developer to code in a high level environment.

- 34 [0353] In one embodiment, the ground control station incorporates several specialized user
- interface concepts designed to effectively support a single operator tasked to control
- multiple vehicles. The GCS also illustratively supports manual control and sensor steering
- 37 modes. In the manual control mode, the operator can assume control authority of the

vehicles individually from the ground control station at any time in flight. In the sensor steering mode, a vehicle will autonomously fly in the direction the operator is manually pointing the on-board imaging sensor (e.g., operator views video output from a digital camera on a TV interface, computer screen display, etc.). A custom data link is illustratively, utilized to support a two-way transfer of data between the ground control station and the UAV's. These design concepts together provide a flexible, multiple vehicle control system. The details of the concepts are discussed below.

[0318] If the pilot chooses a surveillance location outside the total FOV, then the outer loop guidance will illustratively follow a command-to-LOS mode guide law until the UAV flight path points toward the target. Once the desired staring-point comes within a minimum range threshold, the guidance automatically trips into a loiter pattern (either constant-radius or elliptical) to maintain a station with a single key-click while he/she conducts other activities. FIGS. 22A & 22B together demonstrate the surveillance-point approach scenario.

[0322] In accordance with one aspect of the present invention, sensor-slave mode commands are generated by an autonomous line-of-sight driven function, in which the command objectives are generated by the necessities of the function rather than by an operator. For example, a function designed to command a raster-scan of a particular surveillance area, or a function designed to scan a long a roadway could be used to generate sensor slave commands. Another example is a function designed to generate line-of-sight commands for UAV-to-UAV rendezvous formation flying.

[0353] In one embodiment, the ground control station incorporates several specialized user interface concepts designed to effectively support a single operator tasked to control multiple vehicles. The GCS also illustratively supports manual control and sensor steering modes. In the manual control mode, the operator can assume control authority of the vehicles individually from the ground control station at any time in flight. In the sensor steering mode, a vehicle will autonomously fly in the direction the operator is manually pointing the on-board imaging sensor (e.g., operator views video output from a digital camera on a TV interface, computer screen display, etc.). A custom data link is illustratively, utilized to support a two-way transfer of data between the ground control station and the UAV's. These design concepts together provide a flexible, multiple vehicle control system. The details of the concepts are discussed below.

[0356] a synthetic vision display

[0365] The two video monitors are illustratively used to display real-time data linked camera imagery from two air vehicles having cameras (of course, fewer, more or none of the vehicles might have cameras and the number of monitor displays can be altered accordingly). In accordance with one embodiment, camera imagery is recorded on videotapes during a mission. In accordance with one embodiment, the two repeater displays are used to provide redundant views of the GUI and synthetic vision display. The laptop illustratively serves as a GUI backup in the event that the main GUI fails.

[0388] In one aspect of the present invention, synthetic vision display technical approach of the present invention is based upon integrating advanced simulated visuals, originally developed for training purposes, into UAV operational systems. In accordance with one embodiment, the simulated visuals are integrated with data derived from the ground control station during flight to enable real-time synthetic visuals.

5 6 7

8

9

10

11 12

13

14

15

16

17 18

19

20

21

22

23

24

25

1

2

3

4

[0390] In one aspect of the present invention, through GUI display 2622, an operator can maintain a variable level of control over a UAV, from fully manual to fully autonomous, with simple user-friendly inputs. For example, if an operator decides to divert a UAV to a new route, the operator has a plurality of options to select from. The following are examples of some of the options that an operator has. Those skilled in the art should recognize that this is not an exhaustive list. In one embodiment, the operator could graphically edit the existing route on mission situation display 2629 by adding a waypoint or orbit pattern in the vicinity of a desired target region. Prior to accepting the edited route, the control system evaluates the revised route against the vehicle performance capability as well as terrain obstructions. If the route is within acceptable bounds, the control system registers the modified route and maneuvers the vehicle accordingly. In another embodiment, the operator could select a park mode on selections pane 2630. After selected, the control system queues the operator to click the location of and graphical size (via a mouse) the desired orbit pattern in which the vehicle will fly while "parked" over a desired target. In another embodiment, the operator can select a manual control mode on selections pane 2630. By selecting RDC (remote directional command), for example, the control system controls the UAV into a constant altitude, heading and speed flight until the operator instructs a maneuver. While in RDC mode, the operator can either pseudo-manually direct the UAV using the control stick (e.g. joystick) or the operator can program a fixed heading, altitude and speed using the control options provided in selections pane 2630.

262728

29

30

31

32

33

34

35

36 37

38

39

40

41 42

43

[0346] In accordance with one embodiment, an exemplary translation layer implementation will now be provided. After the guidance algorithms execute, the outputs are translated to the native vehicle autopilot commands. The equations below provide example kinematic translations from the guidance acceleration commands to native vehicle autopilot commands. These equations demonstrate the principal that vehicle motion is activated through acceleration. The methods that various vehicles employ to generate acceleration are numerous (bank angle autopilot, acceleration autopilot, heading control autopilot, altitude control autopilot, etc). Since the control algorithms described herein generate acceleration commands that can be kinematically translated into any of these native autopilot commands. the guidance algorithms truly provide a generalized library of control laws that can control any vehicle through that vehicle's native atomic functions. Ubiquitous acceleration control techniques enable VACS to synthesize control commands for any vehicle, including air, ground, or sea-based. 35 a v = vertical plane acceleration command a h = horizontal plane acceleration command = $\tan - 1$ (a h a v) = $\tan \alpha$ angle command a T = a v 2 + a h 2 = $\cot \alpha$ body acceleration command $\cdot = a h V = turn rate command i = i - 1 + . t = heading command$ i = (a v - g) V = flight path rate command i = i - 1 + i = flight path angle command h = V $\sin (\cdot) = \text{climb rate command h } i = \text{h } i = 1 + \text{h} . t = \text{altitude command Eq. } 57$

[0347] Additional functionality that can be enabled in a translation layer is means for discouraging or preventing an operator (e.g., the human or non-human operator interfacing the VACS architecture) from overdriving, stalling, or spinning the vehicle frame. This being said, limiting algorithms can also be employed in the guidance or autopilot functions.

[0348] X. Autopilot

[0349] As has been addressed, the present invention is not limited to, and does not require, a particular autopilot system. The control system and architecture embodiments of the present invention can be adapted to accommodate virtually any autopilot system.

[0350] For the purpose of providing an example, an illustrative suitable autopilot software system will now be described. The illustrative autopilot system incorporates a three-axis design (pitch and yaw with an attitude control loop in the roll axis) for vehicle stabilization and guidance command tracking. The autopilot software design incorporates flight control techniques, which allow vehicle control algorithms to dynamically adjust airframe stabilization parameters in real-time during flight. The flight computer is programmed directly with the airframe physical properties, so that it can automatically adjust its settings with changes in airframe configuration, aerodynamic properties, and/or flight state. This provides for a simple and versatile design, and possesses the critical flexibility needed when adjustments to the airframe configuration become necessary. The three-loop design includes angular rate feedback for stability augmentation, attitude feedback for closed-loop stiffness, and acceleration feedback for command tracking. In addition, an integral controller in the forward loop illustratively provides enhanced command tracking, low frequency disturbance rejection and an automatic trim capability.

[0390] In one aspect of the present invention, through GUI display 2622, an operator can maintain a variable level of control over a UAV, from fully manual to fully autonomous, with simple user-friendly inputs. For example, if an operator decides to divert a UAV to a new route, the operator has a plurality of options to select from. The following are examples of some of the options that an operator has. Those skilled in the art should recognize that this is not an exhaustive list. In one embodiment, the operator could graphically edit the existing route on mission situation display 2629 by adding a waypoint or orbit pattern in the vicinity of a desired target region. Prior to accepting the edited route, the control system evaluates the revised route against the vehicle performance capability as well as terrain obstructions. If the route is within acceptable bounds, the control system registers the modified route and maneuvers the vehicle accordingly. In another embodiment, the operator could select a park mode on selections pane 2630. After selected, the control system queues the operator to click the location of and graphical size (via a mouse) the desired orbit pattern in which the vehicle will fly while "parked" over a desired target. In another embodiment, the operator can select a manual control mode on selections pane 2630. By selecting RDC (remote directional command), for example, the control system controls the UAV into a constant altitude, heading and speed flight until the operator instructs a maneuver. While in RDC mode, the operator can either pseudo-manually direct the UAV using the control stick (e.g. joystick) or the operator can program a fixed heading, altitude and speed using the control options provided in selections pane 2630.

[0391] The described Intelligent displays with smart variables represent an effective approach to actively displaying information for different types of vehicles. However, a problem can arise when a new vehicle is integrated into the ground control station with a completely foreign command and control interface. Under these circumstances, the ground control station is not concerned about displaying data, but is tasked to provide a command and control interface for the operator to perform the required operations. This conundrum is the motivation for another embodiment of the present invention, namely, the integration of vehicle specific panels in the ground control station.

[0392] In one embodiment, a generic vehicle class (GVC) is illustratively a software component that provides a rapid development environment API to add new vehicle classes and types to the ground control station. The GVC also illustratively serves as a software construct that allows the inclusion of multiple vehicles within the ground control station framework. One of the variables in the application is a vector of pointers to a generic vehicle class. This list is constructed by allocating new specific vehicles and returning a type case to the base generic vehicle class. When a new vehicle is integrated into the ground control station, the generic vehicle class provides all of the virtual functions to integrate with system control components (e.g., to integrate with a map display, a communications package, PCIG imagery and/or appropriate display windows). An important object in the application framework is illustratively a pointer to the current vehicle generic class. When the user switches vehicles, this pointer is updated and all displays grab the appropriate smart variables from the pointer to the new base class. This is the mechanism by which windows immediately update to the current vehicle information whenever the user switches vehicles. The default windows use the pointer to the current vehicle to grab information. In this manner, if the user switches to a new vehicle with a different set of datalink variables, that fact is immediately apparent on the display windows.

The Examiner particularly failed to even make an attempt to point out the following limitation in claim 5:

whereas the selected phases of the flight of said unmanned aerial vehicle comprise:

- (a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;
- (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

Again, not only do the Duggan citations fail to support a broadest reasonable interpretation (or even a broadest possible interpretation) for the Examiner's assertion, they amount to a series of non sequiturs.

1	Claim 6 (Dependent)
2	
3	Claim 6 is a dependent claim, dependent on Claim 5. Margolin has shown that Claim 5 is
4	nonobvious. Therefore, under 2143.03 All Claim Limitations Must Be Considered, Claim 6 is
5	non-obvious.
6	
7	Claim 7 (Dependent)
8	
9	Claim 7 is a dependent claim, dependent on Claim 5. Margolin has shown that Claim 5
10	is nonobvious. Therefore, under 2143.03 All Claim Limitations Must Be Considered , Claim 7
11	is non-obvious.
12	
13	Claim 8 (Independent)
14 15	As with his rejection of independent claim 5 the Examiner simply cited the following in '724:
16 17	abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67. See Office Action dated
17	September 1, 2010, pages 6,7 (Evidence Appendix Exhibit 3 at 108) and Office Action dated
18	February 15, 2011, pages 6,7 (Evidence Appendix Exhibit 6 at 441). Then he asserted that he had
19	found most of the elements contained therein.
20 21	The three passages cited in '724 (Column 3, lines 8-67; Column 4, lines 1-67; and Column 5,
22	lines 1-67) form a continuous passage from Column 3, line 8 to Column 5, line 67. This passage
23	of approximately 1619 words forms the core of the '724 DETAILED DESCRIPTION. The
24	Examiner also cited all of the drawings and the abstract.
25	Examiner also cited an of the drawings and the abstract.
25 26	Breaking the long contiguous passage of approximately 1619 words into three sections is
27	misleading. By doing this the Examiner shows awareness of his failure to make a prima facie
28	case for rejection. Or, perhaps it was simply laziness.
29	
30	The Examiner did cite Duggan in one of the elements, but only one:
31 32 33	a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial

vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0329).

- As with claim 1 and claim 5, the Duggan references are irrelevant. And again, the Examiner repeats the mistake of referring to 0390-0329.
- 6 Duggan:

[0352] In one aspect of the present invention, an operator station (also referred to as the ground control station or GCS) is designed to accommodate command and control of multiple vehicles or a single vehicle by a single operator. In accordance with one embodiment, the ground control station is platform independent and implements an application program interface that provides windowing and communications interfaces (e.g., the platform is implemented in Open Source wxWindows API). The underlying operating system is illustratively masked and enables a developer to code in a high level environment.

[0353] In one embodiment, the ground control station incorporates several specialized user interface concepts designed to effectively support a single operator tasked to control multiple vehicles. The GCS also illustratively supports manual control and sensor steering modes. In the manual control mode, the operator can assume control authority of the vehicles individually from the ground control station at any time in flight. In the sensor steering mode, a vehicle will autonomously fly in the direction the operator is manually pointing the on-board imaging sensor (e.g., operator views video output from a digital camera on a TV interface, computer screen display, etc.). A custom data link is illustratively, utilized to support a two-way transfer of data between the ground control station and the UAV's. These design concepts together provide a flexible, multiple vehicle control system. The details of the concepts are discussed below.

[0318] If the pilot chooses a surveillance location outside the total FOV, then the outer loop guidance will illustratively follow a command-to-LOS mode guide law until the UAV flight path points toward the target. Once the desired staring-point comes within a minimum range threshold, the guidance automatically trips into a loiter pattern (either constant-radius or elliptical) to maintain a station with a single key-click while he/she conducts other activities. FIGS. 22A & 22B together demonstrate the surveillance-point approach scenario.

[0322] In accordance with one aspect of the present invention, sensor-slave mode commands are generated by an autonomous line-of-sight driven function, in which the command objectives are generated by the necessities of the function rather than by an operator. For example, a function designed to command a raster-scan of a particular surveillance area, or a function designed to scan a long a roadway could be used to generate sensor slave commands. Another example is a function designed to generate line-of-sight commands for UAV-to-UAV rendezvous formation flying.

[0353] In one embodiment, the ground control station incorporates several specialized user interface concepts designed to effectively support a single operator tasked to control multiple vehicles. The GCS also illustratively supports manual control and sensor steering

modes. In the manual control mode, the operator can assume control authority of the vehicles individually from the ground control station at any time in flight. In the sensor steering mode, a vehicle will autonomously fly in the direction the operator is manually pointing the on-board imaging sensor (e.g., operator views video output from a digital camera on a TV interface, computer screen display, etc.). A custom data link is illustratively, utilized to support a two-way transfer of data between the ground control station and the UAV's. These design concepts together provide a flexible, multiple vehicle control system. The details of the concepts are discussed below.

[0356] a synthetic vision display

[0365] The two video monitors are illustratively used to display real-time data linked camera imagery from two air vehicles having cameras (of course, fewer, more or none of the vehicles might have cameras and the number of monitor displays can be altered accordingly). In accordance with one embodiment, camera imagery is recorded on videotapes during a mission. In accordance with one embodiment, the two repeater displays are used to provide redundant views of the GUI and synthetic vision display. The laptop illustratively serves as a GUI backup in the event that the main GUI fails.

[0388] In one aspect of the present invention, synthetic vision display technical approach of the present invention is based upon integrating advanced simulated visuals, originally developed for training purposes, into UAV operational systems. In accordance with one embodiment, the simulated visuals are integrated with data derived from the ground control station during flight to enable real-time synthetic visuals.

[0390] In one aspect of the present invention, through GUI display 2622, an operator can maintain a variable level of control over a UAV, from fully manual to fully autonomous, with simple user-friendly inputs. For example, if an operator decides to divert a UAV to a new route, the operator has a plurality of options to select from. The following are examples of some of the options that an operator has. Those skilled in the art should recognize that this is not an exhaustive list. In one embodiment, the operator could graphically edit the existing route on mission situation display 2629 by adding a waypoint or orbit pattern in the vicinity of a desired target region. Prior to accepting the edited route, the control system evaluates the revised route against the vehicle performance capability as well as terrain obstructions. If the route is within acceptable bounds, the control system registers the modified route and maneuvers the vehicle accordingly. In another embodiment, the operator could select a park mode on selections pane 2630. After selected, the control system queues the operator to click the location of and graphical size (via a mouse) the desired orbit pattern in which the vehicle will fly while "parked" over a desired target. In another embodiment, the operator can select a manual control mode on selections pane 2630. By selecting RDC (remote directional command), for example, the control system controls the UAV into a constant altitude, heading and speed flight until the operator instructs a maneuver. While in RDC mode, the operator can either pseudo-manually direct the UAV using the control stick (e.g. joystick) or the operator can program a fixed heading, altitude and speed using the control options provided in selections pane 2630.

[0346] In accordance with one embodiment, an exemplary translation layer implementation will now be provided. After the guidance algorithms execute, the outputs are translated to the native vehicle autopilot commands. The equations below provide example kinematic translations from the guidance acceleration commands to native vehicle autopilot commands. These equations demonstrate the principal that vehicle motion is activated through acceleration. The methods that various vehicles employ to generate acceleration are numerous (bank angle autopilot, acceleration autopilot, heading control autopilot, altitude control autopilot, etc). Since the control algorithms described herein generate acceleration commands that can be kinematically translated into any of these native autopilot commands, the guidance algorithms truly provide a generalized library of control laws that can control any vehicle through that vehicle's native atomic functions. Ubiquitous acceleration control techniques enable VACS to synthesize control commands for any vehicle, including air, ground, or sea-based. 35 a v = vertical plane acceleration command a h = horizontal plane acceleration command = tan - 1 (a h a v) = bank angle command a T = a v 2 + a h 2 = total body acceleration command $\cdot = a h V = turn rate command i = i - 1 + . t = heading command$ i = (a v - g) V = flight path rate command i = i - 1 + i = flight path angle command h = V $\sin () = \text{climb rate command h } i = \text{h } i = 1 + \text{h} . t = \text{altitude command Eq. } 57$

1 2

[0347] Additional functionality that can be enabled in a translation layer is means for discouraging or preventing an operator (e.g., the human or non-human operator interfacing the VACS architecture) from overdriving, stalling, or spinning the vehicle frame. This being said, limiting algorithms can also be employed in the guidance or autopilot functions.

[0348] X. Autopilot

[0349] As has been addressed, the present invention is not limited to, and does not require, a particular autopilot system. The control system and architecture embodiments of the present invention can be adapted to accommodate virtually any autopilot system.

[0350] For the purpose of providing an example, an illustrative suitable autopilot software system will now be described. The illustrative autopilot system incorporates a three-axis design (pitch and yaw with an attitude control loop in the roll axis) for vehicle stabilization and guidance command tracking. The autopilot software design incorporates flight control techniques, which allow vehicle control algorithms to dynamically adjust airframe stabilization parameters in real-time during flight. The flight computer is programmed directly with the airframe physical properties, so that it can automatically adjust its settings with changes in airframe configuration, aerodynamic properties, and/or flight state. This provides for a simple and versatile design, and possesses the critical flexibility needed when adjustments to the airframe configuration become necessary. The three-loop design includes angular rate feedback for stability augmentation, attitude feedback for closed-loop stiffness, and acceleration feedback for command tracking. In addition, an integral controller in the forward loop illustratively provides enhanced command tracking, low frequency disturbance rejection and an automatic trim capability.

[0390] In one aspect of the present invention, through GUI display 2622, an operator can maintain a variable level of control over a UAV, from fully manual to fully autonomous,

with simple user-friendly inputs. For example, if an operator decides to divert a UAV to a new route, the operator has a plurality of options to select from. The following are examples of some of the options that an operator has. Those skilled in the art should recognize that this is not an exhaustive list. In one embodiment, the operator could graphically edit the existing route on mission situation display 2629 by adding a waypoint or orbit pattern in the vicinity of a desired target region. Prior to accepting the edited route, the control system evaluates the revised route against the vehicle performance capability as well as terrain obstructions. If the route is within acceptable bounds, the control system registers the modified route and maneuvers the vehicle accordingly. In another embodiment, the operator could select a park mode on selections pane 2630. After selected, the control system queues the operator to click the location of and graphical size (via a mouse) the desired orbit pattern in which the vehicle will fly while "parked" over a desired target. In another embodiment, the operator can select a manual control mode on selections pane 2630. By selecting RDC (remote directional command), for example, the control system controls the UAV into a constant altitude, heading and speed flight until the operator instructs a maneuver. While in RDC mode, the operator can either pseudo-manually direct the UAV using the control stick (e.g. joystick) or the operator can program a fixed heading, altitude and speed using the control options provided in selections pane 2630.

18 19 20

21

22

23

24

25

26

1 2

3

4

5

6

7

8

9

10

11 12

13

14

15 16

17

[0391] The described Intelligent displays with smart variables represent an effective approach to actively displaying information for different types of vehicles. However, a problem can arise when a new vehicle is integrated into the ground control station with a completely foreign command and control interface. Under these circumstances, the ground control station is not concerned about displaying data, but is tasked to provide a command and control interface for the operator to perform the required operations. This conundrum is the motivation for another embodiment of the present invention, namely, the integration of vehicle specific panels in the ground control station.

272829

30

31

32

33

34

35

36 37

38

39

40

41

42

43

44

[0392] In one embodiment, a generic vehicle class (GVC) is illustratively a software component that provides a rapid development environment API to add new vehicle classes and types to the ground control station. The GVC also illustratively serves as a software construct that allows the inclusion of multiple vehicles within the ground control station framework. One of the variables in the application is a vector of pointers to a generic vehicle class. This list is constructed by allocating new specific vehicles and returning a type case to the base generic vehicle class. When a new vehicle is integrated into the ground control station, the generic vehicle class provides all of the virtual functions to integrate with system control components (e.g., to integrate with a map display, a communications package, PCIG imagery and/or appropriate display windows). An important object in the application framework is illustratively a pointer to the current vehicle generic class. When the user switches vehicles, this pointer is updated and all displays grab the appropriate smart variables from the pointer to the new base class. This is the mechanism by which windows immediately update to the current vehicle information whenever the user switches vehicles. The default windows use the pointer to the current vehicle to grab information. In this manner, if the user switches to a new vehicle with a different set of datalink variables, that fact is immediately apparent on the display windows.

1	The Examiner particularly failed to even make an attempt to point out the following limitation in
2	claim 8:
3 4	whereas the selected phases of the flight of said unmanned aerial vehicle comprise:
5 6 7	(a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;
8 9 10	(b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.
11	Again, not only do the Duggan citations fail to support a broadest reasonable interpretation (or
12	even a broadest possible interpretation) for the Examiner's assertion, they amount to a series of
13	non sequiturs.
14	
15	Claim 9 (Dependent)
16 17	Claim 9 is a dependent claim, dependent on Claim 8. Margolin has shown that Claim 8 is
18	nonobvious. Therefore, under 2143.03 All Claim Limitations Must Be Considered, Claim 9 is
19	non-obvious.
20	
21	Claim 10 (Dependent)
22 23	Claim 10 is a dependent claim, dependent on Claim 8. Margolin has shown that Claim 8 is
24	nonobvious. Therefore, under 2143.03 All Claim Limitations Must Be Considered, Claim 10
25	is non-obvious.
26	
27	Claim 11 (Dependent)
28 29	Claim 11 is a dependent claim, dependent on Claim 8. Margolin has shown that Claim 8 is
30	nonobvious. Therefore, under 2143.03 All Claim Limitations Must Be Considered, Claim 11
31	is non-obvious.
32	

Claim 12 (Independent) 1 2 3 As with the Examiner's rejection of claim 5 and claim 8, in his rejection of claim 12 he simply 4 cited the following from '724: abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 5 1-67. See Office Action dated September 1, 2010, pages 8,9 (Evidence Appendix Exhibit 3 at 6 110) and Office Action dated February 15, 2011, pages 8,9 (Evidence Appendix Exhibit 6 at 7 443). 8 9 The three passages cited in '724 (Column 3, lines 8-67; Column 4, lines 1-67; and Column 5, 10 lines 1-67) form a continuous passage from Column 3, line 8 to Column 5, line 67. This passage 11 of approximately 1619 words forms the core of the '724 DETAILED DESCRIPTION. The 12 Examiner also cited all of the drawings and the abstract. 13 14 Breaking the long contiguous passage of approximately 1619 words into three sections is 15 misleading. By doing this the Examiner shows awareness of his failure to make a prima facie 16 case for rejection. Or, perhaps it was simply laziness. 17 18 The Examiner did cite Duggan in one of the elements, but only one: 19 a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during 20 phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a 21 synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial 22 vehicle said unmanned aerial vehicle is flown using an autonomous control system 23 (autopilot, sec 0346 to 0350, 0390-0329). 24 25 As with the rejection of claim 1, claim 5, and claim 8 the Duggan references are irrelevant. And 26 again, the Examiner repeats the mistake of referring to 0390-0329. 27 Duggan: 28 [0352] In one aspect of the present invention, an operator station (also referred to as the 29 ground control station or GCS) is designed to accommodate command and control of 30 multiple vehicles or a single vehicle by a single operator. In accordance with one 31 embodiment, the ground control station is platform independent and implements an 32 application program interface that provides windowing and communications interfaces (e.g., 33 the platform is implemented in Open Source wxWindows API). The underlying operating 34 system is illustratively masked and enables a developer to code in a high level environment.

[0353] In one embodiment, the ground control station incorporates several specialized user interface concepts designed to effectively support a single operator tasked to control multiple vehicles. The GCS also illustratively supports manual control and sensor steering modes. In the manual control mode, the operator can assume control authority of the vehicles individually from the ground control station at any time in flight. In the sensor steering mode, a vehicle will autonomously fly in the direction the operator is manually pointing the on-board imaging sensor (e.g., operator views video output from a digital camera on a TV interface, computer screen display, etc.). A custom data link is illustratively, utilized to support a two-way transfer of data between the ground control station and the UAV's. These design concepts together provide a flexible, multiple vehicle control system. The details of the concepts are discussed below.

[0318] If the pilot chooses a surveillance location outside the total FOV, then the outer loop guidance will illustratively follow a command-to-LOS mode guide law until the UAV flight path points toward the target. Once the desired staring-point comes within a minimum range threshold, the guidance automatically trips into a loiter pattern (either constant-radius or elliptical) to maintain a station with a single key-click while he/she conducts other activities. FIGS. 22A & 22B together demonstrate the surveillance-point approach scenario.

[0322] In accordance with one aspect of the present invention, sensor-slave mode commands are generated by an autonomous line-of-sight driven function, in which the command objectives are generated by the necessities of the function rather than by an operator. For example, a function designed to command a raster-scan of a particular surveillance area, or a function designed to scan a long a roadway could be used to generate sensor slave commands. Another example is a function designed to generate line-of-sight commands for UAV-to-UAV rendezvous formation flying.

 [0353] In one embodiment, the ground control station incorporates several specialized user interface concepts designed to effectively support a single operator tasked to control multiple vehicles. The GCS also illustratively supports manual control and sensor steering modes. In the manual control mode, the operator can assume control authority of the vehicles individually from the ground control station at any time in flight. In the sensor steering mode, a vehicle will autonomously fly in the direction the operator is manually pointing the on-board imaging sensor (e.g., operator views video output from a digital camera on a TV interface, computer screen display, etc.). A custom data link is illustratively, utilized to support a two-way transfer of data between the ground control station and the UAV's. These design concepts together provide a flexible, multiple vehicle control system. The details of the concepts are discussed below.

[0356] a synthetic vision display

[0365] The two video monitors are illustratively used to display real-time data linked camera imagery from two air vehicles having cameras (of course, fewer, more or none of the vehicles might have cameras and the number of monitor displays can be altered accordingly). In accordance with one embodiment, camera imagery is recorded on videotapes during a mission. In accordance with one embodiment, the two repeater displays

are used to provide redundant views of the GUI and synthetic vision display. The laptop illustratively serves as a GUI backup in the event that the main GUI fails.

[0388] In one aspect of the present invention, synthetic vision display technical approach of the present invention is based upon integrating advanced simulated visuals, originally developed for training purposes, into UAV operational systems. In accordance with one embodiment, the simulated visuals are integrated with data derived from the ground control station during flight to enable real-time synthetic visuals.

[0390] In one aspect of the present invention, through GUI display 2622, an operator can maintain a variable level of control over a UAV, from fully manual to fully autonomous, with simple user-friendly inputs. For example, if an operator decides to divert a UAV to a new route, the operator has a plurality of options to select from. The following are examples of some of the options that an operator has. Those skilled in the art should recognize that this is not an exhaustive list. In one embodiment, the operator could graphically edit the existing route on mission situation display 2629 by adding a waypoint or orbit pattern in the vicinity of a desired target region. Prior to accepting the edited route, the control system evaluates the revised route against the vehicle performance capability as well as terrain obstructions. If the route is within acceptable bounds, the control system registers the modified route and maneuvers the vehicle accordingly. In another embodiment, the operator could select a park mode on selections pane 2630. After selected, the control system queues the operator to click the location of and graphical size (via a mouse) the desired orbit pattern in which the vehicle will fly while "parked" over a desired target. In another embodiment, the operator can select a manual control mode on selections pane 2630. By selecting RDC (remote directional command), for example, the control system controls the UAV into a constant altitude, heading and speed flight until the operator instructs a maneuver. While in RDC mode, the operator can either pseudo-manually direct the UAV using the control stick (e.g. joystick) or the operator can program a fixed heading, altitude and speed using the control options provided in selections pane 2630.

[0346] In accordance with one embodiment, an exemplary translation layer implementation will now be provided. After the guidance algorithms execute, the outputs are translated to the native vehicle autopilot commands. The equations below provide example kinematic translations from the guidance acceleration commands to native vehicle autopilot commands. These equations demonstrate the principal that vehicle motion is activated through acceleration. The methods that various vehicles employ to generate acceleration are numerous (bank angle autopilot, acceleration autopilot, heading control autopilot, altitude control autopilot, etc). Since the control algorithms described herein generate acceleration commands that can be kinematically translated into any of these native autopilot commands, the guidance algorithms truly provide a generalized library of control laws that can control any vehicle through that vehicle's native atomic functions. Ubiquitous acceleration control techniques enable VACS to synthesize control commands for any vehicle, including air, ground, or sea-based. 35 a v = vertical plane acceleration command a h = horizontal plane acceleration command = tan - 1 (a h a v) = bank angle command a T = a v 2 + a h 2 = total body acceleration command . = a h V = turn rate command i = i - 1 + i + i = heading command

. = (a v - g) V = flight path rate command $i = i - 1 + . t = flight path angle command <math>h . = V \sin() = c \lim_{n \to \infty} f()

[0347] Additional functionality that can be enabled in a translation layer is means for discouraging or preventing an operator (e.g., the human or non-human operator interfacing the VACS architecture) from overdriving, stalling, or spinning the vehicle frame. This being said, limiting algorithms can also be employed in the guidance or autopilot functions.

[0348] X. Autopilot

[0349] As has been addressed, the present invention is not limited to, and does not require, a particular autopilot system. The control system and architecture embodiments of the present invention can be adapted to accommodate virtually any autopilot system.

[0350] For the purpose of providing an example, an illustrative suitable autopilot software system will now be described. The illustrative autopilot system incorporates a three-axis design (pitch and yaw with an attitude control loop in the roll axis) for vehicle stabilization and guidance command tracking. The autopilot software design incorporates flight control techniques, which allow vehicle control algorithms to dynamically adjust airframe stabilization parameters in real-time during flight. The flight computer is programmed directly with the airframe physical properties, so that it can automatically adjust its settings with changes in airframe configuration, aerodynamic properties, and/or flight state. This provides for a simple and versatile design, and possesses the critical flexibility needed when adjustments to the airframe configuration become necessary. The three-loop design includes angular rate feedback for stability augmentation, attitude feedback for closed-loop stiffness, and acceleration feedback for command tracking. In addition, an integral controller in the forward loop illustratively provides enhanced command tracking, low frequency disturbance rejection and an automatic trim capability.

[0390] In one aspect of the present invention, through GUI display 2622, an operator can maintain a variable level of control over a UAV, from fully manual to fully autonomous, with simple user-friendly inputs. For example, if an operator decides to divert a UAV to a new route, the operator has a plurality of options to select from. The following are examples of some of the options that an operator has. Those skilled in the art should recognize that this is not an exhaustive list. In one embodiment, the operator could graphically edit the existing route on mission situation display 2629 by adding a waypoint or orbit pattern in the vicinity of a desired target region. Prior to accepting the edited route, the control system evaluates the revised route against the vehicle performance capability as well as terrain obstructions. If the route is within acceptable bounds, the control system registers the modified route and maneuvers the vehicle accordingly. In another embodiment, the operator could select a park mode on selections pane 2630. After selected, the control system queues the operator to click the location of and graphical size (via a mouse) the desired orbit pattern in which the vehicle will fly while "parked" over a desired target. In another embodiment, the operator can select a manual control mode on selections pane 2630. By selecting RDC (remote directional command), for example, the control system controls the UAV into a constant altitude, heading and speed flight until the operator instructs a maneuver. While in

RDC mode, the operator can either pseudo-manually direct the UAV using the control stick (e.g. joystick) or the operator can program a fixed heading, altitude and speed using the control options provided in selections pane 2630.

[0391] The described Intelligent displays with smart variables represent an effective approach to actively displaying information for different types of vehicles. However, a problem can arise when a new vehicle is integrated into the ground control station with a completely foreign command and control interface. Under these circumstances, the ground control station is not concerned about displaying data, but is tasked to provide a command and control interface for the operator to perform the required operations. This conundrum is the motivation for another embodiment of the present invention, namely, the integration of vehicle specific panels in the ground control station.

[0392] In one embodiment, a generic vehicle class (GVC) is illustratively a software component that provides a rapid development environment API to add new vehicle classes and types to the ground control station. The GVC also illustratively serves as a software construct that allows the inclusion of multiple vehicles within the ground control station framework. One of the variables in the application is a vector of pointers to a generic vehicle class. This list is constructed by allocating new specific vehicles and returning a type case to the base generic vehicle class. When a new vehicle is integrated into the ground control station, the generic vehicle class provides all of the virtual functions to integrate with system control components (e.g., to integrate with a map display, a communications package, PCIG imagery and/or appropriate display windows). An important object in the application framework is illustratively a pointer to the current vehicle generic class. When the user switches vehicles, this pointer is updated and all displays grab the appropriate smart variables from the pointer to the new base class. This is the mechanism by which windows immediately update to the current vehicle information whenever the user switches vehicles. The default windows use the pointer to the current vehicle to grab information. In this manner, if the user switches to a new vehicle with a different set of datalink variables, that fact is immediately apparent on the display windows.

The Examiner particularly failed to even make an attempt to point out the following limitation in claim 12:

whereas the selected phases of the flight of said unmanned aerial vehicle comprise:

 (a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;

(b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

Again, not only do the Duggan citations fail to support a broadest reasonable interpretation (or even a broadest possible interpretation) for the Examiner's assertion, they amount to a series of non sequiturs.

1 Claim 13 (Dependent) 2 3 Claim 13 is a dependent claim, dependent on Claim 12. Margolin has shown that Claim 12 is 4 nonobvious. Therefore, under 2143.03 All Claim Limitations Must Be Considered, Claim 13 5 is non-obvious. 6 7 Claim 14 (Dependent) 8 9 Claim 14 is a dependent claim, dependent on Claim 12. Margolin has shown that Claim 12 is 10 nonobvious. Therefore, under 2143.03 All Claim Limitations Must Be Considered, Claim 14 11 is non-obvious. 12 13 14 The remaining grounds come from the section **Response to Arguments** on page 10 in the Office 15 Action of February 15, 2011 (See Evidence Appendix Exhibit 6 at 445). By making the Office 16 Action final the Examiner denied Margolin the opportunity to respond to the Examiner's new 17 arguments. In the telephone interview with the Examiner on or about March 2, 2011 Margolin asked the Examiner to withdraw making the Office Action final so Margolin could respond. The 18 19 Examiner refused. (See Evidence Appendix Exhibit 7 at 452.) After a telephone interview with 20 the Examiner's SPE on or about March 22, 2011 the Examiner's SPE distinguished the section in 21 the Office Action of February 15, 2011 "Response to Arguments" with the Formal Rejection in 22 "Claim Rejections" and stated that "Response to Arguments" was not subject to Rule 706.07(a). 23 (See Evidence Appendix Exhibit 8 at 457.) 24 25 The Examiner's **Response to Arguments** contains arguments that he could have made in the 26 Office Action of September 1, 2010. If he had done so, Margolin would have had the opportunity 27 to refute them and produce new evidence. The Examiner denied Margolin this opportunity. 28 29 If, as the Examiner's SPE stated, the Examiner's **Response to Arguments** is not part of the 30 Formal Rejection, then the Board of Appeals should either order that the **Response to** 31 **Arguments** be striken from the Office Action or they should simply ignore them. If not, then the 32 Board of Appeals should consider the following.

Ground B.

2

1

Whether Margolin had a duty to define the term "civilian airspace" or whether he was entitled to use the common meaning of the term.

5

8

9

10

11

- 6 In the Office Action of February 15, 2011 on page 10 (Evidence Appendix Exhibit 6 at 445) the
- 7 Examiner stated:

Applicant further argues that the prior art do not disclose flying an unmanned aerial vehicle (i.e. an aircraft) in civilian airspace. The examiner does not acquiesce to applicant's remarks. The prior art clearly shows flying an unmanned aerial vehicle (i.e. an aircraft) in civilian airspace since the air space in which the vehicle is flown is not restricted. As further noted applicant fails to provide a particular meaning attached to "civilian airspace".

12 13

14 {Emphasis added}

15 16

18

19

- While an Applicant is permitted to be his own lexicographer, he is not required to be one. He
- may rely on the common meanings of words. From MPEP § 2111.01 Plain Meaning [R-5] -

2100 Patentability:

I. THE WORDS OF A CLAIM MUST BE GIVEN THEIR "PLAIN MEANING" UNLESS **>SUCH MEANING IS INCONSISTENT WITH< THE SPECIFICATION

202122

23

24

25

26

27

28

29

30

31

32

33

34

35

36

**>Although< claims of <u>issued</u> patents are interpreted in light of the specification, prosecution history, prior art and other claims, this is not the mode of claim interpretation to be applied during examination. During examination, the claims must be interpreted as broadly as their terms reasonably allow. In re American Academy of Science Tech Center, 367 F.3d 1359, 1369, 70 USPQ2d 1827, 1834 (Fed. Cir. 2004) (The USPTO uses a different standard for construing claims than that used by district courts; during examination the USPTO must give claims their broadest reasonable interpretation >in light of the specification<.). This means that the words of the claim must be given their plain meaning unless **>the plain meaning is inconsistent with< the specification. In re Zletz, 893 F.2d 319, 321, 13 USPQ2d 1320, 1322 (Fed. Cir. 1989) (discussed below); Chef America, Inc. v. Lamb-Weston, Inc., 358 F.3d 1371, 1372, 69 USPO2d 1857 (Fed. Cir. 2004) (Ordinary, simple English words whose meaning is clear and unquestionable, absent any indication that their use in a particular context changes their meaning, are construed to mean exactly what they say. Thus, "heating the resulting batter-coated dough to a temperature in the range of about 400°F to 850°F" required heating the dough, rather than the air inside an oven, to the specified temperature.). **

37 38

{Emphasis added}

1 Part II does not apply here:

2 II. IT IS IMPROPER TO IMPORT CLAIM LIMITATIONS FROM THE

3 SPECIFICATION

4 5

6

7

8

9

10

11

12 13

14 15

16

17

18 19

20

21

22

23 24

25

2627

28

29

30

31

32

33

34

35

36 37

38

39

40

41

42

Part III does:

III. < "PLAIN MEANING" REFERS TO THE ORDINARY AND CUSTOMARY MEAN-ING GIVEN TO THE TERM BY THOSE OF ORDINARY SKILL IN THE ART

"[T]he ordinary and customary meaning of a claim term is the meaning that the term would have to a person of ordinary skill in the art in question at the time of the invention, i.e., as of the effective filing date of the patent application." Phillips v. AWH Corp., *>415 F.3d 1303, 1313<, 75 USPQ2d 1321>, 1326< (Fed. Cir. 2005) (en banc). Sunrace Roots Enter. Co. v. SRAM Corp., 336 F.3d 1298, 1302, 67 USPQ2d 1438, 1441 (Fed. Cir. 2003); Brookhill-Wilk 1, LLC v. Intuitive Surgical, Inc., 334 F.3d 1294, 1298 67 USPQ2d 1132, 1136 (Fed. Cir. 2003)("In the absence of an express intent to impart a novel meaning to the claim terms, the words are presumed to take on the ordinary and customary meanings attributed to them by those of ordinary skill in the art."). It is the use of the words in the context of the written description and customarily by those skilled in the relevant art that accurately reflects both the "ordinary" and the "customary" meaning of the terms in the claims. Ferguson Beauregard/Logic Controls v. Mega Systems, 350 F.3d 1327, 1338, 69 USPQ2d 1001, 1009 (Fed. Cir. 2003) (Dictionary definitions were used to determine the ordinary and customary meaning of the words "normal" and "predetermine" to those skilled in the art. In construing claim terms, the general meanings gleaned from reference sources, such as dictionaries, must always be compared against the use of the terms in context, and the intrinsic record must always be consulted to identify which of the different possible dictionary meanings is most consistent with the use of the words by the inventor.); ACTV, Inc. v. The Walt Disney Company, 346 F.3d 1082, 1092, 68 USPQ2d 1516, 1524 (Fed. Cir. 2003) (Since there was no >express< definition given for the term "URL" in the specification, the term should be given its broadest reasonable interpretation >consistent with the intrinsic record< and take on the ordinary and customary meaning attributed to it by those of ordinary skill in the art; thus, the term "URL" was held to encompass both relative and absolute URLs.); and E-Pass Technologies, Inc. v. 3Com Corporation, 343 F.3d 1364, 1368, 67 USPQ2d 1947, 1949 (Fed. Cir. 2003) (Where no explicit definition for the term "electronic multi-function card" was given in the specification, this term should be given its ordinary meaning and broadest reasonable interpretation; the term should not be limited to the industry standard definition of credit card where there is no suggestion that this definition applies to the electronic multi-function card as claimed, and should not be limited to preferred embodiments in the specification.).

The ordinary and customary meaning of a term may be evidenced by a variety of sources, >including "the words of the claims themselves, the remainder of the specification, the prosecution history, and extrinsic evidence concerning relevant scientific principles, the meaning of technical terms, and the state of the art." < Phillips v. AWH Corp., *>415 F.3d at 1314<, 75 USPQ2d **>at 1327.< If extrinsic reference

1 sources, such as dictionaries, evidence more than one definition for the term, the intrinsic 2 record must be consulted to identify which of the different possible definitions is most 3 consistent with applicant's use of the terms. Brookhill-Wilk 1, 334 F. 3d at 1300, 67 USPO2d 4 at 1137; see also Renishaw PLC v. Marposs Societa" per Azioni, 158 F.3d 1243, 1250, 5 48 USPQ2d 1117, 1122 (Fed. Cir. 1998) ("Where there are several common meanings for a 6 claim term, the patent disclosure serves to point away from the improper meanings and 7 toward the proper meanings.") and Vitronics Corp. v. Conceptronic Inc., 90 F.3d 1576, 8 1583, 39 USPQ2d 1573, 1577 (Fed. Cir. 1996) (construing the term "solder reflow 9 temperature" to mean "peak reflow temperature" of solder rather than the "liquidus 10 temperature" of solder in order to remain consistent with the specification.). If more than one extrinsic definition is consistent with the use of the words in the intrinsic record, the 11 12 claim terms may be construed to encompass all consistent meanings. ** See *>e.g..< 13 Rexnord Corp. v. Laitram Corp., 274 F.3d 1336, 1342, 60 USPO2d 1851, 1854 (Fed. Cir. 14 2001)(explaining the court's analytical process for determining the meaning of disputed 15 claim terms); Toro Co. v. White Consol. Indus., Inc., 199 F.3d 1295, 1299, 53 USPQ2d 16 1065, 1067 (Fed. Cir. 1999)("[W]ords in patent claims are given their ordinary 17 meaning in the usage of the field of the invention, unless the text of the patent makes 18 clear that a word was used with a special meaning."). Compare MSM Investments Co. v. 19 Carolwood Corp., 259 F.3d 1335, 1339-40, 59 USPQ2d 1856, 1859-60 (Fed. Cir. 2001) 20 (Claims directed to a method of feeding an animal a beneficial amount of 21 methylsulfonylmethane (MSM) to enhance the animal's diet were held anticipated by prior 22 oral administration of MSM to human patients to relieve pain. Although the ordinary 23 meaning of "feeding" is limited to provision of food or nourishment, the broad definition of 24 "food" in the written description warranted finding that the claimed method encompasses the 25 use of MSM for both nutritional and pharmacological purposes.); and Rapoport v. Dement, 26 254 F.3d 1053, 1059-60, 59 USPQ2d 1215, 1219-20 (Fed. Cir. 2001) (Both intrinsic 27 evidence and the plain meaning of the term "method for treatment of sleep apneas" 28 supported construction of the term as being limited to treatment of the underlying sleep 29 apnea disorder itself, and not encompassing treatment of anxiety and other secondary 30 symptoms related to sleep apnea.).

31 {Emphasis added}

32

The term "civilian airspace" is commonly used in the aerospace community.

34

- 35 The reference Sensing Requirements for Unmanned Air Vehicles, AFRL's Air Vehicles
- 36 Directorate, Control Sciences Division, Systems Development Branch, Wright-Patterson AFB
- OH, June 2004, was filed with the application. (See Evidence Appendix Exhibit 9 at 462 and
- 38 Exhibit 10 at 465.)

39

40 The very first paragraph refers to "civilian airspace."

Engineers from the Air Vehicles Directorate transferred unmanned air vehicle (UAV) 1 2 sensing system requirements for airspace operations to civilian UAV users and developers. 3 These requirements represent design goals on which to base future sensing subsystem 4 designs, filling an omission in UAV technology planning. Directorate engineers are 5 continuing to develop the technologies that will enable future UAVs to coexist with 6 manned aircraft in both military and civilian airspace. Incorporating these requirements 7 will ensure that engineers design future UAVs to detect possible conflicts, such as midair 8 collisions or runway incursions, and take action to avoid them. 9 10 {Emphasis added} 11 12 Here it is again in the third paragraph. 13 With this goal in mind, directorate engineers worked with Northrop Grumman Corporation 14 (NGC) engineers to establish, iterate, and finalize sensing system performance requirements 15 for the broad range of future Air Force missions. During this collaborative process, 16 directorate engineers noted that many mission elements were similar to civilian 17 airspace operations tasks, and that the requirements they were developing were directly 18 applicable to civilian UAV technology. 19 20 {Emphasis added} 21 22 Thus, there is civilian airspace and there is military airspace. 23 24 This is consistent with the remarks made by FAA Administrator Babbit in a speech he gave 25 November 18, 2009. (See Evidence Appendix Exhibit 14 at 498). 26 27 In the second paragraph he says: 28 So if we are direct with ourselves here, as of today, unmanned aircraft systems are not 29 ready for seamless or routine use yet in civilian airspace. The idea of pilots flying 30 remotely has been around for a long time. And it is, I truly believe, the way of the future. 31 But where we are, on numerous fronts, they're not ready for open access to the NAS and we 32 can't give you the thumbs up. 33 34 Indeed, he equates "civilian airspace" with the NAS. (NAS is the "National Airspace System.") 35 36 He does it again in the next paragraph. 37 And you know that I'm not telling you anything that your technical folks aren't already 38 telling you. While the UAS is undoubtedly the way of the future, my concern must be on 39 today, and right now, the era of the unmanned aircraft system in civilian airspace is just not 40 here yet. Much as we'd all wish the case were different, the level of technical maturity isn't 41 where it needs to be for full operation in the NAS.

1	{Emphasis added}
2 3	And in paragraph 11:
3 4 5 6 7 8 9	That kind of scenario notwithstanding, I think unmanned aircraft systems are here to stay. In FY-09, there were about 20,000 flights in civilian airspace for a total of over 2,500 hours. And the number of operations that have been granted has more than tripled since 2007. But in order for us to get to the place where the UAS can become a viable, accepted part of the national airspace system , we have to make sure that sense-and-avoid is more than a given — it must be a guarantee.
11	Thus the term "civilian airspace" is commonly used in the aerospace community (which includes
12 13	the FAA and the Air Force) and Margolin is entitled to its commonly used (and plain) meaning.
14 15 16	Margolin used the term "civilian airspace" because the military controls its own airspace (such as around its bases) and makes its own rules. The Margolin application documents the difficulties in flying UAVS in civilian airspace in BACKGROUND OF THE INVENTION - Current Practice.
17	(See page 2, line 33 - page 4, line 21.) That is why Margolin's invention is directed to safely
18 19	flying UAVs in civilian airspace.
20	The significance of the Examiner's strategy in denying Margolin the common use of the term
21	can be found in Ex parte MAURICE GIVENS Appeal 2009-003414, BPAI Informative Decision,
2223	Decided: August 6, 2009. (See Evidence Appendix Exhibit 13 at 493.)
24	In Givens (Evidence Appendix Exhibit 13 at 494):
25 26 27 28 29	The Examiner rejected claims 1-15 under 35 U.S.C. § 102(e) based upon the teachings of Lin. The only contention is whether Lin teaches a sub-band spectral subtractive routine external to an LMS-based adaptive filter (App. Br. 7-9; Reply Br. 16-17; Ans. 11-12).
30 31 32 33 34 35	The Examiner finds that Lin teaches an LMS adaptive noise canceller 1412 that includes a sub-band spectral subtraction routine 1410 (Ans. 13). The Examiner further finds that Appellant has not provided a specific definition of "sub-band spectral subtractive routine" and thus, giving the term its broadest reasonable interpretation, the term can include any adaptive filter (Ans. 12). We cannot agree.
36 37 38	Appellant's Specification explains that "sub-band spectral subtraction algorithms are known to those skilled in the art" in paragraph [0023], sets forth the sub-band spectral

1 subtractive mechanism in paragraph [0032], and also sets forth the function that implements 2 the sub-band spectral noisereduction algorithm (Appendix-Spec: 21-22). Although 3 Appellant's Specification does not specifically define the term "sub-band spectral 4 subtractive routine," this is a specific claim term for a specific type of filtering (Spec. 5 ¶[0032]). Any interpretation that fails to give weight to "sub-band," "spectral," 6 "subtractive," and "routine" deprives the words in this claim term of their normal meaning. 7 Thus, the "sub-band spectral subtractive routine" does not include just any adaptive filter, 8 but rather refers to a specific filtering routine. Further, the output from Lin's LMS based 9 adaption circuit is fed to a summer 1124, 1224 (Lin Fig. 14), not a sub-band spectral 10 subtractive routine. A summer is an additive circuit and not a subtractive circuit. Also, Lin does not describe the summer as operating on a sub-band. Thus, because Lin does not 11 12 disclose each and every element of Appellant's invention, Lin does not anticipate claims 1-13 15. RCA Corp. v. Appl. Dig. Data Sys., Inc., 730 F.2d 1440, 1444 (Fed. Cir. 1984).

14

15

16

17

18

Thus, the Examiner's assertion that Margolin does not define "civilian airspace" (and is not entitled to the common meaning of the term) is for the purpose of using a broader interpretation of the prior art than it merits. Indeed, as has been shown, the Examiner has used even more than the broadest *possible* interpretation of the prior art.

19 20

Ground C.

22 23

21

Whether Margolin had a duty to define "safety" or whether he was entitled to use the common meaning of the term; and whether Margolin defined a particular level of safety.

25 26

27

28

29 30

31

24

In the Office Action of February 15, 2011 on page 10 (Evidence Appendix Exhibit 6 at 446) the Examiner stated:

Some of applicant's remarks are that the prior art does not recite the phrase, "safely flying an unmanned aerial vehicle in civilian airspace comprising:...". Applicant thus insists that the rejection is conclusory and is not supported. The examiner disagrees and notes that any particular level of safety is not described or disclosed in the specification nor is there any meaning provided for "civilian airspace" or "safety".

- Margolin does define safety as well as the particular level of safety. In Application page 4, lines
- 35 24-26 (Evidence Appendix Exhibit 1 at 64):
- 36 [010] It is important when flying a UAV in an airspace shared with other aircraft, both
- 37 civilian and military, that collisions during all phases of flight (including taking off and landing) not happen.
- 38

1	This is consistent with the aerospace community's use of the term. MPEP § 2111.01 Parts I and		
2	III cited above apply here as well, as does the above cited reference Sensing Requirements for		
3	Unmanned Air Vehicles, AFRL's Air Vehicles Directorate, Control Sciences Division, Systems		
4	Development Branch, Wright-Patterson AFB OH, June 2004, which was filed with the		
5	application. (See Evidence Appendix Exhibit 9 at 462 and Exhibit 10 at 465.)		
6 7 8 9 10 11 12 13 14	Engineers from the Air Vehicles Directorate transferred unmanned air vehicle (UAV) sensing system requirements for airspace operations to civilian UAV users and developers. These requirements represent design goals on which to base future sensing subsystem designs, filling an omission in UAV technology planning. Directorate engineers are continuing to develop the technologies that will enable future UAVs to coexist with manned aircraft in both military and civilian airspace. Incorporating these requirements will ensure that engineers design future UAVs to detect possible conflicts, such as midair collisions or runway incursions, and take action to avoid them.		
15	{Emphasis added}		
16			
17	Another reference filed by Margolin in his patent application is Presentation: Developing Sense		
18	& Avoid Requirements for Meeting an Equivalent Level of Safety given by RUSS WOLFE,		
19	Technology IPT Lead, Access 5 Project at UVS Tech 2006. (January 18, 2006). (See Evidence		
20	Appendix Exhibit Appendix Exhibit 9 at 462 and Exhibit 11 at 469.)		
21			
22	Page 7 of the presentation (Evidence Appendix Exhibit 11 at 475) says:		
23	Task 1: ELOS Definition Document		
24	Definition and Measures of Performance		
25 26 27 28	Definition: "Equivalent level of safety to manned aircraft see-and-avoid" is the capability to provide situational awareness with adequate time to detect conflicting traffic and the ability to take appropriate action necessary to avoid collisions."		
29	And there is only one level of safety.		
30 31	In the remarks cited above by FAA Administrator Babbit in a speech he gave November 18,		
32	2009. (See Evidence Appendix Exhibit 14 at 498) he said:		
33 34 35	Good afternoon, and thank you, John [Langford, Chairman & President, Aurora Flight Sciences]. It's an exciting time in aviation and to be involved with introducing new technology into the National Airspace System. It's also a good time to be thinking and		

1 2 3 4 5	talking about personal and professional responsibility — something I have unfortunately had to do too much of lately. But we all — every professional in aviation — have a shared responsibility to make this system as absolutely as safe as it can be, and never to just a level where we would ever say, "We could do more, but this is safe enough".	
6	{Emphasis added}	
7		
8	Again, the significance of the Examiner's strategy in denying Margolin the common use of the	
9	term can be found in Ex parte MAURICE GIVENS Appeal 2009-003414, BPAI Informative	
10	Decision, Decided: August 6, 2009. (See Evidence Appendix Exhibit 13 at 494.)	
11 12	The Examiner's assertion that Margolin does not define "safety" or "a particular level of safety"	
13	(and is not entitled to the common meaning of the terms) is for the purpose of using a broader	
14	interpretation of the prior art than it merits. Indeed, as has been shown, the Examiner has used	
15	even more than the broadest possible interpretation of the prior art.	
16		
17	Ground D.	
18 19	Whether the Examiner's assertion that "It is believed that the aircraft flown in the prior art is	
20	flown safely" (and which is asserted without evidence) is proper.	
21 22	This strikes at the heart of Margolin's invention. If " the aircraft flown in the prior art is flown	
23	safely" then Margolin's invention is irrelevant. And it would not be useful.	
24 25	According to MPEP § 2144.03 Reliance on Common Knowledge in the Art or "Well	
26	Known" Prior Art [R-6] - 2100 Patentability the Examiner's statement constitutes Taking	
27	Official Notice.	
28 29	However, the Examiner has completely failed to follow the rules for Taking Official Notice.	
30 31	1. The Examiner failed to provide any evidence for his statement. From § 2144.03(A):	
32 33 34 35 36 37	Official notice without documentary evidence to support an examiner's conclusion is permissible only in some circumstances. While "official notice" may be relied on, these circumstances should be rare when an application is under final rejection or action under 37 CFR 1.113. Official notice unsupported by documentary evidence should only be taken by the examiner where the facts asserted to be well-known, or to be common knowledge in the art are capable of instant and unquestionable demonstration as being well-known. As noted	

1 2 3 4	by the court in <i>In re Ahlert</i> , 424 F.2d 1088, 1091, 165 USPQ 418, 420 (CCPA 1970), the notice of facts beyond the record which may be taken by the examiner must be "capable of such instant and unquestionable demonstration as to defy dispute"		
5 6	2. The Examiner failed to provide even a technical line of reasoning for making his statement. From MPEP § 2144.03(B):		
7 8 9 10 11	B. If Official Notice Is Taken of a Fact, Unsupported by Documentary Evidence, the Technical Line of Reasoning Underlying a Decision To Take Such Notice Must Be Clear and Unmistakable		
12 13 14 15 16 17 18 19	**In certain older cases, official notice has been taken of a fact that is asserted to be "common knowledge" without specific reliance on documentary evidence where the fact noticed was readily verifiable, such as when other references of record supported the noticed fact, or where there was nothing of record to contradict it. See <i>In re Soli</i> , 317 F.2d 941, 945-46, 137 USPQ 797, 800 (CCPA 1963) (accepting the examiner's assertion that the use of "a control is standard procedure throughout the entire field of bacteriology" because it was readily verifiable and disclosed in references of record not cited by the Office);		
20 21 22	3. Because the Examiner made his statement in a Final Office Action Margolin was denied the opportunity to challenge the Examiner to provide evidence for his statement as provided for in MPEP § 2144.03(C):		
23 24 25 26	C. If Applicant Challenges a Factual Assertion as Not Properly Officially Noticed or Not Properly Based Upon Common Knowledge, the Examiner Must Support the Finding With Adequate Evidence		
27 28 29 30 31	To adequately traverse such a finding, an applicant must specifically point out the supposed errors in the examiner's action, which would include stating why the noticed fact is not considered to be common knowledge or well-known in the art. See 37 CFR <u>1.111(b)</u> .		
32	4. The Examiner took Official Notice in an Office Action, which constituted both a new issue		
33	and a new ground of rejection, and improperly made the Office Action final. From MPEP §		
34	2144.03(D):		
35	D. Determine Whether the Next Office Action Should Be Made Final		
36 37 38 39 40 41 42	If the examiner adds a reference in the next Office action after applicant's rebuttal, and the newly added reference is added only as directly corresponding evidence to support the prior common knowledge finding, and it does not result in a new issue or constitute a new ground of rejection, the Office action may be made final. If no amendments are made to the claims, the examiner must not rely on any other teachings in the reference if the rejection is made final. If the newly cited reference is added for reasons other than to support the prior		

1 2 3 4	common knowledge statement and a new ground of rejection is introduced by the examiner that is not necessitated by applicant's amendment of the claims, the rejection may not be made final. See MPEP § 706.07(a).
5	5. The Examiner's statement is dead wrong. It was dead wrong in 2006 (Margolin's priority
6	date) and it is still dead wrong today.
7	
8	Margolin's application used as exemplars the crash of the Predator patrolling the U.S. Southern
9	border (See Application page 4 lines 13-21) and the crash of the Lockheed Martin Polecat. (See
10	Application page 4, lines 6-9 and the reference from Aviation Week & Space Technology
11	Lockheed Martin's Polecat UCAV Demonstrator Crashes which was filed with the
12	application and is reproduced here as Evidence Appendix Exhibit 12 at 489.) The Examiner
13	indicated he had considered the reference in Evidence Appendix Exhibit 9 at 463.
14	
15	Margolin's Application contained the reference Sensing Requirements for Unmanned Air
16	Vehicles, AFRL Air Vehicles (Evidence Appendix Exhibit 10 at 465). The second paragraph
17	stated that "Present UAVs cannot detect manned aircraft and conflict situations and, therefore,
18	they cannot share airspace with manned aircraft."
19	
20	Another reference filed by Margolin in his patent application is Presentation: Developing Sense
21	& Avoid Requirements for Meeting an Equivalent Level of Safety given by RUSS WOLFE,
22	Technology IPT Lead, Access 5 Project at UVS Tech 2006. (January 18, 2006). (See Evidence
23	Appendix Exhibit Appendix Exhibit 9 at 462 and Exhibit 11 at 469.) The conference was held in
24	order to develop UAS Collision Avoidance Initiatives. If UAVS were already being flown safely
25	the conference would not have been necessary.
26	
27	The aerospace community had not solved the problem by November 2009 when FAA
28	Administrator Babbit gave his speech (Evidence Appendix Exhibit 14 at 498) when he said
29	(second paragraph):
30 31 32 33 34	So if we are direct with ourselves here, as of today, unmanned aircraft systems are not ready for seamless or routine use yet in civilian airspace. The idea of pilots flying remotely has been around for a long time. And it is, I truly believe, the way of the future. But where we are, on numerous fronts, they're not ready for open access to the NAS and we can't give you the thumbs up.

Even more recently, an article from TheLedger.com (Lakeland, FL) dated July 6, 2010 details
the problems with UAVs. (The article refers to UAVs by the much older term "drones.") The
article is called **Pentagon Accident Reports Suggest Military's Drone Aircraft Plagued With Problems** and is reproduced in Evidence Appendix Exhibit 15 at 502.

The Examiner's statement, presented without evidence, is contradicted by the evidence shown in
the references Margolin filed with his application (and which the Examiner asserted he had
considered) and by more recent evidence.

1	<u>VIII. CLA</u>	IMS APPENDIX
2		
3	A copy of th	e claims involved in the present appeal is attached hereto as Appendix A.
4		
5	IX. EVII	DENCE APPENDIX
6		
7	The Evidenc	e Appendix is attached as Appendix B. With the exception of Exhibits 2 and 4 the
8	following ex	hibits were reproduced from the Image File Wrapper. Presumably, the reason they
9	are in the Im	age File Wrapper is because they were entered by the Examiner. Exhibits 2 and 4
10	were cited by	y the Examiner, which counts as being constructively entered by the Examiner.
11		
12	Exhibit 1	Patent Application as filed
13	Exhibit 2	U.S. Patent 5,904,724
14	Exhibit 3	First Office Action on the Merits
15	Exhibit 4	U. S. Patent Application 20050004723 (Duggan)
16	Exhibit 5	Applicant's Response to First Office Action
17	Exhibit 6	Second Office Action
18	Exhibit 7	Applicant's Summary of Telephone Interview with Examiner
19	Exhibit 8	Applicant's Summary of Telephone Interview with Examiner's SPE 457
20	Exhibit 9	IDS References Considered by Examiner
21	Exhibit 10	Sensing Requirements for Unmanned Air Vehicles, AFRL Air Vehicles
22		Directorate
23	Exhibit 11	Developing Sense and Avoid Requirements for Meeting An Equivalent
24		Level of Safety, Russel Wolfe
25	Exhibit 12	Article - Lockheed's Polecat UCAV Demonstrator Crashes, Aviation
26		Week & Space Technology, by Amy Butler, 03/19/2007, page 44 489
27		
28	New evidend	ce is being presented in this appeal. This new evidence is necessary because in the
29	Second Office	ce Action mailed 2/15/2011 the Examiner added a section called Response to
30	Arguments	where he expanded the grounds for rejection that he made in the First Office Action.
31	As a result h	e constructively introduced new grounds for rejection.

1	1. Margolin had not amended his claims in his Response to the First Office Action.	
2		
3	2. The Examiner could have made his new grounds for rejection in his First Office Action	
4	but failed to do so.	
5 6	The interests of fairness, as well as Rule 706.07(a), require that Margolin be allowed to introduce	
7	this new evidence.	
8 9	In addition, there is a conflict between MPEP § 41.33 Amendments and affidavits or other	
10	evidence after appeal $(d)(1)$ and the Streamlined Procedure for Appeal Brief Review	
11	published in the Federal Register Vol. 75, No. 60. (United States Patent and Trademark Office	
12	Docket No.: PTO-P-2010-0026.)	
13		
14	Prior to the Streamlined Procedure, the Examiner decided if an Appeal Brief was compliant with	
15	the Rules. ² Under the Streamlined Procedure this is now done by The Chief Judge of the Board	
16	of Patent Appeals and Interferences (BPAI) or his designee. Since the Chief Judge probably has	
17	more important things to do, compliance will probably be determined by a paralegal.	
18 19	That would be ok except for § 41.33 Amendments and affidavits or other evidence after	
20	appeal (d)(1):	
21 22 23 24 25 26	(1) An affidavit or other evidence filed after the date of filing an appeal pursuant to § 41.31(a)(1) through (a)(3) and prior to the date of filing a brief pursuant to § 41.37 may be admitted if the examiner determines that the affidavit or other evidence overcomes all rejections under appeal and that a showing of good and sufficient reasons why the affidavit or other evidence is necessary and was not earlier presented has been made.	
27	The Chief Judge's paralegal is not the Examiner and is unlikely to have the authority to	
28	determine whether Margolin's new evidence overcomes the Examiner's rejections. ³	

² This comes under the category of putting the Fox in charge of the Hen House.

³ As previously noted, the new evidence is necessary to respond the Examiner's expanded grounds for rejection, which is why it could not be presented earlier. Margolin will remind the Board that if it does not allow Margolin to submit this new evidence the U.S. District Court for the District of Columbia will. (*Hyatt v. Kappos*, No. 2007-1066, US Court of Appeals for the Federal Circuit, 2010 US App. LEXIS 23117, 8 November 2010)

1	Exhibit 13	Ex parte MAURICE GIVENS Appeal 2009-003414
2		BPAI Informative Decision, Decided: August 6, 2009
3		
4	Exhibit 14	Speech - "Safety Must Come First"; J. Randolph Babbitt, FAA
5		Administrator; Scottsdale, AZ; November 18, 2009;
6		http://www.faa.gov/news/speeches/news_story.cfm?newsId=10964 498
7		
8	Exhibit 15	Article - Pentagon Accident Reports Suggest Military's Drone
9		Aircraft Plagued With Problems, by David Zucchino, from
10		The Ledger.com, July 6, 2010.
11		http://www.theledger.com/article/20100706/NEWS/7065101 502
12		
13		
14	X. RELAT	TED PROCEEDINGS
15		
16	Ther	e are no decisions rendered by a court or by BPAI in this application.
17		
18		
19	Respectfully	submitted,
20 21	/Jed Ma	rgolin/
22		
23 24	Jed Mar	
25	pro se ii June 16	
26		, 2011 17-7845
27 28		
29		
30		tify that this correspondence is being filed through the USPTO's Electronic Filing
31 32	System.	
33	Date: June	e 16, 2011 Inventor's Signature: /Jed Margolin/
34		
35		Jed Margolin

1 2 Claims Appendix 3 4 Claims involved in the Appeal of Application Serial Number 11/736,356 5 1. A system for safely flying an unmanned aerial vehicle in civilian airspace comprising: 6 (a) a ground station equipped with a synthetic vision system; 7 (b) an unmanned aerial vehicle capable of supporting said synthetic vision system; 8 (c) a remote pilot operating said ground station; 9 (d) a communications link between said unmanned aerial vehicle and said ground station; 10 (e) a system onboard said unmanned aerial vehicle for detecting the presence and position 11 of nearby aircraft and communicating this information to said remote pilot; 12 13 whereas said remote pilot uses said synthetic vision system to control said unmanned aerial 14 vehicle during at least selected phases of the flight of said unmanned aerial vehicle, and 15 during those phases of the flight of said unmanned aerial vehicle when said synthetic vision 16 system is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is 17 flown using an autonomous control system. 18 19 2. The system of claim 1 whereby said selected phases of the flight of said unmanned aerial 20 vehicle comprise: 21 22 (a) when said unmanned aerial vehicle is within a selected range of an airport or other 23 designated location and is below a first specified altitude; 24 25 (b) when said unmanned aerial vehicle is outside said selected range of an airport or other 26 designated location and is below a second specified altitude. 27 28 3. The system of claim 1 further comprising a system onboard said unmanned aerial vehicle for 29 periodically transmitting the identification, location, altitude, and bearing of said unmanned 30 aerial vehicle.

1	4.	The system of claim 1 further comprising a system onboard said unmanned aerial vehicle for	
2	providing a communications channel for Air Traffic Control and the pilots of other aircraft to		
3	cor	nmunicate directly with said remote pilot.	
4			
5	5.	A system for safely flying an unmanned aerial vehicle in civilian airspace comprising:	
6		(a) a ground station equipped with a synthetic vision system;	
7		(b) an unmanned aerial vehicle capable of supporting said synthetic vision system;	
8		(c) a remote pilot operating said ground station;	
9		(d) a communications link between said unmanned aerial vehicle and said ground station;	
10		(e) a system onboard said unmanned aerial vehicle for detecting the presence and position	
11	of nearby aircraft and communicating this information to said remote pilot;		
12			
13	whereas said remote pilot uses said synthetic vision system to control said unmanned aerial		
14	vehicle during at least selected phases of the flight of said unmanned aerial vehicle, and		
15	during those phases of the flight of said unmanned aerial vehicle when said synthetic vision		
16	system is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is		
17		flown using an autonomous control system, and	
18 19		whereas the selected phases of the flight of said unmanned aerial vehicle comprise:	
•		whereas we service phases of the ringht of sure similarity desired compared.	
20		(a) when said unmanned aerial vehicle is within a selected range of an airport or other	
21		designated location and is below a first specified altitude;	
22		(b) when said unmanned aerial vehicle is outside said selected range of an airport or other	
23		designated location and is below a second specified altitude.	
24		designated reduced and is below a second specified artificate.	
25	6.	The system of claim 5 further comprising a system onboard said unmanned aerial vehicle for	
26		riodically transmitting the identification, location, altitude, and bearing of said unmanned	
27	-	ial vehicle.	
28			

1 7. The system of claim 5 further comprising a system onboard said unmanned aerial vehicle for 2 providing a communications channel for Air Traffic Control and the pilots of other aircraft to 3 communicate directly with said remote pilot. 4 5 8. A method for safely flying an unmanned aerial vehicle as part of a unmanned aerial system 6 equipped with a synthetic vision system in civilian airspace comprising the steps of: 7 8 (a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at 9 least selected phases of the flight of said unmanned aerial vehicle, and during those phases 10 of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to 11 control said unmanned aerial vehicle an autonomous control system is used to fly said 12 unmanned aerial vehicle: 13 14 (b) providing a system onboard said unmanned aerial vehicle for detecting the presence and 15 position of nearby aircraft and communicating this information to said remote pilot. 16 17 9. The method of claim 8 whereby said selected phases of the flight of said unmanned aerial vehicle comprise: 18 19 (a) when said unmanned aerial vehicle is within a selected range of an airport or other 20 designated location and is below a first specified altitude; 21 (b) when said unmanned aerial vehicle is outside said selected range of an airport or other 22 designated location and is below a second specified altitude. 23 24 10. The method of claim 8 further comprising the step of providing a system onboard said 25 unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and 26 bearing of said unmanned aerial vehicle. 27 28 11. The method of claim 8 further comprising the step of providing a system onboard said 29 unmanned aerial vehicle for providing a communications channel for Air Traffic Control and the

pilots of other aircraft to communicate directly with said remote pilot.

1	12. A method for safely flying an unmanned aerial vehicle as part of a unmanned aerial system		
2	equipped with a synthetic vision system in civilian airspace comprising the steps of:		
3			
4	(a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at		
5	least selected phases of the flight of said unmanned aerial vehicle, and during those phases		
6	of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to		
7	control said unmanned aerial vehicle an autonomous control system is used to fly said		
8	unmanned aerial vehicle;		
9 10	(b) providing a system onboard said unmanned aerial vehicle for detecting the presence and		
11	position of nearby aircraft and communicating this information to said remote pilot;		
12			
13	whereas said selected phases of the flight of said unmanned aerial vehicle comprise:		
14	(a) when said unmanned aerial vehicle is within a selected range of an airport or other		
15	designated location and is below a first specified altitude;		
16	(b) when said unmanned aerial vehicle is outside said selected range of an airport or other		
17	designated location and is below a second specified altitude.		
18			
19	13. The method of claim 12 further comprising the step of providing a system onboard said		
20	unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and		
21	bearing of said unmanned aerial vehicle.		
22			
23	14. The method of claim 12 further comprising the step of providing a system onboard said		
24	unmanned aerial vehicle for providing a communications channel for Air Traffic Control and the		
25	pilots of other aircraft to communicate directly with said remote pilot.		

	Appendix B - Evidence Appendix
Exhibit 1	Patent Application as filed
Exhibit 2	U.S. Patent 5,904,724 (Margolin)
Exhibit 3	First Office Action on the Merits
Exhibit 4	U. S. Patent Application 20050004723 (Duggan)
Exhibit 5	Applicant's Response to First Office Action
Exhibit 6	Second Office Action
Exhibit 7	Applicant's Summary of Telephone Interview with Examiner 452
Exhibit 8	Applicant's Summary of Telephone Interview with
	Examiner's SPE
Exhibit 9	IDS References Considered by Examiner
Exhibit 10	Sensing Requirements for Unmanned Air Vehicles,
	AFRL Air Vehicles Directorate
Exhibit 11	Developing Sense and Avoid Requirements for Meeting
	An Equivalent Level of Safety, Russel Wolfe
Exhibit 12	Article - Lockheed's Polecat UCAV Demonstrator Crashes, Aviation
	Week & Space Technology, by Amy Butler, 03/19/2007, page 44 489
Exhibit 13	Ex parte MAURICE GIVENS Appeal 2009-003414
	BPAI Informative Decision, Decided: August 6, 2009 493
Exhibit 14	Speech - "Safety Must Come First"; J. Randolph Babbitt,
	FAA Administrator; November 18, 2009, FAA Web site 498
Exhibit 15	Article - Pentagon Accident Reports Suggest Military's Drone
	Aircraft Plagued With Problems, by David Zucchino, from
	The Ledger.com, July 6, 2010.
	http://www.theledger.com/article/20100706/NEWS/7065101 502
	Exhibit 2 Exhibit 3 Exhibit 4 Exhibit 5 Exhibit 6 Exhibit 7 Exhibit 8 Exhibit 9 Exhibit 10 Exhibit 11 Exhibit 12 Exhibit 12

Exhibit 1

Exhibit 1

UNITED STATES PATENT APPLICATION FOR PATENT FOR

SYSTEM AND METHOD FOR SAFELY FLYING UNMANNED AERIAL VEHICLES IN CIVILIAN AIRSPACE

INVENTOR: JED MARGOLIN

SYSTEM AND METHOD FOR SAFELY FLYING UNMANNED AERIAL VEHICLES IN CIVILIAN AIRSPACE

CROSS REFERENCES TO RELATED APPLICATIONS

[**001**] This application claims the benefit of U.S. Provisional Application No. 60/745,111 filed on April 19, 2006.

BACKGROUND OF THE INVENTION - Field of Invention

This invention relates to the field of remotely piloted vehicles (RPVs) and unmanned [002] aerial vehicles (UAVs). RPV is an older term for UAV. UCAV shall mean "Unmanned Combat Aerial Vehicle." UCAV is also sometimes defined as an "Uninhabited Combat Aerial Vehicle." UCAV is a UAV that is intended for use in combat. UAS means "Unmanned Aerial System." UCAS means "Unmanned Combat Air System." ROA means "Remotely Operated Aircraft." The characteristics all these vehicles have in common is that there is no human pilot onboard and although they may be operated autonomously they can also be controlled by a remotely located operator or pilot. The term UAV shall be used as a generic term for such vehicles. "Synthetic Vision" is the current term for three dimensional projected image data presented to the pilot or other observer. Another term for "Synthetic Vision" is "Synthetic Environment." An older term for "Synthetic Vision" is "Virtual Reality." The term "Augmented Reality" (AR) refers to a human/computer interaction in which synthetic, computer generated elements are mixed or juxtaposed with real world elements in such a way that the synthetic elements appear to be part of the real world. A common method used by Augmented Reality systems is to combine and overlay a synthetic vision system with the video from one or more video or infrared cameras. Augmented

Reality is also sometimes referred to as "Enhanced Vision." The term "Remote Pilot" shall mean the same as "Remote Operator." The term "Sense and Avoid" shall mean the same as "See and Avoid."

BACKGROUND OF THE INVENTION – Prior Art

[003] The use of Synthetic Vision in flying a UAV is taught by U.S. Patent 5,904,724 Method and apparatus for remotely piloting an aircraft issued May 18, 1999 to Margolin (the present Applicant) which is hereby incorporated by reference. From the **Abstract:**

A method and apparatus that allows a remote aircraft to be controlled by a remotely located pilot who is presented with a synthesized three-dimensional projected view representing the environment around the remote aircraft. According to one aspect of the invention, a remote aircraft transmits its three-dimensional position and orientation to a remote pilot station. The remote pilot station applies this information to a digital database containing a three dimensional description of the environment around the remote aircraft to present the remote pilot with a three dimensional projected view of this environment. The remote pilot reacts to this view and interacts with the pilot controls, whose signals are transmitted back to the remote aircraft. In addition, the system compensates for the communications delay between the remote aircraft and the remote pilot station by controlling the sensitivity of the pilot controls.

[004] The system by which an aircraft periodically transmits its identification, location, altitude, and bearing was taught by U.S. Patent 5,153,836 issued October 10, 1992 to Fraughton et al. and was materially adopted by the FAA as **Automatic Dependent Surveillance-Broadcast** (ADS-B). According the article **Gulf of Mexico Helo Ops Ready for ADS-B** in Aviation Week & Space Technology (02/26/2007, page 56):

By the end of 2010, FAA expects to have the ADS-B system tested and operationally acceptable for the NAS, with Houston Center providing services in the Gulf region. By 2013, all of the U.S. is scheduled to be covered with ground infrastructure.

BACKGROUND OF THE INVENTION – Current Practice

[005] The current practice in flying UAVs in civilian airspace is typified by the report Sensing Requirements for Unmanned Air Vehicles by AFRL's Air Vehicles Directorate, Control Sciences Division, Systems Development Branch, Wright-Patterson AFB OH, June 2004, which relies on computer-intelligence to use sensors to sense and avoid other aircraft.

[006] According to the presentation entitled Developing Sense & Avoid Requirements for Meeting an Equivalent Level of Safety given by Russ Wolfe, Technology IPT Lead, Access 5 Project at UVS Tech 2006 this had not changed as of January 18, 2006. Access 5 was a national project sponsored by NASA and Industry with participation by the FAA and DOD to introduce high altitude long endurance (HALE) remotely operated aircraft (ROA) to routine flights in the National Airspace System (NAS). Access 5 started in May 2004 but when NASA withdrew its support (and funding) the Industry members decided not to spend their own money and Access 5 was dissolved at the end of 2005.

[007] The presentation Integration into the National Airspace System (NAS) given by John Timmerman of the FAA's Air Traffic Organization (July 12, 2005) essentially says that under current UAS Operations in the NAS UAVs should not harm other aircraft or the public. (Page 3: "While ensuring 'no harm' to other NAS customers and public")

[008] The article **Zone Ready for Drone**, April 7, 2006, on the web site for the FAA's Air Traffic Organization Employees states that,

Since March 29, a temporary flight restriction ... has limited access to the airspace along almost 350 miles of the border, expanding an earlier TFR near Nogales. The restriction is in effect nightly from 6 p.m. to 9 a.m., although that time can be expanded by issuance of a Notice to Airmen. Aircraft wishing to fly in the TFR when it is active must receive authorization from air traffic control prior to entry. Once in, pilots are required to maintain two-way communication with ATC and transmit a discrete transponder code.

The reason for the TFR is to enable Predator UAVs to patrol the border. The article quotes Stephen Glowacki, a Systems Safety and Procedures specialist with the FAA's Air Traffic Organization as saying:

This is an extreme situation that has been presented to us," states Stephen Glowacki, a Systems Safety and Procedures specialist with the FAA's Air Traffic Organization, stressing the nation's security. "We have been working with U.S. Customs and Border Protection to try and answer this situation."

Inserting UASs into the National Airspace System is not a simple feat. According to Glowacki, the technology and certification that will permit unmanned aircraft to "see and avoid" other air traffic is still eight to ten years away. In the mean time, a carefully controlled environment is needed.

[009] The track record of current UAV systems shows two major problem areas:

<u>a.</u> The communications link between the UAV and the ground station is unreliable, even at short ranges.

A recent example is the December 2006 crash of Lockheed Martin's Polecat UAV. When it lost communications with the ground it deliberately crashed itself to avoid flying into civil airspace. (See the article **Lockheed's Polecat UCAV Demonstrator Crashes** in Aviation Week & Space Technology, 03/19/2007, page 44.)

<u>b.</u> Autonomous Mode is not always very smart.

On April 25, 2006 the Predator UAV being used by the U.S. Customs and Border Protection agency to patrol the border crashed in Nogales, AZ. According to the NTSB report (NTSB Identification CHI06MA121) when the remote pilot switched from one console to another the Predator was inadvertently commanded to shut off its fuel supply and "With no engine power, the UAV continued to descend below line-of-site communications and further attempts to re-establish contact with the UAV were not successful." In other words, the Predator crashed because the system did not warn the remote pilot he had turned off the fuel supply and it was not smart enough to turn its fuel supply back on. (Note that this is the same Predator discussed in the article **Zone Ready for Drone** previously mentioned.)

SUMMARY OF THE INVENTION

[010] It is important when flying a UAV in an airspace shared with other aircraft, both civilian and military, that collisions during all phases of flight (including taking off and landing) not happen. The current method for accomplishing this is to place restrictions on all other traffic in an air corridor representing the path of the intended flight of the UAV, thereby inconveniencing other traffic and disrupting the National Airspace System.

Synthetic Vision

[011] One objective of the present invention is to allow UAVs to safely share airspace with other users by using synthetic vision during at least some of the phases of the UAV's flight so that changes required to existing FAA rules and regulations are minimized.

- [012] This may be accomplished by requiring that during selected phases of the flight the UAV be flown by a remote pilot using a Synthetic Vision System such as the one taught by U.S. Patent 5,904,724 Method and apparatus for remotely piloting an aircraft. These selected phases include:
 - (a) When the UAV is within a selected range of an airport or other designated location and is below a first specified altitude. This first specified altitude may be set high enough that, for all practical purposes, it may be considered unlimited.
 - (b) When the UAV is outside the selected range of an airport or other designated location and is below a second specified altitude.
- [013] Each UAV flown under these conditions must be under the direct control of a remote pilot whose sole responsibility is the safe operation of that UAV. The rules will be similar to those for operating piloted aircraft with automatic pilot systems including those with autoland capability.
- [014] UAVs not flying in airspace where the use of a Synthetic Vision System is required may be flown autonomously using an Autonomous Control System (ACS) as long as the following conditions are met:
 - (a) A remote pilot monitors the operation of the UAV at all times.
 - (b) The ACS periodically transmits its identification, location, altitude, and bearing. This information may also be broadcast by UAVs when operated by remote pilots using Synthetic Vision.
- [015] All UAVs must use Radar (either active or passive) or other device to detect the range and altitude of nearby aircraft in order to perform "see and avoid" actions.
- [016] All UAVs must provide a means for Air Traffic Control (ATC) and the pilots of other aircraft to communicate directly with the remote pilot.
- [017] The preferred method for flying a UAV from one airport to another, such as in ferrying UAVs, would be to have the remote pilot at the originating airport be responsible for taking off and flying the UAV to the specified altitude. A remote pilot at the arrival airport would be

responsible for having the UAV descend and land. In between, once the UAV has reached the specified altitude and range the remote pilot monitoring the flight can be at any convenient location.

[018] Synthetic Vision may be enhanced by combining and/or overlaying it with the video from one or more video or infrared cameras or from synthetic aperture radar.

[019] The method described does not require material changes in the present air control system. It would also make UAV flights safer than most existing piloted flights where "see and avoid" is accomplished by looking out small windows providing a limited field of view and hoping you see any nearby aircraft in time to avoid a collision.

Communication Link Failures

[020] The exact cause of the failure of the communications link in the Polecat crash mentioned previously has not been made public. Technical details for UAVs are limited because the systems are developed by private industry which generally considers such information proprietary. In addition, these are mostly military programs which limits public disclosure even more. (Indeed, although the Polecat crash took place in December 2006, it was not publicly reported until March 2007.)

[021] One factor that may cause a communication link to fail is if it is a high-bandwidth link since a high-bandwidth link is more susceptible to interference from other signals than is a lower-bandwidth link. The use of a synthetic vision system allows a lower-bandwidth link to be used which improves its reliability

[022] Another factor that affects a digital communications link when digital packets are sent through a network (such as an Internet-style network) is that the latency of the data packets cannot be assured either because the path may change from packet to packet or because packets may be lost. When data packets are lost the destination server usually times out and a request to resend the packet is issued which further increases the latency. Packets may also be lost simply because the path to a server takes longer than the server's timeout period, causing the server to issue an unending series of requests to resend the packet. If a packet is lost, either outright or because the path is longer than the timeout period, transmission of data may stop entirely as most people who use the Internet have experienced.

- [023] Because each data packet may take a different path, data packets may be received out-of-order. Standard Internet browsers such as Firefox and Microsoft Internet Explorer know to reassemble the packets in the correct order. A custom software application, such as that used to control UAVs, must do likewise to avoid becoming confused as to what is happening when.
- [024] Some communications link failures may simply be due to the failure of the system to measure and adapt to the changing latency of the data packets. The importance of having the system measure and adapt to changing latencies is discussed in U.S. Patent 5,904,724 by the present inventor.

Minimizing Communications Link Failures

- [025] Communications Link Failures can be minimized by, first of all, properly designing the communications link to prevent the obvious types of failures described above.
- The next step is to provide redundant communications links. In addition to the standard types of communications links, an emergency backup communications link can use the standard commercial cell phone network as long as precautions are taken to keep hackers out. Casual hackers can be kept out by using Caller ID so if the UAV receives a call from an unauthorized number it answers the line and immediately hangs up. The reason this keeps out only casual hackers is because PBXs (Private Branch Exchanges) can be programmed to deliver any Caller ID number the PBX operator desires. Once the UAV User is authenticated the ACS hangs up and calls one or more preprogrammed telephone numbers to establish a link to be used for communications. Because of the time needed to establish this link it may be desirable to keep the emergency backup communications link on hot standby during takeoffs and landings. Keeping this link on hot standby during all phases of flight also provides a backup method for tracking the UAV by using the cell phone tower triangulation method. As with the standard communications links all data must be securely encrypted and the User must be periodically authenticated.

What to Do if the Communication Link Fails

[027] If even the emergency backup Communications Link fails there is no choice but to go to the Autonomous Control System (ACS). What ACS does depends on the flight profile of the UAV.

- <u>a.</u> If the UAV is on the runway on takeoff roll and is below V1 (the maximum abort speed of the aircraft) the takeoff is aborted.
- **<u>b.</u>** If the UAV is between V1 and V2 (the minimum takeoff safety speed for the aircraft) the choice is nominally between aborting the takeoff (and overrunning the runway) and taking off. If all other UAV systems are operating properly, taking off is probably the better choice since it may be possible to re-establish the communications link once the UAV is in the air. However, if the UAV is equipped with a tailhook and the runway is equipped with arresting cables a suitable distance before the physical end of the runway, the UAV takeoff may still be safely aborted. The hook and arresting cable method is the standard method used on aircraft carriers for landing aircraft.
- **c.** If the UAV is above V2 the UAV takes off and uses the takeoff profile that is assigned to each particular airport. It then climbs to an altitude high enough to avoid other traffic and, unless the communication link can be firmly established, flies to the nearest airport designated to receive UAVs in distress. Only in extreme cases should the ACS fly the UAV to a designated crash site.

Autonomous Mode is not always very smart or even bug-free

As noted in the case of the Predator previously mentioned, it crashed because the system did not warn the remote pilot he had turned off the fuel supply and it was not smart enough to turn its fuel supply back on. This may have been a design oversight or it may have been a software bug. Complex computer programs always have bugs no matter how brilliant or motivated the programmer(s). Treating every software error as a mistake to be punished only leads to paralysis so that no code gets written. After a good faith effort is made to "get it right" the systems must be thoroughly tested. And they must be tested on the ground.

Testing

[029] Complex systems are difficult to test, especially when one of its parts is a flying machine which, itself, is made up of several systems. Simulation of the individual subsystems is not good enough. A simulation of the entire system is also not good enough because, despite the best efforts, a simulation might not completely characterize the actual hardware and how the different hardware systems act together. The answer is to use Hardware-in-the-Loop simulation where the actual hardware is used with simulated inputs. A good description of Hardware-in-the-Loop simulation can be found in the article **Hardware-in-the-Loop Simulation** by Martin Gomez in Embedded Systems Design (November 30, 2001). The example Mr. Gomez used was an autopilot.

[030] The Ground Station is already on the ground so the proper place to start is with an actual ground station. The simplest configuration is to use an actual ground station with a simulation port connected directly to a computer that simulates the UAV. (See Figure 3). That probably isn't good enough because it only really tests the ground station. The next step is to use a ground station with an actual communication link. (See Figure 4.) This tests the ground station and the communications link.

[031] Since the idea is to test the UAV without actually flying it, the idea of Hardware-inthe-Loop testing is to use as much of the UAVs hardware as possible by using a computer to read the system's output control signals and present the proper sensor input signals. In between is a simulation of the physical model of how the UAV interacts with the physical universe. The UAV lives in an analog universe where space and time are continuously variable, subject only to the Planck Distance and Planck Time. (The Planck length is the scale at which classical ideas about gravity and space-time cease to be valid, and quantum effects dominate. This is the 'quantum of length', the smallest measurement of length with any meaning, roughly equal to 1.6×10^{-35} m. The Planck time is the time it would take a photon traveling at the speed of light to cross a distance equal to the Planck length. This is the 'quantum of time', the smallest measurement of time that has any meaning, and is equal to 10^{-43} seconds.) The UAV's universe is also massively parallel, which is why simulating it with a single computer which is forced to perform different functions sequentially may not always produce accurate results. This can be ameliorated somewhat by oversampling and running the model faster than that required by Nyquist. (The Nyquist rate is the minimum; you don't have to settle for the minimum.)

[032] Ideally each sensor input and each actuator output should have its own processor and all the processors should be linked to a computer that contains the overall physical model of the UAV's universe (the Universe Processor). For example, the Universe Processor knows the location of the UAV, its attitude, its bearing, the air temperature and pressure, local weather, terrain, etc. This assumes that the sensors and actuators are completely characterized. If they are not, then the physical sensors and actuators can be used with devices that provide the proper physical stimulation to the sensors and measure the actual physical results of the actuators. The desired end result is that each device in the UAV flight hardware, especially if it contains software such as the Flight Control Computer, can be operated with its actual hardware and software. When the hardware or software is changed, the old device can be unplugged and the new version installed. This avoids the problem of relying on software that has been ported to hardware other than the hardware it runs on in the flight UAV. For example, the "C" programming language can be difficult to port to different computers because the definition of a "byte" in "C" can be different depending on the computer. Also note that the speed of the link connecting the sensors/actuators to the Universe Processor is determined by the speed of the fastest sensor/actuator, which also sets the minimum update rate of the Universe Processor.

[033] The type of operating system(s) used in simulation and testing is important. In particular, with a non-deterministic Operating System (such as Windows) you cannot count on getting the same result every time because the operating system includes random timing components. From the article "Basic concepts of real-time operating systems" by David Kalinsky (Nov. 18, 2003):

The key difference between general-computing operating systems and real-time operating systems is the need for "deterministic" timing behavior in the real-time operating systems. Formally, "deterministic" timing means that operating system services consume only known and expected amounts of time. In theory, these service times could be expressed as mathematical formulas. These formulas must be strictly algebraic and not include any random timing components. Random elements in service times could cause random delays in application software and could then make the application randomly miss real-time deadlines – a scenario clearly unacceptable for a real-time embedded system.

General-computing non-real-time operating systems are often quite non-deterministic. Their services can inject random delays into application software and thus cause slow responsiveness of an application at unexpected times. If you ask the developer of a non-real-time operating system for the algebraic formula describing the timing behavior of one of its services (such as sending a message from task to task), you will invariably not get an algebraic formula. Instead the developer of the non-real-time operating system (such as Windows, Unix or Linux) will just

give you a puzzled look. Deterministic timing behavior was simply not a design goal for these general-computing operating systems.

This means you may not be able to duplicate a failure. If you cannot duplicate a failure you cannot fix it. And, needless to say, the use of a non-deterministic Operating System in any part of the UAV flight hardware will result in a system that can never be completely trusted.

[034] Failure to do proper ground-based simulation can lead to expensive and/or embarrassing incidents such as this one reported by Aviation Week & Space Technology (02/26/2007, page 18):

The F-22 continues to encounter bumps in its first air expeditionary force deployment to Okinawa. The 12 aircraft from Langley AFB, Va., spent an unscheduled week at Hickam AFB, Hawaii, after the leading four had to abort the trip's last leg. As the Raptors reached the International Date Line, the navigation computers locked up so the aircraft returned to Hickam until a software patch was readied. "Apparently we had built an aircraft for the Western Hemisphere only," says a senior U.S. Air Force official. When the F-22s arrived at Kadena AB, Okinawa, some Japanese citizens held a protest against the aircraft's noise.

Although the F-22 is not a UAV the principle is the same.

[035] Testbeds can be used for more than just verifying that the system works as designed. They can also be used to verify that the system is designed properly for the User.

[036] In military programs, operational procedures can be developed and military personnel can be ordered to follow them. And they will follow them to the best of their ability because their careers are on the line. That doesn't change the fact that people operating poorly designed systems are more likely to make mistakes.

[037] Producing UAVs for the commercial market requires a different mindset. Civilians cannot be ordered to use a system whose design makes mistakes likely or maybe even inevitable. Civilians have the option to not buy the product if they don't like it. They also have the option to sue the manufacturer of a system whose design makes mistakes inevitable. Civilians injured on the ground also have the option to sue the manufacturer of a system whose design makes mistakes inevitable.

- [038] Perhaps the UAV Industry can learn from the Video Game Industry where the standard practice is to hold focus groups early in the game's development using real video game players. Game Designers may not like the players' comments about their game but the players represent the game's ultimate customers. In addition, the video game companies employ people whose sole job is to extensively play the game before it is released and take careful notes of bugs, which are then passed on to the Game Developers. Although it is tempting to cut short the time devoted to testing in order to get the product out the door, a game released with too many bugs will be rejected by the marketplace and will fail.
- [039] UAV manufacturers making UAV systems for the Government are protected from liability under the Supreme Court's 1988 decision in *Boyle v. United Technologies Corp*, 487 U.S. 500 (1988), where the Court held that if a manufacturer made a product in compliance with the government's design and production requirements, but it was defective and caused injury, the victim could not sue the manufacturer.
- [040] Since UAV manufacturers making UAV systems for the civilian market do not have this protection they should consider who their customers really are. Although civilian UAV systems will probably be operated by civilian-rated pilots (at least initially), in a sense the UAV manufacturers are really designing their systems to meet the requirements of the Insurance Industry and doing proper on-ground testing is essential in making UAVs that will fly safely in civilian airspace. Military UAVs should meet the same standard because the crash of a military UAV that injures or kills civilians could ignite a political firestorm that would ground the entire UAV fleet.

The Reasons For Using Synthetic Vision during at least Takeoffs and Landings

- [041] There are several reasons why the use of synthetic vision during at least takeoffs and landings can minimize the risk to the public.
- <u>a.</u> The ACS must be programmed to deal with every possible problem in every possible situation that might arise. This is probably not possible until computers become sentient.

Even after 100 years of aviation, pilots still encounter situations and problems that have not been seen before. The way they deal with new situations and problems is to use their experience, judgment, and even intuition. Pilots have been remarkably successful in saving passengers and crew

under extremely difficult conditions such as when parts of their aircraft fall off (the top of the fuselage peels off) or multiply-redundant critical controls fail (no rudder control). Computers cannot be programmed to display judgment. They can only be programmed to display judgment-like behavior under conditions that have already been anticipated. UAVs should not be allowed to fly over people's houses until they are at least smart enough to turn on their own fuel supply.

Even so, this assumes the computer program has no bugs.

<u>b.</u> Complex computer programs always have bugs no matter how brilliant or motivated the programmer(s). As an example, look at almost every computer program ever written.

(See the article **Embedded Experts: Fix Code Bugs Or Cost Lives** by Rick Merritt in EE Times, April 10, 2006, as well as the article **Entries from the Software Failure Hall of Shame, Part 1** by Tom Rhinelander in **g2zero**, July 6, 2006. g2zero at *www.g2zero.com* is a community dedicated to discussing and advocating ways to improve software quality.)

While adding a sense-and-avoid capability to existing UAV systems is necessary it will increase the code complexity and increase the number of bugs in the software.

c. An Unmmaned Combat Aerial Vehicle (UCAV) will have little chance against one flown by an experienced pilot using Synthetic Vision until Artificial Intelligence produces a sentient, conscious Being. At that point, all bets will be off because a superior sentient artificial Being may decide that war is stupid and refuse to participate. It may also decide that humans are obsolete or fit only to be its slaves.

Acceptable Risk

- [042] Since it is impossible to anticipate every possible problem that might arise and it is impossible to write completely bug-free code it comes down to what is an acceptable risk.
- [043] When a military aircraft is engaged in a military operation, a great deal of risk may be acceptable, especially if it is on a critical mission.

It is unacceptable to expose civilian aircraft flying in civil airspace, as well as the public on the ground, to this same level of risk except under truly exceptional circumstances.

[044] Synthetic Vision puts a human directly in the loop and makes flying a UAV in civilian airspace at least as safe as flying an aircraft with the pilot onboard.

BRIEF DESCRIPTION OF THE DRAWINGS

[045] The invention may best be understood by referring to the following description and accompanying drawings which illustrate the invention. In the drawings:

[046] FIG. 1 is a general illustration showing a circular area of Range 102 around Airport 101.

[047] FIG. 2 is a general illustration showing the airspace around Airport 101 where UAVs must be flown by a remote pilot using synthetic vision. This airspace is represented by the hatched areas.

[048] FIG. 3 shows the simplest system for simulating the UAV system where an actual ground station is connected directly to a simulation computer that simulates the UAV.

[049] FIG. 4 shows a system for simulating the UAV system that includes an actual communications link.

DETAILED DESCRIPTION

[050] In the following description, numerous specific details are set forth to provide a thorough understanding of the invention. However, it is understood that the invention may be practiced without these specific details. In other instances well-known circuits, structures, and techniques have not been shown in detail in order not to obscure the invention.

Figure 1 shows a Distance Range 102 around Airport 101. While a circular area is shown for convenience any area whose shape can be defined may be used such as a square, rectangle, or other polygon. While Figure 1 shows the area around an airport any other designated location may be specified. Figure 2 shows an altitude profile of the airspace surrounding Airport 101. When the UAV is within Distance Range 102 of Airport 101 at an altitude below Selected Altitude 201 the UAV must be flown by a remote pilot using a Synthetic Vision System such as the one taught by U.S. Patent 5,904,724 **Method and apparatus for remotely piloting an aircraft.** When the UAV is outside Distance Range 102, within Distance Range 203, and is below Selected

Altitude 202 the UAV must also be flown by a remote pilot using a Synthetic Vision System. The airspace where the UAV must be flown by a remote pilot using a Synthetic Vision System is represented by the hatched areas in Figure 2.

- [052] Each UAV flown under these conditions must be under the direct control of a remote pilot whose sole responsibility is the safe operation of that UAV. The rules will be similar to those for operating piloted aircraft with automatic pilot systems including those with autoland capability.
- [053] UAVs flying beyond Distance Range 102, within Distance Range 203, and above Altitude 202 may be flown autonomously using an Autonomous Control System (ACS) as long as the following conditions are met:
 - (a) A remote pilot must monitor the operation of the UAV at all times. A remote pilot may monitor several UAVs simultaneously once it is established that this practice may be safely performed by a single pilot. For example, it may be preferable to have two remote pilots work as a team to monitor ten UAVS than to have each remote pilot separately monitor a group of five UAVs.
 - (b) The ACS must periodically transmit its identification, location, altitude, and bearing. This may be done through the use of a speech synthesis system on a standard aircraft communications frequency. This is for the benefit of pilots flying aircraft sharing the airspace. It may also be done through an appropriate digital system such as the one taught in U.S. Patent 5,153,836 Universal dynamic navigation, surveillance, emergency location, and collision avoidance system and method adopted by the FAA as ADS-B. This information may also be broadcast by UAVs when operated by remote pilots using Synthetic Vision.
- [054] All UAVs must use radar (either active or passive) to detect the range and altitude of nearby aircraft in order to perform "see and avoid" actions. An example of a passive radar system is taught by U. S. Patent 5,187,485 **Passive ranging through global positioning system**. Other devices for detecting the range and altitude of nearby aircraft may also be used.

[055] All UAVs must provide a means for Air Traffic Control (ATC) and the pilots of other aircraft to communicate directly with the remote pilot. This may be accomplished by having the communication link between the remote pilot and the UAV relay communications with a standard aircraft transceiver onboard the UAV.

[056] Distance Range 203 extends to where it meets the area covered by another designated location such as another airport. The entire area covered by Distance Range 203 is termed a Designated Area. Another type of Designated Area is a large body of open water where the minimum safe altitude is determined by the height of a large ship riding the crest of a large wave.

[057] The preferred method for flying a UAV from one airport to another, such as in ferrying UAVs, would be to have the remote pilot at the originating airport be responsible for taking off and flying the UAV to the specified altitude. A remote pilot at the arrival airport would be responsible for having the UAV descend and land. This is similar to the longstanding practice of using Harbor Pilots to direct the movement of ships into and out of ports. In between the originating airport and destination airport, once the UAV has reached the specified altitude and range the remote pilot monitoring the flight can be at any convenient location.

[058] Long delays in the communications link (such as through geosynchronous satellites) make flying the UAV by direct control using synthetic vision more difficult and should be avoided.

[059] The method described does not require material changes in the present air control system. It would also make UAV flights safer than most existing piloted flights where "see and avoid" is accomplished by looking out small windows providing a limited field of view and hoping you see any nearby aircraft in time to avoid a collision.

[060] While preferred embodiments of the present invention have been shown, it is to be expressly understood that modifications and changes may be made thereto.

CLAIMS

What is claimed is:

- 1. A system for safely flying an unmanned aerial vehicle in civilian airspace comprising:
 - (a) a ground station equipped with a synthetic vision system;
 - (b) an unmanned aerial vehicle capable of supporting said synthetic vision system;
 - (c) a remote pilot operating said ground station;
 - (d) a communications link between said unmanned aerial vehicle and said ground station;
 - (e) a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot;

whereas said remote pilot uses said synthetic vision system to control said unmanned aerial vehicle during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system.

- 2. The system of claim 1 whereby said selected phases of the flight of said unmanned aerial vehicle comprise:
 - (a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;
 - (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.
- 3. The system of claim 1 further comprising a system onboard said unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and bearing of said unmanned aerial vehicle.
- 4. The system of claim 1 further comprising a system onboard said unmanned aerial vehicle for providing a communications channel for Air Traffic Control and the pilots of other aircraft to communicate directly with said remote pilot.

- 5. A system for safely flying an unmanned aerial vehicle in civilian airspace comprising:
 - (a) a ground station equipped with a synthetic vision system;
 - (b) an unmanned aerial vehicle capable of supporting said synthetic vision system;
 - (c) a remote pilot operating said ground station;
 - (d) a communications link between said unmanned aerial vehicle and said ground station;
 - (e) a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot;

whereas said remote pilot uses said synthetic vision system to control said unmanned aerial vehicle during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system, and

whereas the selected phases of the flight of said unmanned aerial vehicle comprise:

- (a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;
- (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.
- 6. The system of claim 5 further comprising a system onboard said unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and bearing of said unmanned aerial vehicle.
- 7. The system of claim 5 further comprising a system onboard said unmanned aerial vehicle for providing a communications channel for Air Traffic Control and the pilots of other aircraft to communicate directly with said remote pilot.

- 8. A method for safely flying an unmanned aerial vehicle as part of a unmanned aerial system equipped with a synthetic vision system in civilian airspace comprising the steps of:
 - (a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle an autonomous control system is used to fly said unmanned aerial vehicle;
 - (b) providing a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot.
- 9. The method of claim 8 whereby said selected phases of the flight of said unmanned aerial vehicle comprise:
 - (a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;
 - (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.
- 10. The method of claim 8 further comprising the step of providing a system onboard said unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and bearing of said unmanned aerial vehicle.
- 11. The method of claim 8 further comprising the step of providing a system onboard said unmanned aerial vehicle for providing a communications channel for Air Traffic Control and the pilots of other aircraft to communicate directly with said remote pilot.

- 12. A method for safely flying an unmanned aerial vehicle as part of a unmanned aerial system equipped with a synthetic vision system in civilian airspace comprising the steps of:
 - (a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle an autonomous control system is used to fly said unmanned aerial vehicle;
 - (b) providing a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot;

whereas said selected phases of the flight of said unmanned aerial vehicle comprise:

- (a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;
- (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.
- 13. The method of claim 12 further comprising the step of providing a system onboard said unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and bearing of said unmanned aerial vehicle.
- 14. The method of claim 12 further comprising the step of providing a system onboard said unmanned aerial vehicle for providing a communications channel for Air Traffic Control and the pilots of other aircraft to communicate directly with said remote pilot.

ABSTRACT OF THE DISCLOSURE

A system and method for safely flying an unmanned aerial vehicle (UAV), unmanned combat aerial vehicle (UCAV), or remotely piloted vehicle (RPV) in civilian airspace uses a remotely located pilot to control the aircraft using a synthetic vision system during at least selected phases of the flight such as during take-offs and landings.

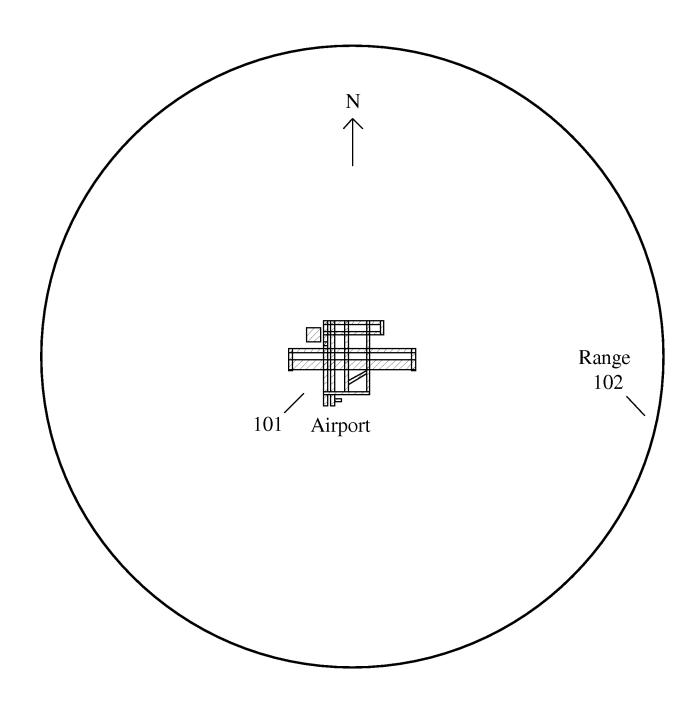
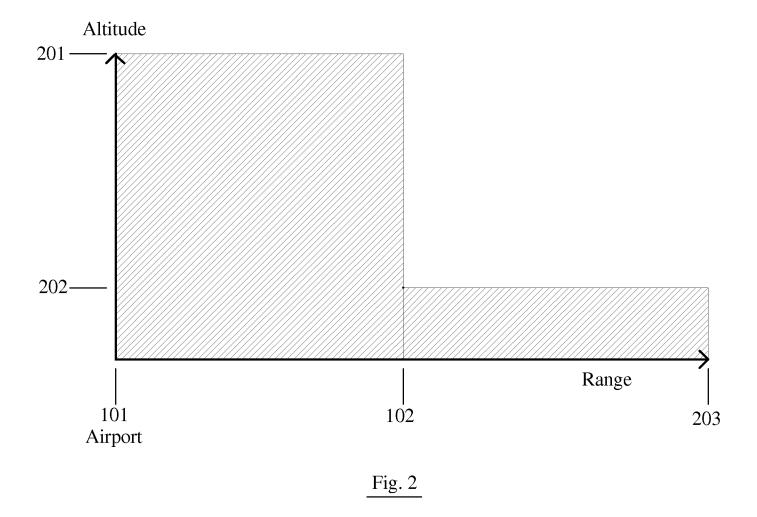
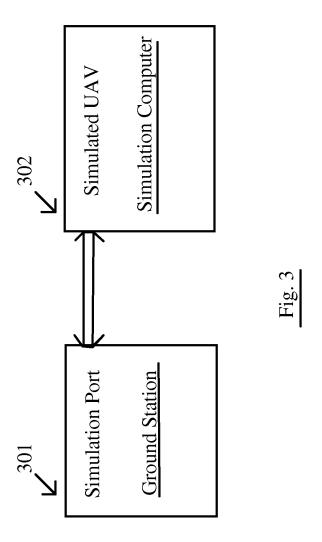


Fig. 1





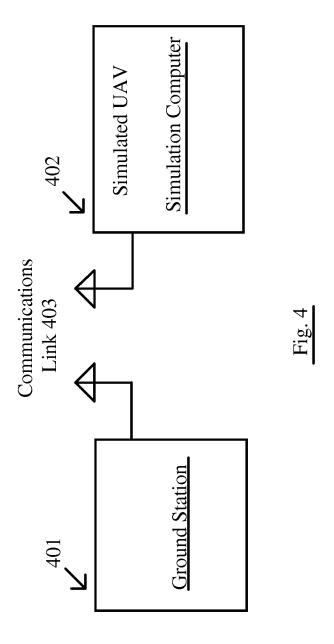


Exhibit 2

Exhibit 2



United States Patent [19]

Margolin

[56]

[11] Patent Number: 5,904,724

Date of Patent:

May 18, 1999

[54] METHOD AND APPARATUS FOR REMOTELY PILOTING AN AIRCRAFT

[76]	Inventor: Jed Margolin , 3570 Pleasant Echo, San Jose, Calif. 95148
[21]	Appl. No.: 08/587,731
[22]	Filed: Jan. 19, 1996
[51] [52]	Int. Cl. ⁶
[58]	Field of Search

References Cited

U.S. PATENT DOCUMENTS

3,742,495	6/1973	Diamantides 342/64
3,795,909	3/1974	Vehrs, Jr 343/7
4,218,702	8/1980	Brocard et al 348/144
4,405,943	9/1983	Kanaly 358/133
4,467,429	8/1984	Kendig 343/433
4,660,157	4/1987	Beckwith et al 345/421
4,739,327	4/1988	Konig et al 342/26
4,760,396	7/1988	Barney et al 342/65
4,835,532	5/1989	Fant
4,855,822	8/1989	Naredra et al 364/423.099
4,964,598	10/1990	Berejik et al 244/190
5,015,187	5/1991	Lord 364/462
5,072,396	12/1991	Fitzpatrick et al 364/450
5,086,396	2/1992	Waruszewski, Jr 364/454
5,155,683	10/1992	Rahim 364/424.029
5,179,638	1/1993	Dawson et al 395/125
5,240,207	8/1993	Eiband et al 364/423.099
5,257,347	10/1993	Busbridge et al 395/129
5,266,799	11/1993	Steinitz et al 324/330
5,272,639	12/1993	McGuffin 364/449
5,335,181	8/1994	McGuffin 364/443
5,381,338	1/1995	Wysocki et al 348/116

5,406,286	4/1995	Tran et al 342/13
5,446,666	8/1995	Bauer 364/434
5,552,983	9/1996	Thornberg et al
5,581,250	12/1996	Khviliviky 340/961

OTHER PUBLICATIONS

Lyons, J.W., "Some Navigational Concepts for Remotely Piloted Vehicles", AGARD Conference Proceed, n 176, Med. Accur. Low Cost Navig. at Avion, Panel Tec. Meeting, 5-1-5-15, Sep. 1975.

"US GeoData Digital Line Graphs", U.S. Dept. of the Interior, U.S. Geolg. Surv. Earth Sci. Info Ctr. (Factsheet)

"US GeoData Digital Elevation Models", U.S. Dept. of the Interior. U.S. Geolg. Surv. Earth Sci. Info Ctr. (Factsheet) Jun. 1993.


Shifrin, Carole A., "Gripen Likely to Fly Again Soon," Aviation Week & Space Technology, Aug. 23, 1993, pp.

Primary Examiner-Tan Q. Nguyen Attorney, Agent, or Firm-Blakely, Sokoloff, Taylor and Zafman LLP


ABSTRACT [57]


A method and apparatus that allows a remote aircraft to be controlled by a remotely located pilot who is presented with a synthesized three-dimensional projected view representing the environment around the remote aircraft. According to one aspect of the invention, a remote aircraft transmits its three-dimensional position and orientation to a remote pilot station. The remote pilot station applies this information to a digital database containing a three dimensional description of the environment around the remote aircraft to present the remote pilot with a three dimensional projected view of this environment. The remote pilot reacts to this view and interacts with the pilot controls, whose signals are transmitted back to the remote aircraft. In addition, the system compensates for the communications delay between the remote aircraft and the remote pilot station by controlling the sensitivity of the pilot controls.

20 Claims, 7 Drawing Sheets

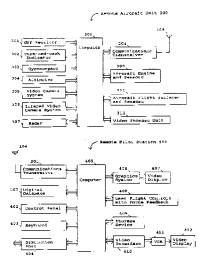


125

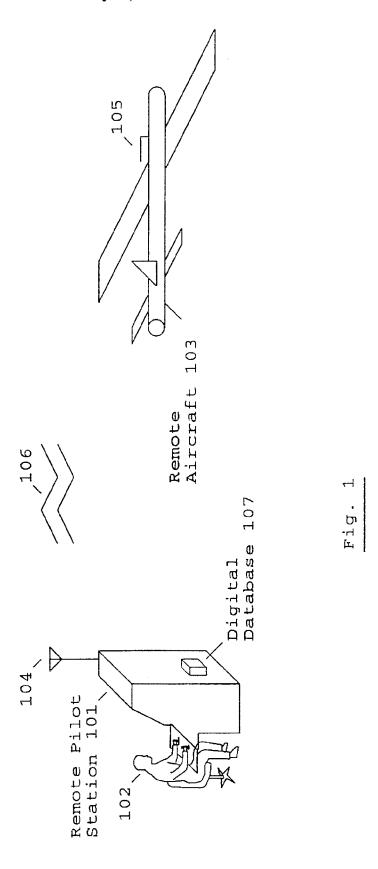


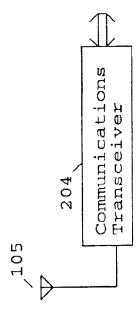



May 18, 1999




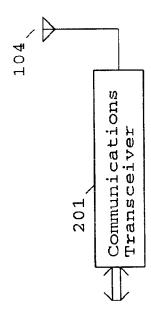

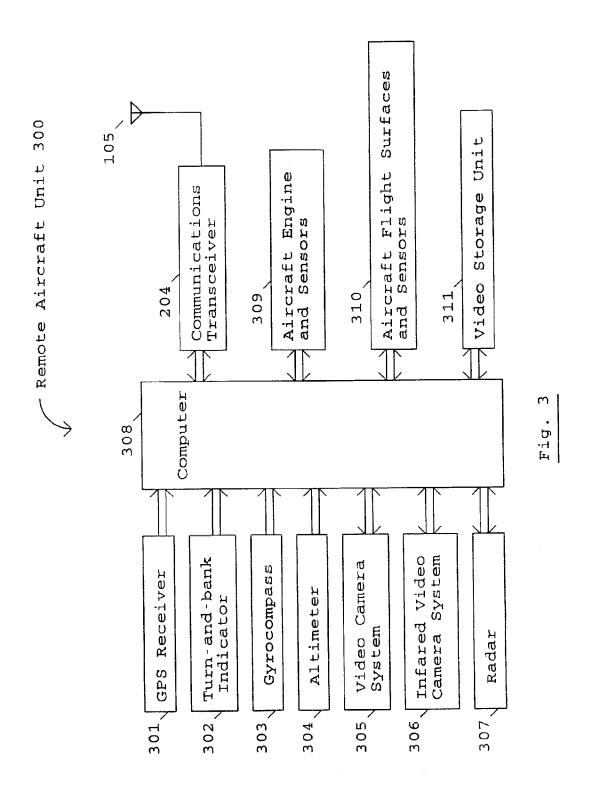

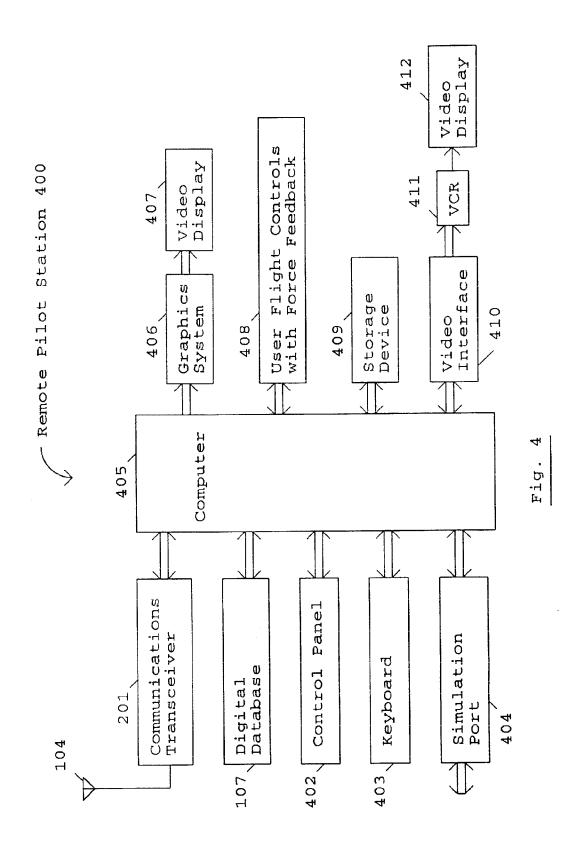

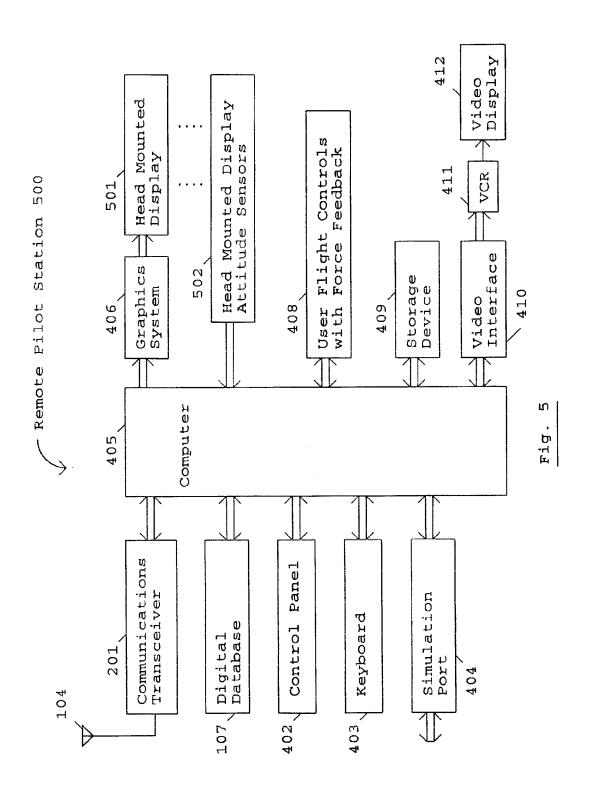

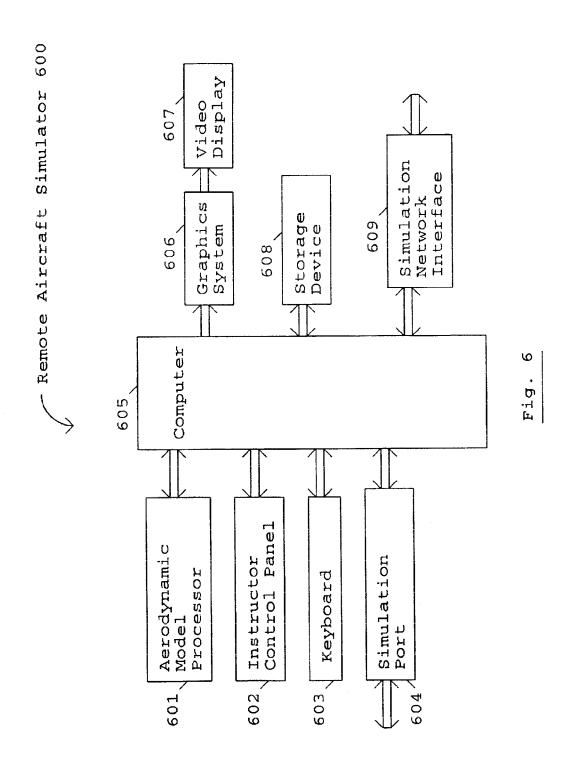

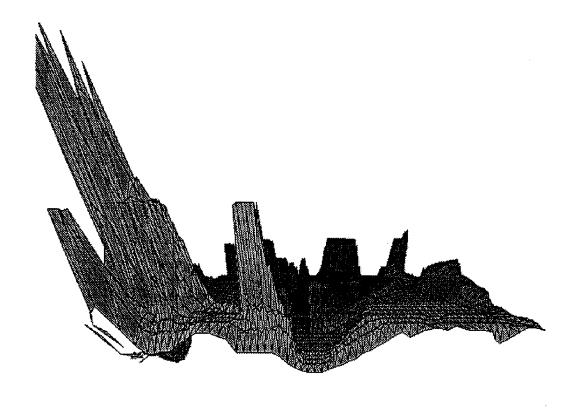


Figure 7

1

METHOD AND APPARATUS FOR REMOTELY PILOTING AN AIRCRAFT

BACKGROUND OF THE INVENTION—CROSS REFERENCES TO RELATED APPLICATIONS

"Pilot Aid Using a Synthetic Environment", Ser. No. 08/274,394 filed Jul. 11, 1994. "Digital Map Generator and Display System", Ser. No. 08/543,590, filed Oct. 16, 1995.

1. Field of Invention

This invention relates to the field of remotely piloted vehicles (RPVs) and unmanned aerial vehicles (UAVs).

2. Discussion of Prior Art

RPVs can be used for any number of purposes. For example, there is a large organization that promotes the use of remote controlled planes. Certain RPVs are controlled by viewing the plane with the naked eye and using a hand held controller to control its flight Other RPVs are controlled by a remote pilot using simple joysticks while watching the video produced by a camera in the remote aircraft. This camera is also used to produce the reconnaissance video. There are tradeoffs involving the resolution of the video, the rate at which the video is updated, and the bandwidth needed to transmit it. The wider the bandwidth the more difficult it is to secure the signal. The freedom to balance these 25 tradeoffs is limited because this video is also used to pilot the aircraft and must therefore be updated frequently.

Certain UAVs are preprogrammed to follow a predetermined course and lack the flexibility to deal with unexpected situations.

The 1983 patent to Kanaly (U.S. Pat. No. 4,405,943) shows a control and communications system for a remotely piloted vehicle where an oculometer determines where the remote operator is looking and signals the remote vehicle to send the high resolution imagery corresponding to the area around where the remote operator is looking and low resolution imagery corresponding to the remote operator's peripheral vision. The objective is to minimize the bandwidth of the information transmitted to the remote operator.

SUMMARY

A method and apparatus is described that allows a remote aircraft to be controlled by a remotely located pilot who is presented with a synthesized three-dimensional projected view representing the environment around the remote aircraft According to one aspect of the invention, a system is used that includes an aircraft and a remote pilot station.

The aircraft uses a communications link to send its location, attitude, and other operating conditions to the remote pilot station. The remote pilot station receives the data and uses a database describing the terrain and manmade structures in the remote aircrafts environment to produce a 3D view of the remote aircraft environment and present it to the remote human pilot.

The remote pilot responds to the information and manipulates the remote flight controls, whose positions and forces are transmitted to the remote aircraft. Since the amount of data is small, it can be readily secured through encryption and spreadspectrum techniques.

Also, because the video reconnaissance cameras are no longer needed to remotely pilot the aircraft there is great flexibility in their use. To minimize bandwidth and reduce the possibility of being detected, the video data can be sent at a slow update rate. The data can also be stored on the 65 remote aircraft for later transmission. Alternatively, low resolution pictures can be sent in real-time, while the cor-

2

responding high resolution pictures can be at a later time. The reconnaissance video can even be transmitted through a different communications link than the control data. There may also be more than one reconnaissance camera.

The delay in the control link must be minimized in order that the remote aircraft can be properly flown. The system can measure the link delay and make this information available to the pilot. This delay link measurement can also be used to modify the control software through which the remote pilot flies the remote aircraft. This is to prevent pilot-induced-oscillation.

The computers in the system allow for several modes of operation. For example, the remote aircraft can be instructed to fly to given coordinates without further input from the remote pilot. It also makes it possible to provide computer assistance to the remote pilot. In this mode, the remote flight control controls absolute pitch and roll angles instead pitch and roll rates which is the normal mode for aircraft In addition, adverse yaw can be automatically corrected so that the resulting control laws make the remote aircraft extremely easy to fly. Because this comes at the expense of being able to put the remote aircraft into unusual attitudes, for complete control of the remote aircraft a standard control mode is provided to give the remote pilot the same type of control that is used to fly a manned aircraft. Since the remote aircraft is unmanned, the remote pilot can subject the remote aircraft to high-G maneuvers that would not be safe for a pilot present in the aircraft.

To facilitate training, a simulated remote aircraft is provided that allows an instructor to set up the training mission and parameters. This is especially useful in giving remote pilots experience flying with different control link delays. In this simulated mode, the system can be further linked to a battlefield simulator such as SIMNET.

In the first embodiment, the remote pilot is provided with a standard video display. Additional display channels can be provided to give the remote pilot a greater field of view. There can even be a display channel to give a rearward facing view.

A second embodiment uses a head mounted display for the remote pilot instead of a standard display. This permits the remote station to be made more compact so that it can be used in a wider variety of installations. An example would be in a manned aircraft flying several hundred miles away.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention may best be understood by referring to the following description and accompanying drawings which illustrate the invention. In the drawings:

FIG. 1 is a general illustration showing a remote pilot at a remote pilot station operating a remote aircraft according to one embodiment of the invention.

FIG. 2 is a block diagram showing the communications link between a remote pilot station and a remote aircraft according to one embodiment of the invention.

FIG. 3 is a block diagram of a remote aircraft according to one embodiment of the invention.

FIG. 4 is a block diagram of a remote pilot station according to one embodiment of the invention.

FIG. 5 is a block diagram of a remote pilot station according to another embodiment of the invention.

FIG. 6 is a block diagram of a remote aircraft simulator used for training remote pilots according to one embodiment of the invention.

FIG. 7 is an example of a three dimensional projected image presented to a remote pilot by a remote pilot station according to one embodiment of the invention.

3

DETAILED DESCRIPTION

In the following description, numerous specific details are set forth to provide a thorough understanding of the invention. However, it is understood that the invention may be practiced without these specific details. In other instances, well-known circuits, structures and techniques have not been shown in detail in order not to obscure the invention.

A method and apparatus is described that allows a remote aircraft to be controlled by a remotely located pilot who is presented with a synthesized three-dimensional projected 10 view representing the environment around the remote aircraft. Since the video from a reconnaissance camera located on the remote aircraft is not used to pilot the remote aircraft, the amount of data transmitted between the remote aircraft and the remote pilot is small. This provides greater flexibility in how the remote aircraft is used and allows the transmitted data to be made more secure. The remote aircraft may be of any type, for example a remote control plane or helicopter as used by recreational enthusiast.

FIG. 1 is a general illustration showing a remote pilot at 20 a remote pilot station operating a remote aircraft according to one embodiment of the invention. FIG. 1 shows Remote Pilot 102 interacting with Remote Pilot Station 101 and controlling Remote Aircraft 103. Remote Pilot Station 101 and Remote Aircraft 103 respectively include an Antenna 104 and an Antenna 105 for communicating Information 106.

In one embodiment, Information 106 includes status information concerning the status of Remote Aircraft 103 and flight control information for controlling the flight of 30 Remote Aircraft 103. The status information is generated by Remote Aircraft 103 and includes the three dimensional position and the orientation (also termed attitude, and comprising heading, roll, pitch) of Remote Aircraft 103. The status information may also include information concerning 35 the flight surfaces, the engine, an additional altitude reading, etc. Remote Pilot Station 101 uses this status information to retrieve data from a Digital Database 107 which contains a three-dimensional description of terrain and manmade structures over which Remote Aircraft 103 is flying. Based on the 40 three dimensional data retrieved from Digital Database 107, Remote Pilot Station 101 projects a synthesized threedimensional projected view of the terrain and manmade structures in the vicinity of Remote Aircraft 103. Based on this view of the terrain and manmade structures, the Remote 45 Pilot Station 101, on its own and/or in response to input from Remote Pilot 102, generates and transmits flight control information to Remote Aircraft 103 which adjusts its flight accordingly.

In one embodiment, the Remote Aircraft 103 is a remote 50 controlled plane or helicopter used for recreational purposes. Since remote controlled planes and helicopters tend to be small in size, the circuitry in such remote aircraft to generate and receive Information 106 is minimized. In such systems, the Remote Pilot Station 101 may be implemented by 55 including additional attachments to an existing portable computer. This allows the user to easily transport the remote aircraft and pilot station to an appropriate location for flight.

FIG. 2 is a block diagram showing a bi-directional communications link between a remote pilot station and a remote 60 aircraft according to one embodiment of the invention. FIG. 2 shows Communications Transceiver 201 coupled to Antenna 104 of Remote Pilot Station 101, as well as Communications Transceiver 204 coupled to Antenna 105 of Remote Aircraft 103. In addition, FIG. 2 shows Informa- 65 Camera System 305 and has the same operating modes. tion 106 being communicated between Antenna 104 and Antenna 105.

FIG. 3 is a block diagram of a remote aircraft unit used in the remote aircraft according to one embodiment of the invention. FIG. 3 shows Remote Aircraft Unit 300 including Computer 308 coupled to GPS Receiver 301, Turn-and-bank Indicator 302, Gyrocompass 303, Communications Transceiver 204, Aircraft Engine and Sensors 309, and Aircraft Flight Surfaces and Sensors 310. GPS Receiver 301 receives signals from the satellites that make up the global positioning system (GPS) and calculates the aircraft's position in three dimensions. Turn-and-bank Indicator 302 and Gyrocompass 303 provide the aircraft's orientation which comprises heading, roll, and pitch. This data is sent to Computer 308 for transformation into the previously described status information. Computer 308 transmits this status information 15 to Communications Transceiver 204 which produces a radio signal and supplies it to Antenna 105.

The Aircraft Engine and Sensors 309 are coupled to control the aircraft's engine, while the Aircraft Flight Surfaces and Sensors 310 are coupled to control the aircraft's flight surfaces. The flight control information is received from the remote pilot station by Computer 308 through Antenna 105 and Communications Transceiver 204. This flight control information is processed by Computer 308 into the necessary signals for transmission to Aircraft Engine and Sensors 309 and Aircraft Flight Surfaces and Sensors 310 to control the aircraft's engine and flight surfaces, respectively. The operation of the aircraft's flight control surfaces will be later described with reference to FIG. 4.

In order to protect against ECM, the communications link between the Remote Pilot Station 101 and the Remote Aircraft 103 may be secured. While any number of different techniques may be used to secure this link, in one embodiment Computer 308 is implemented to encrypttdecrypt the data transmitted and Communications Transceiver 204 is implemented to use spread spectrum techniques.

Computer 308 may optionally be coupled to Altimeter 304, Video Camera System 305, Infrared Video Camera System 306, Radar 307, and/or Video Storage Unit 311. Altimeter 304 provides an output of the aircraft's altitude as a safety check in the event GPS Receiver 301 malfunctions. Thus, this additional altitude reading may also be transmitted to Remote Pilot Station 101 as part of the status information.

Video Camera System 305 is controlled by Computer 308 which determines where the camera is pointing as well as focusing and the zoom factor. The video produced by the camera is not used by the remote pilot for flying the remote aircraft, so there is more flexibility in using the video. As a result, any number of techniques can be used for receiving the images captured by Video Camera System 305. As examples:

- 1. High resolution, high update images may be sent back in real-time through the Communications Link, when the high bandwidth needed can be tolerated.
- 2. High resolution, low update images may be sent back in real-time through the Communications Link to reduce the bandwidth.
- 3. The video may be recorded in Video Storage Unit 311 for later transmission.
- 4. The video may be transmitted through a separate communications link.
- 5. There may be multiple video cameras.
- Infrared Video Camera System 306 is similar to Video

Radar 307 in Remote Aircraft 103 may be passive or active. It may scan a particular pattern or it may track a

selected object. Radar 307 may consist of several Radar units. The information from Radar 307 is processed by Computer 308 so that only the desired information is transmitted over the communication link to the Remote Pilot Station 101 for display.

FIG. 4 is a block diagram of a remote pilot station according to one embodiment of the invention. FIG. 4 shows a Remote Pilot Station 400 including a Computer 405 coupled to Communications Transceiver 201, Digital Database 107, Graphics System 406, User Flight Controls with 10 Force Feedback 408, and a Storage Device 409. The Storage Device 409 represents one or more mechanisms for storing data. For example, the Storage Device 409 may include read only memory TROM), random access memory (RAM), magnetic disk storage mediums, optical storage mediums, 15 flash memory devices, and/or other machine-readable mediums. Of course, Digital Database 107 may be stored in one or more machine-readable mediums and/or in Storage Device 409

As previously described, Antenna 104 receives the radio 20 signals transmitted by Remote Aircraft 103 representing the status information of Remote Aircraft 103. These radio signals are transformed by Communications Transceiver 201 and sent to Computer 405. Communications Transceiver 201 is set to the same mode as Communications Transceiver 25 204, so that if, for example, spread spectrum techniques are used, the signal will be transparently received. Computer 405 recovers the data (de-encrypting, if required) so that the data communications from Computer 308 in the Remote Aircraft to Computer 405 in the Remote Pilot Station is 30 transparent. Thus, the bi-directional communications link comprises the combination of Communications Transceiver 201, Antenna 104, Antenna 105, and Communications Transceiver 204.

As previously described, the status information received 35 by Computer 405 includes the three dimensional position and the orientation of Remote Aircraft 103. The status information may also include information concerning the flight surfaces, flight sensors, the engine, an additional mation to retrieve data from Digital Database 107 which contains a three-dimensional description of terrain and manmade structures over which Remote Aircraft 103 is flying. The composition and creation of the Digital Database 107 is further described later. Based on the three dimensional data 45 retrieved from Digital Database 107, Computer 405 performs the mathematical operations to transform and project the three dimensional data to generate video data representing a synthesized three-dimensional projected view of the terrain (and, if desired, manmade structures) in the vicinity 50 or environment of Remote Aircraft 103. This video data is transmitted to Graphics System 406, which displays the synthesized three-dimensional projected view on Video Display 407.

Since the image is generated from the digital database, 55 virtually any image of the environment of the Remote Aircraft 103 can be generated. As examples, the pilot may select the environment to be: 1) a simulated image of what would be seen out of the cockpit of a manned aircraft on a similar flight path; 3) a simulated image of what would be 60 seen when looking in any direction (e.g., backwards, out a side window, etc.); 3) a simulated image of what would be seen if a camera were tailing the remotely piloted aircraft; etc. In addition, the simulated image may be set to any magnification. Thus, the phrase environment of Remote 65 Aircraft 103 is intended to include any image generated with reference to the remote aircraft's position.

The User Flight controls with Force Feedback 408 are used by the remote pilot to input flight path information. The User Flight Controls may be of any number of different types, some of which are further described later herein. The status information received by Computer 405 also includes information received from Aircraft Flight Surfaces and Sensors 310. This information is used to actuate force feedback circuitry in User Flight Controls With Force Feedback 408. Remote Pilot 102 observes the synthesized threedimensional environment displayed on Video Display 407, feels the forces on User Flight Controls With Force Feedback 408 and moves the controls accordingly. This flight control information is sent through the communications link. to Computer 308, and is used to control the aircraft flight surfaces in Aircraft Flight Surfaces and Sensors 310. Remote Pilot 102 also receives data from Aircraft Engine and Sensors 309 through the communications link and is able to send data back to control the engine.

Flight Control

To illustrate the operation of the remote aircraft, a fixedwing airplane will be described as an example. However, the basic principles apply to other types of aircraft as well. The basic control surfaces of an airplane consist of the ailerons, the horizontal elevators, and the rudder. The ailerons are moved differentially (one up, one down) to rotate the airplane around its roll axis; the horizontal elevators cause the airplane to rotate around its pitch axis; and the rudder causes the airplane to rotate around its yaw axis.

When the ailerons are used to modify the lift characteristics of the wings, one wing creates more lift while the other wing creates less lift. This also changes the drag characteristics of the wings and results in a yaw force that is opposite to the yaw force that results from the tail section causing the airplane to weather-cock into the relative wind. It is this yaw force caused by the airplane weather-cocking into the relative wind that causes a banked airplane to turn. The opposite yaw force produced by using the ailerons is called adverse yaw; the rudder control is used to counteract this force to produce a coordinated turn.

The simplest type of flight control consists of a joystick altitude reading, etc. Computer 405 uses this status infor- 40 and a set of rudder pedals. The controls are directly connected to the flight control surfaces. With a joystick, moving the stick left and right moves the ailerons, while moving the stick forward and backward moves the horizontal elevators. The rudder is controlled by two foot pedals, one for each foot, that are mounted on a common shaft and hinged in the middle like a seesaw. Pressing one foot pedal forward causes the other foot pedal to move backward and causes the rudder to also move in one direction. Pressing the other foot pedal causes it to move forward and the opposite pedal to move backward and causes the rudder to move in the opposite direction.

> An alternative to the joystick is the control yoke which consists of a wheel attached to a shaft that moves in and out of the control housing. Turning the wheel clockwise or counterclockwise moves the ailerons; moving the wheel shaft in and out moves the horizontal elevators. The rudder pedals as the same as those used with a joystick.

> In order to aid in a description of remote aircraft operation, it is thought worthwhile to first describe the operation of non-remotely piloted vehicles. Non-remotely piloted vehicles can be operated in one of two ways (also termed as flight control modes); direct control or computer control (also termed as computer mediated).

Direct Control Non-Remotely Piloted Vehicles

When the flight controls are connected directly to the control surfaces the result is a second order system. Using 7

the joystick as an example, moving the joystick left or right establishes a roll rate. The airplane continues to roll until the joystick is returned to the center position, after which the airplane remains in the bank angle thus established. The foot pedals are used to counteract the adverse yaw as previously 5 described. Moving the joystick forward or backward establishes a pitch rate. The airplane continues to pitch until the joystick is returned to the center position, after which the airplane remains in the pitch angle thus established. Both the roll rate and the pitch rate are subject to the limits of the 10 airplane's design.

Since the joystick is directly connected to the control surfaces, the aerodynamic forces on the control surfaces are transmitted back to the pilot, giving him or her valuable feedback on how the airplane is flying.

The successful operation of the second order system with the pilot in the loop depends on several factors such as the area and placement of the control surfaces, how much the control surfaces move in response to the movement of the pilot controls, and how long the airplane takes to respond to 20 changes of the control surfaces. The total system characteristics also depend on the reaction time of the pilot. If the resulting system is poorly designed it may be unstable, which means it may not be possible for a human pilot to fly it safely. An example of an unstable system is where the pilot 25 desires to perform a gentle roll to the right and so moves the joystick to the right, the airplane's roll rate is faster than the pilot desires so he/she attempts to compensate by moving the joystick to the left, the airplane rolls left at a rate that is faster than the pilot desires so he/she moves the joystick to the right, and so on, with the pilot constantly overcorrecting and with the aircraft's rolling motions constantly getting larger and larger until the aircraft gets into a condition from which it may not be possible to recover, (e.g., spinning into the ground). The type of loss of control described is usually referred to as 'pilot induced oscillation' and although it may be caused by an inexperienced or inattentive pilot, it is more often caused by poor airplane design. Therefore, new airplane designs are extensively tested to make sure they can be safely flown. Examples of airplanes that use direct control of the control surfaces (Direct Control Second Order Systems) are the Cessna 150 and the Piper Cub.

Computer Mediated Non-Remotely Piloted Vehicles

Computer mediated control systems use a computer between the pilot controls and the control surfaces. The pilot controls are read by the computer, the data are modified in a particular way, and the computer sends control signals to the control surfaces. The computer may also sense the forces on the control surface and use it to control force feedback to the pilot controls. This type of computer mediated control may be used to fly an airplane that would otherwise be unstable, such as the F16 or the F117. Aircraft such as the F16 and F117 are also second order systems because the 55 position of the pilot's joystick represents rate of rotation.

There are risks inherent in a computer mediated system. Although the program can be simulated extensively before using it in an actual airplane, the computer program may be quite large and therefore difficult to simulate under all 60 possible conditions. An example of this is the Swedish JAS 39 Gripen Fighter. Despite extensive simulation of the flight control system, during a test flight a Gripen crashed due to "... the flight control system's high amplification of stick commands combined with the pilot's" large, rapid stick 65 movements"." The pilot had entered a low-speed high-banked turn at a 280 meter altitude with lit afterburners and

8

was leaving the turn when his actions led to 'pilot-induced oscillation'. (Aviation Week & Space Technology, Aug. 23, 1993, pages 72–73).

Having described techniques for operating non-remotely piloted vehicles, the Fight Control Modes for RPVs will be described.

Second Order RPV Flight Control Mode

A second order control system for an RPV is inherently computer mediated because the remote pilot must interact through two computers: the computer in the remote aircraft and the computer in the remote pilot station.

Flying an RPV is further complicated because there are 15 additional time delays in the loop. The computer in the remote aircraft must first determine the aircraft's position and orientation. The additional processing for transmitting a secure signal by encryption and/or spread spectrum techniques may create additional delays. Transmission delay of signals between the remote aircraft and remote pilot station is negligible for a direct path. However, if the signals are relayed through other facilities the delay time may be appreciable, especially if an orbiting satellite is used. There are additional delays in the remote pilot station as the remote aircraft's position and orientation are used to transform the data from the digital database to present the pilot with the synthesized 3D projected view from the remote aircraft. In one embodiment, the RPV system measures the various delays and modifies the control laws used by the computer in the remote pilot aircraft and in the feedback provided by the computer in the remote pilot station to the remote pilot. For example, the computer may adjust the sensitivity of the User Flight Controls 408 according to the delay (e.g., as the delay increases, the computer will decrease the sensitivity of the flight controls). The system also displays the measured delay to the remote pilot.

First Order RPV Flight Control Mode

The stability of the flight control system, and thus the flyability of an RPV, can be improved considerably by using a first order system. In one embodiment of such a first order system the position of the remote pilot's joystick represents an angle relative to the horizon, instead of representing a rate of rotation as in a second order system. The position of the joystick is transmitted to the computer in the remote aircraft which moves the control surfaces as required to place the remote aircraft in the requested orientation. The control system in the remote aircraft is still a second order system but the delays in the communications link and the remote pilot station are no longer a part of the system's loop.

When a joystick is centered, the remote aircraft will fly straight and level. When the joystick is to the right of center the remote aircraft will be in a right banked turn. When the joystick is to the left of center the remote aircraft will be in a left banked turn. When the joystick is backward from center the remote aircraft will be in a pitch up orientation. When the joystick is forward of center the remote aircraft will be in a pitch down orientation.

The amount of bank and pitch permitted depends on the design of the remote aircraft. A high performance remote aircraft will be capable of a greater amount of pitch and bank than will a low performance remote aircraft.

Referring again to FIG. 4, Computer 405 may optionally be coupled to Control Panel 402, Keyboard 403, Simulation Port 404, Video Interface 410, VCR 411, and/or Video Display 412. In one embodiment, Control Panel 402 con-

tains specialized lights, displays, and switches to allow a quicker response to situations than can be provided by Keyboard 403. Control Panel 402 can be arranged to approximate the look and feel of an actual aircraft cockpit. Keyboard 403 allows the remote pilot to select various operating modes. For training purposes, Simulation Port 404 allows the remote pilot station to be connected to a remote aircraft simulator instead of an actual remote aircraft. The remote aircraft simulator will be further described with reference to FIG. 6. Storage Device 409 allows the flight data to be recorded. During playback this previously recorded data is substituted for real-time data from the remote aircraft to replay the mission for analysis. Any video received from any reconnaissance cameras on the Remote Aircraft 103 is converted by Video Interface 410 so that it can be recorded on VCR 411 and displayed on Video 15 Display 412. VCR 411 can also operate in straight-through mode so that the reconnaissance video can be viewed in real

FIG. 5 is a block diagram of a remote pilot station according to another embodiment of the invention. FIG. 5 shows Remote Pilot Station 500. Remote Pilot Station 500 is similar to Remote Pilot Station 400 of FIG. 4, except Video Display 407 is replaced by Head Mounted Display 501. In addition, Head Mounted Display Attitude Sensors 502 are coupled to Computer 405. Head Mounted Display 25 Attitude Sensors 502 measure the attitude of Head Mounted Display 501. This information is used by Computer 405 to produce an additional three dimensional transformation of the data from Digital Database 107 to account for the attitude of the remote pilots Head Mounted Display 501. This does not require any additional data from the remote aircraft. Of course, alternative embodiments could include both a video display and a head mounted display.

FIG. 6 is a block diagram of a simulated remote aircraft used for training remote pilots according to one embodiment of the invention. FIG. 6 shows Remote Aircraft Simulator 600 including Computer 605 coupled to Aerodynamic Model Processor 601, Instructor Control Panel 602, Keyboard 603, Simulation Port 604, Graphics System 606, Storage Device 608, and Simulation Network Interface 609. Remote Aircraft Simulator 600 communicates with Remote 40 Pilot Station 400 or 500 through Simulation Port 604. Aerodynamic Model Processor 601 executes a mathematical model that simulates the behavior of a remote aircraft. An instructor uses Instructor Control Panel 602 and Keyboard 603 to select various training scenarios. Graphics System 45 606 and Video Display 607 are used to observe the operation of the system. Storage Device 608 is used to record the training session for later evaluation of the session. In addition to proficiency training, the Remote Aircraft Simulator can also be used to practice a proposed mission. The data 50 communicated to the remote pilot station can include training and evaluation data for processing and/or display. This training and evaluation data can include any relevant information, such as flight path accuracy, etc.

Simulation Network Interface 609 permits participation in a battlefield simulation system such as SIMNET, mixing aircraft, tanks, and ground troops for training in the coordination of mixed forces. Thus, the system is designed to allow for the communication of this battlefield simulation information between the remote aircraft simulator and the remote pilot station. This allows the remote pilot station to display one or more other simulated entities (e.g., tanks, ground troops, other aircraft, etc.) described by the battlefield simulation information.

The Database

The Digital Database 107 can be comprised of any type of data from which a three dimensional image can be gener-

ated. For example, the U.S. Geological Survey (USGS) makes available various databases, two of which are of particular interest The first is the Digital Elevation Model data which consist of an array of regularly spaced terrain elevations.

The other USGS database is the Digital Line Graph data which includes: political and administrative boundaries; hydrography consisting of all flowing water, standing water, and wetlands; major transportation systems consisting of roads and trails, railroads, pipelines, transmission lines, and airports; and significant manmade structures. The Digital Line Graph data is two-dimensional. In the present invention features such as water, roads, railroads, and pipelines are represented as polygons with elevations determined from the Digital Elevation Model data. Transmission lines and significant manmade structures are defined as threedimensional objects made of polygons and are placed according to the elevations determined from the Digital Elevation Model data. The different types of objects are tagged so that the remote pilot can select them to be highlighted by category or by specific object.

Data from additional digital databases can also be incorporated. An example of such a database is from Jeppesen Sanderson whose NavData Services division provides aeronautical charts and makes this information available in digital form.

The procedure for generating the synthesized threedimensional view from the Digital Database may use any number of techniques, including those disclosed in the 1987 patent to Beckwith et al. (U.S. Pat. No. 4,660,157 REAL TIME VIDEO PERSPECTIVE DIGITAL MAP DISPLAY METHOD), and the 1993 patent to Dawson et al. (U.S. Pat. No. 5,179,638 METHOD AND APPARATUS FOR GEN-ERATING A TEXTURE MAPPED PERSPECTIVE VIEW). One disadvantage of generating the synthesized three-dimensional view from these elevation databases in real time is the amount of storage space they require. To avoid this large amount of data storage, one embodiment of Digital Database 107 is composed of terrain data that represents the real terrain using polygons. This database may be generated using any number of techniques. For example, this database may be generated by transforming one or more elevation databases into a polygon database using the technique taught in "Pilot Aid Using a Synthetic Environment", Ser. No. 08/274,394 filed Jul. 11, 1994. Another method for transforming one or more elevation databases into a polygon database is taught in "Digital Map Generator and Display System", Ser. No. 08/543,590, filed Oct. 16, 1995. An example of a three dimensional projected image created from this database is shown in FIG. 7.

While the invention has been described in terms of several embodiments, those skilled in the art will recognize that the invention is not limited to the embodiments described. The method and apparatus of the invention can be practiced with modification and alteration within the spirit and scope of the appended claims. The description is thus to be regarded as illustrative instead of limiting on the invention.

What is claimed is:

- 1. A system comprising:
- a remotely piloted aircraft including,
 - a position determining system to locate said remotely piloted aircraft's position in three dimensions; and
 - an orientation determining system for determining said remotely piloted aircraft's orientation in three dimensional space;
- a communications system for communicating flight data between a computer and said remotely piloted aircraft,

11

said flight data including said remotely piloted aircraft's position and orientation, said flight data also including flight control information for controlling said remotely piloted aircraft;

- a digital database comprising terrain data;
- said computer to access said terrain data according to said remotely piloted aircraft's position and to transform said terrain data to provide three dimensional projected image data according to said remotely piloted aircraft's orientation:
- a display for displaying said three dimensional projected image data; and
- a set of one or more remote flight controls coupled to said computer for inputting said flight control information, wherein said computer is also for determining a delay time for communicating said flight data between said computer and said remotely piloted aircraft, and wherein said computer adjusts the sensitivity of said set of one or more remote flight controls based on said delay time.
- 2. The system of claim 1, wherein:
- said remotely piloted aircraft includes a device for capturing image data; and
- said system operates in at least a first mode in which said 25 image data is not transmitted from said remotely piloted aircraft to said computer at a sufficient data rate to allow for real time piloting of the remotely piloted aircraft.
- 3. The system of claim 1, wherein the flight data communicated between said remotely piloted aircraft and said computer is secured.
- 4. The system of claim 1, wherein said remotely piloted aircraft further comprises a set of one or more video cameras.
- 5. The system of claim 4, wherein said communications system is also for communicating video data representing images captured by said set of one or more video cameras, said video data for displaying said images.
- 6. The system of claim 5, wherein said video data is ⁴⁰ transmitted on a different communication link than said flight data.
- 7. The system of claim 4, wherein at least one camera in said set of one or more video cameras is an infrared camera.
- 8. The system of claim 1, wherein said display is a head 45 mounted display.
- 9. The system of claim 1, wherein said set of one or more remote flight controls is responsive to manual manipulations.
- 10. The system of claim 1, wherein said set of one or more 50 remote flight controls allows for inputting absolute pitch and roll angles instead of pitch and roll rates.
- 11. The system of claim 1, wherein said computer is also used for correcting adverse yaw without requiring input from said set of one or more remote flight controls.

12

- 12. The system of claim 1, wherein:
- said remotely piloted aircraft includes a device for capturing image data; and said system operates in at least a first mode in which said image data is not transmitted from said remotely piloted craft to said computer but stored in said remotely piloted aircraft.
- 13. A station for flying a remotely piloted aircraft that is real or simulated comprising:
 - a database comprising terrain data;
 - a set of remote flight controls for inputting flight control information:
 - a computer having a communications unit configured to receive status information identifying said remotely piloted aircraft's position and orientation in three dimensional space, said computer configured to access said terrain data according to said status information and configured to transform said terrain data to provide three dimensional projected image data representing said remotely piloted aircraft's environment, said computer coupled to said set of remote flight controls and said communications unit for transmitting said flight control information to control said remotely piloted aircraft, said computer also to determine a delay time for communicating said flight control information between said computer and said remotely piloted aircraft, and said computer to adjust the sensitivity of said set of remote flight controls based on said delay time: and
 - a display configured to display said three dimensional projected image data.
- 14. The station of claim 13, wherein said communications unit is also configured to receive video data representing images captured by a set of video cameras on said remotely piloted aircraft, said video data for displaying said images.
- 15. The station of claim 14, wherein said video data is transmitted on a different communication link that said flight control information and said status information.
- 16. The station of claim 13, wherein said display is a head mounted display.
- 17. The station of claim 13, wherein said set of remote flight controls is responsive to manual manipulations.
- 18. The station of claim 13, wherein said set of remote flight controls are configured to allow inputting absolute pitch and roll angles instead of pitch and roll rates.
- 19. The station of claim 13, wherein said computer is also configured to correct adverse yaw without requiring input from said set of remote flight controls.
- 20. The station of claim 13, wherein said communications unit includes at least one of a communications transceiver and a simulation port.

* * * * *

Exhibit 3

Exhibit 3

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address: COMMISSIONER FOR PATENTS P.O. Box 1450 Alexandria, Virginia 22313-1450 www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
11/736,356	04/17/2007	Jed Margolin		3649
23497 JED MARGOL	7590 09/01/201 J N	EXAMINER		
1981 EMPIRE I		MANCHO, RONNIE M		
RENO, NV 89521-7430			ART UNIT	PAPER NUMBER
			3664	
			MAIL DATE	DELIVERY MODE
			09/01/2010	PAPER

Please find below and/or attached an Office communication concerning this application or proceeding.

The time period for reply, if any, is set in the attached communication.

	Application No.	Applicant(s)				
	11/736,356	MARGOLIN, JED				
Office Action Summary	Examiner	Art Unit				
	RONNIE MANCHO	3664				
The MAILING DATE of this communication Period for Reply	appears on the cover sheet with the o	correspondence address				
A SHORTENED STATUTORY PERIOD FOR REPLY IS SET TO EXPIRE 3 MONTH(S) OR THIRTY (30) DAYS, WHICHEVER IS LONGER, FROM THE MAILING DATE OF THIS COMMUNICATION. - Extensions of time may be available under the provisions of 37 CFR 1.136(a). In no event, however, may a reply be timely filed after SIX (6) MONTHS from the mailing date of this communication. - If NO period for reply is specified above, the maximum statutory period will apply and will expire SIX (6) MONTHS from the mailing date of this communication. - Failure to reply within the set or extended period for reply will, by statute, cause the application to become ABANDONED (35 U.S.C. § 133). Any reply received by the Office later than three months after the mailing date of this communication, even if timely filed, may reduce any earned patent term adjustment. See 37 CFR 1.704(b).						
Status						
1)⊠ Responsive to communication(s) filed on <u>1</u>	7 April 2007.					
· · · · · · · · · · · · · · · · · · ·	This action is non-final.					
3) Since this application is in condition for allo	wance except for formal matters, pro	osecution as to the merits is				
closed in accordance with the practice unde	er <i>Ex parte Quayle</i> , 1935 C.D. 11, 4	53 O.G. 213.				
Disposition of Claims						
4)⊠ Claim(s) <u>1-14</u> is/are pending in the applicat	ion.					
4a) Of the above claim(s) is/are without	4a) Of the above claim(s) is/are withdrawn from consideration.					
5) Claim(s) is/are allowed.						
6)⊠ Claim(s) <u>1-14</u> is/are rejected.						
7) Claim(s) is/are objected to.						
8)☐ Claim(s) are subject to restriction an	d/or election requirement.					
Application Papers						
9)☐ The specification is objected to by the Exam	niner.					
10)☐ The drawing(s) filed on is/are: a)☐ a	accepted or b) objected to by the	Examiner.				
Applicant may not request that any objection to						
Replacement drawing sheet(s) including the cor		•				
11)☐ The oath or declaration is objected to by the	Examiner. Note the attached Office	e Action or form PTO-152.				
Priority under 35 U.S.C. § 119						
12) Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f). a) All b) Some * c) None of:						
	1. Certified copies of the priority documents have been received.					
2. Certified copies of the priority documents have been received in Application No						
3. Copies of the certified copies of the priority documents have been received in this National Stage application from the International Bureau (PCT Rule 17.2(a)).						
* See the attached detailed Office action for a list of the certified copies not received.						
Gee the attached detailed Office action for a list of the certified copies not received.						
Attachment(s)						
1) Notice of References Cited (PTO-892) 4) Interview Summary (PTO-413)						
2) Notice of Draftsperson's Patent Drawing Review (PTO-948)	ate					
3) Information Disclosure Statement(s) (PTO/SB/08) Paper No(s)/Mail Date <u>4/2007</u> .	5) Notice of Informal F 6) Other:	-акепк Арріксаціоп				

Application/Control Number: 11/736,356

Art Unit: 3664

DETAILED ACTION

Claim Rejections - 35 USC § 103

- 1. The following is a quotation of 35 U.S.C. 103(a) which forms the basis for all obviousness rejections set forth in this Office action:
 - (a) A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subject matter sought to be patented and the prior art are such that the subject matter as a whole would have been obvious at the time the invention was made to a person having ordinary skill in the art to which said subject matter pertains. Patentability shall not be negatived by the manner in which the invention was made.
- 2. Claims 1-14 are rejected under 35 U.S.C. 103(a) as being unpatentable over Margolin (5904724) in view of Duggan et al (US 2005004723).

Regarding claim 1, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) discloses a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

- (a) a ground station 400 (fig. 1&4) equipped with a synthetic vision system (figs. 1&3; col. 4, lines 1 to col. 5, lines 67);
- (b) an unmanned aerial vehicle 300 (figs. 1&3) capable of supporting said synthetic vision system (305, 306, 307, 311 on aircraft; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67);
- (c) a remote pilot 102 operating said ground station 400 (figs. 1&4; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67);
- (d) a communications link between said unmanned aerial vehicle 300 and said ground station 400;

Page 2

Application/Control Number: 11/736,356

Art Unit: 3664

Page 3

e) a system onboard said unmanned aerial vehicle 300 for detecting the presence and position of nearby aircraft (305, 306, 307, 311 on aircraft) and communicating this information to said remote pilot 102 (col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67);

whereas said remote pilot uses said synthetic vision system (305, 306, 307, 311 on aircraft) to control said unmanned aerial vehicle 300 during at least selected phases of the flight of said unmanned aerial vehicle.

Margolin did not disclose that the vehicle is flown using an autonomous control system. However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0329).

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggna abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne having ordinary skill in the art.

Regarding claim 2, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the system of claim 1 whereby said selected phases of the flight of said unmanned aerial vehicle comprise:

Art Unit: 3664

(a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;

(b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

Regarding claim 3, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the system of claim 1 further comprising a system onboard said unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and bearing of said unmanned aerial vehicle.

Regarding claim 4, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the system of claim 1 further comprising a system onboard said unmanned aerial vehicle for providing a communications channel for Air Traffic Control and the pilots of other aircraft to communicate directly with said remote pilot.

Regarding claim 5, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

- (a) a ground station equipped with a synthetic vision system;
- (b) an unmanned aerial vehicle capable of supporting said synthetic vision system;
- (c) a remote pilot operating said ground station;
- (d) a communications link between said unmanned aerial vehicle and said ground station;
- e) a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot;

Page 4

Art Unit: 3664

whereas said remote pilot uses said synthetic vision system to control said unmanned aerial vehicle during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system, and

whereas the selected phases of the flight of said unmanned aerial vehicle comprise:

- (a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;
- (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

Margolin did not disclose that the vehicle is flown using an autonomous control system.

However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0329).

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggna abstract, sec 0014, 0085, 0086).

Application/Control Number: 11/736,356 Page 6

Art Unit: 3664

The different embodiments in both prior arts are combinable as it would be obvious to ne having ordinary skill in the art.

Regarding claim 6, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the system of claim 5 further comprising a system onboard said unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and bearing of said unmanned aerial vehicle.

Regarding claim 7, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the system of claim 5 further comprising a system onboard said unmanned aerial vehicle for providing a communications channel for Air Traffic Control and the pilots of other aircraft to communicate directly with said remote pilot.

Regarding claim 8, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose a method for safely flying an unmanned aerial vehicle as part of a unmanned aerial system equipped with a synthetic vision system in civilian airspace comprising the steps of:

- (a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle an autonomous control system is used to fly said unmanned aerial vehicle;
- (b) providing a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot.

Art Unit: 3664

Margolin did not disclose that the vehicle is flown using an autonomous control system. However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0329).

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggna abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne having ordinary skill in the art.

Regarding claim 9, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the method of claim 8 whereby said selected phases of the flight of said unmanned aerial vehicle comprise:

- (a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;
- (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

Regarding claim 10, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the method of claim 8 further comprising the step

Art Unit: 3664

of providing a system onboard said unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and bearing of said unmanned aerial vehicle.

Regarding claim 11, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the method of claim 8 further comprising the step of providing a system onboard said unmanned aerial vehicle for providing a communications channel for Air Traffic Control and the pilots of other aircraft to communicate directly with said remote pilot.

Regarding claim 12, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose a method for safely flying an unmanned aerial vehicle as part of a unmanned aerial system equipped with a synthetic vision system in civilian airspace comprising the steps of:

- (a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle an autonomous control system is used to fly said unmanned aerial vehicle;
- (b) providing a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot;

whereas said selected phases of the flight of said unmanned aerial vehicle comprise:

(a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;

Art Unit: 3664

(b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

Margolin did not disclose that the vehicle is flown using an autonomous control system. However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0329).

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggna abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne having ordinary skill in the art.

Regarding claim 13, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the method of claim 12 further comprising the step of providing a system onboard said unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and bearing of said unmanned aerial vehicle.

Regarding claim 14, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the method of claim 12 further comprising the step of providing a system onboard said unmanned aerial vehicle for providing a communications

Application/Control Number: 11/736,356 Page 10

Art Unit: 3664

channel for Air Traffic Control and the pilots of other aircraft to communicate directly with said

remote pilot.

Communication

3. Any inquiry concerning this communication or earlier communications from the

examiner should be directed to RONNIE MANCHO whose telephone number is (571)272-6984.

The examiner can normally be reached on Mon-Thurs: 9-5.

If attempts to reach the examiner by telephone are unsuccessful, the examiner's

supervisor, Tran Khoi can be reached on 571-272-6919. The fax phone number for the

organization where this application or proceeding is assigned is 571-273-8300.

Information regarding the status of an application may be obtained from the Patent

Application Information Retrieval (PAIR) system. Status information for published applications

may be obtained from either Private PAIR or Public PAIR. Status information for unpublished

applications is available through Private PAIR only. For more information about the PAIR

system, see http://pair-direct.uspto.gov. Should you have questions on access to the Private PAIR

system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-free). If you would

like assistance from a USPTO Customer Service Representative or access to the automated

information system, call 800-786-9199 (IN USA OR CANADA) or 571-272-1000.

/Ronnie Mancho/

Primary Examiner, Art Unit 3664

/Ronnie Mancho/

Primary Examiner, Art Unit 3664

Application/Control Number: 11/736,356 Page 11

Art Unit: 3664

Exhibit 4

Exhibit 4



(19) United States

(12) Patent Application Publication (10) Pub. No.: US 2005/0004723 A1

Duggan et al.

(43) Pub. Date:

Jan. 6, 2005

(54) VEHICLE CONTROL SYSTEM INCLUDING RELATED METHODS AND COMPONENTS

(75) Inventors: **David S. Duggan**, Aubrey, TX (US); David A. Felio, Highland Village, TX (US); Billy B. Pate, Houston, TX (US); Vince R. Longhi, Dallas, TX (US); Jerry L. Petersen, Southlake, TX (US); Mark J. Bergee, Dallas, TX (US)

> Correspondence Address: Christopher L. Holt Westman, Champlin & Kelly **Suite 1600** 900 Second Avenue South Minneapolis, MN 55402-3319 (US)

(73) Assignee: Geneva Aerospace, Carrollton, TX

10/871,612 (21)Appl. No.:

(22)Filed: Jun. 18, 2004

Related U.S. Application Data


(60) Provisional application No. 60/480,192, filed on Jun. 20, 2003.


Publication Classification


- **U.S. Cl.** **701/24**; 701/11; 701/13 (52)


(57)**ABSTRACT**

Embodiments are disclosed for a vehicle control system and related sub-components that together provide an operator with a plurality of specific modes of operation, wherein various modes of operation incorporate different levels of autonomous control. Through a control user interface, an operator can move between certain modes of control even after vehicle deployment. Specialized autopilot system components and methods are employed to ensure smooth transitions between control modes. Empowered by the multimodal control system, an operator can even manage multiple vehicles simultaneously.

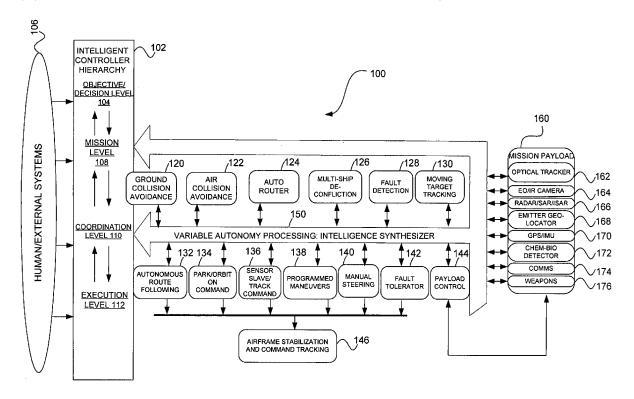


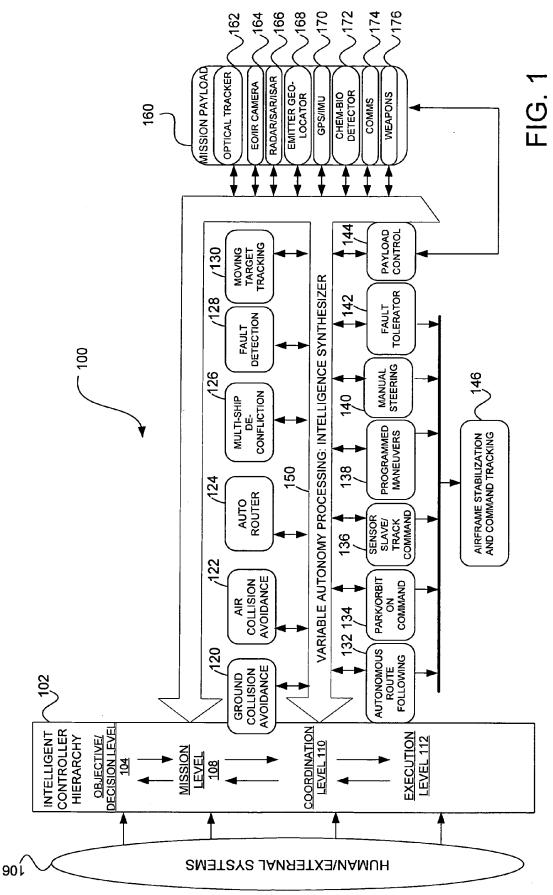


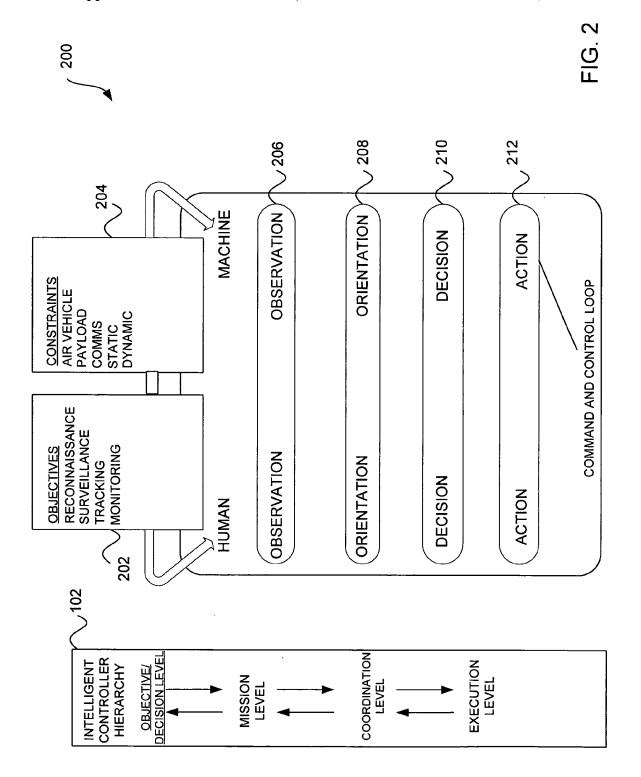


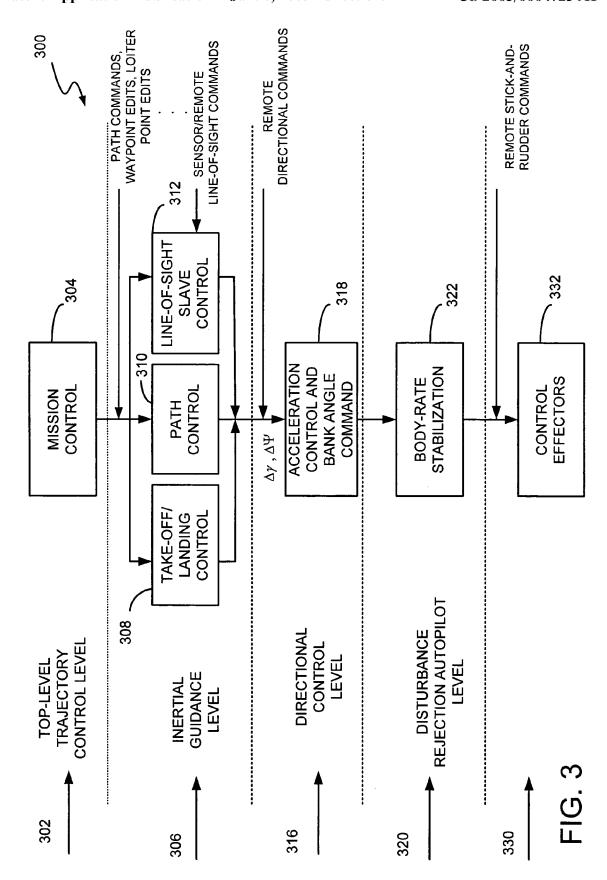





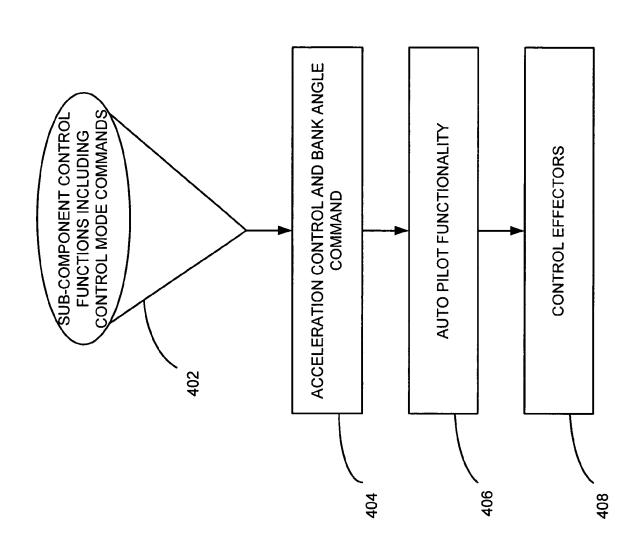

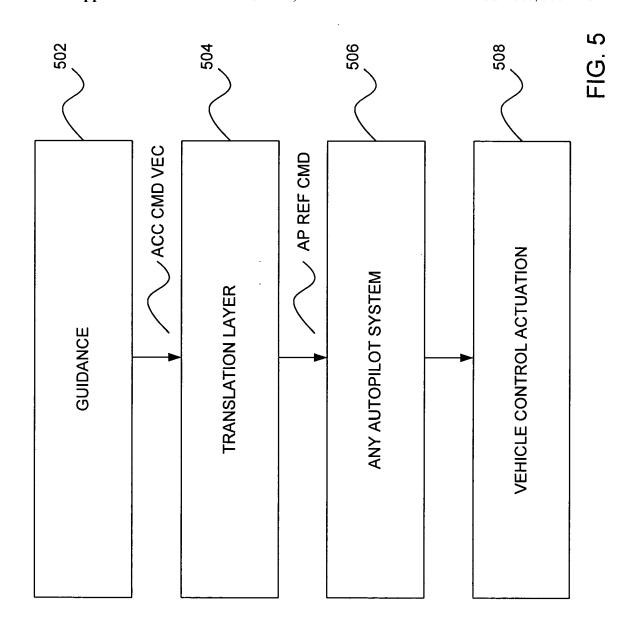

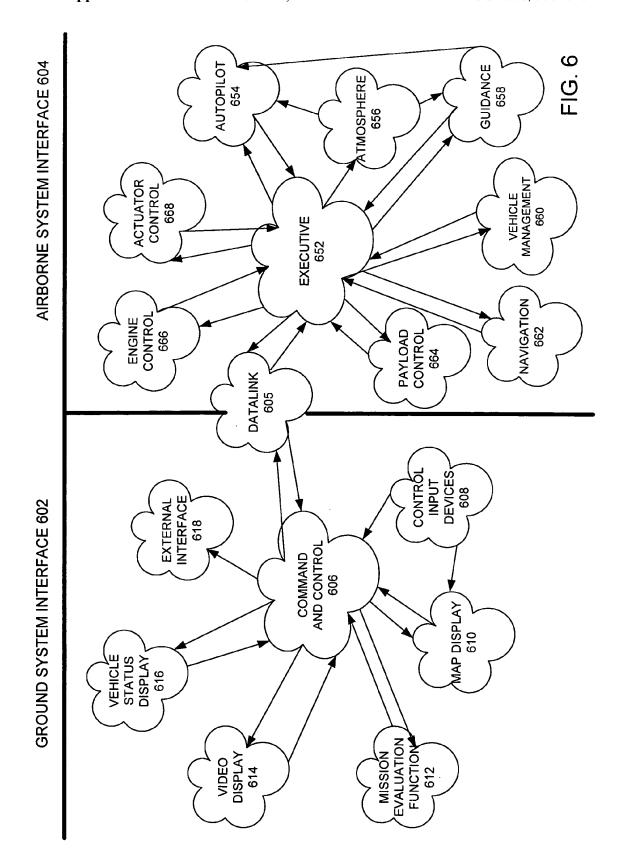

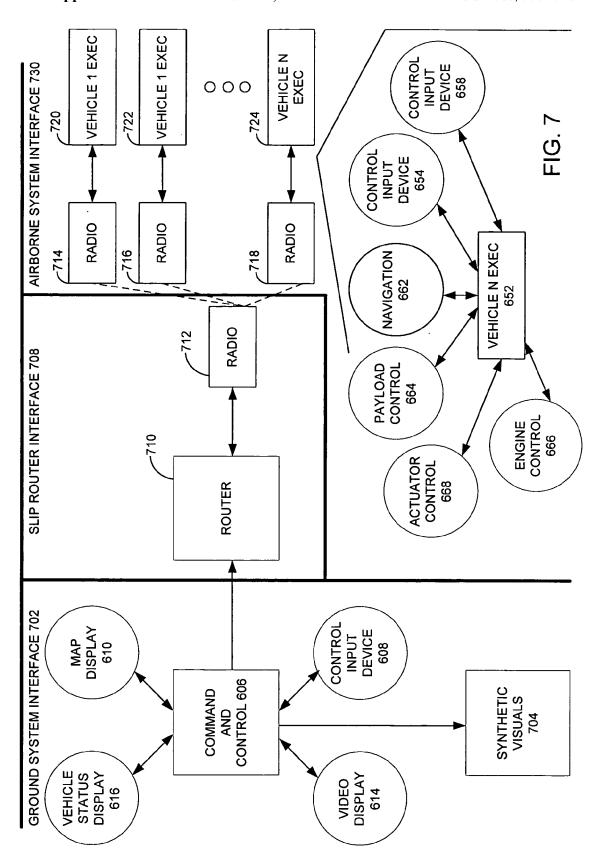

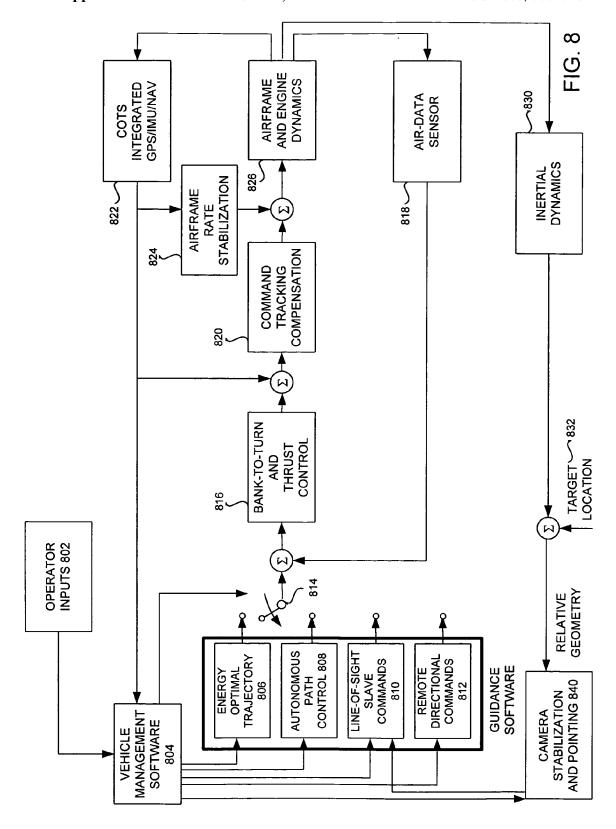

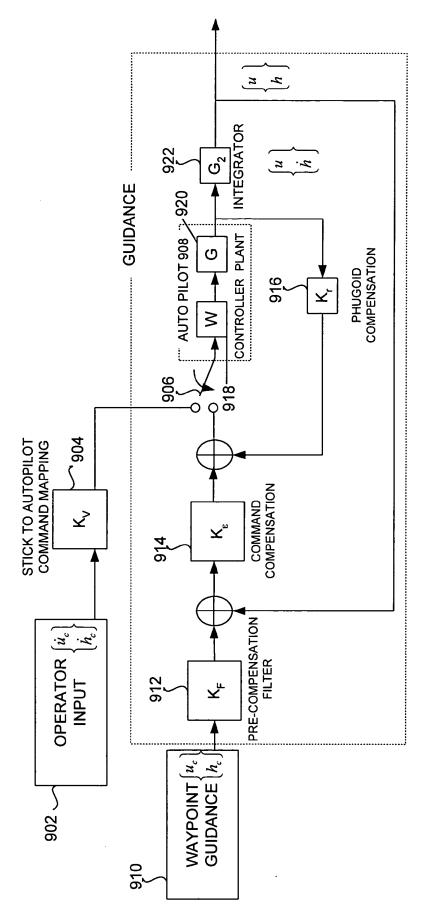
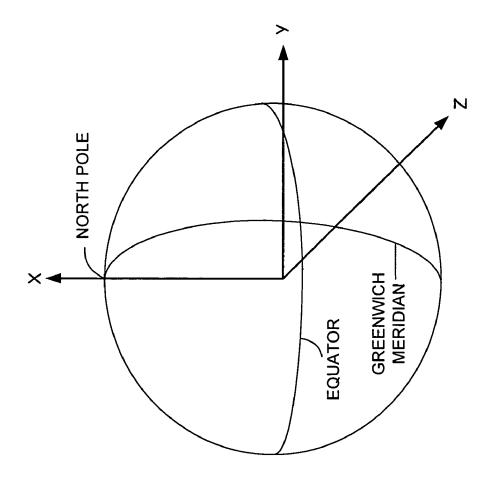
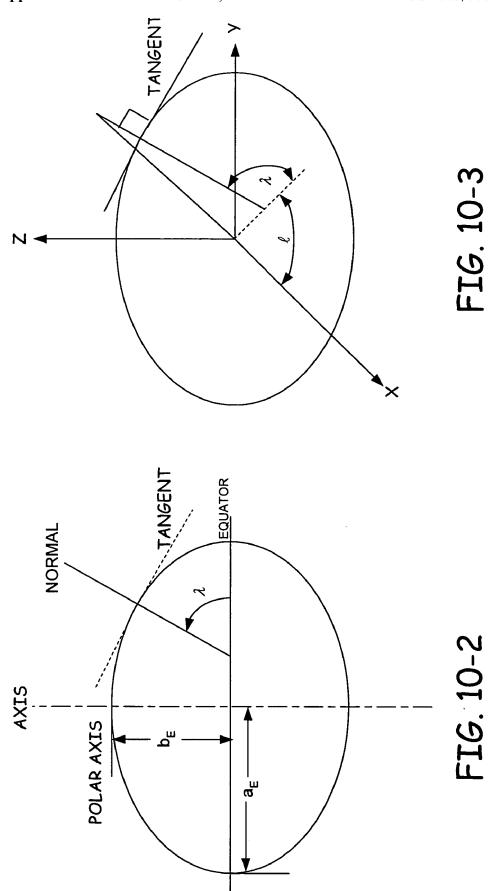
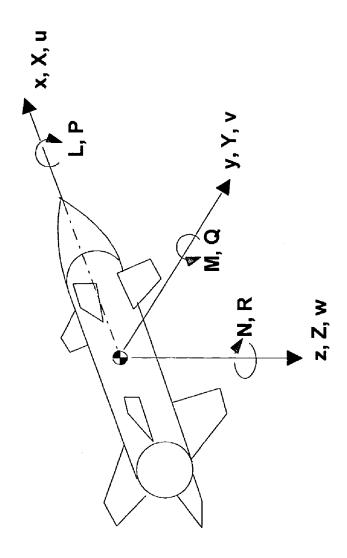


FIG. 9

FIG. 10-1







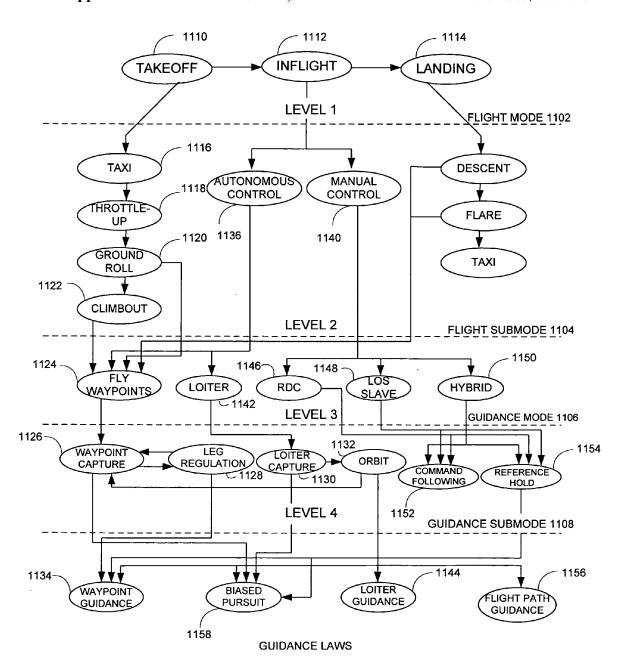


FIG. 11

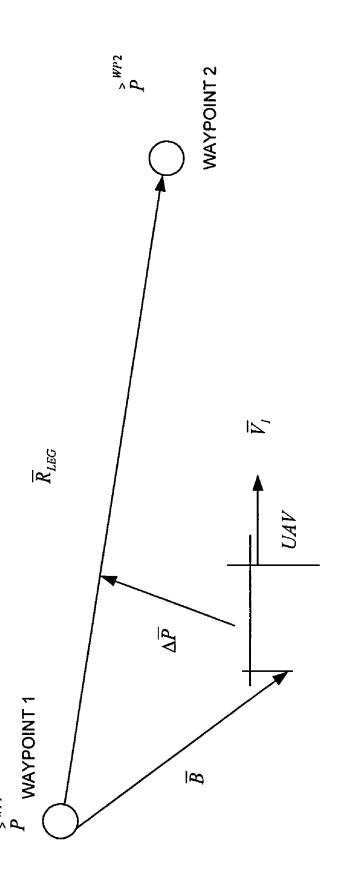


FIG. 13

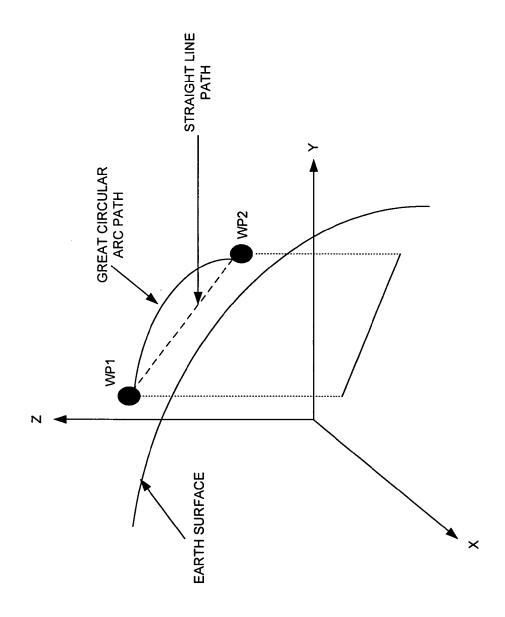


FIG. 14




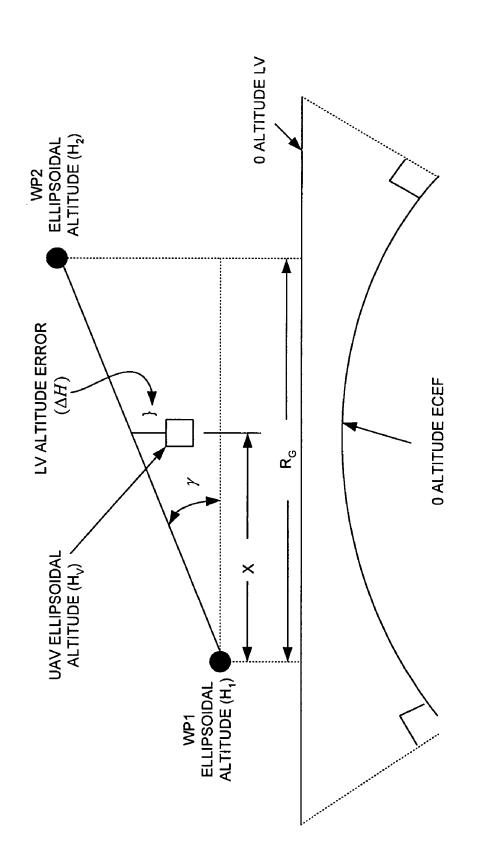


FIG. 18




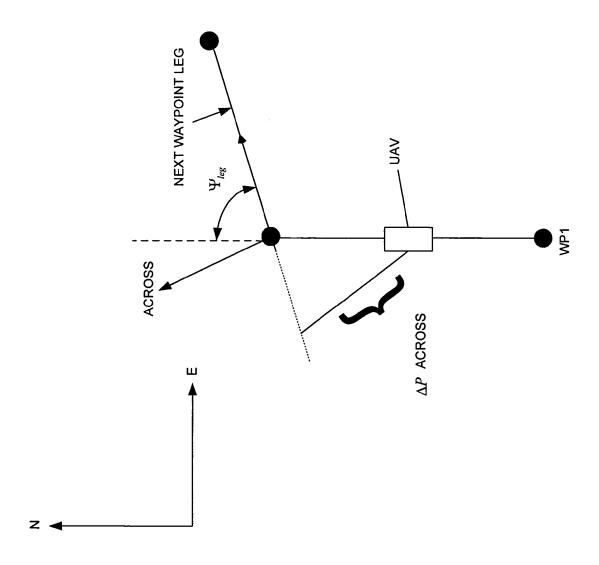


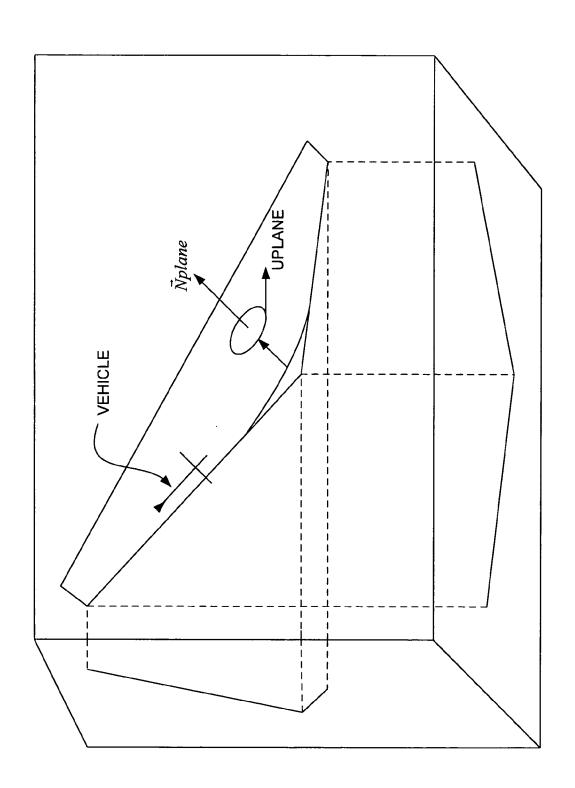


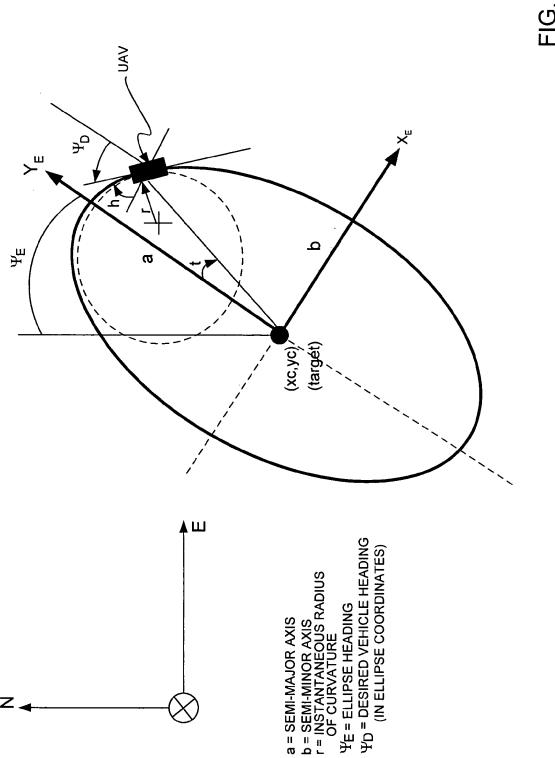



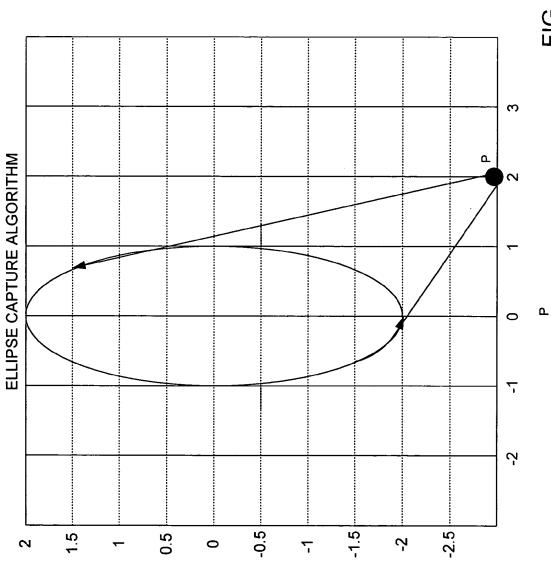

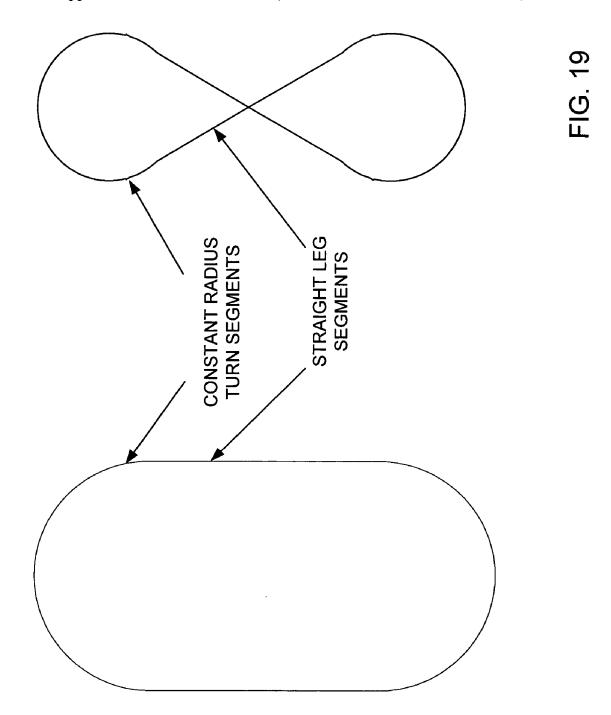

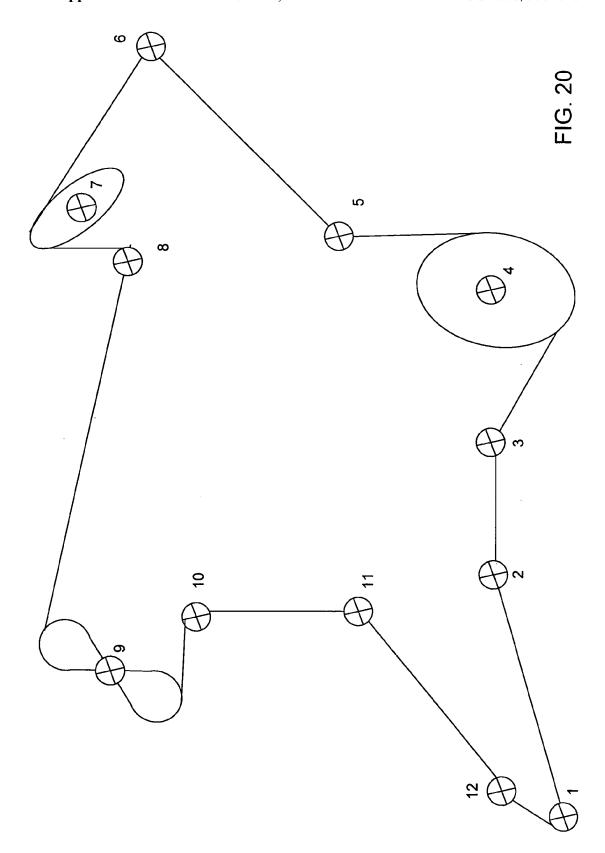



CURRENT LOS DESIGNATION


CURSOR LOCATION


PRE-PLANNED SURVEILLANCE POINTS


FIG. 22A

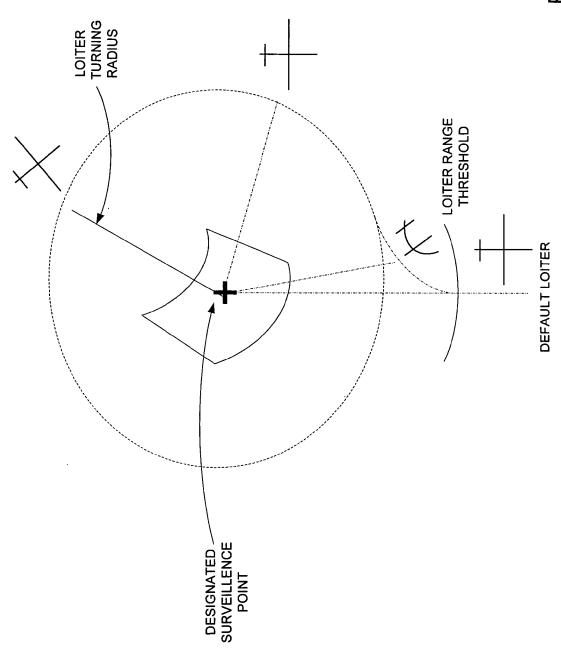


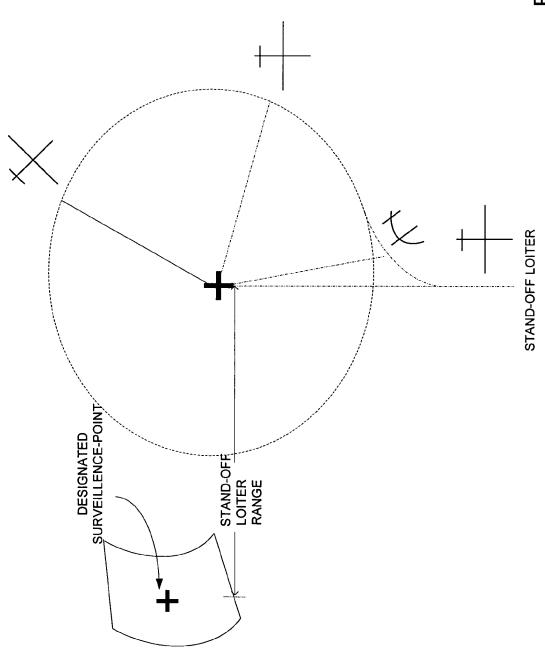


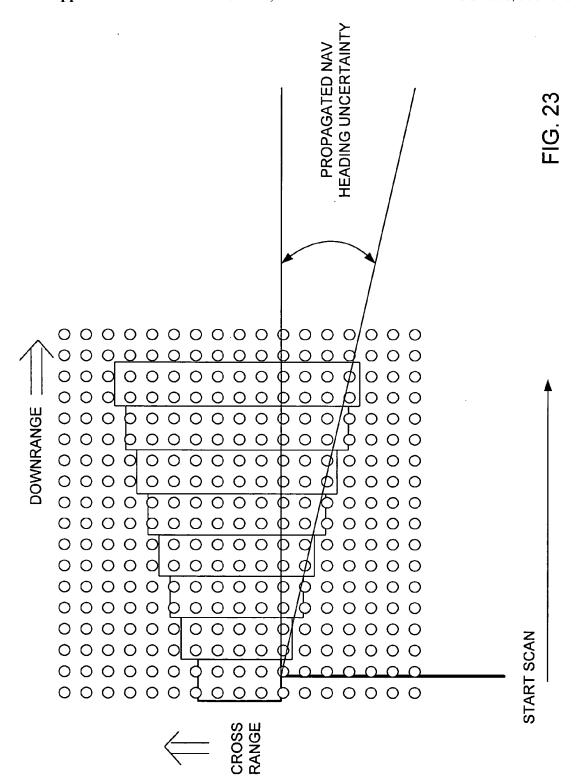

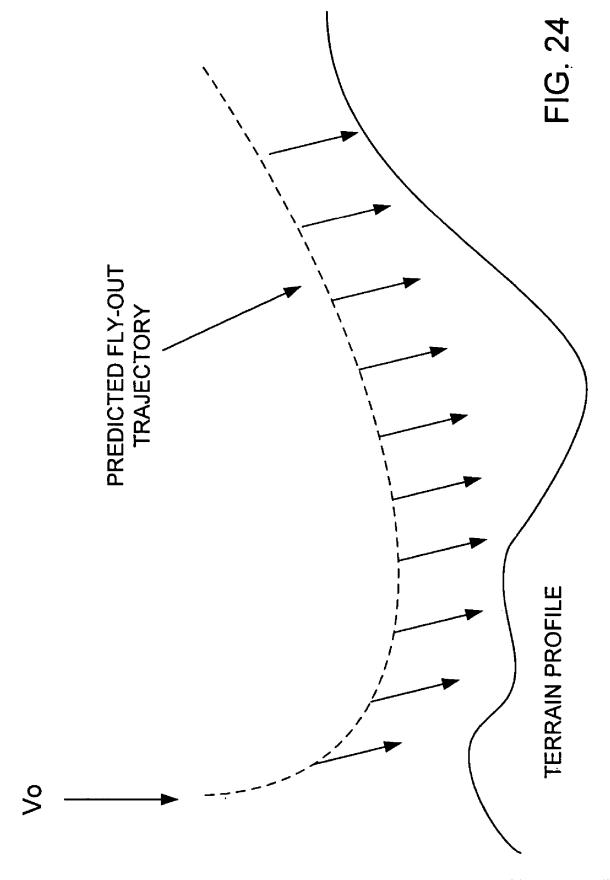

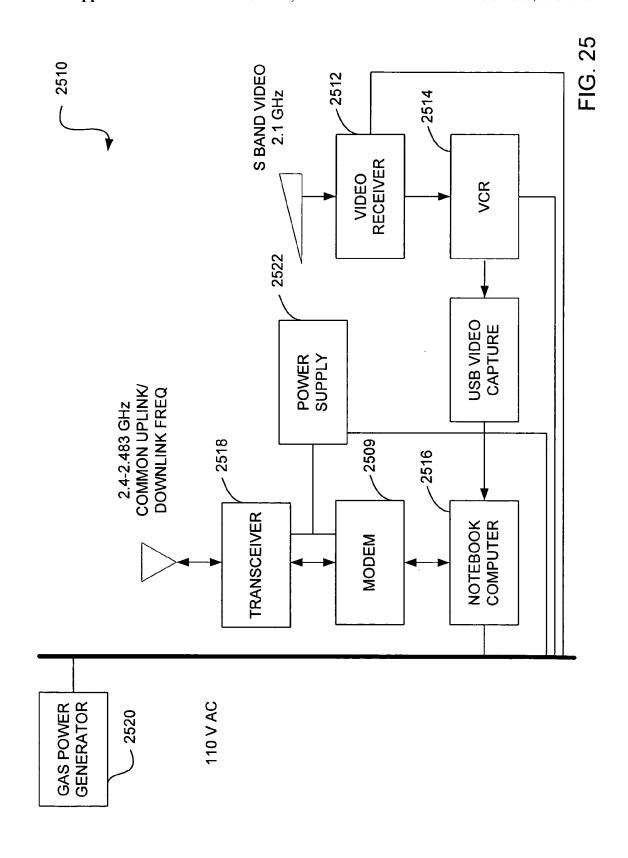

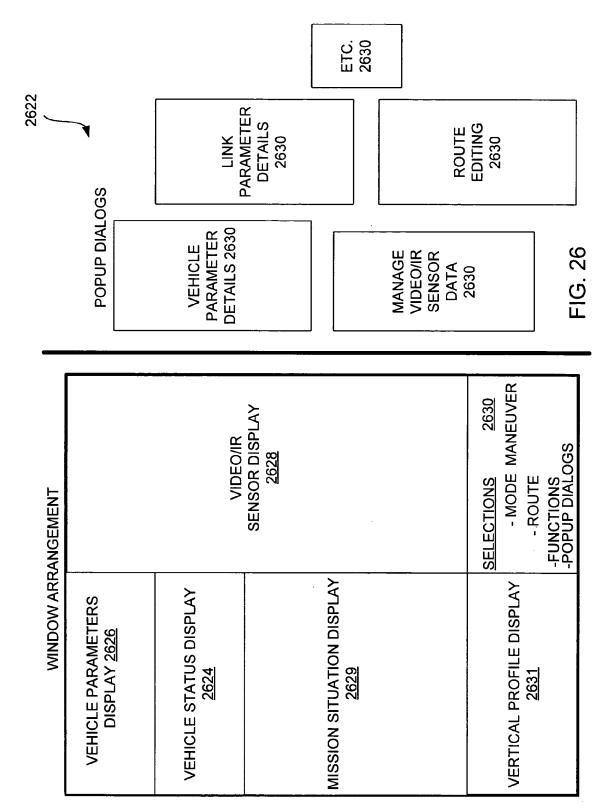

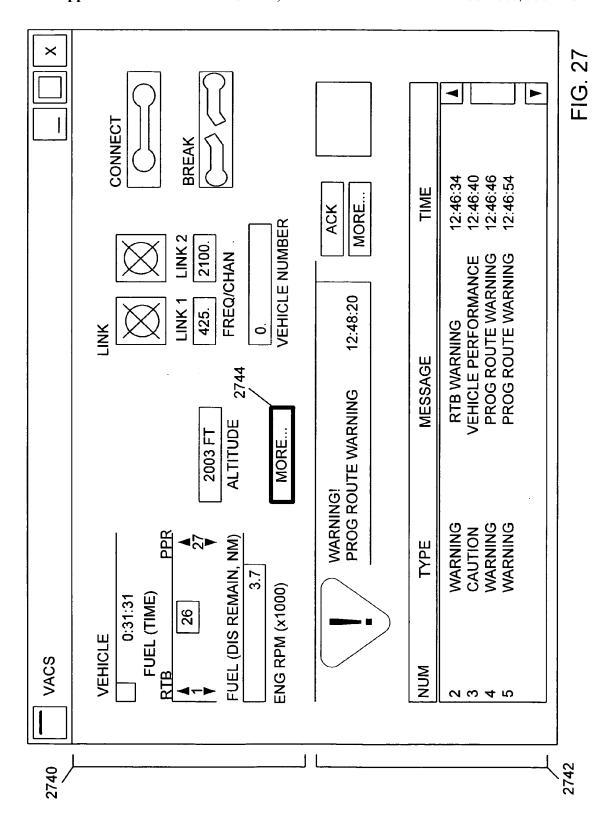

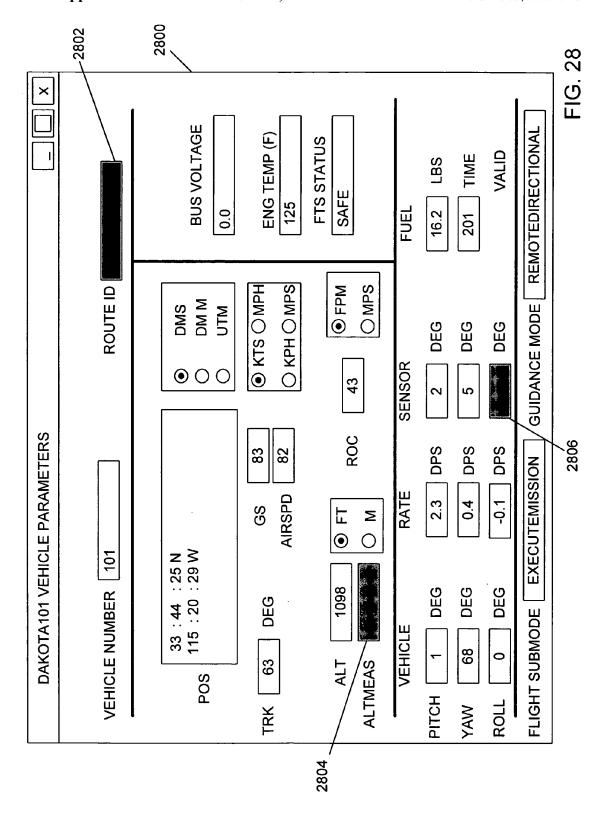
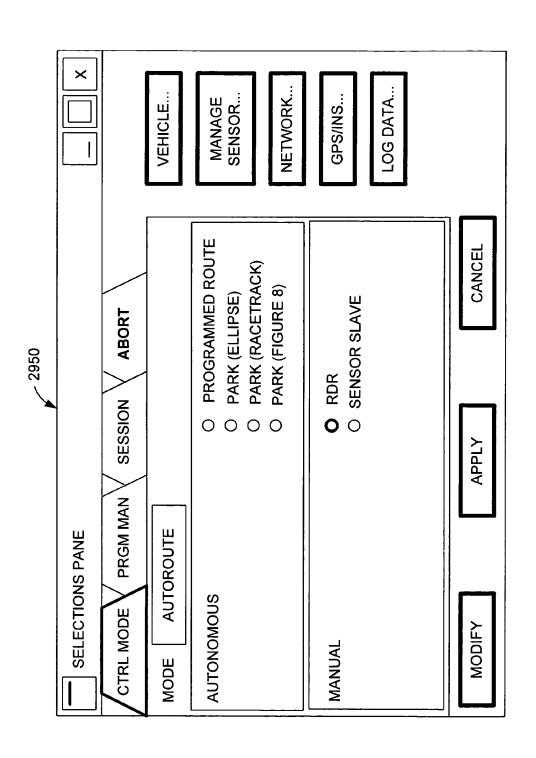
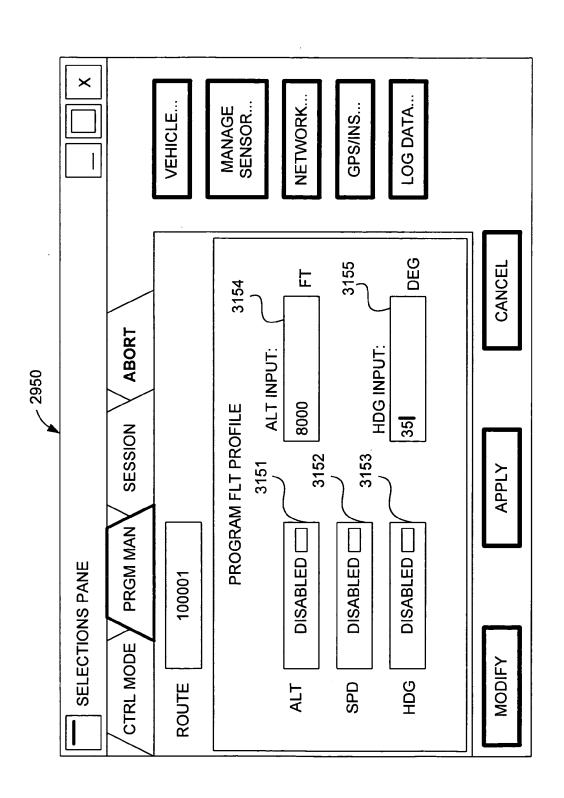
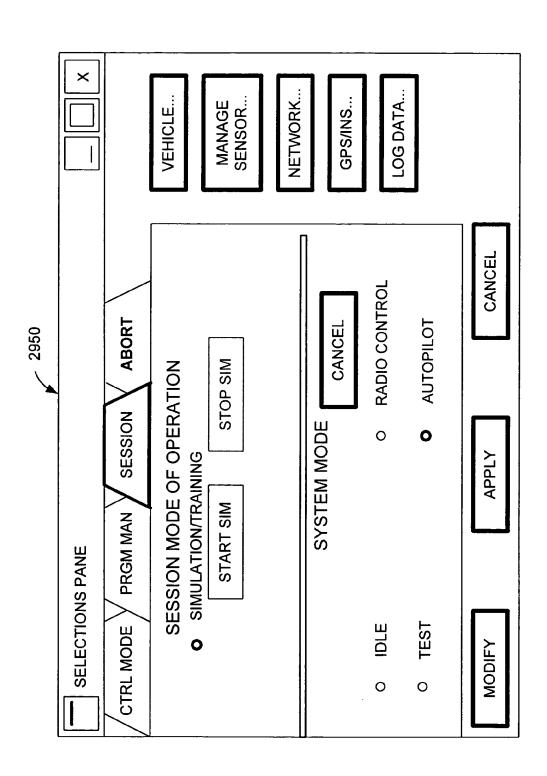


FIG. 29







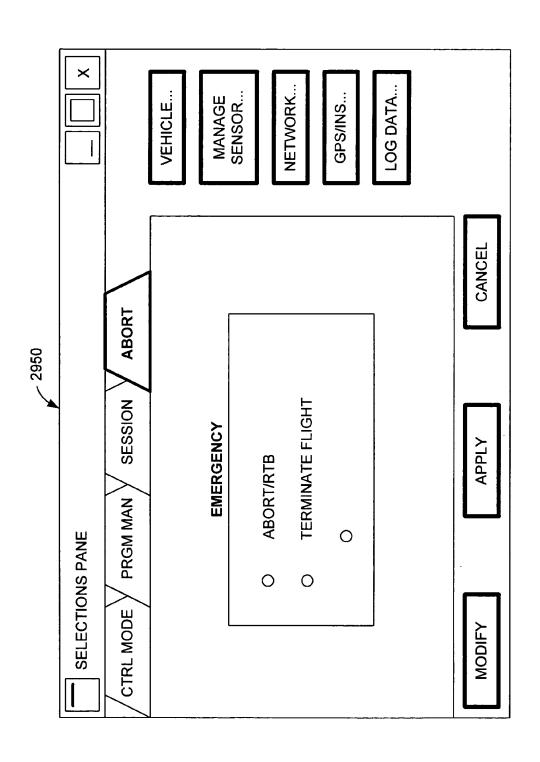
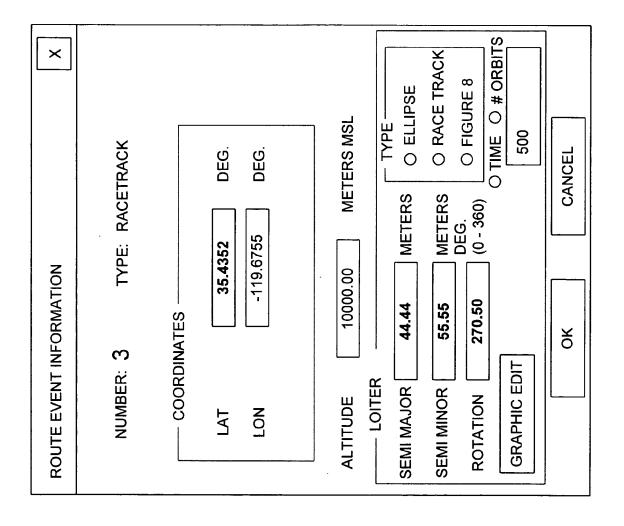


FIG. 33







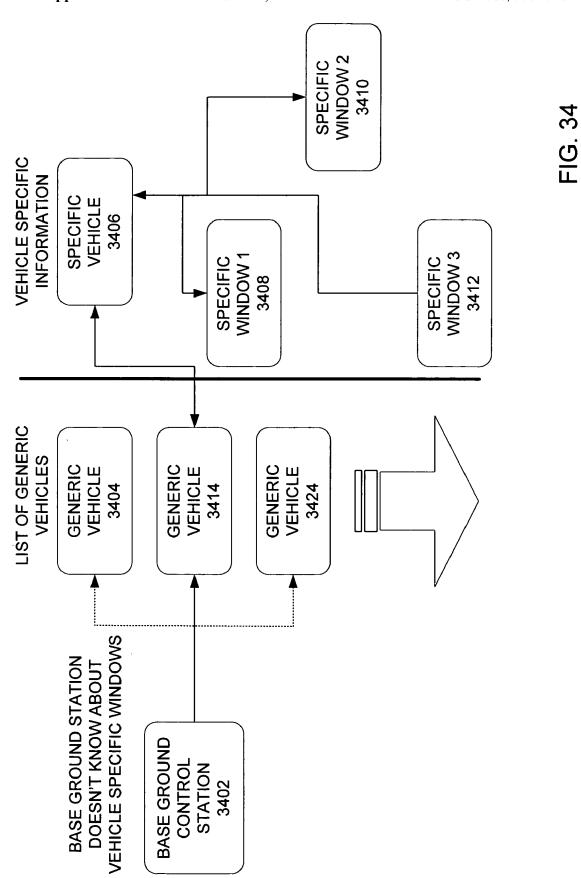



FIG. 35

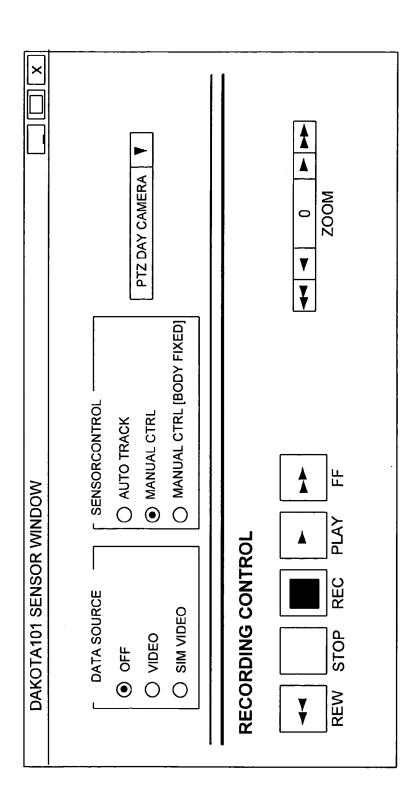

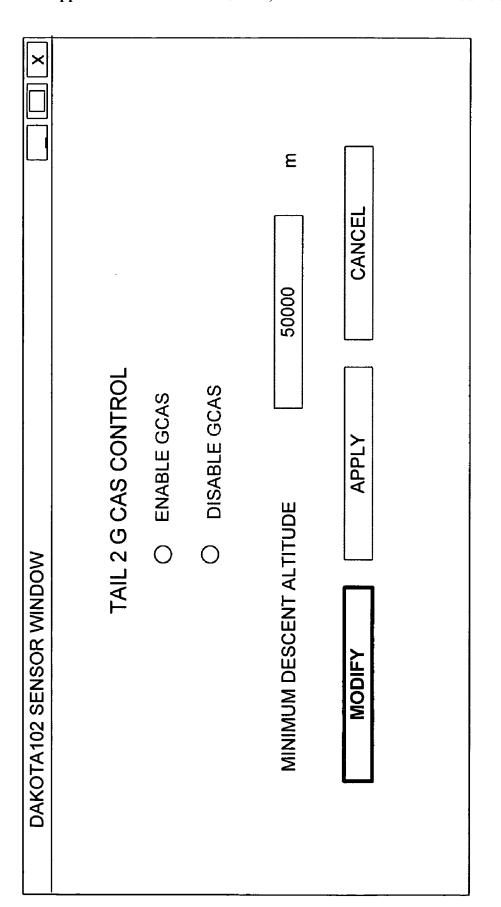

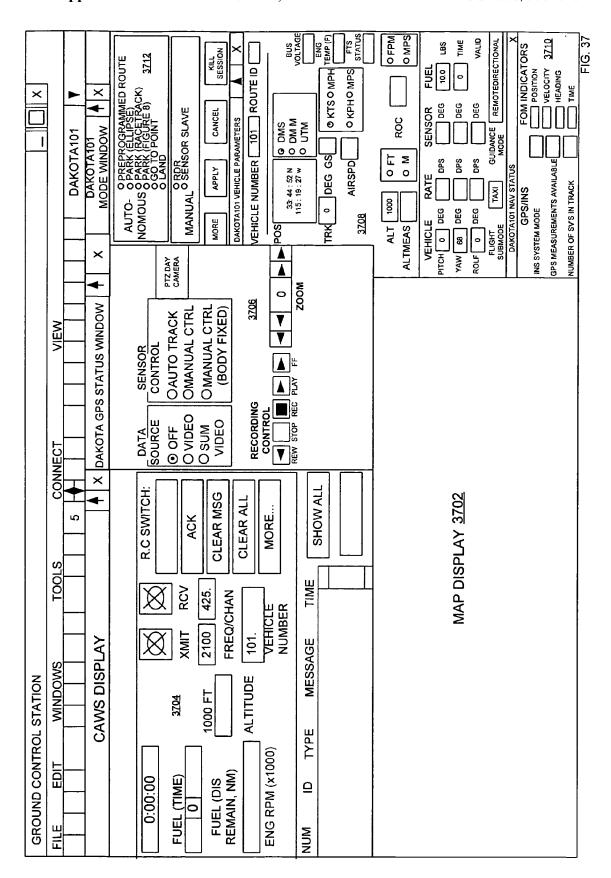

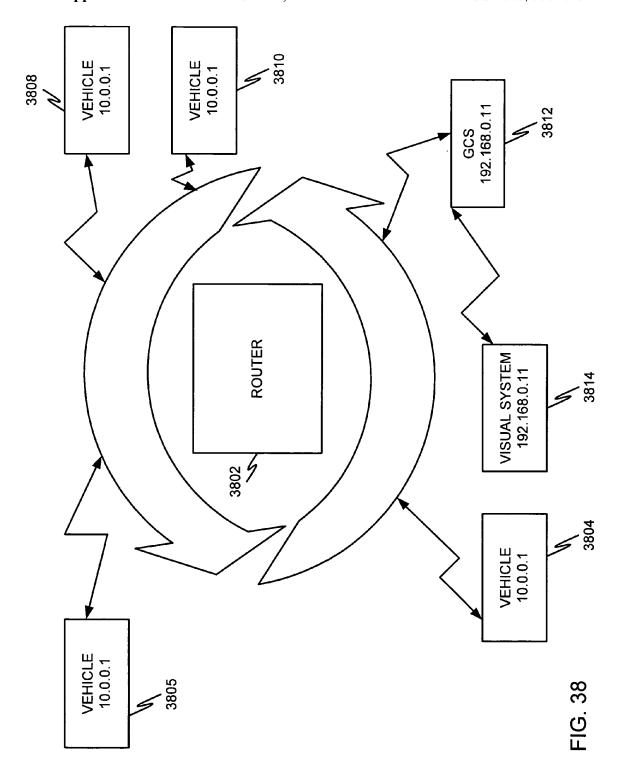

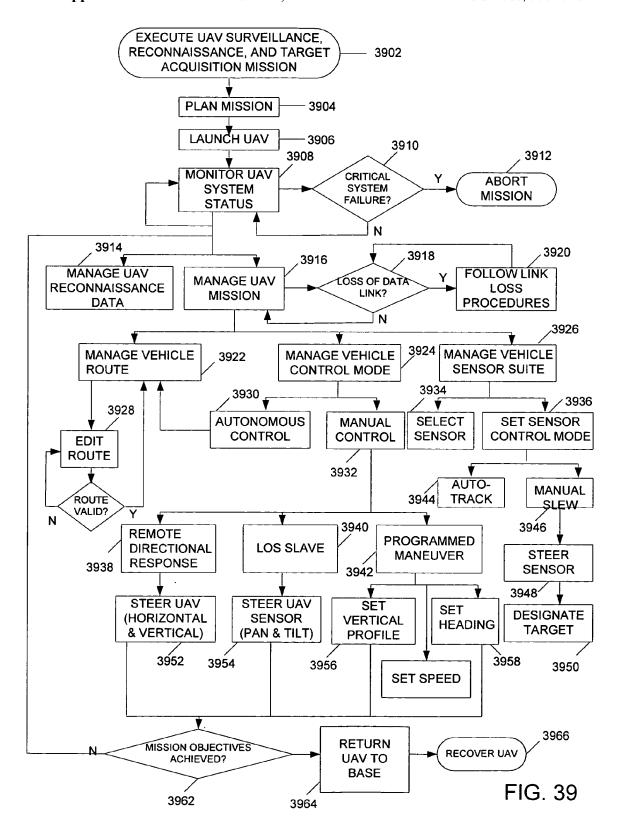

VEHICLE CONTROL SYSTEM INCLUDING RELATED METHODS AND COMPONENTS

RELATED METHODS AND COMPONENTS

[0001] The present application is based on and claims the benefit of U.S. provisional patent application Ser. No. 60/480,192, filed Jun. 20, 2003, the content of which is hereby incorporated by reference in its entirety.

BACKGROUND OF THE INVENTION

[0002] The present invention relates to a system utilized to control a vehicle. More particularly, the present invention pertains to a variable autonomy control system that enables a human to manage and operate a vehicle through interaction with a human-system interface.

[0003] Vehicle control systems are well known in the art, one known example being a control system that enables a human operator to remotely manage and control an unmanned vehicle. In one known application, an operator remotely controls an unmanned aerial vehicle (UAV) through a human-system interface. The operator typically controls details related to payload, mission and/or flight characteristics of the unmanned aircraft.

[0004] The development of practical applications for UAV technology has been hindered by an absence of a wellintegrated control and guidance system. Potential applications for UAV's include border patrol, traffic monitoring, hazardous area investigation, atmospheric sampling or even motion picture filming. All of these and other UAV applications would benefit from a control system that enables a person with minimal aviation experience or manual skill to operate the vehicle. With presently known systems, the operator is rarely able to focus on payload or mission operation because he or she is consumed with the significant responsibilities associated with aircraft piloting.

[0005] In order to be truly versatile, UAV control systems should be comfortably usable by individuals with training that is focused on the requirements of a given mission or on the usability of a payload, rather than on the aviation of the air vehicle. In many cases, present systems require an individual with pilot training to engage a control system and manage mission, payload, and aviation functions simultaneously. It is not common for known control systems to be configured for the support of intuitive high level commands such as "go left", "go right", "take off", "land", "climb", or "dive". It is instead more typical that known control systems require low-level stick-and-rudder commands from the operator. Thus, there is a need for a control system that supports integration of intuitive, mission-level remote commands into a UAV guidance system, thereby significantly reducing the work load on a human operator as it pertains to vehicle aviation.

[0006] Known control systems are generally not configured to support multiple levels of autonomous operation. In fact, few systems even offer autonomous or semi-autonomous mission capability packaged with an ability to remotely interrupt the mission. Thus, for known systems, the workload of the operator is generally too great to enable him or her to fly multiple UAV's from a single ground control station, which is an appealing possibility. Thus, there is a need for a flexible vehicle control and management concept that will operate even when responding to remote intuitive commands such that one person can operate multiple vehicles from the same control station.

[0007] Known UAV control systems typically offer limited real-time control capability or they require management by rated pilots. It is known for systems to have a capability to automatically follow pre-planned mission routes. However, it is common that real-world missions fail to go exactly as planned. For example, time-critical targets or surveillance objectives can pop up during the mission; traffic conflicts with manned aircraft can occur; clouds can get in the way of sensors (e.g., EO/IR sensors); or intelligent and devious adversaries can make target location and identification difficult. Real-time control is required to deviate from the planned route to find and identify new targets; to maneuver UAV's to avoid traffic; to fly under the weather; or to get better line-of-sight-angles. Skilled pilots can maneuver aircraft, but then an additional operator is typically necessary to manage sensors and/or the dynamic mission.

[0008] While commercialized products such as video games and CAD utilities now provide an excellent model for human interfaces, such interfaces have generally not been completely integrated into an actual vehicle control system. In fact, very few known UAV autopilot systems are readily compatible with known Commercial Off-The-Shelf (COTS) hardware. This is unfortunate because it is not uncommon for non-pilot trained individuals to be pre-equipped with a familiarity with such hardware that includes standard joysticks, track-balls, lap-top computers, virtual reality head mounted displays and glove input devices.

[0009] Known vehicle control systems generally do not include an operational mode that enables an operator to focus his or her attention on a tactical situation display (e.g., images transmitted from an onboard sensor) rather than providing directional commands based primarily on a control interface. Such a control mode has many potential advantageous applications, for example, an operator can command the scope of the vehicle's on-board sensor to survey a battle field (or other topographical region) while the vehicle autonomously commands a flight profile that is slaved to the operator's sensor line-of-sight commands. There is a need for an integrated guidance solution that adapts to such a mode of control.

[0010] Advances in virtual reality simulation graphic display technology have made the concept of a virtual reality interface to real-time systems feasible. Already used by surgeons in the medical community, the use of virtual reality, such as Telepresence or Mixed Reality systems, in the context of UAV control is now feasible but generally unknown. Thus, there is a need for a control system that provides an operator with functionality that takes advantage of this new technology.

[0011] Finally, many known control systems are not adaptable to on-going command-and-control software development efforts. For example, for military applications, it is desirable that a control system be equipped to operate within the advanced Command Control Communication Computers and Intelligence (C4I) infrastructure and interface with associated Common Ground Control Stations such as the Joint STARS Common Ground Station. It is desirable that guidance software have the capability not only to respond to the command interface, but also an ability to be expanded modularly as new capabilities are desired, such that expansions can be accomplished without significant changes in the interface.

SUMMARY OF THE INVENTION

[0012] Embodiments of the present invention pertain to a vehicle control system that includes an integrated guidance Evidence Appendix - 158 design and systems engineering approach that enables a system having a modular core structure. The core structure enables the control system to be conveniently upgraded or updated. For example, the control system can be easily extended to accommodate increasing and/or additional guidance, payload or other technology. Further, the core structure enables the system to be efficiently adapted for various manned and/or unmanned vehicles.

[0013] Embodiments of the present invention also pertain to a vehicle control system and related sub-components that together provide an operator with a plurality of specific modes of operation, wherein each mode of operation incorporates a different level of autonomous control. Through a control user interface, an operator can smoothly switch between modes of operation even after vehicle deployment. Specialized autopilot system components and methods are employed to ensure seamless transitions between operational modes. Empowered by the multi-modal control system, an operator can even manage multiple vehicles simultaneously.

[0014] Embodiments of the present invention pertain to a hierarchical control system, user interface system, and control architecture that together incorporate a broad range of user-selectable control modes representing variable levels of autonomy and vehicle control functionality. A unified autopilot is provided to process available modes and mode transitions. An intelligence synthesizer is illustratively provided to assist in resolving functional conflicts and transitioning between control modes, although certain resolutions and transitions can be incorporated directly into the functional sub-components associated with the different control modes. In accordance with one embodiment, all modes and transitions are funneled through an acceleration-based autopilot system. Accordingly, control commands and transitions are generally reduced to an acceleration vector to be processed by a centralized autopilot system.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] FIG. 1 is a schematic block diagram illustrating a variable autonomy control system.

[0016] FIG. 2 is a schematic representation of a human-based command and control loop.

[0017] FIG. 3 is a diagrammatic block representation of a hierarchical control structure.

[0018] FIG. 4 is a simplified diagrammatic representation of a control structure.

[0019] FIG. 5 is a diagrammatic block representation of a control system incorporating a translation layer.

[0020] FIG. 6 is a schematic representation of top-level software objects associated with system interface components of a control system.

[0021] FIG. 7 is a schematic representation of an interface system for the control of multiple vehicles.

[0022] FIG. 8 is a schematic diagram representing a vehicle control scheme.

[0023] FIG. 9 is a control diagram representing a general integrated guidance loop structure.

[0024] FIG. 10-1 is a diagrammatic representation of an ECEF coordinate frame definition.

[0025] FIG. 10-2 and 10-3 are diagrammatic representations of a geodetic coordinate frame definition.

[0026] FIG. 10-4 is a schematic representation of a body reference frame.

[0027] FIG. 11 is a schematic block diagram demonstrating a basic flow structure for various flight mode levels.

[0028] FIG. 12 is a schematic diagram demonstrating waypoint guidance error calculation.

[0029] FIG. 13 is a schematic diagram demonstrating the effect that the earth's curvature can have on calculations.

[0030] FIG. 14 is a schematic diagram demonstrating altitude error calculation.

[0031] FIG. 15 is a schematic diagram demonstrating one aspect of waypoint leg transition.

[0032] FIG. 16 is a schematic diagram demonstrating a vehicle turn.

[0033] FIG. 17 is a schematic diagram defining parameters and coordinate frames used to support an elliptical loiter guidance law.

[0034] FIG. 18 is a schematic chart demonstrating that for any point P outside of an ellipse there exist two lines passing tangent to the ellipse and containing the point P.

[0035] FIG. 19 is a schematic diagram demonstrating segments associated with racetrack and figure-8 patterns.

[0036] FIG. 20 is a schematic diagram demonstrating an example of a programmed route using various loiter algorithms.

[0037] FIGS. 21, 22A & 22B are schematic diagrams demonstrating features of a line-of-sight-slave control approach.

[0038] FIG. 23 is a schematic illustration of a scan process in the context of a ground collision avoidance system.

[0039] FIG. 24 is a schematic diagram illustrating a fly-out trajectory in the context of a ground collision avoidance system.

[0040] FIG. 25 is a simplified block diagram of a ground control station.

[0041] FIG. 26 is a block diagram representation of an example graphical user interface display.

[0042] FIG. 27 is a sample screen shot representation of a vehicle status display.

[0043] FIG. 28 is an example screen shot representation of an intelligent window display.

[0044] FIGS. 29-33 are examples of pop-up window displays.

[0045] FIG. 34 is a schematic diagram demonstrating a generic vehicle class system configuration.

[0046] FIGS. 35 & 36 are examples of vehicle-specific window displays.

[0047] FIG. 37 is an example screen shot representation of a graphical user interface.

[0048] FIG. 38 is a schematic block diagram demonstrating a network centric UDP communications scheme.

[0049] FIG. 39 is a schematic block diagram illustrating potential control paths through a mission. Evidence Appendix - 159

DETAILED DESCRIPTION OF ILLUSTRATIVE **EMBODIMENTS**

[0050] I. Introductory Comments

[0051] Much of the present invention description will be devoted to describing embodiments in the context of an unmanned aerial vehicle (UAV). However, it is to be understood that the embodiments generally pertain to vehicle control systems and are designed for broad application. The embodiments can be adapted by one skilled in the art to be applied in the context of any of a variety of unmanned vehicles including, but not limited to, airplanes, helicopters, micro air vehicles (MAV's), missiles, submarines, balloons or dirigibles, wheeled road vehicles, tracked ground vehicles (i.e., tanks), and the like. Also, embodiments of the present invention can be adapted by one skilled in the art to be implemented in the context of manned vehicles (e.g., a human passenger operates the control system, or a human remotely operates a control system for a vehicle that transports a passenger, etc). It should be noted that the relatively modular nature of the vehicle control system of the present invention enables the adaptations necessary to accommodate different vehicles to be made in a relatively small period of

[0052] Certain embodiments of the present invention pertain to specialized control subsystems that each individually enable a specific control functionality to be accessed through the larger control system. It is to be understood that such subsystems can be adapted and independently deployed even in the context of vehicle control systems other than those specifically described herein. Also, such subsystems can be adapted to support any type of manned or unmanned vehicle including, but not limited to, those specifically listed

[0053] II. Overview—Variable Autonomy Control System Architecture

[0054] Embodiments of the present invention generally pertain to a variable autonomy control system (VACS) architecture that enables, among other characteristics, a general simplification of UAV operation and control. The architecture illustratively supports selectable levels of control autonomy from fully autonomous control to simplified manual flight control modes for enhanced real-time control.

[0055] As dependence on UAV's for military operations grows and UAV technology is integrated into the emerging global command and control architecture, the cost and complexity of managing and controlling these assets could easily become substantial. This limitation is brought about by either of two extremes in the vehicle command and flight control philosophy: complete dependence on a human-inthe-loop (fully manual control) or complete exclusion of a human-in-the-loop (fully autonomous control). The former requires a dedicated, highly trained operator whereas the latter provides no mechanism for real-time operator interaction or mission management. The need for a dedicated highly-trained operator drives costs (personnel and training requirements) and severely limits a single operator's flexibility in that he or she is primarily focused on the aviation of the vehicle rather than the higher level mission objectives. On the other hand, the exclusion of the human-in-the-loop drives logistics costs (mission planning and asset allocation) and severely limits the UAV's operational flexibility.

[0056] A control design consistent with embodiments of the present invention exploits existing flight control technologies to arrive at an ideal balance between the two above-described control philosophies. The control design includes a flight control structure that supports variable levels of control autonomy and minimizes personnel and training requirements for vehicle operation. Human factors play a key role in that the vehicle is treated as one of many assets (e.g., including other vehicles) available to an individual operator during the execution of a defined mission. Therefore, the vehicle must be easily controllable. Embodiments of the present invention reflect the philosophical notion that a truly enabled UAV operator should not be required to be a trained aviator but should still retain variable levels of control capability to execute mission objectives that call upon his/her specialized expertise.

[0057] Embodiments of the present invention pertain to a hierarchical flight control structure with varied levels of remote operator input combined with an off-board controller software package and intuitive human system interface. Research of problems related to UAV control has indicated that a good solution lies in the appropriate functional allocation between human and machine. In the context of embodiments of the present invention, this leads to segregation of control into two fundamental categories: flight control and flight management. Flight control associates with the aviation of the aircraft whereas flight management associates with the mission plan (navigation tasking) for the aircraft.

[0058] III. Details—VACS Architecture

[0059] FIG. 1 is a schematic block diagram illustrating a VACS architecture 100 in accordance with one aspect of the present invention. Architecture 100 incorporates a hierarchical design that enables an invocation of different control behaviors at various levels in the hierarchy. Primitive control functions are combined with complex autonomous functions to enable a broad range of behaviors. An operator is illustratively able to access and selectively invoke certain of the control behaviors through an intuitive interface, such as an interface made available through a workstation. In accordance with one embodiment, the architecture design enables a single operator to work through the interface to effectively control multiple vehicles simultaneously.

[0060] FIG. 1 includes a spectrum 102 that demonstrates the hierarchical nature of architecture 100. Inputs 106 from human and other external sources are characterized across spectrum 102. At the top of the spectrum is the objective/ decision level 104. Level 104 represents the highest end of the control spectrum wherein autonomous control is maximized, and the level of intelligent interaction (e.g., interaction with a human or other systems) consists of higher-level objective-based planning. The lowest level of intelligent autonomy is the execution level 112, in which external command interaction is either directly proportional to the actuation or is minimally compensated.

[0061] In between ends 104 and 112 are mission level 108 and coordination level 110. Levels 108 and 110 are sublevels of the spectrum and represent varying levels of a blending of external and automated functionality. Mission level $1\overline{08}$ is more human-oriented than coordination level 110, which is more human-oriented than execution level 112. Conversely, execution level 112 is more autonomous in nature than coordination level 110, which is more autonomous in nature than mission level 108. Evidence Appendix - 160

[0062] Architecture 100 includes a plurality of functional sub-components 120-146. With regard to the FIG. 1 depiction, it should be noted that the individual functional sub-components are not necessarily illustrated on the level where they would correspond to the illustrated spectrum 102. Spectrum 102 is provided simply to demonstrate a hierarchical structure underlying architecture 100. Functional sub-components 120-146 represent control behaviors available for invocation either automatically or based on operator selection inputs.

[0063] When the illustrated control system architecture is actually applied, two or more of the illustrated functional sub-components can be applied simultaneously to accomplish a unified control scheme. In addition, in accordance with one embodiment, an operator is provided with the capability to interact through an interface to activate and deactivate certain functional control sub-components in order to activate and deactivate different modes of operator control representing different levels of system autonomy. An intelligence synthesizer 150 is provided to coordinate applicable functional sub-components and resolve conflicts there between. For example, if a vehicle is autonomously tracking a target (sub-component 130) and a new control command is inserted to automatically avoid an air collision (subcomponent 122), then it is illustratively up to intelligence synthesizer 150 to determine which control source is to be given priority. Assumedly, collision avoidance will be given priority. Following execution of collision avoidance, intelligence synthesizer 150 is illustratively configured to resume normal operation (e.g., resume target tracking, hold a reasonable heading, etc.). In another example, if an operator interrupts the tracking of a target with an instruction to switch to autonomous route following (sub-component 132), then intelligence synthesizer 150 will ensure that the switch between modes of control is carried out as smoothly and efficiently as possible.

[0064] In accordance with one embodiment, intelligence synthesizer 150 is configured to manage the interfaces between modular autonomous and semi-autonomous functions so that they can be integrated in a 'plug-n-play' format. Some functions require de-confliction between competing commands to the airframe, on-board sensors, or outer-loop guidance. The intelligence synthesizer is illustratively configured to determine what functions exist in the configuration, what functions have priority, what functions are dormant, and what functions do not exist in the configuration. The intelligence synthesizer is illustratively further configured to implement the VACS hierarchical architecture to manage which level autonomy is allocated to each function. With reference to the FIG. 1 architecture hierarchy, the lowest level Execution functions are implemented with direct interfaces to the airframe and payload hardware. These functions illustratively include an airframe body-rate stabilization loop, an airframe acceleration command-tracking loop, a bank-angle command tracking loop, and/or a collection of payload management functions (these and other applicable functions are commercially available for integration and/or are described in other sections below as embodiments of the present invention). The higher level functions have interfaces as well, and in some cases will illustratively share responsibility with Coordination Level functions. Examples of such functions include implementation of inertial trajectories, pre-programmed maneuvers such as racetrack loiter patterns, waypoint leg regulation and switching, management of a waypoint list, and management of semi-autonomous control functionality such as sensor slave and remote-directional control (these and other applicable functions are commercially available modules for integration and/or are described in detail below in other sections as embodiments of the present invention).

[0065] The Coordination level functions illustratively share responsibilities with some Mission level functions. Examples of mission-level functions are autonomous route planners, autonomous ground collision avoidance, and autonomous see-and-avoid (these and other applicable functions are commercially available modules for integration and/or are described in detail below in other sections as embodiments of the present invention). Generally speaking, these functions process mission-level requirements and implement them based on vehicle state and mission status information.

[0066] In accordance with one embodiment, autonomous and semi-autonomous functions illustratively communicate and coordinate with each other via intelligence synthesizer 150, which is a pseudo-bus and communications manager. In cases where autonomous commands conflict or interfere with each other, intelligence synthesizer 150 determines how to de-conflict, blend, or prioritize the output commands.

[0067] A payload control functional sub-component 144 is included in order to facilitate transfers of information to and from mission payload 160. Mission payload 160 is illustrated with a variety of payload components 162-176. The illustrated payload components are illustrative only in that other or different components could be included without departing from the scope of the present invention. Some of the payload components are sensors that gather data that is transferred to intelligence synthesizer 150 either for the purpose of serving as a reference to be utilized in a vehicle control scheme or, alternatively, to be collected for some inherent value of the information itself (e.g, collected for a mission-oriented purpose). One illustrative purpose for communication payload component 174 is to facilitate communication between a ground station and a corresponding system implemented on the remote vehicle. Embodiments of the present invention pertain to specific communications components and will be described in greater detail below in other sections. Weapons payload component 176 is an example of an active component that can be triggered (e.g., fired) in response to operator input. Many of the illustrated payload components will be described in greater detail below. Chemical-biological detector component 172 is illustratively a sensor for detecting chemical and/or biological substances, for example for the purpose of identifying areas contaminated by chemical or biological agents. The GPS/ IMU component 170 is illustratively a vehicle motion identification component for generating vehicle location information for any purpose such as, but not limited to, vehicle guidance, navigation or to be viewed by the operator (these and other applications of the data provided by sensor 170 will be described below in greater detail). Camera component 164 gathers information for mission purposes and/or for control purposes (the latter purpose being an embodiment of the present invention that will be described in detail below in other sections). Optical tracker 162 is illustratively configured to track an airborne or ground-based object relative to the vehicle for control purposes (e.g., air collision avoidance, ground target tracking, air target tracking, etc.) or Evidence Appendix - 161 mission purposes. Components 166 and 168 support additional mission and/or control functionality. Component 166 facilitates data collection and transfer of information in the nature of radar data, SAR data, ISAR data or the like. Component 168 could be any of a variety of components but illustratively facilitates data collection and transfer of information in the nature of a radar emitting device configured to sense and locate ground objects and the like.

[0068] The VACS architecture 100 illustratively enables a man-in-the-loop (i.e., the operator) to intuitively assign and deploy one or more UAV's in accordance with available control behavior parameters. The architecture supports intuitive control characteristics that are illustratively based on the human learning and decision-making process. Accordingly, the available control behavior parameters are designed to emulate the human learning, decision-making, and action processes. The architecture is distributed by design so that appropriate learning, decision-making and action behaviors are resident onboard the vehicle and supported with autonomous functionality when necessary.

[0069] It should be emphasized that the present invention is not limited to the illustrated sub-components 120-146. In fact, in accordance with one embodiment of the present invention, architecture 100 is designed such that additional sub-components can be modularly plugged into control architecture 100 to extend the system functionality. When a new sub-component is installed, intelligence synthesizer 150 is illustratively configured to recognize and manage the new functionality (e.g., synthesizer 150 is configured to manage conflicts with other sub-components, etc.).

[0070] FIG. 2 is a schematic representation of a humanbased command and control loop 200 as is emulated in the VACS architecture 100. For reference purposes, FIG. 2 includes the same intelligent controller hierarchy spectrum 102 that was illustrated in FIG. 1. At the highest end of the spectrum, objectives 202 (e.g., typically human defined such as reconnaissance, surveillance, tracking, monitoring, etc.) provide a fundamental basis for the subsequent support levels. The lower levels of activity will illustratively be influenced by the overarching objectives. For the machine or vehicle, the fundamental equivalent of objectives 202 is machine constraints 204 (e.g., aviation limitations of the vehicle, available payload components, communications limitations such as range, static and dynamic limitations, etc.). The overarching machine constraints illustratively influence the lower levels of activity. In accordance with one aspect of the present invention, a human (i.e., an operator) can utilize a machine (e.g., a UAV) that is equipped with a system implementing the VACS architecture to observe (bubble 206), orient (bubble 208), decide (bubble 210) and take action (bubble 212). The steps of observe, orient, decision and action are hierarchical in nature and reflect a natural human process flow, and notably are reflected in the available coordination of autonomous functionality offered through the VACS architecture.

[0071] FIG. 3, in accordance with one aspect of the present invention, is a diagrammatic block representation of a hierarchical control structure 300. Control structure 300 is illustratively designed to support the VACS architecture 100described in relation to FIG. 1. Most of the functional sub-components illustrated in FIG. 1 represent a range of potential functional control capabilities incorporating different levels of autonomy. Again, as has been discussed, the architecture is designed to be modularly extendable to even non-illustrated control schemes.

[0072] The highest level of control structure 300 is level 302, which is identified as the trajectory control level. Level 302 represents autonomous flight control modes and functionality that basically incorporate substantially full autonomy requiring practically no operator input. For illustrative purposes, mission control 304 is included on level 302 and represents mission-oriented fully autonomous flight control (e.g., mission is automatically planned and executed).

[0073] The next level of control structure 300 is level 306, which is identified as the inertial guidance level. Level 306 broadly represents autonomous flight control functionality with operator inserted path commands such as, but not limited to, waypoint editing, loiter point editing or real-time route editing. For illustrative purposes, take-off/landing control 308 and path control 310 have been included on level 306 (it is assumed that both are autonomous to some extent but require operator path input). To simplify the diagram, only a few relevant modes and functions are noted in the Figure specifically.

[0074] As is demonstrated on level 306, some sub-components or functions can be configured to work in cooperation with others. For example, take-off and landing components may utilize waypoint component functionality in generation of a flight approach for landing purposes. Such functional interdependence is within the scope of the present invention. Further, it should be noted that FIG. 3 is similar to FIG. 1 in that it is simply intended to demonstrate a hierarchical organization scheme in accordance with one aspect of the present invention. Actual characterization of the different functional components is open to interpretation.

[0075] In accordance with one aspect of the present invention, box 312 represents a specific level 306 autonomous mode of control that is worth previewing as an example. Box 312 represents a line-of-sight slave control mode of operation wherein a payload sensor is integrated into the guidance loop such that the vehicle is slaved to operator commanded sensor-pointing angles. In one embodiment of this control mode, the operator is generally concerned primarily with pointing the sensor with his/her attention focused on sensor imagery. The sensor commands are then blended into the UAV guidance algorithms and airframe stabilization commands are computed to orient the vehicle optimally in the mission environment. This control mode illustratively provides the foundation for a virtual reality human system interface, such as a head mounted display, and facilitates telepresence (the linking of remote sensors in the real world to the senses of a human operator) of surveillance and reconnaissance.

[0076] The next level of control structure 300 is level 316, which is identified as the directional control level. Level 316 broadly represents a hybrid level of autonomous flight control including, in accordance with one aspect of the present invention, as is notably depicted as an insert above block 318, remote directional command (RDC) capability. In accordance with one embodiment of RDC control, an operator can select a preprogrammed vertical profile maneuver (such as max climb or in-route descent) and maintain manual horizontal directional control of the vehicle. The Evidence Appendix - 162

operator can instantaneously transition to a control mode in which he/she has complete directional control (both vertical and horizontal) of the vehicle without being required to stabilize it rotationally. In accordance with one embodiment, the operator's control stick commands are mapped to directional commands (horizontal turn rate and climb/descent rates) that are then transformed into acceleration and bank angle commands prior to being fed into a stabilization autopilot, which is represented on level 320.

[0077] In accordance with one embodiment of the present invention, as is represented by box 318, control commands, regardless of their functional sub-component source, are transformed into acceleration and bank angle commands. These commands are then passed to the next level of the control structure, namely level 320, which is illustratively identified as the disturbance rejection autopilot level. In accordance with one aspect of the present invention, all levels of control utilize the same autopilot for a given vehicle, which in the illustrated case is a body-rate stabilization component 322.

[0078] The lowest level of control structure 300 is level 330, which is illustratively the level wherein actual manipulation of the aircraft's aerodynamic surfaces and thrust control occurs. Control commands after being filtered through autopilot component 322 are executed on level 330. In accordance with one embodiment, as is illustrated on level 330 as an arrow insert, one mode of control involves direct control of the aviation surfaces. Accordingly, such control commands are effectuated at a level below level 320 and are therefore relatively manual in nature.

[0079] In accordance with one embodiment of the present invention, the control modes and functions above box 318 generally do not require the operator to possess particularly specialized skills in aircraft aviation. On top of these control modes and functions, the UAV flight control computer performs higher frequency inner loop stabilization and command tracking (e.g., boxes 318 and 322). To the extent that control conflicts arise wherein multiple sub-components or functions generate conflicting control requests, intelligence synthesizer 150 is illustratively configured to resolve such conflicts prior to generation of acceleration and bank angle commands (box 318).

[0080] In accordance with one aspect of the present invention, the described vehicle control scheme supports transitions between changing control modes and functions. For example, suppose a UAV is flying a set of waypoints and the operator edits the waypoints. A transition must be made from the old waypoints to the new waypoints. In another example, suppose an aircraft flying a set of waypoints is on course to collide with another aircraft. It is within the scope of the present invention that an air collision avoidance sub-component will override the waypoint path and direct the aircraft off of the collision course. In this case, in accordance with one embodiment, the commands generated for level 316 will first correspond to the requested waypoint path, then there will be a transition to a non-collision path, and then there will be a graceful transition back to the waypoint path.

[0081] In accordance with one aspect of the present invention, intelligence synthesizer 150 is customized to support incorporated sub-components and functions and is thereby configured to generate the control commands necessary to transition control between sub-components and/or functions as necessary (e.g., acceleration and bank angle commands are obtained and executed as necessary for transitions). In accordance with another embodiment, information for resolving functional conflicts is embedded directly into a sub-component or function itself. It is also within the scope of the present invention that transitions be handled from both locations (e.g., some transitions are processed by the intelligence synthesizer and others are addressed directly within the sub-components or functions).

[0082] Generally speaking, FIG. 3 represents a top-level flow diagram of how the Mission, Coordination and Execution-Level hierarchical control architecture is organized so that external commands can be easily injected in to the autonomous control structure. The highest-level commands issued by the mission-level functions can be overridden or blended with trajectory edits inserted by a human operator, for example, via a ground control station interface. These commands are sent down to the inertial path regulation control loops, which generate airframe acceleration commands (or flight-path equivalent). If the user injects joystick steering commands, they are translated to the equivalent body acceleration commands, which are gracefully blended into the command chain by the VACS software. The acceleration commands are translated to bank angle and normal acceleration commands, which are articulated by the acceleration tracking and rate stabilization loops. The VACS architecture also provides an insertion point for low-level commands (e.g., stick-and-rudder commands), which correspond to more traditional inputs for piloted aircraft. These commands are directly input to the servos and override all of the other autonomous commands coming into the system.

[0083] FIG. 4 is a simplified diagrammatic representation of a control structure 400 in accordance with one aspect of the present invention. Control structure 400 includes a funnel representation 402 that represents a funneling of sub-component control functions into an acceleration control and bank angle command generator 404. In accordance with one embodiment, the information transferred to component 404 incorporates as necessary resolutions for functional conflicts and transitions between control modes or functions.

[0084] Information received by component 404 is transformed into corresponding acceleration and bank angle commands. These commands are then transferred to autopilot component 406, which in accordance with one embodiment, is configured to make control adjustments as necessary to maintain vehicle stabilization and/or track control commands. Accordingly, all levels of control are filtered through the same autopilot for a given vehicle. In accordance with one embodiment, autopilot component 406 is configured to make adjustments as necessary to maintain stability across control modes. The autopilot functionality is generally fixed and generally does not change regardless of mode selections or changes (e.g., all commands are funneled through the same autopilot). A mode change does not require the autopilot to be reset. Accordingly, the present invention provides continuity at the autopilot level, which is excellent for mode transition. This is an advantage over known systems wherein mode changes are known to cause instability, such as systems that incorporate a different autopilot for different modes.

[0085] As will be discussed in greater detail below, the control system and architecture embodiments of the present Evidence Appendix - 163 invention essentially enable any autopilot design to support control of a vehicle in numerous control modes that are executed with switches between modes during flight. All control modes are supported even in the presence of sensor errors, such as accelerometer and gyro biases. This robustness is at least partially attributable to the fact that the closed-loop system, in all control modes, is essentially slaved to an inertial path and, hence, the sensor biases wash out in the closed loop, assuming the biases are not so grossly large that they induce stability problems in the autopilot system. Furthermore, winds are generally not an issue in the overall control scheme in that the flight control system will regulate to the inertial path, adjusting for winds automatically in the closed loop. Given the precision afforded by inertial navigation aided by GPS technology, inertial path regulation offers a highly effective and robust UAV control approach. Generally speaking, the autopilot system functions such that winds, medium Dryden turbulence levels, sensor errors, airframe aerodynamic and mass model parameter uncertainties, servo non-linearity (slew rate limits, etc.), and various other atmospheric and noise disturbances will non have a critically negative impact on flight path regula-

[0086] Component 408 receives commands generated by component 404 and filtered by autopilot component 406. The commands received by component 408 are executed to actually manipulate the vehicle's control surfaces. Autopilot component 406 then continues to monitor vehicle stabilization and/or command tracking, making additional commands to component 408 as necessary.

[0087] Generally speaking, relative to the control structures illustrated in FIGS. 3 and 4, known control systems are inflexible. For example, some known systems support little or no control functionality beyond remote stick-and-rudder commands (e.g., direct control of vehicle control surfaces with little or no incorporated automation). To the extent that a known system offers multiple modes of vehicle control, the modes are typically rigid in nature rather than flexible.

[0088] In accordance with one aspect of the present invention, an entire hierarchical spectrum of multi-autonomous control modes are made available to a system operator. The operator is illustratively able to efficiently and smoothly change control modes mid-mission as desired. The operator can do much more than simply change, edit or adjust waypoints on a waypoint-following mission. An operator can interrupt a waypoint-following mission to guide the vehicle manually, or partially manually (e.g., remote directional commands), or based on sensor/remote line-of-sight command control. In accordance with one embodiment, the control system is configured to optionally transition back to an interrupted mission (e.g., back to an original waypointfollowing mission). It should be noted that the "operator" is not necessarily human. For example, the operator could be an automated decision-making source, such as a military C4I system.

[0089] The spectrum of control modes available to an operator illustratively corresponds to the particular functional sub-components incorporated into the variable autonomy control system architecture (e.g., architecture 100 in FIG. 1). In accordance with one aspect of the present invention, in addition to numerous specific control modes

that will be described within the present description, a spectrum of additional control modes are conceivable. The control systems of the present invention can be easily configured to support (including conflict and transition support that enables the operator to switch back and forth between modes) basically any control mode or module. Examples of such control modes include:

[0090] 1. Operator inputs a planned route and then the control system autonomously chooses a vehicle (e.g., one of several available vehicles) and automatically guides the vehicle along the planned route . . . or operator designates a moving ground target and then the control system autonomously chooses a vehicle and automatically guides the vehicle to track the ground target

[0091] 2. Operator provides a planned route for a specific vehicle before the vehicle is launched . . . the vehicle follows the pre-planned route

[0092] 3. Same as #2 but operator is allowed to change to a different planned route post launch (e.g., ability to change missions)

[0093] 4. Control based on a vector-based decision process (e.g., vehicle will head in a predetermined direction at speed x, altitude y, etc. . . . then turn based on new vector input information

[0094] 5. Remote Directional Control (RDC) control (e.g., flying directionally such as with a multi-directional joystick input mechanism . . . with autonomous safety nets that do not let the operator aerodynamically stall, over-steer, overbank, or otherwise compromise flight of the vehicle)

[0095] 6. Full Manual Control (remote commands which directly reach the control surfaces un-compensated or conditioned)

[0096] Accordingly, the control systems of the present invention enable an operator to move in and out of a range of different control modes selected from a broad control spectrum including everything from automated mission planning to direct control, with many available modes in between. Modes other than the six listed above are certainly within the scope of the present invention.

[0097] In accordance with one embodiment, the control system architecture of the present invention is flexible enough to support implementation of commercial-off-theshelf (COTS) components to enable additional system subcomponents and corresponding control functionality. For example, software products for automatic route planning are commercially available an can be implemented in the context of the described control system and architecture. For example, OR Concepts Applied (ORCA) of Whittier, Calif. provides at least one software product for route planning such as their "ORCA Planning & Utility System" (OPUS). This is but one example of a software component that can be utilized to extend the functionality of the broader control system. In accordance with one embodiment, while programs such as OPUS are configured to generate a route plan, the configuration of the control structure of the present invention (described in relation to FIGS. 3 and 4) will ensure that a generated plan is optimized for the relevant vehicle (e.g., the plan is filtered through command generator 404 and autopilot 406 before vehicle control is directly impacted). Evidence Appendix - 164 [0098] It should be noted that while FIG. 3 shows manual commands being entered below the autopilot component 322, this is not necessarily the case. With reference to FIG. 4, in accordance with one embodiment of the present invention, when an operator chooses a manual control mode, manual instructions are translated into corresponding acceleration commands. In accordance with one embodiment, the trajectory commands are processed by the autopilot component 406 such that, for example, when the operator lets go of the stick the vehicle will continue on a relatively straight and balanced path.

[0099] The present description, including FIGS. 3 and 4, has been described in the context of a system that incorporates an autopilot component configured to operate in accordance with commands expressed as acceleration-based descriptors of motion. It should be noted that any other commands and corresponding autopilot system can be utilized without departing from the scope of the present invention. For example, component 404 (FIG. 4) can be configured to generate commands in the form of bank-to-turn thrust values, skid-to-turn values, velocity-based values, or any other descriptor of motion. Accordingly, autopilot component 406 is generally a modular component that can be configured to support any of a wide variety of directional command structures and descriptors of motion. Examples of autopilot systems within the scope of the present invention include, but are not limited to, bank-to-turn autopilots, skid-to-turn autopilots, and the like.

[0100] Accordingly, the present invention provides a hierarchical control system and architecture that incorporates a broad range of user-selectable control modes representing variable levels of autonomy. A unified autopilot is provided to process available modes and mode transitions. An intelligence synthesizer is illustratively provided to assist in resolving functional conflicts and transitioning between control modes, although certain resolutions and transitions can be incorporated directly into the functional sub-components associated with the different control modes and functions. In accordance with one embodiment, all modes and transitions are funneled through an acceleration-based autopilot system. Accordingly, control commands and transitions are generally reduced to an acceleration vector to be processed by the centralized autopilot system.

[0101] In accordance with one aspect of the present invention, a translation layer is included to enable specialized control support for a given set of autopilot and vehicle control systems. In other words, the translation layer receives acceleration vectors (or some other output) and translates them into control instructions that are acceptable for a particular vehicle's autopilot and control system. The translation layer essentially enables the control architecture and structures of the present invention to be adapted for any vehicle's autopilot system. For example, in accordance with one embodiment, a vehicle that incorporates a control system that includes flight path angle-based trajectory control can be enhanced with the significant variable autonomy control features of the present invention. The translation layer is configured to receive an input and translate it into whatever commands are necessary to support a given vehicle. It should also be noted it is not required that the translation layer input be in the form of an acceleration vector (e.g., it could be a velocity representation, etc.).

[0102] FIG. 5 is a diagrammatic block representation of a translation layer embodiment of the present invention. As is indicated by block 502, acceleration vectors are passed to a translator 504. Translator 504 translates the acceleration vectors into a format appropriate for a given autopilot system 506. As is indicated by block 508, the translated control instructions are utilized for vehicle control. Without departing from the scope of the present invention, the software support for the translation layer can be implemented in association with a ground station system and/or an on-board vehicle control system.

[0103] In accordance with one embodiment, through implementation of a translation layer, the control systems of the present invention employ a generalized high-bandwidth autopilot interface design that can be applied to a variety of air vehicles from conventional statically stable tail control airframes to high performance, statically unstable, tail-less combat vehicles or neutrally stable cruise missiles.

[0104] IV. System Architecture

[0105] In accordance with one aspect of the present invention, the described VACS architecture and associated hierarchical control structure are implemented in the context of two basic facilitating interface components: a ground control station interface and an airborne system interface. FIG. 6 is a schematic representation of top-level hardware and software objects associated with each interface (labeled interface 602 and 604, respectively). Interfaces 602 and 604 are linked to one another by a datalink 605. Datalink 605 is illustratively a communications link that enables remote communication between the ground station interface and the vehicle interface. All known methods for implementing such a datalink are within the scope of the present invention.

[0106] The ground system interface 602 includes a centralized command and control component 606. Component 606 is illustratively configured to provide an operator with a user control interface. Through the interface, with the aid of a video display component 614, component 606 provides the operator with image data that is received by a mission sensor that is part of the vehicle's on-board payload. Through the interface, with the aid of a vehicle status display 616, component 606 provides the operator with control settings, warnings or other relevant vehicle status information. Through the user interface, with the aid of a map display 610, component 606 provides the operator with a real time map display that shows a vehicle's location relative to a map. A mission evaluation component 612 performs mission analysis and influences command and control component 606 as necessary depending on a given implementation. External interface 618 provides a means for communication with external sources such as, but not limited to, maintenance training equipment that provides logistics support for any of a wide variety of maintenance training equipment. Component 606 is illustratively configured to receive and respond to inputs received from the operator through control input devices 608. Component 606 communicates through datalink 605 with an executive component 652 associated with airborne system interface 604. In this way, the operator is able to control the vehicle at least with regard to flight characteristics and payload operations. Also, component 606 receives data from executive component 652 as necessary to support various system functionalities (e.g., component 606 receives navigation data from component 652 for any of a wide variety of functions, for example, for supplying an indication of aircraft location relative to map display 610).

[0107] The executive component 652 is configured at least to process commands and information received from command and control component 606. Several components are Evidence Appendix - 165 configured to support the functionality of executive component 652, particularly with regard to flight control and management. An atmosphere component 656 processes characteristics of the vehicle's surroundings as necessary at least to support the execution of manual and automated flight control decisions. A guidance component 658 processes operator inputs, as well as automated and data inputs, in order to facilitate flight control of the aircraft. A navigation component 662 facilitates the collection and provision of data pertaining to aircraft location. Autopilot component 654 receives flight control commands, processes the commands (e.g., makes adjustments to ensure stable flight patterns), and passes commands to actuator control component 668 and engine control component 666 as necessary for flight control execution. Vehicle management component 660 could have any of a variety of functions but illustratively at least coordinates and organizes flight control sensor inputs. Payload control component 664 manages the vehicle payload and facilitates the execution of payload commands received from the operator.

[0108] FIG. 7 is a schematic diagram illustrating an interface system similar to that illustrated in FIG. 6 but adapted for multiple vehicles. Ground system interface 702 is illustratively the same or similar to interface 602 shown in FIG. 6. In order to simplify the illustration of interface 702, only components 606, 608, 610, 614 and 616 are included. Any of the other components of interface 602 could be included without departing from the scope of the present invention. Other or different components could be included without departing from the scope of the present invention.

[0109] Ground system interface 702 includes one component that interface 602 did not. Interface 702 includes a synthetic visuals component that is configured to provide the operator with a relatively real-time display of a synthetically generated depiction of the vehicle and/or its environment. The concept of synthetic visual display represents an embodiment of the present invention and will be described in greater detail below.

[0110] With further reference to FIG. 7, in accordance with one aspect of the present invention, communication between ground system interface 702 and an airborne system interface 730 is through a communications interface 710 (e.g., a SLIP router) (in place of the simplified "datalink" illustrated in FIG. 6). Router 710 works in conjunction with a radio 712 to transfer commands and flight information in a distributed manner to a plurality of radios 714-718. Each radio 714-718 is associated with a different executive component (e.g., components 720-724) located on board a separate vehicle. Each vehicle's executive component is illustratively configured in a manner that is the same or similar to component. 652 illustrated in FIG. 6. As is shown in FIG. 7, each executive component 720-724 includes components 652, 666, 668, 664, 662, 654 and 658. Other or different components could be included without departing from the scope of the present invention.

[0111] V. Dynamic Control Schemes

[0112] FIG. 8, in accordance with one aspect of the present invention, is a schematic diagram representing a vehicle control scheme that supports implementation in the context of the described VACS architecture and control structure. It should be emphasized that any form of autopilot controller (e.g., classical, optimal, robust, non-linear, or adaptive) can be employed without departing from the scope of the present invention, and without affecting the system architecture or operator control policies.

[0113] In accordance with the illustrated control scheme, operator inputs 802 are provided to vehicle management software 804. Management software 804 is configured to support an illustrative three different classes of control and corresponding operator inputs. The first class is represented by block 806, which is labeled energy optimal trajectory. Control modes of this type involve controlling the vehicle in a substantially automated manner so as to maintain a preferred or designated trajectory while expending a relatively minimized amount of energy (e.g., to conserve potential energy). The second class is represented by block 808, which is labeled autonomous path control. Control modes of this type involve controlling the vehicle in a substantially automated manner so as to maintain a flight control path that is mission oriented and, optionally, selected and/or modified by the operator. The third class is represented by block 810, which is labeled line-of-sight slave commands. As has been described, control modes of this type generally involve controlling the vehicle based primarily on manipulation of a visual sensor. The third class is represented by block 812, which is labeled remote directional commands. Control modes of this type have been previously described herein and generally involve, in one embodiment, controlling the vehicle based on simplified directional commands with reliance on automation to determine appropriate execution parameters.

[0114] A switch 814 represents a selection of one of the different control classes based, for example, on a control mode selection that corresponds to an operator input 802. The switch 814 is notionally represented by a simple switch but is illustratively embedded in the more complex Intelligence Synthesizer processing architecture. Once a connection with a control class/mode has been established, subsequent corresponding vehicle control commands are translated through bank-to-turn and thrust control component 816 (e.g., corresponding acceleration vector commands are generated). Additional data derived from an air-data sensor source 818 and/or software 804 is fed into the control process as necessary. The output of control component 816 is adjusted at component 820 (e.g., autopilot adjustments) in order to compensate for deviations from the original control command. As is illustrated, information from commercialoff-the-shelf integrated components 822 (e.g., coordinate information from GPS/IMU/NAV systems) can be fed into the determination of actual deviations as necessary, and can also be utilized by software 804 for any purpose such as but not limited to route planning. Following adjustments for deviations, box 824 represents adjustments for airframe stabilization (e.g., autopilot adjustments).

[0115] Following the steps associated with boxes 816, 820 and 824, box 826 represents the step wherein control commands are actually executed and vehicle control surfaces and engine dynamics are actually manipulated based on the commands. Following execution of the commands, sensors associated with air-data sensor 818 and integrated components 822 return data to points upstream in the process such that additional adjustments can be made if necessary (e.g., necessary to keep the vehicle on track with a desired route or necessary to keep the vehicle from stalling, crashing, etc.). As is indicated at 830, inertial dynamics are processed following command execution. This information is passed along to camera stabilization and pointing component 840 such that adjustments can be made if necessary to stabilize a camera, such as a gimbal-mounted camera utilized to support line-of-sight slave commands 810. Adjustments can be made to the camera configuration based on relative geometry in order to keep the camera relatively stable. Evidence Appendix - 166 Information input 832 represents an input of target location information that enables the camera to focus on and follow a target.

[0116] There are several features and extensions of the described control approach to highlight:

[0117] 1. In accordance with one aspect of the present invention, a library of robust mathematical guidance algorithms (examples of which are described later in the present description as embodiments of the present invention) are employed to accommodate remote operator command insertion at every level of flight control to address not just the flight control problem but also flight management. This design approach provides simplified manual control modes that enable a relatively unskilled operator with minimal training to control the vehicle.

[0118] 2. In accordance with another aspect of the present invention, the payload sensor control is integrated into the guidance loop to provide a control mechanism that shifts the operator's focus from vehicle control to sensor control, without concern of the vehicle flight profile. This control mechanism also facilitates the introduction of a virtual control interface bringing immersive control techniques to the airborne surveillance and reconnaissance arena

[0119] 3. An intuitive human-system interface (described in other sections below) offers an interface with which operators can be trained to execute a successful vehicle mission in a matter of hours or days as opposed to weeks, months, or years.

[0120] 4. An intuitive, real-time mission planning capability is built into the ground control station software to support real-time route editing and vehicle mission retask-

[0121] 5. The system enables real-time mission assessment such that the operator can make rapid and precise real-time mission updates, as dictated by higher level operational needs that change continuously within a dynamic environment (e.g., battle environment).

[0122] In accordance with one aspect of the present invention, to enable a simplified manual control concept, the controller structure is implemented such that the operator can have direct control of three outer-loop states: airspeed (u), turn rate (ψ) and altitude rate (h). To satisfy the requirements of fully autonomous flight, it is generally desired to close the outer loop around a fixed path that is defined by preprogrammed waypoints. Analysis of the problem shows that both requirements (simplified manual and fully autonomous control) could be satisfied with a single control loop structure.

[0123] In accordance with one aspect of the present invention, an improved control loop structure is provided. FIG. 9 is a control diagram representing a general integrated guidance loop structure. Box 902 represents operator input and box 904 represents gain or mapping from input to autopilot. Together, boxes 902 and 904 represent an operator command insertion point, for example for the simplified manual control mode herein referred to as Remote Directional Response (RDR) or Remote Directional Command (RDC). Box 910 represents a waypoint guidance input. Box 912 represents pre-filtering adjustment to input 910 to maintain a properly conditioned signal with desirable steady-state properties. Box 914 represents a gain adjustment to input 910 to compensate for command error. Box 916 represents a feedback loop providing an adjustment for phugoid dampening. Box 918 represents autopilot controller functionality. Box 920 represents the airframe plant itself (e.g., the vehicle and associated actuators actuated in response to the control input). Finally, box 922 represents integrals of the first dynamic states, thus completing the plant dynamics model.

[0124] A switch 906 is inserted between the autopilot 908 and guidance system thereby enabling the operator to command the autopilot 908 directly. The switch 906 is notionally represented by a simple switch but is illustratively embedded in the more complex Intelligence Synthesizer processing architecture. An example of operator commanded autopilot control is horizontal steering. For horizontal steering, the operator's control stick commands are mapped to horizontal turn rate commands. The guidance software illustratively gains the turn rate command by the current vehicle inertial velocity and feeds this term to the autopilot. In the vertical channel, the operator control stick commands are mapped to an altitude rate. The guidance software converts this command into a flight path angle command and computes a flight path following acceleration command that feeds the autopilot. In accordance with one embodiment, when the operator "lets go of the stick", the flight software simply commands the vehicle to fly straight and level at the current altitude and current heading.

[0125] As FIG. 9 demonstrates, the general form of the outer loop guidance algorithm is a second order inertial path controller. The corresponding form of the autopilot utilizes an acceleration command input. Thus, the incorporated autopilot structure is an acceleration command autopilot in the pitch and yaw axis and a bank angle command autopilot in the roll axis. It should be noted that other gain scheduling techniques and acceleration autopilots are within the scope of the present invention. Different autonomous vehicles will illustratively incorporate different gain scheduling techniques and autopilots, the VACS architecture and control structures being conveniently adaptable by one skilled in the art to accommodate such variations. A list of autopilot systems that can be accommodated includes, but is not limited to:

[0126] 1. Linear classical control designs using poleplacement gain scheduling techniques

[0127] 2. Non-linear control design using dynamic inver-

[0128] 3. Non-linear adaptive control design

[0129] 4. LQR (optimal) control design

[0130] 5. Loop shaping control design

[0131] In one embodiment, as was alluded to in relation to FIG. 5, a translation layer can be implemented to translate a given control output (e.g., an acceleration based command) to an alternative form as necessary to accommodate any of the above five or other autopilot systems.

[0132] VI. Coordinate Frame Definitions

[0133] In order to support description of specific control modes and guidance methods, a few different standard coordinate frame definitions and transformations will now be described.

[0134] FIG. 10-1 is a diagrammatic representation of an Earth Centered Earth Fixed (ECEF) coordinate frame definition. The ECEF reference frame is oriented with its origin at the earth's center. The x and y axes lie in the equatorial Evidence Appendix - 167 plane with the x-axis passing through the Greenwich Meridian. The z-axis is normal to the x-y plane and passes through the North Pole.

[0135] FIGS. 10-2 and 10-3 are diagrammatic representations of a Geodetic coordinate frame definition. The geodetic coordinate frame defines the lines of latitude and longitude along the earth's surface. Geodetic latitude is the angle between the equatorial plane and the normal to the surface of the ellipsoid. Geodetic longitude is the angular rotation relative to the ECEF x-axis in the equatorial plane. Geodetic altitude is the elevation above the ellipsoid surface.

$$T_E^L = \begin{bmatrix} -\sin(\lambda)\cos(l) & -\sin(\lambda)\sin(l) & \cos(\lambda) \\ -\sin(l) & \cos(l) & 0 \\ -\cos(\lambda)\cos(l) & -\cos(\lambda)\sin(l) & -\sin(\lambda) \end{bmatrix}$$
 Eq. 2

[0140] Local vertical guidance commands can then be transformed into the body reference frame for input to the autopilot through the transformation matrix (pitch angle Θ , yaw angle Ψ , roll angle Φ):

$$T_{B}^{L} = \begin{bmatrix} \cos\Psi\cos\Theta & \sin\Psi\cos\Theta & -\sin\Theta \\ \cos\Psi\sin\Theta\sin\Phi - \sin\Psi\cos\Phi & \sin\Psi\sin\Theta\sin\Phi + \cos\Psi\cos\Phi & \cos\Theta\sin\Phi \\ \cos\Psi\sin\Theta\cos\Phi + \sin\Psi\sin\Phi & \sin\Psi\sin\Theta\cos\Phi - \cos\Psi\sin\Phi & \cos\Theta\cos\Phi \end{bmatrix}$$
 Eq. 3

[0136] A coordinate reference frame definition that is not illustrated is the local vertical reference frame, which is oriented with its origin at a point along the earth's surface defined by an angular rotation from the ECEF frame (latitude and longitude) and an altitude, h, above the earth's surface. This frame's z-axis is normal to the local tangent of the ellipsoid. The x-y plane lies normal to the z-axis and parallel to the local horizon.

[0137] FIG. 10-4 is a schematic representation of a body reference frame. The body reference frame has its origin at the vehicle center of gravity. The y-axis extends out of the right wing of the vehicle, the x-axis extends out the nose of the vehicle, and the z-axis is positive down passing normal to the x-y plane.

[0138] Certain embodiments of the present invention involve coordinate frame transformations. For example, a function can be applied to transform geodetic coordinates to ECEF coordinates. In accordance with one embodiment of such a transformation, coordinate waypoints are passed into the UAV flight computer in geodetic coordinates (latitude (λ) , longitude (l), and altitude (h), Earth semi-major axis (a_E) , eccentricity e). These waypoint locations are then transformed to ECEF coordinates utilizing a function such as:

$$\overline{P}_{ECEF} = \begin{cases} \left(\frac{a_E}{\sqrt{1 - e^2 \sin^2(\lambda)}} + h \right) \cos(\lambda) \cos(l) \\ \\ \left(\frac{a_E}{\sqrt{1 - e^2 \sin^2(\lambda)}} + h \right) \cos(\lambda) \sin(l) \\ \\ \left(\frac{a_E(1 - e^2)}{\sqrt{1 - e^2 \sin^2(\lambda)}} + h \right) \sin(\lambda) \end{cases}$$
 Eq. 1

[0139] Similarly, ECEF coordinates can be transformed into local vertical coordinates. In accordance with one embodiment of such a transformation, the guidance error equations are formulated in the ECEF reference frame, then converted to the local vertical reference frame for computation of the guidance commands. The ECEF to local vertical transformation matrix can be defined as:

[0141] VII. Navigator

[0142] In another aspect of the present invention, vehicle state information is provided by a component herein referred to as the navigator component. Navigator components are known in the art to provide information such as, but not limited to, position, velocity, acceleration, angular position and/or angular velocity associated with the vehicle. Some known navigator components incorporate sensor devices such as, but not limited to, a three-axis inertial measurement unit, a GPS receiver, and/or strap-down equation software, and Kalman filter used to estimate the IMU sensor error.

[0143] Information output from navigator components is utilized for any of a variety of purposes. For example, the accelerations, angular rates and other similar outputs are illustratively fed into an autopilot system in support of stability-enhancing processes. Position, velocity, angular position and other similar outputs are used by the guidance functionality to aid in decision-making such as, but certainly not limited to, path-regulation.

[0144] VIII. Guidance

[0145] In another aspect of the present invention, a guidance function is responsible for generating autopilot commands that, when executed, achieve a particular guidance objective. Guidance objectives are designed to satisfy operator interface and mission control requirements and include functions such as, "regulate to a preprogrammed inertial path," go to and monitor a specified target coordinate, "execute an operator commanded programmed maneuver, "slave to an operator commanded sensor stare command," etc.

[0146] FIG. 11, in accordance with one aspect of the present invention, is a schematic block diagram demonstrating a basic flow structure for the various flight mode levels and identifying underlying guidance laws called by the flight management software component. There are an illustrative four levels of operational modes within the vehicle manager: flight mode 1102, flight sub-mode 1104, guidance mode 1106, and guidance sub-mode 1108.

[0147] Flight mode 1102 includes three different functions, namely, take-off 1110, inflight 1112, and landing 1114. For take-off 1110, flight sub-mode 1104 includes four primary functions, namely, taxi 1116, throttle-up 1118, ground Evidence Appendix - 168

roll 1120 and climbout 1122. When these four sub-mode functions have been executed, guidance mode 1124 (fly waypoints) is executed. In that regard, waypoint guidance law 1134 is executed including sub-modes 1126 (waypoint capture) and 1128 (leg regulation).

[0148] When the flight mode is inflight 1112, the operator can select between flight sub-modes 1136 (autonomous control) and 1140 (manual control). One selectable option for autonomous control is the fly waypoints 1124 guidance mode in accordance with waypoint guidance law 1134. Another selectable autonomous control mode is loiter guidance mode 1142, which is executed in accordance with loiter capture guidance sub-mode 1130 and orbit guidance sub-mode 1132 being subcomponents of loiter guidance law 1144.

[0149] Options for manual control 1140 include RDC guidance mode 1146, LOS-slave mode 1148 and hybrid control mode 1150. Each of these manual control modes are related to guidance sub-modes 1152 (command following) and 1154 (reference hold), which are related to flight path guidance law 1156. It should be noted that guidance modes and guidance sub-modes can be combined as indicated to enable a biased pursuit guidance law 1158 in accordance with one aspect of the present invention.

[0150] The library of outer-loop guidance modes support both autonomous control as well as simplified manual control. Guidance laws that are within the scope of the present invention and are exploited by the vehicle manager include, but are not limited to, waypoint guidance, loiter guidance, line-of-sight slave control guidance and remote directional command guidance. Various guidance modes invoke these guidance laws to achieve diverse mission objectives. For example, loiter guidance is a guidance law invoked by several difference guidance modes including, but not limited to, programmed route guidance, park guidance, observation point guidance, and moving target tracking guidance.

[0151] In one embodiment, the operator at any point during a mission can interrupt the vehicle management software component. The component will illustratively process the operator's inputs and perform the appropriate action, which may include entering a manual control mode, entering an operator specified orbit pattern, or updating and executing a planned navigation route.

[0152] The control system design and architecture of the present invention enables a single operator to seamlessly transition between varying levels of control autonomy for an individual vehicle. Such control capability even enables the single operator to effectively manage and control a team of vehicles. In another aspect of the present invention, to support such functionality, a gradient control scheme is provided and utilizes on-board trajectory synthesis techniques to establish an inertial reference trajectory to which a vehicle is regulated. The gradient control approach is predicated on the use of acceleration feedback in the pitch channel autopilot. As has been alluded to, however, the solution is extensible to platforms that do not employ acceleration feedback, for example through implementation of a mathematical translation or transformation from the acceleration command to the native state command accepted by the native autopilot. Hence, an acceleration autopilot is not implicitly required to adequately satisfy the guidance objectives generated by the presently described variable autonomy control algorithms.

[0153] Kinematics provides a motivation for acceleration based vehicle control. Both rectilinear and relative general plane equations of motion relate position and velocity states (translational or angular) to acceleration through mathematically tractable differential equations. The following equations are examples of translational and rotational differential equations formulated as guidance laws for typical navigation and homing guidance:

$$\vec{a}_{cmd}\omega^2\Delta \vec{P} + 2\zeta\omega\Delta \vec{P} + \vec{g}$$
 Eq. 4

[0154] where

[0155] w=guidance law natural frequency

[0156] $\Delta \vec{P}$ = guidance position error

[0157] ζ=guidance law damping ratio

[0158] $\Delta \vec{P}$ = guidance velocity error

[0159] \overrightarrow{g} = gravity

[0160] (translational—waypoint guidance)

$$R\lambda - 2V\lambda\lambda = -NV\lambda = -a_{cmd}$$
 Eq. 5

[0161] where

[0162] R=relative range to target

[0163] (λ=line-of-sight accleration

[0164] V=closing velocity to target

[0165] λ =line-of-sight rate

[0166] N=guidance law gain

[0167] (rotational—proportional navigation)

[0168] Such equations are consistent with fundamental principals of autonomous vehicle guidance and control. The theory behind the autonomy control systems of the present invention illustratively capitalizes on the properties of the differential equations that formulate the desired acceleration commands. Given that the underlying equations of motion that describe physical motion of air vehicles are continuous functions operating over a set of real variables from "negative infinity to positive infinity" (no discontinuities in the function), then it serves that the derivatives of these functions are continuous. Hence, rectilinear acceleration commands can be generated to regulate velocity reference trajectories (first order control law-acceleration is the first derivative of velocity) or position reference trajectories (second order control law-acceleration is the second derivative of position). It can therefore be shown that the transition between derivative control modes is stable, assuming the gains for each corresponding control scheme provide a stable response. Closed-loop stability over mode transitions is then eliminated as a concern and, hence, the transition between control modes is essentially seamless.

The following equations illustrate this principal: Evidence Appendix - 169

Gradient Control Scheme:

Eq. 6

R =Input (state to be controlled)

U =Control signal

$$U = \frac{\partial'' R}{\partial r''}$$
, *n* is number of derivatives between input and control signal

Example Applications

Eqs. 7 & 8

CASE 1: SECOND - ORDER

R =Reference path for waypoint guidance (P)

U = Acceleration command(a)

$$a = \frac{\partial^2 P}{\partial t^2} \underset{Laplace}{\stackrel{}{=}} (As^2 + Bs + C)P(s) = 0 \xrightarrow{\overline{Discret}\epsilon} \delta \ddot{P} = a = 2 \xi \omega \delta \dot{P} + \omega^2 \delta P$$

CASE 2: FIRST - ORDER

$$R = \text{Flight path velocity command} \left(\gamma \approx \frac{V_{up}}{|\overline{V}|} \right)$$

U = Acceleration command(a)

$$a = \frac{|\overline{V}|\partial\gamma}{\partial I} \underset{La\overline{p}lace}{La\overline{p}lace} |\overline{V}|(As+B)\gamma(s) = 0 \xrightarrow[\overline{Discrete}]{\overline{V}|\dot{\lambda}} = a = \frac{|\overline{V}|}{\tau}\delta\gamma$$

[0169] The above examples illustrate waypoint guidance (second order) and flight path angle guidance (first order) laws. The guidance laws can regulate to any mathematically tractable reference path from which position and/or velocity and orientation errors between the vehicle and the path are computed. The reference paths can be generated apriori by a mission planner (waypoint route, for example) or synthesized autonomously by on-board flight control software to achieve a high level objective commanded by an operator (autonomous landing terminal trajectory, for example). This approach provides a control scheme in which an operator can issue commands of varying levels of autonomy without regard for the closed-loop vehicle stability during mode transitions. Applying this scheme, in accordance with one embodiment of the present invention, a baseline set of guidance laws alluded to in FIG. 8 (waypoint guidance, flight path angle guidance, line-of-sight rate guidance, and sensor-slave guidance) provide a core guidance law toolbox upon which the variable autonomy control system described herein is built. Higher level software processing functions then interpret operator commands, sensor inputs, and database inputs and translate these inputs into executable guidance laws that the control system then acts on. In another aspect of the present invention, this design enables robust higher level autonomous control functions within the described VACS framework. Such functions illustratively include, but are not limited to, functions for ground collision avoidance, air collision avoidance ("see & avoid"), ground moving target tracking and following, formation flying (multiple vehicles), and autonomous landing. Autonomous guidance algorithms designed to support the system will now be described in greater detail.

[0170] A. Waypoint Guidance

[0171] In accordance with one aspect, as is indicated by block 132 in FIG. 1, one provided control mode enables a

waypoint guidance control mode. In one embodiment of waypoint guidance, guidance error computations are performed in the ECEF reference frame then rotated into the local vertical reference frame prior to being addressed in the guidance law. The error computations are illustratively separated between a waypoint leg regulation phase and a waypoint leg transition phase. While inertially guiding to a waypoint leg, the guidance errors are illustratively derived by first forming a vector triangle between the vehicle (i.e., the UAV) and the two waypoints that make up the waypoint leg.

[0172] FIG. 12 is a schematic diagram demonstrating waypoint guidance error calculation in accordance with one embodiment of the present invention. The position error $(\Delta \vec{P})$ and the velocity error $(\Delta \vec{V})$ can be computed from the vector triangle shown in the Figure. For example,

$$\vec{B} = \vec{P}^{UAV} - \vec{P}^{WPI}$$
Eq. 9
$$\vec{R}_{LEG} = \vec{P}^{WP2} - \vec{P}^{WPI}$$

$$\vec{u}_{LEG} = \frac{\vec{R}_{LEG}}{|\vec{R}_{LEG}|}$$

$$\Delta \vec{P} = \vec{B} - (\vec{B} \cdot \vec{u}_{LEG}) \vec{u}_{LEG}$$

$$\Delta \vec{P} = \vec{V}_1 - (\vec{V}_1 \cdot \vec{u}_{LEG}) \vec{u}_{LEG}$$

[0173] These Eq. 9 calculations provide the solution for horizontal channel guidance errors. A correction must be made, however, to the vertical channel guidance error to account for the earth's curvature.

[0174] FIG. 13 is a schematic diagram demonstrating that considerable altitude errors can be introduced by failing to account for the earth's curvature. Since the guidance errors are ultimately rotated into the local vertical coordinate frame, a simple solution exists to performing the great circular arc correction. Through recognizing the fact that each waypoint altitude is stored as an ellipsoidal altitude and that the current vehicle ellipsoidal altitude is always available from the navigation solution, the curvature problem can be mathematically eliminated from the altitude error calculation with instantaneous ECEF to local vertical transformation. Simply stated, the altitude error is computed as the error between the current vehicle ellipsoidal altitude and the geodesic line connecting the two waypoints. Although the path is a curved path in the ECEF frame, the instantaneous rotation to the local vertical frame linearizes the problem.

[0175] FIG. 14 is a schematic diagram demonstrating altitude error calculation in the form of a curvature correction for the vertical guidance error. Using the nomenclature in FIG. 14, the local vertical altitude error (accounting for the earth's curvature) is illustratively computed as:

$$\Delta H = H_V - H_1 - \frac{x}{R_G} (H_2 - H_1)$$
 Eq. 10

[0176] The local vertical velocity error is calculated as:

$$\Delta \dot{H} = \dot{H}_{V} - |\overrightarrow{\nabla}_{1}|\sin(\gamma_{D})$$

[0177] In accordance with one aspect of the present invention, waypoint leg transition logic is premised on a desire to transition waypoint legs when the horizontal acceleration required to drive the vehicle onto the next waypoint leg heading in the desired waypoint leg direction is a minimum. This requirement is achieved mathematically by transitioning waypoint legs when the dot product of the horizontal position error (relative to the next waypoint leg) and the horizontal acceleration error (relative to the next waypoint leg) is zero. Since it is not guaranteed that this dot product will be identically zero on any given compute cycle, the transition occurs when the sign of this dot product changes from positive to negative.

[0178] FIG. 15 is a schematic diagram demonstrating the waypoint leg transition issue with particular coordinate frames to be utilized in an algorithm designed to address the issue. The waypoint leg transition algorithm begins by computing local vertical guidance errors (position and velocity) and an acceleration command vector relative to the next waypoint leg in the same manner that these errors are computed relative to the current waypoint leg. Next a rotation matrix between the local vertical reference frame (E, N) and the next waypoint leg reference frame (Along, Across) is computed as follows:

$$\left\{ \begin{array}{c} \text{Along} \\ \text{Across} \end{array} \right\} = \begin{bmatrix} \sin(\Psi_{leg}) & \cos(\Psi_{leg}) \\ \cos(\Psi_{leg}) & -\sin(\Psi_{leg}) \end{bmatrix} \left\{ \begin{array}{c} E \\ N \end{array} \right\}$$
 Eq. 12

[0179] The local vertical to waypoint leg reference frame rotation matrix is illustratively denoted $T_L^{\ W}$. The position and acceleration errors relative to the next waypoint leg are then rotated into the next waypoint leg reference frame:

$$\Delta \vec{P}_{W} = T_{L} ^{W} \Delta \vec{P}_{LV}$$
 Eq. 13
$$\Delta \vec{a}_{cw} = T_{L} ^{W} \vec{a}_{cLV}$$

[0180] The waypoint leg transition illustratively occurs when $\Delta P_{Across} a_{c_{Across}} \leq 0$.

[0181] In accordance with one aspect of the present invention, an enhanced waypoint guidance algorithm is applied to achieve improved path regulation during 3D waypoint turns. Issues arise when two adjoining waypoint segments have different vertical and horizontal slopes, requiring the vehicle to "turn" in both the horizontal and vertical channels. These two waypoint segments form a plane ('two intersecting lines form a plane'). In accordance with one embodiment, the parameters for this plane are computed and the vehicle is commanded to perform its turn in that plane.

[0182] FIG. 16 is a schematic diagram demonstrating the concept of commanding the vehicle to perform its turn in the derived plane. In accordance with one embodiment, the control law used during the 3D planar turn is:

$$\overrightarrow{a}_{emd} = -\frac{V^2}{R}\overrightarrow{U}_{plane} + \omega^2 \Delta \overrightarrow{P} + 2\xi\omega\Delta \overrightarrow{V} + g\overrightarrow{U}p$$
 Eq. 14

[0183] where

$$\begin{split} \Delta \overrightarrow{P} &= \overrightarrow{R} + R_{\text{turn}} \overrightarrow{u}_{\text{plane}} \\ \Delta \overrightarrow{V} &= (\overrightarrow{V} \cdot \overrightarrow{n}_{\text{plane}}) \overrightarrow{n}_{\text{plane}} + (\overrightarrow{V} \cdot \overrightarrow{u}_{\text{plane}}) \overrightarrow{u}_{\text{plane}}) \end{split}$$

[0184] R_{turn}=Vehicle turn radius

[0185] \vec{R} = relative distance between vehicle and turn cen-

[0186] The turn radius is illustratively vehicle dependent and the planar parameters (plane center location, plane normal vector, and plane unit vector) are all illustratively computed using basic analytical geometry. This algorithm is illustratively advantageous at least in that it promotes generality for precision path control across a broad class of UAV's.

[0187] The waypoint guidance system is illustratively organized as a linked list of events augmented with smooth turn and leg propagation logic at each station. An event is illustratively, but not limited to, a way point, an orbit pattern, a payload command (e.g., point camera at location x) or some other event. This provides the capability to easily edit the mission plan from the graphical display both during pre-flight mission planning and while the UAV is in the air. If the operator discovers an unknown hazard in the preplanned flight-path, then he can either "drag-and-drop" existing events or he can delete and insert new events as necessary.

[0188] For illustrative purposes only, table 1 is provided as a sample collection of event parameters.

TABLE 1

Event Type	Waypoint, figure 8, racetrack, ellipse (circle is racetrack with equal length and width)
Waypoint latitude	Geodetic latitude of waypoint or orbit pattern center
Waypoint longitude	Geodetic latitude of waypoint or orbit pattern center
Waypoint Altitude	Ellipsoidal altitude of waypoint or orbit pattern center
Waypoint Speed	Speed setting at waypoint location
Orbit pattern	Length of desired orbit pattern
length	
Orbit pattern width	Width of desired orbit pattern
Orbit pattern	Rotation angle of orbit pattern
orientation	(relative to true North)
Number of orbit	Desired number of orbit laps
laps	
Time in orbit	Desired time to maintain orbit pattern (overrides orbit laps if greater than minimum threshold)
Orbit pattern center offset	Offset vector of orbit pattern center from known target location

[0189] B. Loiter Control

[0190] In accordance with one aspect of the present invention, as is indicated by block 134 in FIG. 1, one provided control mode enables an operator to loiter a vehicle over a given station, for example, to monitor a desired surveillance point. 10 The system illustratively enables the operator to either preprogram a set of orbit patterns embedded within a waypoint route or dynamically insert orbit patterns into an existing route in real-time. The operator can illustratively set loiter parameters such as length, width, and orientation (i.e., heading) of the orbit pattern with a simply controlled input operation (e.g., mouse controlled click-and-drag operation on a 2D map displayed as part of the user interface). In accordance with one embodiment, a set of relief or hand-off park modes is also provided in which the vehicle will Evidence Appendix - 171 automatically enter into a default racetrack, a figure-8, or an elliptical orbit pattern upon command from the operator.

[0191] Accordingly, one embodiment of the present invention pertains to system support for an elliptical orbit pattern. The system illustratively enables the operator to select an oval or a constant radius (circular) loiter pattern. In accordance with one embodiment, along with an operator selectable offset vector for the loiter pattern centroid, the operator is also illustratively provided with the capability to select a loiter pattern "heading" relative to north. For circular patterns this option has little value. For elliptical patterns, however, the latter selection option provides the operator with an ability to adjust a loiter pattern to fit virtually any desired geographic location, such as a country's border or a canyon.

[0192] In accordance with one aspect of the present invention, loiter guidance is achieved through two basic guidance laws: 1) Biased pursuit guidance law used to drive the vehicle onto a desired loiter pattern (illustratively referred to herein as loiter capture); and 2) Elliptical guidance law which serves as an inertial path controller designed to slave the vehicle to an elliptical loiter pattern (illustratively referred to herein as loiter guidance).

[0193] FIG. 17, in accordance with one aspect of the present invention, is a schematic diagram defining parameters and coordinate frames used to construct the elliptical loiter guidance law. The desired surveillance point and ellipse center offset, semi-major axis, and semi-minor axis are either preprogrammed into the UAV flight software or input by the operator real-time during a mission. Once the UAV captures the desired loiter pattern, the loiter guidance law is invoked. The loiter guidance error equations are computed in the ellipse reference frame. This frame is defined as (x_E, y_E) in FIG. 17. The transformation matrix from the local vertical reference frame to the ellipse reference frame (T_{LV}^E) is computed as:

$$\begin{cases} x_E \\ y_E \\ z_E \end{cases} = \begin{bmatrix} \cos(\Psi_E) & -\sin(\Psi_E) & 0 \\ \sin(\Psi_E) & \cos(\Psi_E) & 0 \\ 0 & 0 & 1' \end{bmatrix} \begin{cases} E \\ N \\ U \end{cases}$$
 Eq. 15

[0194] The transformation matrix from the ECEF frame to the ellipse frame is then computed as:

$$T_{\rm ECEF}^{\quad E} = T_{\rm LV}^{\quad E} T_{\rm ECEF}^{\quad LV} \qquad \qquad {\rm Eq. \ 16}$$

[0195] The position of the vehicle is computed relative to the surveillance point in ellipse coordinates as follows:

$$\vec{P}_{rel}^{E} = T_{ECEF}^{E} (\vec{P}_{UAV}^{ECEF} - \vec{P}_{S}^{ECEF})$$
 Eq. 17

[0196] where

[0197] $\overrightarrow{P}_{UAV}^{ECEF}$ =ECEF UAV position

[0198] \vec{P}_s^{ECEF} =ECEF surveillance point location

[0199] Consistent with basic analytic geometry, the equation for an ellipse can be written in parametric coordinates:

 $x_E = x_C + b \sin(t); y_E = y_C + a \cos(t)$ Eq. 18

[0200] Utilizing this relationship and assuming that the vehicle is near the desired ellipse, the instantaneous ellipse parametric angle (t) is computed as

$$t = \tan^{-1} \left(\frac{a(P_{rel_x}^E - x_c)}{b(P_{rel_y}^E - y_c)} \right)$$
 Eq. 19

[0201] It is important to emphasize the assumption that the vehicle is near the desired loiter pattern. This is the assumption that drives the requirement of a second guidance law (loiter capture) to guide the vehicle onto the ellipse. In accordance with one embodiment, "Near the ellipse" is quantified in terms of relative heading and horizontal ground distance. The guidance software is configured to consider the vehicle to be near the ellipse if the horizontal ground distance between the vehicle and the ellipse surface is less than a predetermined distance threshold (e.g., 0.1 nm) and the relative heading error between the vehicle and the ellipse tangent is less than a predetermined angular threshold (e.g., 10 deg.).

[0202] Having computed the instantaneous parametric angle, the desired vehicle position is computed using the ellipse parametric equations:

$$\overrightarrow{P}_D^E = \begin{cases} x_c + b \sin(t) \\ y_c + a \cos(t) \\ 0 \end{cases}$$
 Eq. 20

[0203] The desired heading in ellipse coordinates is then computed as:

$$\Psi_D = \tan^{-1} \left(\frac{a^2 (P_{D_X}^E - x_c)}{b^2 (P_{D_Y}^E - y_c)} \right) - \pi$$
 Eq. 21

[0204] The associated desired inertial velocity vector is then computed:

$$\overrightarrow{V}_{D}^{E} = T_{LV}^{E} \begin{cases} |\overrightarrow{V}_{1}| \sin(\Psi_{D}) \\ |\overrightarrow{V}_{1}| \cos(\Psi_{D}) \end{cases}$$
 Eq. 22

[0205] Note that a constant altitude loiter is illustratively assumed. The guidance position and velocity errors in local vertical coordinates are computed as follows:

$$\begin{split} & \Delta \, \overrightarrow{P}^{\,\mathrm{LV}} \!\!=\!\! [T_{\mathrm{LV}}{}^{\mathrm{E}}]^{\mathrm{T}} (\overrightarrow{P}_{\mathrm{rel}}{}^{\mathrm{E}} \!\!-\! \overrightarrow{P}_{\mathrm{D}}{}^{\mathrm{E}}) \\ & \Delta \, \overrightarrow{\nabla}^{\,\mathrm{LV}} \!\!=\!\! [T_{\mathrm{LV}}{}^{\mathrm{E}}]^{\mathrm{T}} (\overrightarrow{\nabla}_{\mathrm{I}}{}^{\mathrm{E}} \!\!-\! \overrightarrow{\nabla}_{\mathrm{D}}{}^{\mathrm{E}}) \end{split}$$

[0206] where $\overrightarrow{V}_{\rm I}^{\rm E}$ =Inertial velocity vector in ellipse coordinates

[0207] An instantaneous radius of curvature (ρ) can be computed at each point along the ellipse. This curvature vector is normal to the ellipse tangent, which defines the heading to which the vehicle will align the inertial velocity vector. Because the vehicle is slaved to the ellipse, the Evidence Appendix - 172

instantaneous radius of curvature of the ellipse is identically equal to the instantaneous vehicle horizontal turn radius. Hence the ellipse radius of curvature can be used to augment the guidance law, as it will provide the desired steady-state horizontal centripetal acceleration. The radius of curvature is computed as:

$$\rho = \frac{[b^2 \cos^2(t) + a^2 \sin^2(t)]^{\frac{3}{2}}}{ab}$$
 Eq. 24

[0208] The desired centripetal acceleration command in local vertical coordinates can then be computed as:

$$\overrightarrow{a}_{cent} = [T_{LV}^E]^T \left(\frac{|\overrightarrow{V}_I^2|}{\rho} \right) \begin{cases} -\sin(\eta) \\ -\cos(\eta) \\ 0 \end{cases}$$
 Eq. 25

[0209] The local vertical acceleration command vector is computed as:

$$\overrightarrow{\mathbf{a}}_{c}^{LV} = \overrightarrow{\mathbf{a}}_{cenf} - k_{p} \Delta \overrightarrow{\mathbf{P}}^{LV} - k_{v} \Delta \overrightarrow{\mathbf{V}}^{LV} - \overrightarrow{\mathbf{g}}^{LV} + k_{p} k_{FF_{2,1}} \overrightarrow{\mathbf{V}}_{c}$$
 Eq. 26
$$\overrightarrow{\mathbf{V}}_{c} = [0 \ 0 \ V_{c}]^{T} = \text{Airspeed command}$$

$$[\overrightarrow{\mathbf{g}}^{LV} = [0 \ 0 \ -9.81]^{T}$$

[0210] This acceleration command vector is then processed through a translation layer and/or is delivered to the autopilot system.

[0211] In accordance with one aspect of the present invention, the loiter capture algorithm is designed to drive the vehicle onto the desired loiter pattern from any location outside of the planned pattern. In accordance with one embodiment, the loiter capture algorithm simultaneously drives the vehicle onto the desired ellipse at the desired heading utilizing the biased pursuit guidance law and the ellipse tangent lines.

[0212] FIG. 18, in accordance with one embodiment, is a schematic chart demonstrating that, for any point, P, outside of the ellipse there exist two lines passing tangent to the ellipse and containing the point P. The arrows in the figure indicate a desired direction of travel along the ellipse. Although there are two tangent line solutions, accounting for the desired direction of travel reduces the problem to one solution. Upon entrance into loiter capture, the guidance algorithm illustratively solves for the ellipse tangent line that will bring the vehicle onto the ellipse headed in the desired direction of travel along the ellipse. A biased pursuit guidance law is then illustratively used to control the vehicle along the computed tangent line.

[0213] In accordance with one embodiment, the position of the vehicle is first computed relative to the loiter pattern center in ellipse coordinates as follows:

$$\vec{P}_{rel}^{E} = T_{ECEF}^{E} (\vec{P}_{UAV}^{ECEF} - \vec{P}_{S}^{ECEF}) - \vec{P}_{center}$$
 Eq. 27

[0214] where

[0215] \vec{P}_{UAV}^{ECEF} =ECEF UAV position

[0216] \vec{P}_s^{ECEF} =ECEF surveillance point location

[0217] $\overrightarrow{P}_{\rm center}$ =ellipse center location relative to surveillance point in ellipse cooridates

[0218] The tangent point on the ellipse is then computed:

$$x_r =$$
 Eq. 28

$$\begin{cases} -\frac{b\sqrt{y_{v}^{2}-a^{2}}}{y} & x_{v}=0 \\ -\frac{b^{2}\left(-1+\frac{1}{2}\frac{y_{v}\left(2b^{2}y_{v}+2\sqrt{a^{2}x_{v}^{4}-a^{2}x_{v}^{2}b^{2}+b^{2}y_{v}^{2}x_{v}^{2}}\right)\right)}{a^{2}x_{v}^{2}+b^{2}y_{v}^{2}} & x_{v}>0 \\ -\frac{b^{2}\left(-1+\frac{1}{2}\frac{y_{v}\left(2b^{2}y_{v}-2\sqrt{a^{2}x_{v}^{4}-a^{2}x_{v}^{2}b^{2}+b^{2}y_{v}^{2}x_{v}^{2}}\right)}{a^{2}x_{v}^{2}+b^{2}y_{v}^{2}} & x_{v}<0 \end{cases}$$

$$y_t = \begin{cases} \frac{a^2}{y_v} & x_v = 0 \\ \frac{1}{2} \frac{\left(2b^2y_v + 2\sqrt{a^2x_x^4 - a^2x_v^2b^2 + b^2y_v^2x_v^2}\right)a^2}{a^2x_v^2 + b^2y_v^2} & x_v > 0 \\ \frac{1}{2} \frac{\left(2b^2y_v - 2\sqrt{a^2x_v^4 - a^2x_v^2b^2 + b^2y_v^2x_v^2}\right)a^2}{a^2x_v^2 + b^2y_v^2} & x_v < 0 \end{cases}$$

[0219] where

[0220] $x_v = P_{rel_x}^E$ = vehicle x position relative to ellipse center

[0221] $y_v = P_{rel_x}^E$ = vehicle y position relative to ellipse center

[0222] The desired heading is then computed as:

$$\Psi_D = \tan^{-1} \left(\frac{a^2 x_t}{b^2 y_t} \right) - \pi$$
 Eq. 29

[0223] The horizontal acceleration command is formulated in the ellipse capture bearing reference frame. Hence a transformation matrix from the ellipse reference frame to the capture bearing reference frame ($T_E^{\ B}$) is computed.

$$T_E^B = \begin{bmatrix} \cos(\Psi_D) & -\sin(\Psi_D) & 0\\ \sin(\Psi_D) & \cos(\Psi_D) & 0\\ 0 & 0 & 1 \end{bmatrix}$$
 Eq. 30

[0224] The vehicle heading error relative to the ellipse capture bearing is computed as:

$$\Delta\Psi = \Psi_{\rm D} - \Psi_1 + \Psi_{\rm E} \tag{Eq. 31}$$

[0225] where

[0226] Ψ_1 =vehicle ground track angle

[0227] $\Psi_{\rm E}$ =ellipse heading relative to north

[0228] The position error relative to the ellipse tangent point is computed in the capture bearing reference frame. Evidence Appendix - 173

$$\Delta \overline{P}^B = T_E^B \begin{cases} P_{rel_x}^E - x_t \\ P_{rel_y}^E - y_t \\ P_{rel_y}^E \end{cases}$$
 Eq. 32

[0229] The horizontal acceleration command is computed using the biased pursuit guidance law:

$$a_{c_h} = -k_p \Delta P^{B}_x + k_v | \overrightarrow{\nabla}_1 | \Delta \Psi$$
 Eq. 33

[0230] The total local vertical acceleration command vector is computed as follows:

$$\overrightarrow{a}_{c}^{LV} = [T_{LV}^{E}]^{T} [T_{E}^{B}]^{T} \begin{cases} a_{c_{h}} \\ 0 \\ k_{p} \Delta P_{z}^{B} - k_{v} V_{1z} + |g| + k_{p} k_{FF_{2.1}} V_{c} \end{cases}$$
 Eq. 34

[0231] where

[0232] V_c=Airspeed command

[**0233**] |g|=9.81

[0234] This acceleration command vector is then processed through a translation function that generates native vehicle autopilot commands.

[0235] As has been alluded to, the present invention also accommodates racetrack and figure-8 path orbit control. FIG. 19 is a schematic diagram demonstrating various segments of the racetrack and figure-8 patterns.

[0236] In one embodiment, the guidance laws used for racetrack orbit patterns are a combination of the waypoint guidance laws and the ellipse guidance laws. The waypoint guidance law is used during the straight leg segments of the orbit patterns and the ellipse guidance law is used during the turn segments of the orbit patterns. The turn segments are constant radius; therefore the conic equations are simplified over that of the ellipse.

[0237] In one aspect of the present invention, the description will now turn to an explanation of mathematical algorithms (step-by-step) for computing a desired vehicle location along the orbit pattern inertial path. This desired location is illustratively an instantaneous point in threedimensional space that is used to formulate guidance errors. The guidance algorithms for the racetrack and figure-8 patterns illustratively follow the same processing as the ellipse guidance law with slight computational variations that can be noted in the calculations that follow. These calculations are based on the orbit pattern reference point and orbit pattern size and orientation selected by the operator either graphically during real-time route editing or apriori during mission planning. The vehicle enters and exits an orbit pattern via an entrance path and an exit path, respectively. The entrance path to an orbit pattern and the exit path from the orbit pattern are defined as follows: 1) The path from the waypoint preceeding an orbit pattern to the orbit pattern is defined as the tangent line to the orbit pattern that passes through the waypoint (algorithmic computations defined below); and 2) The path from the orbit pattern to the waypoint proceeding the orbit pattern is defined as the tangent line to the orbit pattern that passes through the waypoint (algorithmic computations defined below). The orbit pattern desired location computations are defined below. The coordinate frame definitions and transformations were previously defined.

[0238] In accordance with one embodiment, the processing steps for orbit pattern desired location computations proceed as follows:

[0239] STEP ONE—Compute the ECEF position of the orbit pattern reference point:

$$\overrightarrow{P}_{ref}^{ECEF} = geo2ecef(\lambda, l, h)$$
 Eq. 35

[0240] where

[0241] $\overrightarrow{P}_{ref}^{ECEF}$ =ECEF position vector of reference point

[0242] λ =Geodetic latitude of reference point

[0243] 1=Geodetic longitude of reference point

[0244] h=Ellipsoidal altitude of reference point

[0245] NOTE: "geo2ecef" represents the coordinate transformation defined herein within the Section entitled "Coordinate Frame Definitions"

[0246] STEP TWO—Compute the ECEF position of the orbit pattern centroid using the local vertical offset vector (the vertical component of this offset vector is zero).

$$\vec{P}_{C}^{ECEF} = \vec{P}_{ref}^{ECEF} + T_{ECEF}^{LV} \vec{P}_{offset}$$
 Eq. 36

[0247] where

 ${\hbox{\large [0248]}}\quad {\hbox{\scriptsize T}_{\rm ECEF}}^{\rm LV} \hbox{\scriptsize =Local vertical to ECEF transformation}$ matrix

[0249] $\vec{P}_{\rm offset}$ =Local vertical offset vector (vertical component is zero)

[0250] STEP THREE—The (x,y) coordinates of the orbit pattern relative to the orbit pattern centroid at the current angle, t, in the orbit pattern reference frame are computed as follows (the z-component of the vector is zero; a is the orbit pattern semi-major axis length and b is the orbit pattern semi-minor axis lentgh):

$$\Delta P_x^{ELL} = b \sin(t_i)$$

$$\Delta P_y^{ELL} = \begin{cases} a \cos(t_i) & \text{ellipse} \\ a - b(1 - \cos(t_i)) & \left\{ \text{racetrack } \& -\frac{\pi}{2} \leq t \leq \frac{\pi}{2} \right\} \\ -a + b(1 - \cos(t_i)) & \text{otherwise} \end{cases}$$

where
$$\zeta = \cos^{-1} \left(\frac{b}{a-b} \right)$$

$$\vec{P}^{ELL} = \vec{P}_{c}^{ECEP} + [T_{ECEF}^{E}]^{J} \Delta \vec{P}^{ELL}$$
where
$$\vec{P}^{ELL} = \begin{bmatrix} \Delta P_{x}^{ELL} \\ \Delta P_{y}^{ELL} \\ 0 \end{bmatrix}$$

T

 $[T_{ECEF}^E]$ = Transpose of ECEF to ellipse coordinate

transformation matrix

[0251] STEP FOUR—Rotate the orbit pattern coordinate into the ECEF reference frame:

$$\overline{P}^{ECEF} = \overline{P}_{c}^{ECEF} + [T_{ECEF}^{E}]^{T} \Delta \overline{P}^{ELL}$$
where
$$\overline{P}^{ELL} = \begin{bmatrix} \Delta P_{x}^{ELL} \\ \Delta P_{y}^{ELL} \\ 0 \end{bmatrix}$$
Eq. 38

 $[T_{ECEF}^{E}]$ = Transpose of ECEF to ellipse coordinate

trasformation matrix

[0252] STEP FIVE—Compute the latitude and longitude of the orbit pattern coordinate:

$$(\lambda_{p} l_{p} h_{i}) = ecef2geo(\overrightarrow{P}^{ECEF})$$
 Eq. 39

[0253] NOTE: "eccf2geo" represents the inverse of the "geo2ecef" coordinate transformation defined herein within the Section entitled "Coordinate Frame Definitions"

[0254] STEP SIX—Pass the computed parameters to the guidance law for computation of the autopilot command inputs (e.g., utilizing the algorithms were defined in the preceeding sections).

[0255] The UAV enters a racetrack orbit pattern along a capture path that passes tangent to the orbit pattern. This is

the desired capture path due to the fact that the horizontal acceleration command at the point of the capture will be effectively zero, indicating that the vehicle does not require a correction to establish the orbit course at the time of capture.

[0256] In accordance with one embodiment, the processing steps for waypoint to orbit pattern segment calculation proceed as follows (the following algorithm applies to both the preceding and proceeding waypoint paths):

[0257] STEP ONE—Using the ECEF location of the orbit pattern centroid computed in steps 1 and 2 of the orbit pattern desired location computation algorithm compute the position of the waypoint (either preceding or proceeding the orbit pattern, whichever the case may be) relative to the orbit pattern centroid in the ellipse reference frame as follows:

$$\Delta \vec{P}_{v}^{ELL} = T_{ECEF}^{E} (\vec{P}_{w}^{ECEF} - \vec{P}_{c}^{ECEF})$$
 Eq. 40

[0258] where

[0259] $\Delta \overrightarrow{P}_{\rm v}^{\rm ELL}$ =waypoint position relative to orbit pattern center in ellipse reference frame

[0260] $\overrightarrow{P}_{w}^{ECEF}$ =waypoint ECEF position

[0261] $\overrightarrow{P}_{c}^{ECEF}$ =orbit pattern centroid ECEF position

[0262] $T_{\rm ECEF}^{\rm E}$ =ECEF to ellipse reference frame coordinate transformation matrix

[0263] STEP TWO—Compute the orbit pattern tangent point which lies on the line passing through the waypoint:

$$x_{t} = \begin{cases} -k \frac{b\sqrt{y_{v}^{2} - a^{2}}}{y_{v}} & x_{v} = 0 \\ -\frac{b^{2}\left(-1 + \frac{1}{2} \frac{y_{v}\left(2b^{2}y_{v} + 2k\sqrt{a^{2}x_{v}^{4} - a^{2}x_{v}^{2}b^{2} + b^{2}y_{v}^{2}x_{v}^{2}}\right)}{a^{2}x_{v}^{2} + b^{2}y_{v}^{2}} & x_{v} > 0 \\ -\frac{b^{2}\left(-1 + \frac{1}{2} \frac{y_{v}\left(2b^{2}y_{v} + 2k\sqrt{a^{2}x_{v}^{4} - a^{2}x_{v}^{2}b^{2} + b^{2}y_{v}^{2}x_{v}^{2}}\right)}{a^{2}x_{v}^{2} + b^{2}y_{v}^{2}} & x_{v} < 0 \end{cases}$$

$$= -\frac{b^{2}\left(-1 + \frac{1}{2} \frac{y_{v}\left(2b^{2}y_{v} + 2k\sqrt{a^{2}x_{v}^{4} - a^{2}x_{v}^{2}b^{2} + b^{2}y_{v}^{2}x_{v}^{2}}\right)}{a^{2}x_{v}^{2} + b^{2}y_{v}^{2}} & x_{v} < 0 \end{cases}$$

$$y_{t} = \begin{cases} \frac{a^{2}}{y_{v}} & x_{v} = 0 \\ \frac{1}{2} \frac{\left(2b^{2}y_{v} + 2k\sqrt{a^{2}x_{v}^{4} - a^{2}x_{v}^{2}b^{2} + b^{2}y_{v}^{2}x_{v}^{2}}\right)a^{2}}{a^{2}x_{v}^{2} + b^{2}y_{v}^{2}} + kd & x_{v} > 0 \\ \frac{1}{2} \frac{\left(2b^{2}y_{v} - 2k\sqrt{a^{2}x_{v}^{4} - a^{2}x_{v}^{2}b^{2} + b^{2}y_{v}^{2}x_{v}^{2}}\right)a^{2}}{a^{2}x_{v}^{2} + b^{2}y_{v}^{2}} - kd & x_{v} < 0 \end{cases}$$

where b = semi-minor axis (half orbit region box width)

$$a = \begin{cases} \text{semi-major axis (half orbit region box length)} & \text{ellipse} \\ b & \text{racetrack} \end{cases}$$

d = (half orbit region box length)-(half orbit region box width)

-continued

$$k = \begin{cases} 1 & \text{for preceeding waypoint} \\ -1 & \text{for proceeding waypoint} \end{cases}$$

$$x_v = \Delta \overrightarrow{P}_v^{ELL}(x)$$

$$y_v = \begin{cases} \Delta \overrightarrow{P}_v^{ELL}(y) & \text{ellipse or } x_v = 0 \\ \Delta \overrightarrow{P}_v^{ELL}(y) - kd & \text{fracetrack} \text{ and } x_v > 0 \\ \Delta \overrightarrow{P}_v^{ELL}(y) + kd & \text{fracetrack} \text{ and } x_v < 0 \end{cases}$$

[0264] STEP THREE—Rotate the orbit pattern tangent point into the ECEF reference frame:

$$\overrightarrow{P}_{t}^{ECEF} = \overrightarrow{P}_{c}^{ECEF} + [T_{ECEF}^{E}]^{T} \Delta \overrightarrow{P}_{t}^{ELL}$$
where $\Delta \overrightarrow{P}^{ELL} = \begin{bmatrix} x_{t} \\ y_{t} \\ 0 \end{bmatrix}$

$$[T_{ECEF}^{E}]^{T} = \text{Transpose of } ECEF \text{ to}$$

ellipse coordinate transformation matrix

[0265] STEP FOUR—Compute the latitude and longitude of the orbit pattern tangent point:

$$(\lambda_t l_D h_t) = ecef2geo(\overrightarrow{P}_t^{ECEF})$$
 Eq. 43

[0266] STEP FIVE—Insert a waypoint leg connecting the waypoint and the computed orbit pattern tangent point

[0267] FIG. 20 is a schematic diagram demonstrating an example of a programmed route using the defined loiter algorithms. Within FIG. 20, items 4, 7, and 9 represent orbit patterns and the remaining numbered elements represent waypoints. In accordance with one embodiment, the orbit guidance laws are configured to allow the operator to input either a desired orbit time or a desired number of orbit laps. The UAV will exit the orbit pattern when either the specified orbit time or specified number of orbit laps has been completed.

[0268] An interesting characteristic of the loiter pattern embodiments of the present invention is that one is able to mathematically define a desired location on a path in association with a given point in time. Points can be defined relative to a center point, even relative to a moving center point.

[0269] C. Remote Directional Command Mode

[0270] In accordance with one aspect of the present invention, as is inferred by block 140 in FIG. 1, a remote directional command (RDC) control mode is implemented. The versatility of the overall control system design of the described VACS architecture makes implementation of an RDC control mode relatively straightforward.

[0271] Inertial turn rates are kinematically related to acceleration through multiplication of the inertial velocity magnitude ($a=V\omega$). Hence, in the horizontal channel, an acceleration command can be generated for the autopilot by multiplying a desired or commanded turn rate by the inertial

velocity magnitude. To accomplish this guidance law, the operator's horizontal control stick input is linearly mapped to a horizontal turn rate command in which the maximum stick position is equal to the maximum allowable horizontal turn rate.

[0272] The vertical channel manual control mode is a little different. For most UAV applications the vertical stick position will translate into a climb/descent rate command. It is more intuitive for operators to control the vertical channel via climb rate. Hence, in accordance with one embodiment, a look-up table of climb performance as a function of vehicle state (altitude and airspeed) is incorporated into the algorithms (the table is illustratively programmable to accommodate multiple UAV platforms). On each pass through the guidance software, the maximum climb rate is computed. The vertical control stick location is then linearly mapped to this maximum climb rate (center stick=zero climb rate, max stick=max climb rate). This climb rate command is then used to compute a flight path angle (gamma) command, which is fed into a gamma control guidance law (defined later in this section). A combination of control input device rate limiting and guidance command rate limiting illustratively results in a robust design that prevents the operator from being able to overdrive, stall, spin or in any other way crash the vehicle.

[0273] It should be noted that practically any known commercial control input device can be utilized for RDC control without departing from the scope of the present invention. For example, a USB game pad can be utilized thereby providing relative compactness and versatility. In accordance with one embodiment, the game pad utilized has a throttle slide control, a plurality of control buttons, and two thumb control sticks—one of which is used to steer the UAV and the other used to steer the UAV imaging sensor.

[0274] In accordance with one aspect of the present invention, the control system software translates the vehicle control stick motion as follows:

[0275] 1. Forward (away from the operator)—descent rate command

[0276] 2. Backward (toward the operator)—climb rate command

[0277] 3. Left—left turn rate command

[0278] 4. Right—right turn rate command

[0279] The raw stick position readings are illustratively calibrated and normalized to range from -1.0 to 1.0 in both channels where (0,0) represents the center (neutral) stick position. When the stick is in the neutral position (0,0), the Evidence Appendix - 176

vehicle flies a straight and level profile. In accordance with one embodiment, the off-board control system software (i.e., the software resident on the ground station) maps the stick range limits as follows:

[0280] 1. Maximum horizontal stick position (±1)—max vehicle turn rate

[0281] 2. Maximum forward stick position (+1)—max vehicle descent rate

[0282] 3. Maximum aft stick position (-1)—max vehicle climb rate

[0283] In one aspect of the present invention, the vehicle max climb rate is a function of altitude and airspeed. The off-board control software illustratively maintains a database of the vehicle max climb rate and interpolates based on current flight conditions to obtain the instantaneous control limit. This methodology will prevent the operator from overdriving the vehicle. A similar methodology is used for descent rate, although the descent rate is not as restrictive as the climb rate and requires a more empirical approach to setting.

[0284] In accordance with one aspect of the present invention, the following equations define the basic simplified manual control approach. The algorithm maintains a set of vertical and horizontal reference conditions that are used to command the vehicle when the operator lets go of the stick. First, the vertical stick position is checked for movement and the associated vertical commands and reference conditions are computed:

$$\begin{split} &\text{if } |\delta_{v_i} - \delta_{v_{i-1}}| > \varepsilon \\ &H_{ref} = H \\ &R = 0 \\ &\text{else} \\ &R_i = R_{i-1} + V_{horz} \Delta t \\ &\text{endif} \\ &\dot{H}_c = \delta_{v_1} \dot{H}_{\max} \\ &\gamma_c = \sin^{-1} \bigg(\frac{\dot{H}_c}{V_1}\bigg) \end{split}$$

where δ_v = vertical control stick position

 $\varepsilon = \text{control stick measurement noise/freeplay tolerance}$

 H_{ref} = reference altitude

H = vehicle altitude

R =integrated path length during vertical maneuver

 \dot{H}_c = climb/descent rate command

 \dot{H} = vehicle altitude rate

 γ_c = flight path angle command

 V_1 = vehicle ineritial velocity magnitude

[0285] Next, the horizontal stick is checked for movement and the associated horizontal commands and reference conditions are computed:

$$\begin{aligned} &\text{if } |\delta_{\text{h}}| > \epsilon & \text{Eq. 45} \\ &\Psi_{\text{c}} = \delta_{\text{h}} \Psi_{\text{max}} & \\ &\Psi_{\text{ref}} = \Psi_{\text{t}} & \\ &\overrightarrow{P}_{\text{ref}}^{L \nu} = \{0,0\}^{\text{T}} & \\ &\text{else} & \\ &\overrightarrow{P}_{\text{ref}_{\text{i}}} = \overrightarrow{P}_{\text{ref}_{\text{i-1}}}^{L \nu} + \overrightarrow{\nabla}_{\text{h}} \Delta t & \\ & \boxed{\textbf{0286}} \quad \overrightarrow{P}_{\text{ref}}^{W} = T_{\text{LV}}^{W} \overrightarrow{P}_{\text{ref}}^{L \text{V}} \end{aligned}$$

[0287] where

[0288] δ_h =horizontal control stick position

[0289] Ψ_c =horizontal turn rate command

[0290] Ψ=horizontal turn rate

[0291] Ψ_{ref} =reference heading

[0292] Ψ_t =vehicle ground track angle

[0293] \overrightarrow{P}_{ref} =reference position

[0294] The above equations illustrate how trajectory synthesis is employed to guide the vehicle on a straight and level path when the control stick is returned to zero. This synthesis technique generates an inertial path to which the

Eq. 44

vehicle guides, thus ensuring that inertial sensor errors do not cause the vehicle to deviate from the operator's expected course.

[0295] The airspeed command is computed based on the slide control setting:

$$V_{\rm c} = V_{\rm min} + \delta_{\rm t} (V_{\rm max} - V_{\rm min}) \label{eq:Vc}$$
 Eq. 46

[0296] where

[0297] δ_t =slide control setting

[0298] Any of a variety of vertical channel control schemes can be implemented without departing from the scope of the present invention, including both position and velocity reference control laws. It is intuitively obvious that when the operator commands a climb or descent via the manual control operation, the only altitude of concern is the altitude at which to level off. Hence, the actual implementation of the control law does not require a position-slave component. This reduces the order of the control law to a first order control law in which the velocity command term is acted upon to generate an acceleration command to the autopilot. In accordance with one embodiment, the following perturbational first-order control law is illustratively used for the altitude rate control:

$$a_{c_{up}} = \frac{|V_1|}{\tau} (\gamma - \gamma_c) - g$$
 where
$$a_{c_{up}} = \text{local vertical } UP \text{ acceleration command}$$

$$\gamma = \text{flight path angle}$$

$$\gamma_c = \text{flight path angle command} = \sin^{-1} \left(\frac{h_c}{V} \right)$$

$$h_c = \text{altitude rate command}$$

$$\tau = \text{guidance law time constant}$$

$$g = \text{acceleration of gravity}$$

$$|V_1| = \text{inertial velocity magnitude}$$

[0299] In one embodiment, the time constant is a tunable parameter that can be adjusted for specific platforms. For example, the time constant used for a given vehicle might be 0.3 seconds, whereas the time constant used for another vehicle might be 0.1 seconds. The vertical channel guidance generally works in coordination with the automatic speed control loop. In other words, simply commanding a constant throttle setting as opposed to a constant speed setting can easily drive the vehicle into a stall condition when maximum (or near maximum) climb rates are commanded. By including the automatic speed control design and mapping the operator's "throttle" control input to a speed command as opposed to a throttle setting the problem is alleviated.

[0300] In accordance with one embodiment, the horizontal acceleration command is computed as

$$a_{c_h} = \begin{cases} -k_p \vec{P}_{ref}^{W}(\text{across}) - k_v |V_{horz}| (\Psi_t - \Psi_{ref}) & |\delta_h| \le \varepsilon \\ V_1 \Psi_c & |\delta_h| > \varepsilon \end{cases}$$
 Eq. 48

[0301] It should be noted that when the horizontal stick is in the neutral location a biased pursuit guidance law is used to maintain a constant heading. The local vertical acceleration command vector is then illustratively computed as:

$$\overline{a}_c^{LV} = \begin{cases} a_{c_h} \cos(\Psi_t) \\ -a_{c_h} \sin(\Psi_t) \\ a_{c_{UP}} \end{cases}$$
 Eq. 49

[0302] This acceleration command vector is then illustratively processed through a translation layer and delivered to the autopilot system.

[0303] An additional aspect of the present invention pertains to control stick command rate limiting. A key desired objective of the simplified manual control modes described herein is that the control modes will resist the operator's ability to overdrive the vehicle. In accordance with one embodiment, a robust, algorithmic approach to aid in the achievement of this objective is to implement a rate limit on the operator's control stick command inputs. A simple rate-limiting algorithm has a dynamic effect similar to passing the commands through a low-pass filter. The rate limiting essentially attenuates high frequency command inputs. The benefit to the controller is that rate limiting the command inputs enables an elimination of high frequency "jerks" from the command stick. Further an avoidance is enabled of inadvertent and unnecessarily large steps and high frequency impulses directed to the controller. This, in turn, minimizes the transient effects of the closed-loop on the human operator's perception of the vehicle response to his/her commands. In other words, with the control stick rate limiting algorithm functioning, the operator always sees the vehicle respond smoothly to the directional commands that he/she is supplying. In accordance with one embodiment, the control stick rate limiting is a tunable parameter within VACS and can be adjusted to satisfy the specific performance desires of a given operator with a given vehicle under VACS control.

[0304] Another aspect of the present invention pertains to an automatic speed control loop. Important to the application of a robust simplified manual control capability is the ability of the embedded controller to maintain speed, even through harsh maneuvering environments. Consider a scenario wherein an operator commands a hard turn, a max climb, or a combined climb and turn maneuver, the VACS controller will rapidly orient the vehicle into the desired maneuver (flight path and turn rate). The maneuver, in turn, will require the vehicle to pull a large angle-of-attack, which results in increased drag, or to fly a glide slope in which the effects of gravity in the axial channel are significant enough to induce a rapid deceleration. To expect the operator to keep up this rapidly changing dynamic environment by manually Evidence Appendix - 178

adjusting the throttle would directly oppose the goal of the simplified manual control design. Hence, in accordance with one embodiment of the present invention, an automatic speed control loop is coupled into the system. A basic implementation allows the operator to enter a preprogrammed speed setting (cruise for best range, cruise for best endurance, cruise at max speed, etc) or a manual speed setting using a typical joystick throttle input. For the manual speed setting, the control stick throttle setting is not mapped to throttle setting, but rather mapped to a speed command that is linearly proportional to the control setting. In other words, the minimum control setting maps to the vehicle minimum control speed and the maximum control setting maps to the vehicle maximum cruise speed. The remaining settings are mapped linearly between the min and max speeds.

[0305] As the vehicle decelerates through commanded maneuvers, the automatic speed loop responds and adjusts the throttle setting to maintain the desired speed programmed by the operator. Even as the operator adjusts his manual speed control, the flight software is simply adjusting the speed command to the autospeed loop, which is always running. The advantage is that the bandwidth of the control system is higher than the bandwidth of a human operator; hence, using VACS, the operator generally cannot command a maneuver that ultimately drives the vehicle to stall—the flight computer is continuously adjusting the throttle to maintain the proper speed setting.

[0306] Another aspect of the present invention pertains to climb gradient limiting. When mapping the vertical control stick command to a climb rate command, the vehicle climb rate performance capability is illustratively taken into account. The maximum climb rate of the vehicle directly corresponds to the maximum vertical control stick deflection. When a combined climb and turn maneuver is commanded, the net reduction in climb rate capability resulting from the out-of-plane acceleration component required to generate the turn rate is accounted for. There is a closed form analytic climb rate reduction that can be computed to account for the turn. In accordance with one embodiment, this reduction in climb rate is computed as:

$$\Delta \dot{h} = -\frac{2\frac{\partial C_D}{\partial (C_L^2)} m^2 \Psi^2 V}{\rho g S_{ref}}$$
 Eq. 50
where
$$\frac{\partial C_D}{\partial (C_L^2)} = \text{vehicle drag polar constant } (k)$$

$$m = \text{vehicle mass}$$

$$\Psi = \text{turn rate command}$$

$$V = \text{inertial velocity}$$

$$\rho = \text{air density}$$

$$g = \text{acceleration of gravity}$$

$$S_{ref} = \text{aerodynamic reference area}$$

[0307] The maximum climb rate used to generate the flight path reference command during the manual control mode is reduced by the amount computed using the above equation.

The combination of this reduction, along with the limiting algorithms and speed control loop discussed in the preceding sections offers a robust manual control system design that prevents the operator from overdriving the UAV.

[0308] D. Line-of-Sight Slave Control Mode

[0309] In accordance with one aspect of the present invention, as is indicated by block 136 in FIG. 1, a line-of-sight (LOS) slave control mode is implemented. The versatility of the overall control system design of the described VACS architecture makes implementation of this control mode relatively straightforward.

[0310] The underlying operational concept of the LOS slave control mode is illustratively defined by the fact that the operator is ultimately interested in the imagery captured and transmitted by the UAV. The goal of the guidance mode therefore becomes to offer the operator the capability to manually slew the UAV sensor while surveying a battlefield or other topological region with complete disregard for the aviation or direction of the UAV. To accomplish this guidance objective, the vehicle is slaved to the sensor line-of-sight. To maximize the operator's probability of visual object recognition, the guidance policy is to align the heading of the UAV to the horizontal sensor line-of-sight. With this policy, the vehicle is always commanding a path toward the desired surveillance area. A simple pursuit guidance law is employed to achieve the stated guidance goal.

[0311] In accordance with one embodiment of LOS slave control, the applicable guidance law commands the nose of the UAV to align with centerline of the gimbaled sensor by issuing the following horizontal acceleration command:

$$a_{c_h} = \begin{cases} -k_p \overline{P}_{ref}^W(\text{across}) - k_v |V_{horz}| (\Psi_t - \Psi_{ref}) & |\delta_h| \le \varepsilon \\ -K_V |V_1| \Delta \Psi & |\delta_h| > \varepsilon \end{cases}$$
 Eq. 51

[0312] $\Delta\Psi$ represents the angle between the vehicle centerline and the sensor horizontal line-of-sight angle. The sensor horizontal line-of-sight angle is derived from the platform gimbal angles.

[0313] Generally speaking, the directional-response autopilot, combined with the stabilized platform, allows a single minimally trained operator to easily conduct a UAV surveillance mission. A further level of user simplification is achieved by combining seeker designation command logic with the outer loop guidance. This mixing provides Lineof-Sight Slave mode capability in which the operator's point of reference is the image scene transmitted from the UAV's on-board camera. In this mode the operator does not provide direction commands to the UAV. Instead, the operator focuses his attention on the tactical situation display, commanding the look angle of the UAV's on-board sensor to survey the battlefield (or other topographical region for non-military applications) while the UAV autonomously commands a flight profile which is slaved to the operator's sensor line-of-sight commands. This integration of the camera platform with the guidance provides the following benefits:

[0314] 1. Time-on-station loiter control which can be easily selected and designated.

Evidence Appendix - 179

[0315] 2. Further reduction of workload on the operator, who can now focus primarily on the surveillance aspects of the mission.

[0316] 3. An easily adaptable relative Navigation method.

[0317] FIG. 21 is a diagrammatic illustration demonstrating how LOS slave control is implemented with the ground station display in accordance with one aspect of the present invention. The display is illustratively a top-view with a schematic of the aircraft for easier conceptualization. The outer circle around the aircraft is illustratively a projection of the entire field-of-view onto the ground. The smaller pie-shaped queue is illustratively a ground projection of the current seeker borsight position. These are calculated by the ground station software from the positional information and seeker angle sent across the data-link. The remote operator can illustratively opt to either keep the cursor active as the continual steering point, or he/she can designate a "surveillance-point" by clicking on a desired ground location. In the latter case, the staring point would be captured so the cursor could be moved to a new constant location.

[0318] If the pilot chooses a surveillance location outside the total FOV, then the outer loop guidance will illustratively follow a command-to-LOS mode guide law until the UAV flight path points toward the target. Once the desired staring-point comes within a minimum range threshold, the guidance automatically trips into a loiter pattern (either constant-radius or elliptical) to maintain a station with a single key-click while he/she conducts other activities. FIGS. 22A & 22B together demonstrate the surveillance-point approach scenario.

[0319] If a constant location is selected within the minimum turning radius, then the guidance will fly over the surveillance-point and plan an out-and-back pattern to avoid a singularity in the loiter guide-law. This can be easily achieved by inserting waypoint legs autonomously. If the operator chooses, he/she can select a standoff range (or accept the default range) for surveillance over a hostile target. The line-of-sight commands will also comprehend the offset location to track on the desired location. This is achieved by inserting the offset range vector in the positional component of the loiter guide-law.

[0320] The following simplified equations are used to show the basic structure of the LOS Slave mode guidance:

If
$$(R_{Target} > \text{Loiter_Threshold})$$
 then

$$\dot{\psi}_{Cmd} = K_{\dot{\psi}}(\lambda_{Horiz} - \psi_{Heading})$$

$$\dot{\gamma}_{Cmd} = K_{H}(H_{CMD} - H) + H_{\dot{H}}\dot{H} + \frac{g}{V}$$
else

$$\dot{\psi}_{Cmd} = K_{\dot{\psi}}\Delta\Psi + K_{p}\Big(P_{Turn} - \left\|\overline{R}_{Target} + \overline{R}_{Stand-Off}\right\|$$

$$\dot{\gamma}_{Cmd} = K_{H}(H_{CMD} - H) + K_{\dot{H}}\dot{H} + \frac{g}{V}$$
endif

where

$$R_{Target} = \text{Horizontal Range-to-Target}$$

$$\dot{\psi}_{Cmd} = \text{Horizontal Turning Rate Command}$$

-continued $\Delta \Psi = \text{Heading Error Relative To Loiter Path}$ $\lambda_{Horiz} = \text{Horizontal Line-of-Sight to Target}$ $\dot{\gamma}_{Cmd} = \text{Vertical Turning Rate Command}$ $\Psi_{Heading} = \text{Heading Angle}$ $P_{Tum} = \text{Loiter Turning Radius}$ H = Altitude g = Gravity Acceleration Magnitude V = Vehicle Inertial Velocity Magnitude

[0321] The above equations show two active horizontal guidance terms when flying the constant turning radius circle. The first term is the damping term which drives the vehicle to align its ground track with the desired circular loiter pattern and is the dominating term. The second term is a positional term to help maintain the constant arc.

[0322] In accordance with one aspect of the present invention, sensor-slave mode commands are generated by an autonomous line-of-sight driven function, in which the command objectives are generated by the necessities of the function rather than by an operator. For example, a function designed to command a raster-scan of a particular surveillance area, or a function designed to scan a long a roadway could be used to generate sensor slave commands. Another example is a function designed to generate line-of-sight commands for UAV-to-UAV rendezvous formation flying.

[0323] E. Ground Collision Avoidance System (GCAS)

[0324] In accordance with one aspect of the present invention, as is indicated by block 120 in the FIG. 1 architecture, a ground collision avoidance system (GCAS) provides an automated mechanism enabling the control system to avoid terrain without having to task the operator with studying altitude above ground for each vehicle under his or her control. In accordance with one embodiment, the GCAS provides the operator with some form of situational awareness information about an upcoming collision (e.g., a warning signal). If the user does not react to that information, the GCAS will automatically avoid the terrain and let the user know the system is in an auto-avoidance mode. During this mode, the user is illustratively locked out from making flight path changes until the system has cleared the offending terrain.

[0325] In accordance with one embodiment, the operator is provided with a timer display that counts down a time period within which the operator can manually avoid a high potential terrain collision. If the operator does not manually steer off of the collision path during the time period, then the GCAS will initiate the auto-avoidance mode.

[0326] In accordance with one embodiment, an altitude profile sensor is set up to provide data for GCAS purposes. While other known sensors can be utilized without departing from the scope of the present invention, one suitable ground terrain sensor system is the Digital Terrain Elevation Data (DTED) Level 1 database available from the National Imagery and Mapping Agency (NIMA). The spacing for Level 1 DTED is approximately 93 meters—which somewhat limits Evidence Appendix - 180

the amount of surface information the GCAS algorithm uses. However, the GCAS algorithm is illustratively generic and can accept Level 2 DTED for a higher resolution model. It should be noted that it is also within the scope of the present invention to adopt even more advanced terrain description mechanisms to provide terrain topology map information for the ground collision avoidance logic.

[0327] In accordance with one embodiment, a first input to the GCAS is a desired clearance height above terrain for a vehicle to be controlled. Once the desired clearance has been defined, the GCAS algorithm produces a terrain altitude profile. The profile is created from the DTED maps using a scan pattern that accounts for Navigation and DTED errors.

[0328] FIG. 23 is a schematic representation of a top view of a scan pattern within the context of the GCAS. The scan pattern starts at the vehicle position. A horizontal uncertainty box is generated. A maximum terrain altitude is then calculated within the uncertainty box. The uncertainty box is then propagated forward adjusting for heading and any other uncertainty. The algorithm then determines the maximum altitude in the new uncertainty boxes and continues forward an amount to occupy a limited fly-out time (e.g., a 60 second fly-out). The maximum values for these uncertainty boxes are used to feed the terrain profile for the GCAS guidance.

[0329] The philosophy behind the design of the GCAS system is to take the current vehicle position and fly out a medium fidelity simulation as if the operator had commanded a maximum g pull up. While the simulation performs this pull up, the algorithm monitors vehicle altitude and ground altitude and attempts to predict at what point the vehicle will intersect the terrain.

[0330] FIG. 24 is a schematic diagram demonstrating of a sample trajectory. Assuming the vehicle is flying with current velocity V_o , the algorithm starts at the current vehicle position and flies a maximum g pull up trajectory. The maximum g pull up is an acceleration command generated according to the following equation:

$$a_c = \frac{QSC_{L_{\max}}}{m}$$
 Eq. 53

where

Q = dynamic pressure

S = vehicle aerodynamic reference area

 $C_{L_{\max}}$ = vehicle maximum lift coefficient

m = vehicle mass

[0331] The algorithm then assumes a constant initial velocity and projects the trajectory along the velocity line to estimate a time to fly up. The time to fly up represents the time to start the maneuver in order to avoid the terrain by an amount equal to the minimum descent altitude. The minimum descent altitude is a constant and represents the minimum height above the terrain for the platform through the terrain avoidance mode.

[0332] After the algorithm finds the minimum altitude above ground through the fly-out trajectory, the closure rate

is computed based on the initial velocity and the velocity at the minimum altitude above ground.

$$V_c = \frac{V_{H,0} * V_{U,\mathrm{MinAgl}} - V_{H,\mathrm{MinAgl}} * V_{U,0}}{|\overrightarrow{V}_{\mathrm{MinAgl}}|}$$
 Eq. 54

[0333] Once the closing rate has been computed, the value is limited (e.g., limited to 2 feet/second) to avoid division by zero problems in the time to fly up calculation.

$$V_{c}$$
=max(V_{c} ,2.0) Eq. 55

[0334] Once the closure rate computation is complete, the time to fly up is calculated as:

$$TTFU = \frac{(H_{\text{MinAgl}} - MDA)}{V_c}$$
 Eq. 56

[0335] The MDA variable represents the minimum descent altitude, or the minimum altitude the vehicle should attain during the climb out. in accordance with one embodiment, the time to fly up is computed periodically (e.g., every 1 Hz) and reported to the operator station (i.e., the ground control station). Should the time to fly up reduce to zero, the guidance code will perform the maximum g pull up maneuver while ignoring any commands from the operator station. Once the fly out is complete and the time to fly up returns to a predetermined threshold (e.g., greater than 10 seconds), control is relinquished and returned to the operator station.

[0336] In accordance with one embodiment, in order to perform the simulation in faster than real time, the high fidelity simulation is updated for computational simplicity. Accordingly, the design flies a paired down version of the vehicle simulation in a faster than real-time environment to estimate when the vehicle might impact the ground. For example, the baseline simulation can be adapted with the following changes:

[0337] Truth Navigation model

[0338] Truth actuator models

[0339] No wind model

[0340] Reduced simulation time step to 16 Hz

[0341] These are examples of changes that can be made to enable performance of a flyout simulation of the vehicle in a faster than real-time environment.

[0342] In accordance with one embodiment, the simulation has the capability to fly out 10 seconds of medium fidelity data and then extrapolate for another 50 seconds of data giving a 1 minute window of simulated data. The data provides time for the max g-pull up maneuver to execute and acquire the desired flight path angle. Once that flight path angle is captured, an inertial propagation for the next 50 seconds provides an accurate assessment of the vehicle motion.

[0343] In accordance with one embodiment, the operator station (e.g., the ground control station including the operator interface) is configured to provide the operator with an opportunity to understand that the vehicle is about to go into a GCAS maneuver. For example, the time to fly up variable Evidence Appendix - 181

from the GCAS simulation is transmitted to the operator station. If the time to fly up value reduces to a value less than or equal to a predetermined value (e.g., 10 seconds), an indicator is provided to the operator (e.g., the vehicle on the display turns yellow) and a counter is added to show the estimated time to fly up. Should that number reduce to zero, an indication is provided (e.g., the vehicle turns red) showing that the operator no longer has control of the vehicle and the ground collision avoidance maneuver is currently being executed.

[0344] IX. Translator

[0345] As was described in relation to FIG. 5, a translation layer can be implemented to translate guidance commands into reference commands appropriate for the specific autopilot implementation.

[0346] In accordance with one embodiment, an exemplary translation layer implementation will now be provided. After the guidance algorithms execute, the outputs are translated to the native vehicle autopilot commands. The equations below provide example kinematic translations from the guidance acceleration commands to native vehicle autopilot commands. These equations demonstrate the principal that vehicle motion is activated through acceleration. The methods that various vehicles employ to generate acceleration are numerous (bank angle autopilot, acceleration autopilot, heading control autopilot, altitude control autopilot, etc). Since the control algorithms described herein generate acceleration commands that can be kinematically translated into any of these native autopilot commands, the guidance algorithms truly provide a generalized library of control laws that can control any vehicle through that vehicle's native atomic functions. Ubiquitous acceleration control techniques enable VACS to synthesize control commands for any vehicle, including air, ground, or sea-based.

 $a_{v} = \text{vertical plane acceleration command}$ Eq. 57 $a_{h} = \text{horizontal plane acceleration command}$ $\phi = \tan^{-1}\left(\frac{a_{h}}{a_{v}}\right) = \text{bank angle command}$ $a_{T} = \sqrt{a_{v}^{2} + a_{h}^{2}} = \text{total body acceleration command}$ $\psi = \frac{a_{h}}{V} = \text{turn rate command}$ $\psi = \psi_{i-1} + \psi \Delta t = \text{heading command}$ $\psi = \frac{(a_{v} - g)}{V} = \text{flight path rate command}$ $\gamma_{i} = \gamma_{i-1} + \gamma \Delta t = \text{flight path angle command}$ $h = V \sin(\gamma) = \text{climb rate command}$ $h_{i} = h_{i-1} + h \Delta t = \text{altitude command}$

[0347] Additional functionality that can be enabled in a translation layer is means for discouraging or preventing an operator (e.g., the human or non-human operator interfacing the VACS architecture) from overdriving, stalling, or spinning the vehicle frame. This being said, limiting algorithms can also be employed in the guidance or autopilot functions.

[**0348**] X. Autopilot

[0349] As has been addressed, the present invention is not limited to, and does not require, a particular autopilot

system. The control system and architecture embodiments of the present invention can be adapted to accommodate virtually any autopilot system.

[0350] For the purpose of providing an example, an illustrative suitable autopilot software system will now be described. The illustrative autopilot system incorporates a three-axis design (pitch and yaw with an attitude control loop in the roll axis) for vehicle stabilization and guidance command tracking. The autopilot software design incorporates flight control techniques, which allow vehicle control algorithms to dynamically adjust airframe stabilization parameters in real-time during flight. The flight computer is programmed directly with the airframe physical properties, so that it can automatically adjust its settings with changes in airframe configuration, aerodynamic properties, and/or flight state. This provides for a simple and versatile design, and possesses the critical flexibility needed when adjustments to the airframe configuration become necessary. The three-loop design includes angular rate feedback for stability augmentation, attitude feedback for closed-loop stiffness, and acceleration feedback for command tracking. In addition, an integral controller in the forward loop illustratively provides enhanced command tracking, low frequency disturbance rejection and an automatic trim capability.

[0351] XI. Multi-Vehicle Ground Control Station

[0352] In one aspect of the present invention, an operator station (also referred to as the ground control station or GCS) is designed to accommodate command and control of multiple vehicles or a single vehicle by a single operator. In accordance with one embodiment, the ground control station is platform independent and implements an application program interface that provides windowing and communications interfaces (e.g., the platform is implemented in Open Source wxWindows API). The underlying operating system is illustratively masked and enables a developer to code in a high level environment.

[0353] In one embodiment, the ground control station incorporates several specialized user interface concepts designed to effectively support a single operator tasked to control multiple vehicles. The GCS also illustratively supports manual control and sensor steering modes. In the manual control mode, the operator can assume control authority of the vehicles individually from the ground control station at any time in flight. In the sensor steering mode, a vehicle will autonomously fly in the direction the operator is manually pointing the on-board imaging sensor (e.g., operator views video output from a digital camera on a TV interface, computer screen display, etc.). A custom data link is illustratively, utilized to support a two-way transfer of data between the ground control station and the UAV's. These design concepts together provide a flexible, multiple vehicle control system. The details of the concepts are discussed below.

[0354] In one aspect of the present invention, the ground control station implemented for flight control includes any or all of the following components:

[0355] a graphical user interface (GUI)

[0356] a synthetic vision display

[0357] two video monitors

[0358] a laptop computer

Evidence Appendix - 182

[0359] two repeater displays

[0360] a hand-held controller

[0361] a keyboard

[0362] a mouse control

[0363] a two-way radio

[0364] a computer network

[0365] The two video monitors are illustratively used to display real-time data linked camera imagery from two air vehicles having cameras (of course, fewer, more or none of the vehicles might have cameras and the number of monitor displays can be altered accordingly). In accordance with one embodiment, camera imagery is recorded on videotapes during a mission. In accordance with one embodiment, the two repeater displays are used to provide redundant views of the GUI and synthetic vision display. The laptop illustratively serves as a GUI backup in the event that the main GUI fails.

[0366] FIG. 25 is a simplified block diagram of ground control station 2510 in accordance with an embodiment of the present invention. As illustrated, ground control station 2510 receives real-time video images through a video receiver 2512. In accordance with one embodiment, a digital video camera is installed on one or more of the air vehicles for the production of such images. The camera imagery from each camera is illustratively data linked to a dedicated display screen at the ground control station. In accordance with one embodiment, a pan-tilt-zoom color camera is illustratively implemented by being installed on the underside fuselage or the underside of a wing. However, monochrome imagery cameras are also within the scope of the present invention. In accordance with one embodiment, cameras are illustratively operator-controlled from the ground control station via a data link to the vehicle, such as through transceiver 2518.

[0367] Video receiver 2512 captures video from a sensor camera and delivers the imaging data to VCR 2514 for video display and processing such that ground control system 2510 can relay processed video through a USB port to notebook computer 2516 for recording onto a hard disk. Notebook computer 2516 is configured to playback the recorded video stream. Transceiver 2518 receives data from multiple UAV's as well as transmits data to the multiple UAV's. Mode in 2509 supports information transfer to and from notebook 2516. Data transmitted to a UAV includes operator specific information and non-operator specific information. In addition, a power source 2520 is coupled to notebook computer 2516, video receiver 2512, VCR 2514 and a power supply 2522. Power supply 2522 provides power for data transmission.

[0368] Ground control station 2510 incorporates a graphical user interface that places minimal significance on standard "cockpit" displays and focuses on situational displays. The ground control station display is generally reconfigurable so that an operator can customize the information layout to suit his/her specific needs and/or vehicle requirements. An operator interacts with the graphical user interface through a mouse, a handheld controller (e.g. a joystick, game pad or keyboard arrow keys) a keyboard.

[0369] In another aspect of the present invention, an operator is able to exert manual control of all controlled air

vehicles and any associated on board cameras (e.g., gimbaled cameras) via a hand-held controller, which is illustratively similar to that utilized in the commercial computer gaming industry. In one embodiment, the controller includes two thumb-operated joysticks; one used for steering the selected vehicle, and the other for panning and tilting the camera. In one embodiment, the system is configured such that the operator can take manual control of any vehicle at any time in the mission, and can return to autonomous vehicle control as desired.

[0370] In another aspect of the present invention, the mouse control is configured to control a cursor on the GUI (e.g., the GUI illustrated in FIG. 26 and described below), for example through standard operator-initiated "point-and-click" operations, menu options and/or icons. In another embodiment, alphanumeric entries are inserted in the GUI with the keyboard as necessary. In another embodiment, the operator can be in voice communication with the flight line personnel throughout a mission with the two-way radio. It should be noted that any other similar input and output means (e.g., voice recognition input, etc.) can be implemented without departing from the scope of the present invention.

[0371] FIG. 26, in accordance with one aspect of the present invention, is a block diagram representation of an example GUI display 2622. In accordance with one embodiment, display 2622 is subdivided into several sub-components (e.g, sub-windows). These sub-components illustratively include a vehicle status display 2624, a vehicle parameter display 2626, a video display 2628, a mission situation display 2629, a vertical profile display 2631 and a selection pane 2630. In addition, display 2622 also includes pop-up dialogs 2630. An operator is able to view more information then that which is displayed in the four subcomponents by accessing various pop-up dialogs 2630. For example, the operator can view details of vehicle parameters, data link parameter details, detailed management of video/IR sensor data and support information related to route editing. It should be noted that this is not an exhaustive list of information sets to which the operator is provided access.

[0372] In one aspect of the present invention, display 2622 incorporates at least one intelligent window display having smart variables included therein. The concept behind an intelligent window display is that a display will function whether or not underlying data is provided through a vehicle data link. The motivation for such a window is to allow different vehicles with different data link variables to use common windows for situational awareness. The intelligent window fills the displays with 'smart variables', allowing the display to be adaptive, and fills in data when it is available. When data is not available, then the corresponding data field will appear inactive or grayed out.

[0373] FIG. 27 illustrates one illustrative example of a combination vehicle status display 2624 and vehicle parameters display 2626. The display includes vehicle link parameters 2740 and caution, alerts and warnings (CAWS) pane 2742. Vehicle link parameters pane 2740 illustratively includes critical vehicle parameters such as engine RPM, fuel remaining in accordance with time and distance the vehicle can fly with the fuel remaining, altitude and data link parameters. The CAWS pane 2742 illustratively contains Evidence Appendix - 183

active and/or inactive alerts to apprise the operator of system malfunctions. Examples include: return to base ranges, problems with the programmed route, vehicle performance problems and various other off-nominal conditions. The CAWS pane 2742 allows an operator to focus on imagery and mission level tasking with reduced attention to detailed information related to UAV state and health. With respect to vehicle status display 2624, the operator can view more detailed information or pop-up dialogs related to vehicle status by pointing and clicking on various push buttons such as "MORE" button 2744.

[0374] FIG. 28, in accordance with one aspect of the present invention, is an illustrative screen shot representation of an intelligent window display in the form of a pop-up dialog 2800 (e.g., as activated by pointing and clicking on the selectable "MORE" button 2744 in FIG. 27). The Route ID box 2802, the measured altitude box 2804, and the sensor roll angle box 2806 are displayed as inactive (i.e., are grayed out) while the rest of the display elements are actively updated with data. This is illustratively true because the route ID is not included in the corresponding vehicle's data link. Similarly, the vehicle is illustratively not equipped with a radar altimeter for ground altitude. Finally, the sensor is illustratively gimbaled in pitch and yaw only, so the concept of the gimbal roll angle does not make sense for this configuration. The intelligent window accesses the smart variables in the datalink download list. If the smart variable has not been set, the display simply displays the corresponding control box as inactive.

[0375] In accordance with one aspect of the present invention, the described GUI is configured such that the operator can access one or more control selection windows configured in a manner similar to the exemplary screen shots provided in FIGS. 29 through 32. FIGS. 29 through 32 together represent various components of a selections pane 2950 that supports a system of fully functional dynamic control and management such as can be utilized to manage and control multiple UAV's, as well as corresponding UAV payloads. The GUI is illustratively configured such that the operator can select and access a selections panel 2950 for any vehicle under control. As illustrated in FIG. 29, the selections panel 2950 includes means for instigating and switching between various levels of manual and autonomous control for a corresponding vehicle (without departing from the scope of the present invention, a fully manual option, i.e., stick-and-rudder control, could also be presented as a "manual" control mode). When a manual control mode is selected (e.g., RDC or Sensor Slave), the operator illustratively assumes control authority of the corresponding vehicle individually from the ground control station, which can be done at any time in flight. When an autonomous mode is selected, the corresponding autonomous flight control scheme will be initiated. In some cases, upon selection of an autonomous control mode, the operator is presented with a screen for inserting parameters to which the operator desires the autonomous mode to conform (e.g., the operator can designate a point around which to loiter, etc.). FIG. 33 is one example of a pop-up window designed to collect operator parameters for a racetrack loiter pattern.

[0376] Other selectable features of the selections panel 2950 provide other control options such as auto maneuvers illustrated in FIG. 30, session options in FIG. 31 and an emergency abort option in FIG. 32 (e.g., from here the

automated landing process can illustratively be accessed for vehicle recovery). Selections pane 2950 illustratively provides additional functionality and details such as vehicle parameters, dynamic sensor control capability, a network connectivity ability to broadcast or transmit the UAV video data over LAN or WAN, critical GPS/INS performance parameters and a TM logging capability in association with the GCS notebook computer 2516 herd drive (FIG. 25).

[0377] With reference to FIG. 26, display 2622 also includes mission situational display 2629 as well as vertical profile display. The mission situational display 262 iilustratively provides the operator with real-time route information for one or more vehicles from a map perspective. In accordance with one embodiment, display 2629 supports realtime route editing. For example, in accordance with one embodiment, a toolbar is displayed across the top of the display and provides an operator-based rapid, intuitive point and click interaction for real-time mission planning and route editing capability, as well as map display editing features (e.g. zoom, center, change map background, etc.). In addition, in accordance with one embodiment, situation display 2629 includes a target editor (configured to tie a target to UAV mission objectives) and a corridor editor (configured to set no-fly zones and/or other mission planning boundary constraints).

[0378] The screen shot illustrated in FIG. 33, described in a different context previously, is also one example of a screen shot representation of an intelligent window display in the form of a pop-up dialog for route editing. The illustrated display provides the operator the capability to either type in known, precise waypoint coordinates or record graphically edited route event coordinates and parameters. This and similar pop-up functionality is illustratively provided through display 2622.

[0379] A. Synthetic Visualization Tools

[0380] In accordance with one aspect of the present invention, a combination of high fidelity synthetic visualization tools, faster than real time simulation technology, and variable autonomy control together provide a baseline architecture that is capable of supporting an enhanced level of real-time UAV control and situation awareness. In accordance with one embodiment, a synthetically enhanced situation awareness system (SESAS) supports real-time management and control of multiple UAVs by a single operator. The synthetic visualization display can include threat data realistically displayed over mapped and photo-realistic 3D terrain. These visuals are driven (dynamically propagated) by a combination of simulated and real UAV data. The simulated data is generated by the ground control station and propagated at a higher rate than real data is received from the air vehicle. When real data is received, it is used to correct the simulation solution, thus providing an accurate, continuous representation of the UAV flight state within its environment.

[0381] The described SESAS technology can be utilized to provide a wide field of view (FOV) that augments live video and sensor feeds while circumventing payload end bandwidth limitations. Specifically, correlated, photo-realistic 3D terrain can be presented on multiple monitors or flea panel displays to provide a wide area FOV to aid operators in orientation and situation awareness. Furthermore, in accordance with one embodiment, the photo-realistic representativity of the photo-r

tion of the scene can be viewed from various frames of reference (e.g., with the simple push of a button). For example, one view is an out-the-window (OTW) view that provides a forward-looking wide area view of the scene (this would represent a pilot's cockpit view, for example). Another view is from above and behind the UAV, providing an outside observer's frame of reference (illustratively including a representation of the vehicle). An additional view is a sensor view in which the live sensor FOV is synthetically increased.

[0382] Significant reductions in datalink bandwidth requirements can be achieved with the aid of the simulation. Background and high frequency update information is provided by the simulation, while low-frequency data specific to the UAV—data that changes in real time over long periods of time—is provided via downlinks. By filling in the high frequency gaps with simulated data, very low update rates over the datalink are made feasible in that the operator is provided with a continuous situation awareness that is comprised of mixed live and simulated data. In accordance with one embodiment, a simulated wide field of view from the perspective of an on-board sensor is optionally provided (e.g., synthetic data is utilized to expand the sensor view).

[0383] The realism afforded by the synthetic visuals significantly enhances the operator's situation awareness. The synthetic visuals illustratively offer multiple views (or frames of reference) and increased field-of-views over that of on-board sensors. In accordance with one embodiment, video display 2628 in FIG. 26 provides a synthetic visual yet photo-realistic, computer-generated image of the visual environment of a selected air vehicle (a selected one of several vehicles being controlled by an operator). In accordance with one embodiment, the global positioning system (GPS) and inertial navigation system (INS) data that correspond to a vehicle's current position provide an input to the synthetic visual display, along with the vehicle's flight parameters (e.g., bank angle, pitch angle, heading, and speed). In accordance with one embodiment, special effects, such as target features and explosions, can be programmed in the display.

[0384] Accordingly, one aspect of the present invention pertains to a display system and situation awareness technology that presents the operator with an at least partially virtual representation of the vehicle environment. This enables the operator to be immersed in the vehicle environment without requiring the expense and data link bandwidth requirements of extended image based sensor suites. This display technology can be utilized to orient operators of both manned and unmanned vehicles. For example, the synthetic display can enable a pilot onboard a vehicle to orient himself relative to actual terrain even when conditions, are dark, cloudy, foggy, etc.

[0385] In one embodiment of a synthetic display system in accordance with the present invention, a state-of-the-art PC Image Generation (PCIG) component is an incorporated component. Such a component is available from SDS International of Arlington, Virginia. The PCIG is integrated into the control interface of the present invention to facilitate synthetically enhanced operator situation awareness display. The resulting display is a real-time display of 2D and 3D images that can be configured to include threats, friendlies, and command control overlays. The visuals offer complete

and current sensor/decision, maker/shooter information, plus situation awareness for safety and navigation.

[0386] In one embodiment, synthetic visuals are driven by the vehicle in a manner very similar to a high fidelity flight simulator commanding ownship eye-point, environment and other entities. The chief difference being that instead of a high fidelity flight simulator, live vehicle state information drives the ownship eye-point. Furthermore, the other entities (ground-based threats, other aircraft, etc.) are illustratively real-world sensed entities as opposed to simulated entities.

[0387] In one embodiment of the synthetic visual display, the photo-realistic geo-specific visuals originally developed for training and mission rehearsal are directly utilized in an operational UAV context. In the simplest terms, the GPS and INS data that report UAV position are utilized as inputs to the Synthetic Visual Display's API, which couples the state data with FOV and orientation information from the cameras and sensors onboard the UAV. Replication of the simulated visuals provides "perfect weather", daylight visuals regardless of the night, weather, fog, clouds, or camera/sensor battle damage. The use of wider Field of View, multiple screens, augmented symbology and network integrated data exchange support an entire new generation of situation awareness enhancements, tools and operator decision aids, especially in the context of UAVs with their flexible ground control stations and network interconnectivity.

[0388] In one aspect of the present invention, synthetic vision display technical approach of the present invention is based upon integrating advanced simulated visuals, originally developed for training purposes, into UAV operational systems. In accordance with one embodiment, the simulated visuals are integrated with data derived from the ground control station during flight to enable real-time synthetic visuals.

[0389] B. GUI Component Selection

[0390] In one aspect of the present invention, through GUI display 2622, an operator can maintain a variable level of control over a UAV, from fully manual to fully autonomous, with simple user-friendly inputs. For example, if an operator decides to divert a UAV to a new route, the operator has a plurality of options to select from. The following are examples of some of the options that an operator has. Those skilled in the art should recognize that this is not an exhaustive list. In one embodiment, the operator could graphically edit the existing route on mission situation display 2629 by adding a waypoint or orbit pattern in the vicinity of a desired target region. Prior to accepting the edited route, the control system evaluates the revised route against the vehicle performance capability as well as terrain obstructions. If the route is within acceptable bounds, the control system registers the modified route and maneuvers the vehicle accordingly. In another embodiment, the operator could select a park mode on selections pane 2630. After selected, the control system queues the operator to click the location of and graphical size (via a mouse) the desired orbit pattern in which the vehicle will fly while "parked" over a desired target. In another embodiment, the operator can select a manual control mode on selections pane 2630. By selecting RDC (remote directional command), for example, the control system controls the UAV into a constant altitude, heading and speed flight until the operator instructs a maneuver. While in RDC mode, the operator can either Evidence Appendix - 185 pseudo-manually direct the UAV using the control stick (e.g. joystick) or the operator can program a fixed heading, altitude and speed using the control options provided in selections pane 2630.

[0391] The described Intelligent displays with smart variables represent an effective approach to actively displaying information for different types of vehicles. However, a problem can arise when a new vehicle is integrated into the ground control station with a completely foreign command and control interface. Under these circumstances, the ground control station is not concerned about displaying data, but is tasked to provide a command and control interface for the operator to perform the required operations. This conundrum is the motivation for another embodiment of the present invention, namely, the integration of vehicle specific panels in the ground control station.

[0392] In one embodiment, a generic vehicle class (GVC) is illustratively a software component that provides a rapid development environment API to add new vehicle classes and types to the ground control station. The GVC also illustratively serves as a software construct that allows the inclusion of multiple vehicles within the ground control station framework. One of the variables in the application is a vector of pointers to a generic vehicle class. This list is constructed by allocating new specific vehicles and returning a type case to the base generic vehicle class. When a new vehicle is integrated into the ground control station, the generic vehicle class provides all of the virtual functions to integrate with system control components (e.g., to integrate with a map display, a communications package, PCIG imagery and/or appropriate display windows). An important object in the application framework is illustratively a pointer to the current vehicle generic class. When the user switches vehicles, this pointer is updated and all displays grab the appropriate smart variables from the pointer to the new base class. This is the mechanism by which windows immediately update to the current vehicle information whenever the user switches vehicles. The default windows use the pointer to the current vehicle to grab information. In this manner, if the user switches to a new vehicle with a different set of datalink variables, that fact is immediately apparent on the display windows.

[0393] FIG. 34 is a schematic block diagram demonstrating implementation of vehicle specific panels. Through base control station 3402, an operator has access to a plurality of vehicle classes labeled as 3404, 3414 and 3424 (others can be included as well). Each vehicle class illustratively contains a pointer to associated vehicle specific windows, along with virtual functions that can be asserted to provide an appropriate display. When a vehicle is selected, the appropriate vehicle specific information (i.e., windows 3406, 3408, 3410, 3412, etc.) will be displayed.

[0394] In one embodiment, a given vehicle can be configured to select default panels, in which case vehicle specific panels will not be provided for that particular vehicle class. In one embodiment, if a default window does not provide a particular functionality required by a new vehicle, a new vehicle specific class can override those base windows and the new windows will be displayed upon selection.

[0395] FIGS. 35 and 36 are screen shot representations demonstrating vehicle specific sensor control windows.

FIG. 35 is illustratively a vehicle specific control window for a vehicle identified as Dakota1. FIG. 36 is illustratively a vehicle specific control window for a vehicle identified as Dakota2. Whenever Dakota1 is selected as the active vehicle, the platform includes a steerable sensor with an optional IR digital camera. However, the Dakota2 variant has no steerable camera at all. Instead, it is equipped with a fixed camera and a Ground Collision Avoidance System. When the user selects Dakota2 as the active vehicle, the sensor control window switches to the vehicle specific sensor window. This window allows the user the option to turn on and off the ground collision avoidance system.

[0396] The described ability to tailor the ground control station windows enables any vehicle to be integrated with the ground control station without loss of information from the previously integrated vehicles. Accordingly, the ground control station supports a multi heterogeneous platform command and control application. One potential limitation on the number of selectable vehicles is the throughput of the collective datalink packages.

[0397] Referring back to mission situation display 2629 of FIG. 26, each vehicle is illustratively represented on the display (e.g., the map display) by a symbol (e.g., a representation of a vehicle). A vehicle symbol moves across the display, typically an illustrated map, in accordance with movement of the actual vehicle (e.g., movement relative to the map is to scale). The path of where a vehicle has been (and/or where the vehicle has been directed to go) is illustratively represented by a line. In one embodiment, each vehicle and its associated path lines are displayed in a unique color so as to distinguish one vehicle's activity from another. The interface is illustratively configured such that a user can click directly on the display and thereby select one of the vehicles causing vehicle specific control windows to be displayed for the selected vehicle. Once a vehicle is selected, the system is configured such that the user can change the mode of control for the selected vehicle. In the context of the VACS design described herein, the operator can select from the range of available variable autonomous control modes. In accordance with one embodiment, if the operator switches control to a second vehicle without leaving adequate prospective flight instructions for the first vehicle, then the first vehicle will "hold steady" (e.g., steady velocity, altitude, etc.) until direct control is resumed.

[0398] FIG. 37 is a screen shot representation of a detailed operator control graphical user interface display in accordance with an embodiment of the present invention. The display includes a mission situation display 3702 illustratively configured in a manner similar to the map display described in the preceding paragraph. Window 3704 is illustratively configured for operating data and function display. FIG. 37 is illustratively configured to display data and functions related to GPS and/or camera functionality. Window 3708 is illustratively a window configured to display data and functionality related to various system parameters. Window 3710 is illustratively configured to display data and functionality related to the navigation system. Finally, window 3712 is configured to display data and functionality related to control modes (e.g., operator can interact with this window to change control modes for a given vehicle). Displayed windows are illustratively configured for relocation and reconfiguration as desired by a particular operator. In one embodiment, the vehicle for Evidence Appendix - 186 which displayed parameters are associated depends on which vehicle has been selected by the operator. Again, the map display can illustratively be configured to show all vehicles relative to one another (and relative to the map) regardless of which vehicle is selected.

[0399] In one aspect of the present invention, the dynamic information in the dialog windows and navigation map is updated as the flight progresses and as the flight parameters undergo change. The vehicle information that is displayed corresponds to the vehicle the operator selects (simply clicking on the appropriate vehicle icon in the map display), and any one of the vehicles currently in flight can be selected. The map display provides a photographic depiction of the mission site, the relative locations of the air vehicles at the site, and the planned routes of the vehicles. An image output synthetic or otherwise, can alternatively be portrayed on the map display (alternatively, sensor data and/or synthetic image data can be displayed on separate monitors). The vehicle icons and the navigation routes are illustratively color-coded and highlighted on the map display as the vehicles are individually selected. Route planning can be performed from the map display, and route editing (e.g., changing waypoint locations) can be accomplished at any time in a mission. The map display also provides a depiction of the imaging payload field of view and the terrain area encompassed within it. The location and types of targets in the flight environment can also be represented on the may display. A profile view showing the height of the operatorselected vehicle above to the terrain can be displayed below the map. Various drop-down menus are also available to the operator from the GUI.

[0400] In one embodiment, for vehicles that incorporate a visual sensor (e.g., a digital camera), the vehicle indicated on the map display includes a sensor window indication displayed proximate to the vehicle indication (e.g., a box located in front of the vehicle indication). The dimensions of the sensor window indication illustratively corresponds to a field of view for the camera as it is displayed on a monitor in a control station. If the operator guides the vehicle or camera so as to open up a broader field of view, then the box indication illustratively becomes larger. Conversely, if the operator guides the vehicle or camera so as to narrow the field of view, then the box indication illustratively becomes smaller

[0401] In review, a VACS human-system interface (HSI) is implemented with a graphical user interface (GUI) that allows the operator to quickly alter the UAV course with little effort. The VACS HSI focuses on the UAV mission tasking rather than vehicle aviation; hence, the VACS interface places minimal significance on standard "cockpit" displays and focuses on situation displays. The operator interacts with VACS through the use of a mouse, a joystick (or game pad), and/or a keyboard. The software can easily be modified to take advantage of touch-screen capabilities as well.

[0402] In accordance with one embodiment, a ground control station display is divided into 4 subcomponents: a vehicle status display, a situation display, a video display, and a selection pane. This interface contains a route editing dialog to support real-time route editing as well as a variety of selection panes to support fully functional dynamic control and management of the UAV.

[0403] In accordance with one embodiment, push buttons in the main GUI provide access to additional dialogs that provide vehicle status information, sensor management and control functionality, and information dissemination capability through both data logging and network connectivity. A route editing dialog is accessed from the map display and provides the operator rapid, intuitive point-n-click system interaction for real-time mission planning and route editing capability, as well as map display editing features (zoom, center, change map background, etc). The route editing pop-up dialog provides the operator the capability to either type in known, precise waypoint coordinates or record graphically edited route event coordinates and parameters. The situation (map) display also contains a target editor with the capability to tie targets to UAV mission objectives and a corridor editor set no-fly zones and/or other mission planning boundary constraints.

[0404] In accordance with one embodiment, mission/route editing is performed manually by the operator, using the graphical user interface "point-n-click" functionality on the map or typing in the coordinates. The interface, however, is illustratively designed generically so automated route plans can be accepted. VACS contains automatic route/mission analysis tools to alert the operator if a planned mission is not physically realizable due to vehicle performance constraints or terrain collision issues.

[0405] In accordance with one embodiment, the VACS GCS also contains a Cautions, Alerts, and Warnings (CAWS) panel that alerts the operator to system malfunctions, low fuel, route errors, and various other off-nominal conditions. The CAWS display will alert the operator when a vehicle subsystem fault is detected.

[0406] Using the VACS GUI interface, the operator can maintain any level of control over the UAV, from fully manual to fully autonomous, with the simple click of a mouse. For example, if the UAV is flying a preprogrammed waypoint route and the operator decides to divert it from that route to a new desired location, he/she has a myriad of options at his disposal. For example, a few of the options are:

[0407] 1. Graphically edit the existing route on the mission situation display by adding a waypoint or orbit pattern in the vicinity of the desired target region. Prior to accepting the edited route, VACS evaluates the revised route against the vehicle performance capability as well as terrain obstructions. If the route is within acceptable performance bounds, VACS then registers the modified route into the outer-loop control function and the vehicle maneuvers accordingly.

[0408] 2. Select "Go To" point on the 2D situation map display. When this mode is selected, VACS will queue the operator to click the location of and graphically size (via the mouse) the desired orbit pattern, which the vehicle is to fly while "parked" over a target area.

[0409] 3. Select a manual control mode on the vehicle selections panel. By selecting RDR (remote directional response), for example, VACS controls the UAV into a constant altitude, constant heading, and constant speed flight condition until the operator instructs a maneuver. While in RDR mode, the operator can either:

[0410] a. Pseudo-manually direct the UAV using the control stick (horizontal stick commands map to horizontal turn rates, vertical stick commands map to vertical climb/descent rates). Evidence Appendix - 187

[0411] b. Program in a fixed heading, altitude, and speed using the control options provided in the route tab of the selection pane.

[0412] XII. Datalink

[0413] In one aspect of the present invention, in order to facilitate simplified multi-vehicle communications, the ground control station implements a UDP/IP (user datagram protocol/internet protocol) standard. This configuration enables the underlying operating system to organize and multiplex data based on IP addresses. In one embodiment, the generic vehicle class system provides a means for assigning a vehicle IP address. When all system IP addresses are known, each vehicle provides its data link messages and the ground control station forwards those messages to the appropriate Internet address. In one embodiment, this type of data collection is used primarily for uplink information.

[0414] One aspect of the present invention pertains to the parsing of downlink messages. One embodiment pertains to an implementation of the known serial line Internet protocol (SLIP). The SLIP protocol takes standard IP type information and encodes it to a serial stream to be sent over a serial device. On the other side, a decoder converts the serial stream back to IP so the computers on each side of the interface do not know about the underlying serial protocol—to them, communication is consistent with IP over Ethernet links

[0415] In accordance with one embodiment of the present invention, the ground control station actually connects to a router (e.g., a SLIP router), which takes all of the information from the ground control station and forwards it to the appropriate vehicle. In accordance with one embodiment, this enables a user of hybrid hardware systems with 802.11b amplified cards or serial communication radios (e.g., Freewave radios) which run the SLIP protocol to mask the underlying serial interface. With this setup, the ground control station always connects to vehicles as if they were computers on a network, and all routing is taken care of by the router. Thus, data packets going over serial communication radio interfaces (e.g., Freewave radio interfaces) are run through the SLIP protocol and data packages going over 802.11b amplified cards are forwarded without processing. It should be noted that a SLIP router and SLIP protocol are provided as examples of a suitable implementation. Other similar known communications implementations could be incorporated without departing from the scope of the present invention.

[0416] The reading of download data links becomes a bit complex. The reason is that the ground control station always talks to the SLIP box, so information from any vehicle is effectively coming from the same Internet address. Therefore, in accordance with one embodiment, the ground control station monitors a specific designated port for all incoming data. The data has an assumed header that contains a vehicle ID and message size. The communications package then forwards the datalink information to the appropriate vehicle class.

[0417] FIG. 38 is a schematic block diagram demonstrating a network centric UDP communications scheme in accordance with one embodiment of the present invention. Vehicles 3804, 3806, 3808 and 3810 each include an illustrated IP address and communicate with ground control

station **3812** by way of router (e.g., SLIP protocol means) **3802**. Station **3812** also includes an illustrated IP address. It should be noted that other components can be assigned IP addresses and added to the communications loop. For example, within **FIG. 38**, a visual system **3814** is illustrated and includes an illustrated IP address for communications support.

[0418] Accordingly, one aspect of the present invention pertains to a spread-spectrum communications hardware architecture and supporting multi-layered communications software packages that enable multi-vehicle IP-based messaging (TCP, UDP). This IP-based messaging design enables multi-vehicle control using either conventional radios driven by serial interfaces or wireless Ethernet boards (i.e., 802.11).

[0419] One advantage of the described multi-vehicle communications architecture is compatibility with conventional spread-spectrum data link systems that operate with standard serial interfaces. An Ethernet-to-transceiver bridge provides a transparent IP (TCP or UDP) network interface for the Ground Control Station (GCS) to interface to multiple UAVs. In accordance with one embodiment, to utilize wireless Ethernet (i.e., 802.11) technology, the bridge and spread-spectrum radios are simply replaced with the 802.11 board—no software modifications are required.

[0420] XIII. Flight Control System Hardware

[0421] In accordance with one aspect of the present invention, the VACS architecture is applied in the context of an integrated UAV digital flight control system and ground control system. In accordance with one embodiment, the airborne digital flight control system is implemented in the context of a computing environment (e.g., a PC/104 stack) configured for guidance, navigation, and control processing, power distribution, I/O handling, and/or a data link system. Depending on a given application and implementation, the computing environment can also be configured to support an inertial measurement unit (IMU), a precision pressure transducer for airspeed measurements, a GPS receiver, and/or a control interface to a pan-tilt-zoom or gimbaled payload system. An interface controller box can also be provided to allow the UAV to be operated by either the VACS controller or a back-up radio control (R/C) transmitter. As has been described, the airborne system guidance and autopilot software is capable of supporting varying levels of control autonomy.

[0422] XIV. Sample Mission

[0423] The described VACS architecture and user interface control system enables an example mission as follows. In the example scenario, three UAV's are simultaneously controlled by a single operator from a ground control station. The operator controls the vehicles during a simulated target search and destroy mission. Two of the vehicles image a ground "target", using on-board digital cameras, and one of the vehicles performs a simulated target attack maneuver. Each vehicle provides various autonomous flight control capabilities to the operator, including autonomous waypoint navigation, various orbit patterns for time-on-target, lossof-link and return-to-base (automatic landing initiated to preprogrammed or operator-designated location when communications link lost), and automatic ground collision avoidance. Evidence Appendix - 188 [0424] In accordance with the example mission, three air vehicles are flown simultaneously, simulating a target search and destroy mission. The vehicles are launched individually under the control of an R/C pilot, who is located near the takeoff point on an airfield runway. The pilot remotely steers each of the vehicles to a transition point, where vehicle control is switched over to the GCS operator. Following the switchover, the operator manually steers the vehicle toward a pre-planned orbit pattern. After the vehicle is properly oriented, the operator commands the VACS control system and the vehicle flies autonomously to the orbit pattern. The vehicles all orbit at an altitude of 1500-ft. MSL (~1000-ft. AGL) and at a speed of approximately 75 kts.

[0425] One of the vehicles illustratively circles near the end of the runway and briefly images the runway as it circles. An automobile, representing a ground target, is positioned on the runway. The air vehicle is then commanded to a lower altitude in the orbit pattern to simulate a target surveillance maneuver. The vehicle is then commanded to climb to its original orbiting altitude.

[0426] Next, the operator redirects one of the vehicles and sends it from its orbit pattern to the runway by designating a target location on the situation display and invoking a "go to" mode. The UAV autonomously captures and enters an orbit patter over the target and automatically steers the camera to maintain persistent surveillance of the target. Subsequently, the vehicle autonomously returns to the orbit pattern.

[0427] The operator then decouples the VACS automation on another vehicle and programs a new route to pass over the runway. Near the runway the vehicle is sent to a lower altitude to simulate a weapon attack. After several passes over the runway, the vehicle is returned to its initial altitude and the vehicle autonomously returns to its pre-assigned orbit pattern.

[0428] Vehicle speeds are always maintained at about 75 kts. The autonomous landing system of the present invention is engaged to return the vehicles to the runway from which they took off. An automated take-off can illustratively also be implemented to eliminate the necessity of an RC controller for landing/take-off.

[0429] FIG. 39 is a schematic block diagram illustrating potential control paths through a mission in accordance with the VACS architecture. Block 3902 represents the potential missions that can be executed such as surveillance, reconnaissance and/or target acquisition. Of course, other missions, including non-military related missions, are within the scope of the present invention. Block 3904 represents the step of planning a mission. Block 3906 represents launching a vehicle. Block 3908 represents monitoring system status after launch. Block 3910 represents evaluating whether a critical system failure has occurred. If such a failure does occur, then the mission is aborted in accordance with block 3912 (e.g., the vehicle is recovered in accordance with an automated landing process execution). Such monitoring is executed in a loop to continually watch for critical failures.

[0430] In accordance with block 3914, reconnaissance data is gathered if necessary. Block 3916 represents vehicle mission management. In accordance with block 3918, communication links are monitored. If a communication link is interrupted, then link loss procedures are implemented in

accordance with block 3920 (e.g., automatic landing system is initiated for vehicle recovery). In accordance with block 3922, the operator manages the route the vehicle is set to follow. In accordance with block 3928, the operator can edit the route. If a non-valid route is entered, then the route must be edited again. Otherwise, the valid route is executed. This is but one means of control available to the operator for mission execution.

[0431] In accordance with block 3926, the operator manages sensors associated with the vehicle. Block 3934 indicates selection of a sensor. In accordance with block 3936, a sensor control mode can be set. One of the sensor control mode settings available corresponds to block 3944 and is an auto-tracking functionality wherein the sensor will automatically track as necessary. Block 3946 represents a manual control of the sensor and block 3948 represents steering of the sensor. Block 3950 represents sensor control based on a designated target.

[0432] Block 3924 represents control mode management by the operator. In accordance with block 3930, the operator can choose an autonomous control mode such as, but not limited to, vehicle route management. In accordance with block 3932, the operator can select a manual control mode. In accordance with block 3938, the operator can choose RDR control. In accordance with block 3952, the vehicle can be steered in the horizontal and vertical planes. These modes can be executed as necessary to support achievement of mission objectives in accordance with block 3962.

[0433] Another available mode of control is line-of-sightslave control in accordance with block 3940. In accordance with block 3954 the vehicle sensor is utilized for steering purposes as necessary to support achievement of mission objectives. Block 3942 represents program maneuver control. Block 3956, 3960 and 3958 represent a setting of parameters for programmed maneuver control. The program maneuver control can also be selected to support the achievement of mission objectives. In accordance with block 3962, analysis is conducted to determine whether mission objectives have been achieved. If they have not, then the control processes are continued. If the objectives have been achieved, then, in accordance with block 3964 and 3966, the vehicle is recovered (e.g., automated landing system is implemented if necessary). In accordance with one embodiment, radio control is utilized to launch and/or recover a vehicle.

[0434] Although the present invention has been described with reference to preferred embodiments, workers skilled in the art will recognize that changes may be made in form and detail without departing from the spirit and scope of the invention.

What is claimed is:

1. A computer-implemented method for providing an operator of a vehicle with a plurality of control modes, wherein the system is configured to support transitioning between control modes during operation of the vehicle, the method comprising:

receiving a first operator input that corresponds to a first control mode;

generating a first directional representation of the first operator input; Evidence Appendix - 189

- processing the first directional representation through a unified autopilot system so as to generate a first control output;
- mechanically adjusting a control component associated with the vehicle based on the first control output;
- receiving a second operator input that corresponds to a request to transition from the first control mode to a second control mode;
- transitioning from the first control mode to the second control mode;
- receiving a third operator input that corresponds to the second control mode;
- generating a second directional representation of the third operator input;
- processing the second directional representation through the unified autopilot system so as to generate a second control output; and
- mechanically adjusting a control component associated with the vehicle based on the second control output.
- 2. The method of claim 1, wherein said transitioning comprises processing a transition command through the unified autopilot system.
- 3. The method of claim 1, wherein generating a first directional representation comprises generating a first set of acceleration and bank angle commands.
- 4. The method of claim 1, wherein transitioning from the first control mode comprises transitioning from a first control mode wherein the vehicle is controlled based on manipulations by the operator of an image sensor that is located onboard the vehicle.
- 5. The method of claim 1, wherein transitioning from the first control mode comprises transitioning from a line-of-sight-slave mode of operation.
- **6**. The method of claim 1, wherein transitioning from the first control mode comprises transitioning from a remote directional control mode of operation.
- 7. The method of claim 1, wherein transitioning from the first control mode comprises transitioning from a ground collision avoidance mode of operation.
- 8. The method of claim 1, wherein said processing through a unified autopilot system comprises processing through an acceleration-based autopilot system.
- 9. The method of claim 1, wherein said processing the first and second directional representations through a unified autopilot system comprises adjusting for disturbance rejection.
- 10. The method of claim 1, further comprising processing the first and second directional representations to adjust for route following accuracy.
- 11. The method of claim 1, wherein transitioning from the first control mode to the second control mode comprises transitioning from a first mode offering a first level of system autonomy to a second mode offering a different level of system autonomy.
- 12. A multi-modal variable autonomy control system configured to support transitioning between control modes during operation of a vehicle, the system comprising:
 - a first control mode component configured to respond to a first user input by generating a first control mode command;

- a second control mode component configured to respond to a second user input by generating a second control mode command;
- a control mode selection component for responding to an operator control mode selection input by transitioning between a first mode of control that corresponds to the first control mode component and a second mode of control that corresponds to the second control mode component; and
- a unified autopilot system for processing the first or second control mode - commands depending on which of the first and second modes of control has been selected.
- 13. The system of claim 12, further comprising a translation layer for translating the first or second control mode commands into a format appropriate for the unified autopilot system.
 - 14. The system of claim 12, wherein:
 - the first control mode component is further configured to generate a first control mode command in the form of a directional command representation; and
 - the second control mode component is further configured to generate a second control mode command in the form of a second directional command representation.
 - 15. The system of claim 12, wherein:
 - the first control mode component is further configured to generate a first control mode command in the form of acceleration and bank angle commands; and
 - the second control mode component is further configured to generate a second control mode command in the form of acceleration and bank angle commands.
- **16**. The system of claim 12, wherein the unified autopilot system is an acceleration-based autopilot system.
- 17. The system of claim 12, wherein said first user input corresponds to a manipulation of an image sensor located on-board the vehicle.
- 18. The system of claim 12, wherein said first user input corresponds to an input originating from a multi-directional input mechanism.
- 19. The system of claim 18, wherein said first user input corresponds to an input originating from a multi-directional input mechanism that is part of a game pad input device.
- **20**. The system of claim 12, wherein the first control mode component is configured to support a remote directional response mode of control.
- 21. The system of claim 12, wherein the first control mode component is configured to support a line-of-sight-slave mode of control.
- 22. The system of claim 12, wherein the first control mode component is configured to support a ground collision avoidance mode of control.
- 23. The system of claim 12, wherein the first control mode component is configured to support an autonomous route following mode of control.
- 24. The system of claim 12, wherein the first control mode component is configured to support loiter pattern modes of control.
- 25. The system of claim 24, wherein the first control mode component is configured to support an oval-based loiter pattern mode of control.

 Evidence Appendix 190

- **26**. The system of claim 24, wherein the first control mode component is configured to support a figure-8 loiter pattern mode of control.
- 27. The system of claim 24, wherein the first control mode component is configured to support an racetrack-shaped loiter pattern mode of control.
- 28. The system of claim 12, wherein the first control mode component is configured to support a programmed maneuvers mode of control.
- 29. The system of claim 12, further comprising an intelligence synthesizer layer configured to resolve functional conflicts between the first and second modes of control.
- **30**. The system of claim 12, further comprising an intelligence synthesizer layer configured to provide commands to the unified autopilot system as necessary to support transition between the first and second modes of control.
- 31. A multi-modal variable autonomy control system, the system comprising:
 - a plurality of control mode components each corresponding to a different mode of control and being configured to respond to command inputs by generating directionally descriptive control commands; and

- a unified autopilot component for processing said directionally descriptive control commands.
- an vehicle control component for receiving processed commands from the unified autopilot system and actuating control devices accordingly.
- **32**. The system of claim 31, wherein said plurality of control mode components are associated with more than three different modes of control.
- **33**. The system of claim 31, wherein said plurality of control mode components are associated with both autonomous and user-input-based modes of control.
- **34**. The system of claim 31, wherein said plurality of control modes are further configured to respond to command inputs by generating control commands in the form of acceleration and bank angle commands.
- **35**. The system of claim 31, wherein the unified autopilot component is an acceleration-based autopilot component.

* * * * *

Exhibit 5

Exhibit 5

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 1 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 2 3 4 IN THE UNITED STATES PATENT AND TRADEMARK OFFICE 5 6 7 8 In re Application of Jed Margolin 9 Serial No.: 11/736,356 Examiner: Ronnie M. Mancho Filed: 04/17/2007 Art Unit: 3664 10 11 For: SYSTEM AND METHOD FOR SAFELY FLYING UNMANNED AERIAL VEHICLES IN CIVILIAN AIRSPACE 12 13 14 15 Mail Stop Amendment Commissioner for Patents 16 17 P.O. Box 1450 Alexandria, VA 22313-1450 18 19 20 **RESPONSE** 21 Dear Sir: 22 23 24 In response to the Office Action mailed September 1, 2010, please consider the following 25 remarks. 26 27 **Section 1. General Summary** 28 Claims 1 - 14 were rejected solely under 35 U.S.C. §103(a) as being obvious by combining U.S. 29 Patent 5,904,724 ("Margolin '724") and published Patent Application US 2005004723 ("Duggan"). 30 Applicant will show that the Examiner has failed his burden of establishing a prima facie case of obviousness. 31 32 a. The Examiner has failed to distinctly point out where all of the claim elements and 33 limitations of Applicant's claims are present in the two cited references.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 2 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 <u>**b.**</u> The Examiner has mischaracterized the two cited references as teaching all of the claim elements and limitations of Applicant's claims, when they do not.

<u>c.</u> The present Applicant is the named inventor on one of the Examiner's cited references

(U.S. Patent 5,904,724).

5

3

4

Section 2 - Detailed Response

7 8

6

Part A - Examiner's Detailed Action Paragraph 2

9 10

2. Claims 1-14 are rejected under 35 U.S.C. 103(a) as being unpatentable over Margolin (5904724) in view of Duggan et al (US 2005004723).

12

11

Regarding claim 1, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) discloses a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

- (a) a ground station 400 (fig. 1 & 4) equipped with a synthetic vision system (figs. 1 & 3; col. 4, lines 1 to col. 5, lines 67);
- (b) an unmanned aerial vehicle 300 (figs. 1 &3) capable of supporting said synthetic vision system (305, 306, 307, 311 on aircraft; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67);
- (c) a remote pilot 102 operating said ground station 400 (figs. 1&4; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67);
- (d) a communications link between said unmanned aerial vehicle 300 and said ground station 400;
- (e) a system onboard said unmanned aerial vehicle 300 for detecting the presence and position of nearby aircraft (305, 306, 307, 311 on aircraft) and communicating this information to said remote pilot 102 (col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67);

whereas said remote pilot uses said synthetic vision system (305, 306, 307, 311 on aircraft) to control said unmanned aerial vehicle 300 during at least selected phases of the flight of said unmanned aerial vehicle.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 3 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

- 1 Applicant Responds.
- 2 MPEP § 2142 states under the heading ESTABLISHING A PRIMA FACIE CASE OF
- **3 OBVIOUSNESS**

a. **> The key to supporting any rejection under 35 U.S.C. 103 is the clear articulation of the reason(s) why the claimed invention would have been obvious. The Supreme Court in KSR International Co. v. Teleflex Inc., 550 U.S. ____, ____, 82 USPQ2d 1385, 1396 (2007) noted that the analysis supporting a rejection under 35 U.S.C. 103 should be made explicit. The Federal Circuit has stated that "rejections on obviousness cannot be sustained with mere conclusory statements; instead, there must be some articulated reasoning with some rational underpinning to support the legal conclusion of obviousness." In re Kahn, 441 F.3d 977, 988, 78 USPQ2d 1329, 1336 (Fed. Cir. 2006). See also KSR, 550 U.S. at ____, 82 USPQ2d at 1396 (quoting Federal Circuit statement with approval). <

5 {Emphasis added}

67

4

The Examiner has cited lengthy passages in the above rejection and made conclusory statements as to their contents.

9

10

8

<u>Examiner:</u>

- Regarding claim 1, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5,
- lines 1-67) discloses a system for safely flying an unmanned aerial vehicle in civilian airspace
- comprising:

14

15

Applicant:

- In Margolin '724: Column 3, lines 8-67; Column 4, lines 1-67; and Column 5, lines 1-67 form a
- 17 continuous passage from Column 3, line 8 to Column 5, line 67. This passage of approximately
- 18 1619 words forms the core of the Margolin '724 DETAILED DESCRIPTION. The remainder of the
- 19 Margolin '724 DETAILED DESCRIPTION teaches additional topics such as **Flight Control** (with
- 20 headings Flight Control, Direct Control Non-Remotely Piloted Vehicles, Computer Mediated Non-
- 21 Remotely Piloted Vehicles, Second Order Flight Control Mode, First Order Flight Control Mode

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 4 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 {See Column 6, line 19 - Column 8, line 3}, the features of a Control Panel (See Column 8, line 64

- 2 Column 9, line 18}, the use of a Head-Mounted Display {See Column 9, lines 19 32}, the use of
- 3 the invention for training {See Column 9, lines 33 63}, and **The Database** {See Column 9, line 64
- 4 Column 10, line 50.}

5

- 6 The Examiner cites Figures 1 7 in Margolin '724. These constitute all the figures in Margolin
- 7 '724.

8

- 9 The Examiner also cites the Abstract in Margolin '724. According to **608.01(b)** Abstract of the
- 10 **Disclosure** [R-7]:
- 11 37 CFR 1.72 Title and abstract.

12 *****

- 13 (b) A brief abstract of the technical disclosure in the specification must commence on a
- separate sheet, preferably following the claims, under the heading "Abstract" or "Abstract of
- the Disclosure." The sheet or sheets presenting the abstract may not include other parts of the
- application or other material. The abstract in an application filed under 35 U.S.C. 111 may not
- exceed 150 words in length. The purpose of the abstract is to enable the United States Patent
- and Trademark Office and the public generally to determine quickly from a cursory inspection
- the nature and gist of the technical disclosure.

20

21 {Emphasis added}

22

- 23 The popular interpretation of 608.01(b) is that the purpose of the Abstract is to provide search
- terms. In any event, the Abstract in Margolin '724 does not say anything about civilian airspace.

25

- 26 The Examiner has made a conclusory statement by repeating the title of Applicant's invention
- 27 (leaving out the words "and method") and citing the core of the DETAILED DESCRIPTION in
- 28 Margolin '724.

29

- 30 In the remaining sections of the Examiner's rejection of Applicant's Claim 1 he asserts that he has
- found all of the elements and limitations of Applicant's invention.

32

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 5 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 It is not surprising that some of the elements of Applicant's invention are present in Margolin '724 2 since Margolin '724 is probably the pioneering patent for the use of what is now called *synthetic* 3 vision in remotely piloted aircraft (now commonly called Unmanned Aerial Vehicles) and 4 Applicant's present invention uses synthetic vision as an element. 5 6 However, there are limitations in Applicant's current invention that are not present in Margolin 7 [.]724. 8 9 **Examiner:** 10 11 whereas said remote pilot uses said synthetic vision system (305, 306, 307, 311 on aircraft) to 12 control said unmanned aerial vehicle 300 during at least selected phases of the flight of said 13 unmanned aerial vehicle. 14 15 {From Applicant's Claim 1} 16 17 References 305, 306, 307, 311, and 300 come from Margolin '724 Figure 3 which shows the structural elements in Margolin '724 Remote Aircraft Unit 300. There is nothing in these structural 18 19 elements which show that synthetic vision is used "during at least selected phases of the flight of 20 said unmanned aerial vehicle." 21 22 The Examiner has not shown that this limitation is taught in Margolin '724. He has only made a 23 conclusory statement. 24 25 Although KSR may have loosened the required reasoning that may be employed for combining prior 26 art references in an obviousness rejection, the Examiner must still provide a factual basis for each of 27 the claimed features of a rejected claim. MPEP 2143.03 entitled "All Claim Limitations must be 28 Considered" states: "all words in a claim must be considered in judging the patentability of that 29 claim against the prior art." In re Wilson, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970)." If an examiner fails to address all of the recitations of a rejected claim, a prima facie case of 30 31 obviousness has not been established because such a deficiency fails to satisfy the evidentiary 32 requirements articulated by the Supreme Court in KSR (e.g. "the key to supporting any rejection

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 6 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 under 35 U.S.C. 103 is the clear articulation of the reason(s) why the claimed invention would have

- been obvious" and that "a rejection under 35 U.S.C. 103 should be made explicit.")
- 3 The BPAI in a recent decision (Ex parte Wehling et al.) stated (with emphases added):
- 4 "the dispositive issue in this case is whether the Examiner has explicitly articulated a prima
- 5 facie case of obviousness which addresses all of the limitations of the claimed invention." The
- 6 BPAI was guided by the following legal principles:
- 7 "When determining whether a claim is obvious, an Examiner must make 'a searching comparison of
- 8 the claimed invention including all its limitations with the teachings of the prior art.' In re
- 9 Ochiai, 71 F.3d 1565, 1572 (Fed. Cir. 1995) (emphasis added). Thus, 'obviousness requires a
- suggestion of all limitations in a claim.' CFMT, Inc. v. Yieldup Int'l. Corp., 349 F.3d 1333, 1342
- 11 (Fed. Cir. 2003) (citing *In re Royka*, 490 F.2d 981, 985 (CCPA 1974)). Furthermore, in *KSR Int'l*
- 12 Co. v. Teleflex Inc., 550 U.S. 398, 418 (2007) (citing In re Kahn, 441 F.3d 977, 988 (Fed. Cir.
- 13 2006), the Supreme Court noted that '[t]o facilitate review, this [obviousness] analysis should
- be made explicit." (Ex parte Wehling et al., Appeal No. 2009-8111 (BPAI))
- 15 The BPAI in Ex Parte Wehling et al. held that "absent a fact-based analysis which explicitly
- 16 compares all the limitations of the claimed invention with the combined teachings of Gioffre and
- 17 Rockliffe, we are constrained to reverse the rejection of claims 1, 21, 29, and 31 and the claims
- dependent thereon under § 103 over the combined teachings of Gioffre and Rockliffe."
- Note that Ex Parte Wehling et al. (Appeal 2009-008111, Application 10/743,118) was decided May
- 20 17, 2010. According to the BPAI online database the decision was issued 10/19/2010 which is after
- 21 the mail date of the Examiner's rejection (9/1/2010).

2223

Examiner's Detailed Action Paragraph 2 (Continued)

2425

The Examiner continues

26

- 27 Margolin did not disclose that the vehicle is flown using an autonomous control system.
- 28 However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian
- 29 airspace comprising:
- a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 7 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0329).

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggna abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne[sic] having ordinary skill in the art.

(Applicant assumes Examiner meant to say, "The different embodiments in both prior arts are combinable as it would be obvious to one having ordinary skill in the art.)

The Examiner has mischaracterized Duggan.

Examiner	<u>Duggan</u>
Margolin did not disclose that the	[0352] In one aspect of the present invention, an operator
vehicle is flown using an	station (also referred to as the ground control station or GCS)
autonomous control system.	is designed to accommodate command and control of multiple
However, Duggan teach of a	vehicles or a single vehicle by a single operator. In accordance
system for safely flying an	with one embodiment, the ground control station is platform
unmanned aerial vehicle in civilian	independent and implements an application program interface
airspace comprising:	that provides windowing and communications interfaces (e.g.,
a ground station controlling an	the platform is implemented in Open Source wxWindows
unmanned aerial vehicle (sec.	API). The underlying operating system is illustratively
0352,	masked and enables a developer to code in a high level
	environment.
00353),	[0353] In one embodiment, the ground control station
	incorporates several specialized user interface concepts

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 8 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

designed to effectively support a single operator tasked to control multiple vehicles. The GCS also illustratively supports manual control and sensor steering modes. In the manual control mode, the operator can assume control authority of the vehicles individually from the ground control station at any time in flight. In the sensor steering mode, a vehicle will autonomously fly in the direction the operator is manually pointing the on-board imaging sensor (e.g., operator views video output from a digital camera on a TV interface, computer screen display, etc.). A custom data link is illustratively, utilized to support a two-way transfer of data between the ground control station and the UAV's. These design concepts together provide a flexible, multiple vehicle control system. The details of the concepts are discussed below.

wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, [0318] If the pilot chooses a surveillance location outside the total FOV, then the outer loop guidance will illustratively follow a command-to-LOS mode guide law until the UAV flight path points toward the target. Once the desired staring-point comes within a minimum range threshold, the guidance automatically trips into a loiter pattern (either constant-radius or elliptical) to maintain a station with a single key-click while he/she conducts other activities. FIGS. 22A & 22B together demonstrate the surveillance-point approach scenario.

0322,

[0322] In accordance with one aspect of the present invention, sensor-slave mode commands are generated by an autonomous line-of-sight driven function, in which the command objectives are generated by the necessities of the function rather than by an operator. For example, a function

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 9 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

designed to command a raster-scan of a particular surveillance area, or a function designed to scan a long a roadway could be used to generate sensor slave commands. Another example is a function designed to generate line-of-sight commands for UAV-to-UAV rendezvous formation flying.

0353)

[0353] In one embodiment, the ground control station incorporates several specialized user interface concepts designed to effectively support a single operator tasked to control multiple vehicles. The GCS also illustratively supports manual control and sensor steering modes. In the manual control mode, the operator can assume control authority of the vehicles individually from the ground control station at any time in flight. In the sensor steering mode, a vehicle will autonomously fly in the direction the operator is manually pointing the on-board imaging sensor (e.g., operator views video output from a digital camera on a TV interface, computer screen display, etc.). A custom data link is illustratively, utilized to support a two-way transfer of data between the ground control station and the UAV's. These design concepts together provide a flexible, multiple vehicle control system. The details of the concepts are discussed below.

when a synthetic vision (sec. 0356,

[0356] a synthetic vision display

0365,

[0365] The two video monitors are illustratively used to display real-time data linked camera imagery from two air vehicles having cameras (of course, fewer, more or none of the vehicles might have cameras and the number of monitor displays can be altered accordingly). In accordance with one

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 10 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

embodiment, camera imagery is recorded on videotapes during a mission. In accordance with one embodiment, the two repeater displays are used to provide redundant views of the GUI and synthetic vision display. The laptop illustratively serves as a GUI backup in the event that the main GUI fails.

0388,

[0388] In one aspect of the present invention, synthetic vision display technical approach of the present invention is based upon integrating advanced simulated visuals, originally developed for training purposes, into UAV operational systems. In accordance with one embodiment, the simulated visuals are integrated with data derived from the ground control station during flight to enable real-time synthetic visuals.

0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system

[0390] In one aspect of the present invention, through GUI display 2622, an operator can maintain a variable level of control over a UAV, from fully manual to fully autonomous, with simple user-friendly inputs. For example, if an operator decides to divert a UAV to a new route, the operator has a plurality of options to select from. The following are examples of some of the options that an operator has. Those skilled in the art should recognize that this is not an exhaustive list. In one embodiment, the operator could graphically edit the existing route on mission situation display 2629 by adding a waypoint or orbit pattern in the vicinity of a desired target region. Prior to accepting the edited route, the control system evaluates the revised route against the vehicle performance capability as well as terrain obstructions. If the route is within acceptable bounds, the control system registers the modified route and maneuvers the vehicle accordingly. In another

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 11 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

embodiment, the operator could select a park mode on selections pane 2630. After selected, the control system queues the operator to click the location of and graphical size (via a mouse) the desired orbit pattern in which the vehicle will fly while "parked" over a desired target. In another embodiment, the operator can select a manual control mode on selections pane 2630. By selecting RDC (remote directional command), for example, the control system controls the UAV into a constant altitude, heading and speed flight until the operator instructs a maneuver. While in RDC mode, the operator can either pseudo-manually direct the UAV using the control stick (e.g. joystick) or the operator can program a fixed heading, altitude and speed using the control options provided in selections pane 2630.

(autopilot, sec 0346 to 0350,

[0346] In accordance with one embodiment, an exemplary translation layer implementation will now be provided. After the guidance algorithms execute, the outputs are translated to the native vehicle autopilot commands. The equations below provide example kinematic translations from the guidance acceleration commands to native vehicle autopilot commands. These equations demonstrate the principal that vehicle motion is activated through acceleration. The methods that various vehicles employ to generate acceleration are numerous (bank angle autopilot, acceleration autopilot, heading control autopilot, altitude control autopilot, etc). Since the control algorithms described herein generate acceleration commands that can be kinematically translated into any of these native autopilot commands, the guidance algorithms truly provide a generalized library of control laws that can control any vehicle through that vehicle's native atomic functions. Ubiquitous

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 12 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

acceleration control techniques enable VACS to synthesize control commands for any vehicle, including air, ground, or sea-based. 35 a v = vertical plane acceleration command a h = horizontal plane acceleration command = tan - 1 (a h a v) = bank angle command a T = a v 2 + a h 2 = total body acceleration command . = a h V = turn rate command i = i - 1 + . t = heading command . = (a v - g) V = flight path rate command i = i - 1 + . t = flight path angle command h . = V sin () = climb rate command h i = h i = 1 + h . t = altitude command Eq . 57

[0347] Additional functionality that can be enabled in a translation layer is means for discouraging or preventing an operator (e.g., the human or non-human operator interfacing the VACS architecture) from overdriving, stalling, or spinning the vehicle frame. This being said, limiting algorithms can also be employed in the guidance or autopilot functions.

[0348] X. Autopilot

[0349] As has been addressed, the present invention is not limited to, and does not require, a particular autopilot system. The control system and architecture embodiments of the present invention can be adapted to accommodate virtually any autopilot system.

[0350] For the purpose of providing an example, an illustrative suitable autopilot software system will now be described. The illustrative autopilot system incorporates a three-axis design (pitch and yaw with an attitude control loop in the roll axis) for vehicle stabilization and guidance

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 13 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

command tracking. The autopilot software design incorporates flight control techniques, which allow vehicle control algorithms to dynamically adjust airframe stabilization parameters in real-time during flight. The flight computer is programmed directly with the airframe physical properties, so that it can automatically adjust its settings with changes in airframe configuration, aerodynamic properties, and/or flight state. This provides for a simple and versatile design, and possesses the critical flexibility needed when adjustments to the airframe configuration become necessary. The three-loop design includes angular rate feedback for stability augmentation, attitude feedback for closed-loop stiffness, and acceleration feedback for command tracking. In addition, an integral controller in the forward loop illustratively provides enhanced command tracking, low frequency disturbance rejection and an automatic trim capability.

0390-0329).

{The Examiner may have meant 0390-0392. Otherwise the range is not credible}

[0390] In one aspect of the present invention, through GUI display 2622, an operator can maintain a variable level of control over a UAV, from fully manual to fully autonomous, with simple user-friendly inputs. For example, if an operator decides to divert a UAV to a new route, the operator has a plurality of options to select from. The following are examples of some of the options that an operator has. Those skilled in the art should recognize that this is not an exhaustive list. In one embodiment, the operator could graphically edit the existing route on mission situation display 2629 by adding a waypoint or orbit pattern in the vicinity of a desired target region. Prior to accepting the edited route, the control system

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 14 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

evaluates the revised route against the vehicle performance capability as well as terrain obstructions. If the route is within acceptable bounds, the control system registers the modified route and maneuvers the vehicle accordingly. In another embodiment, the operator could select a park mode on selections pane 2630. After selected, the control system queues the operator to click the location of and graphical size (via a mouse) the desired orbit pattern in which the vehicle will fly while "parked" over a desired target. In another embodiment, the operator can select a manual control mode on selections pane 2630. By selecting RDC (remote directional command), for example, the control system controls the UAV into a constant altitude, heading and speed flight until the operator instructs a maneuver. While in RDC mode, the operator can either pseudo-manually direct the UAV using the control stick (e.g. joystick) or the operator can program a fixed heading, altitude and speed using the control options provided in selections pane 2630.

[0391] The described Intelligent displays with smart variables represent an effective approach to actively displaying information for different types of vehicles. However, a problem can arise when a new vehicle is integrated into the ground control station with a completely foreign command and control interface. Under these circumstances, the ground control station is not concerned about displaying data, but is tasked to provide a command and control interface for the operator to perform the required operations. This conundrum is the motivation for another embodiment of the present invention, namely, the integration of vehicle specific panels in the ground control station.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 15 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

[0392] In one embodiment, a generic vehicle class (GVC) is illustratively a software component that provides a rapid development environment API to add new vehicle classes and types to the ground control station. The GVC also illustratively serves as a software construct that allows the inclusion of multiple vehicles within the ground control station framework. One of the variables in the application is a vector of pointers to a generic vehicle class. This list is constructed by allocating new specific vehicles and returning a type case to the base generic vehicle class. When a new vehicle is integrated into the ground control station, the generic vehicle class provides all of the virtual functions to integrate with system control components (e.g., to integrate with a map display, a communications package, PCIG imagery and/or appropriate display windows). An important object in the application framework is illustratively a pointer to the current vehicle generic class. When the user switches vehicles, this pointer is updated and all displays grab the appropriate smart variables from the pointer to the new base class. This is the mechanism by which windows immediately update to the current vehicle information whenever the user switches vehicles. The default windows use the pointer to the current vehicle to grab information. In this manner, if the user switches to a new vehicle with a different set of datalink variables, that fact is immediately apparent on the display windows.

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 16 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggna abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne [sic] having ordinary skill in the art.

Abstract

Embodiments are disclosed for a vehicle control system and related sub-components that together provide an operator with a plurality of specific modes of operation, wherein various modes of operation incorporate different levels of autonomous control. Through a control user interface, an operator can move between certain modes of control even after vehicle deployment. Specialized autopilot system components and methods are employed to ensure smooth transitions between control modes. Empowered by the multi-modal control system, an operator can even manage multiple vehicles simultaneously.

[0014] Embodiments of the present invention pertain to a hierarchical control system, user interface system, and control architecture that together incorporate a broad range of user-selectable control modes representing variable levels of autonomy and vehicle control functionality. A unified autopilot is provided to process available modes and mode transitions. An intelligence synthesizer is illustratively provided to assist in resolving functional conflicts and transitioning between control modes, although certain resolutions and transitions can be incorporated directly into the functional sub-components associated with the different control modes. In accordance with one embodiment, all modes and transitions are funneled through an acceleration-based autopilot system. Accordingly, control commands and transitions are generally reduced to an acceleration vector to

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 17 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

be processed by a centralized autopilot system.

[0085] As will be discussed in greater detail below, the control system and architecture embodiments of the present invention essentially enable any autopilot design to support control of a vehicle in numerous control modes that are executed with switches between modes during flight. All control modes are supported even in the presence of sensor errors, such as accelerometer and gyro biases. This robustness is at least partially attributable to the fact that the closed-loop system, in all control modes, is essentially slaved to an inertial path and, hence, the sensor biases wash out in the closed loop, assuming the biases are not so grossly large that they induce stability problems in the autopilot system. Furthermore, winds are generally not an issue in the overall control scheme in that the flight control system will regulate to the inertial path, adjusting for winds automatically in the closed loop. Given the precision afforded by inertial navigation aided by GPS technology, inertial path regulation offers a highly effective and robust UAV control approach. Generally speaking, the autopilot system functions such that winds, medium Dryden turbulence levels, sensor errors, airframe aerodynamic and mass model parameter uncertainties, servo non-linearity (slew rate limits, etc.), and various other atmospheric and noise disturbances will non have a critically negative impact on flight path regulation.

[0086] Component 408 receives commands generated by component 404 and filtered by autopilot component 406. The commands received by component 408 are executed to actually manipulate the vehicle's control surfaces. Autopilot component 406 then continues to monitor vehicle stabilization

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 18 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

	and/or command tracking, making additional commands to
1	component 408 as necessary.
1	
2	At the beginning of this subsection, the Examiner asserts, "Margolin did not disclose that the
3	vehicle is flown using an autonomous control system. However, Duggan teach of a system for
4	safely flying an unmanned aerial vehicle in civilian airspace comprising:"
5	
6	The Examiner's statement, "However, Duggan teach of a system for safely flying an unmanned
7	aerial vehicle in civilian airspace comprising:" is conclusory and is not supported by the
8	Examiner's citations to Duggan.
9	
10	In addition, none of the Duggan citations teach that either synthetic vision or Duggan's Variable
11	Autonomy System is used "during at least selected phases of the flight of said unmanned aerial
12	vehicle" which is a limitation in Applicant's Claim 1.
13	
14	Duggan fails to teach the limitation that his Variable Autonomy System is used during selected
15	phases of a UAV's flight and Margolin '724 fails to teach the limitation that synthetic vision is used
16	during selected phases of a UAV's flight. Therefore, the combination of Duggan and Margolin '724
17	does not read on Applicant's Claim 1.
18	
19	As cited above by Applicant, MPEP 2143.03 "All Claim Limitations must be Considered" states:
20	"all words in a claim must be considered in judging the patentability of that claim against the prior
21	art." In re Wilson, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970)."
22	
23	The Examiner has failed his duty under MPEP 2143.03 (and in view of Wehling) to present a prima
24	facie case of obviousness for rejecting Applicant's Claim 1.
25	
26	Examiner's Regarding Claim 2, a claim dependent on Claim 1. Applicant has shown that Claim 1
27	is nonobvious. Therefore, under 2143.03 All Claim Limitations Must Be Considered , Claim 2 is
28	non-obvious.
29	2143.03 All Claim Limitations Must Be **>Considered< [R-6]

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 19 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

** "All words in a claim must be considered in judging the patentability of that claim against the prior art." *In re Wilson*, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970). If an independent claim is nonobvious under 35 U.S.C. 103, then any claim depending therefrom is nonobvious. *In re Fine*, 837 F.2d 1071, 5 USPQ2d 1596 (Fed. Cir. 1988).

5

9

- 6 Examiner's Regarding Claim 3, a claim dependent on Claim 1. Applicant has shown that Claim 1
- 7 is nonobvious. Therefore, under 2143.03 **All Claim Limitations Must Be Considered**, Claim 3 is
- 8 non-obvious.
 - 2143.03 All Claim Limitations Must Be **>Considered< [R-6]
- 10 ** "All words in a claim must be considered in judging the patentability of that claim against
- the prior art." *In re Wilson*, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970). If an
- independent claim is nonobvious under <u>35 U.S.C. 103</u>, then any claim depending therefrom is
- nonobvious. *In re Fine*, 837 F.2d 1071, 5 USPQ2d 1596 (Fed. Cir. 1988).

14

- 15 **Examiner's Regarding Claim 4**, a claim dependent on Claim 1. Applicant has shown that Claim 1
- is nonobvious. Therefore, under 2143.03 **All Claim Limitations Must Be Considered**, Claim 4 is
- 17 non-obvious.
- 2143.03 All Claim Limitations Must Be **>Considered< [R-6]
- 19 ** "All words in a claim must be considered in judging the patentability of that claim against
- 20 the prior art." *In re Wilson*, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970). If an
- independent claim is nonobvious under 35 U.S.C. 103, then any claim depending therefrom is
- 22 nonobvious. *In re Fine*, 837 F.2d 1071, 5 USPQ2d 1596 (Fed. Cir. 1988).

23

24

Examiner:

Regarding claim 5, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose a system for safely flying an unmanned aerial vehicle

- in civilian airspace comprising:
- (a) a ground station equipped with a synthetic vision system;
- (b) an unmanned aerial vehicle capable of supporting said synthetic vision system;
- (c) a remote pilot operating said ground station;

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 20 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

(d) a communications link between said unmanned aerial vehicle and said ground station;

e) a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot;

whereas said remote pilot uses said synthetic vision system to control said unmanned aerial vehicle during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system, and

whereas the selected phases of the flight of said unmanned aerial vehicle comprise:

- (a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;
- (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

1

2

Applicant:

- 3 In Margolin '724: Column 3, lines 8-67; Column 4, lines 1-67; and Column 5, lines 1-67 form a
- 4 continuous passage from Column 3, line 8 to Column 5, line 67. This passage of approximately
- 5 1619 words forms the core of the Margolin '724 DETAILED DESCRIPTION. The remainder of the
- 6 Margolin '724 DETAILED DESCRIPTION teaches additional topics such as **Flight Control** (with
- 7 headings Flight Control, Direct Control Non-Remotely Piloted Vehicles, Computer Mediated Non-
- 8 Remotely Piloted Vehicles, Second Order Flight Control Mode, First Order Flight Control Mode
- 9 {See Column 6, line 19 Column 8, line 3}, the features of a Control Panel (See Column 8, line 64
- Column 9, line 18, the use of a Head-Mounted Display {See Column 9, lines 19 32}, the use of
- the invention for training {See Column 9, lines 33 63}, and **The Database** {See Column 9, line 64
- 12 Column 10, line 50.}

13

- 14 The Examiner cites Figures 1 7 in Margolin '724. These constitute all the figures in Margolin
- 15 '724.

16

- 17 The Examiner also cites the Abstract in Margolin '724. According to **608.01(b)** Abstract of the
- 18 **Disclosure [R-7]:**
- 19 **37 CFR 1.72 Title and abstract.**

Serial Number: 11/736,356 Filed: 04/17/20 Examiner: Ronnie M. Mancho Art Unit: 3664 Jed Margolin Filed: 04/17/2007 Sheet 21 of 241

1	***
2	(b) A brief abstract of the technical disclosure in the specification must commence on a
3	separate sheet, preferably following the claims, under the heading "Abstract" or "Abstract of
4	the Disclosure." The sheet or sheets presenting the abstract may not include other parts of the
5	application or other material. The abstract in an application filed under 35 U.S.C. 111 may not
6	exceed 150 words in length. The purpose of the abstract is to enable the United States Patent
7	and Trademark Office and the public generally to determine quickly from a cursory inspection
8	the nature and gist of the technical disclosure.
9	(Emembosis added)
10	{Emphasis added}
1112	The popular interpretation of 608.01(b) is that the purpose of the Abstract is to provide search
13	terms. In any event, the Abstract in Margolin '724 does not say anything about civilian airspace.
13	terms. In any event, the Abstract in Margonn 724 does not say anything about cryman anspace.
15	The Examiner has made a conclusory statement by repeating the title of Applicant's invention
16	(leaving out the words "and method") and citing the core of the DETAILED DESCRIPTION in
17	Margolin '724.
18	
19	In the remaining sections of the Examiner's rejection of Applicant's Claim 5 he asserts that he has
20	found all of the elements and limitations of Applicant's invention.
21	
22	It is not surprising that some of the elements of Applicant's invention are present in Margolin '724
23	since Margolin '724 is probably the pioneering patent for the use of what is now called synthetic
24	vision in remotely piloted aircraft (now commonly called Unmanned Aerial Vehicles) and
25	Applicant's present invention uses synthetic vision as an element.
26	
27	However, there are limitations in Applicant's current invention that are not present in Margolin
28	'724 .
29	
30	Examiner:
31	whereas said remote pilot uses said synthetic vision system to control said unmanned aerial
32	vehicle during at least selected phases of the flight of said unmanned aerial vehicle, and during

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 22 of 241 Serial Number: 11/736,356 Filed: 04/17/20 Examiner: Ronnie M. Mancho Art Unit: 3664

1	those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is
2	not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an
3	autonomous control system, and
4 5	whereas the selected phases of the flight of said unmanned aerial vehicle comprise:
6	(a) when said unmanned aerial vehicle is within a selected range of an airport or other designated
7	location and is below a first specified altitude;
8	(b) when said unmanned aerial vehicle is outside said selected range of an airport or other
9	designated location and is below a second specified altitude.
10	
11	The Examiner has not even attempted to show where these limitations are taught in Margolin '724.
12	As noted, he has cited the core of the Margolin '724 DETAILED DESCRIPTION, all of the
13	drawings, and the abstract. His rejection is purely conclusory and does not follow the requirements
14	for making a prima facie rejection required by MPEP § 2143.03 All Claim Limitations Must Be
15	Considered, KSR, and Wehling, as well as MPEP § 2142 ESTABLISHING A PRIMA FACIE
16	CASE OF OBVIOUSNESS.
17	
18	The Examiner continues:
19	Margolin did not disclose that the vehicle is flown using an autonomous control system.
20	However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian
21	airspace comprising:
22	a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein
23	during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a
24	synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial
25	vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot,
26	sec 0346 to 0350, 0390-0329).
27	Therefore, it would have been obvious to one of ordinary skill in the art at the time the
28	invention was made to modify Margolin as taught by Duggan for the purpose of incorporating
29	an autopilot to ensure smooth transitions (Duggna abstract, sec 0014, 0085, 0086).

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 23 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

The different embodiments in both prior arts are combinable as it would be obvious to ne

having ordinary skill in the art.

1

Examiner	<u>Duggan</u>
Margolin did not disclose that the	[0352] In one aspect of the present invention, an operator
vehicle is flown using an	station (also referred to as the ground control station or GCS)
autonomous control system.	is designed to accommodate command and control of multiple
However, Duggan teach of a	vehicles or a single vehicle by a single operator. In accordance
system for safely flying an	with one embodiment, the ground control station is platform
unmanned aerial vehicle in civilian	independent and implements an application program interface
airspace comprising:	that provides windowing and communications interfaces (e.g.,
a ground station controlling an	the platform is implemented in Open Source wxWindows
unmanned aerial vehicle (sec.	API). The underlying operating system is illustratively
0352,	masked and enables a developer to code in a high level
	environment.
00353),	[0353] In one embodiment, the ground control station
	incorporates several specialized user interface concepts
	designed to effectively support a single operator tasked to
	control multiple vehicles. The GCS also illustratively supports
	manual control and sensor steering modes. In the manual
	control mode, the operator can assume control authority of the
	vehicles individually from the ground control station at any
	time in flight. In the sensor steering mode, a vehicle will
	autonomously fly in the direction the operator is manually
	pointing the on-board imaging sensor (e.g., operator views
	video output from a digital camera on a TV interface,
	computer screen display, etc.). A custom data link is
	illustratively, utilized to support a two-way transfer of data
	between the ground control station and the UAV's. These
	design concepts together provide a flexible, multiple vehicle

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 24 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

control system. The details of the concepts are discussed below.

wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, [0318] If the pilot chooses a surveillance location outside the total FOV, then the outer loop guidance will illustratively follow a command-to-LOS mode guide law until the UAV flight path points toward the target. Once the desired staring-point comes within a minimum range threshold, the guidance automatically trips into a loiter pattern (either constant-radius or elliptical) to maintain a station with a single key-click while he/she conducts other activities. FIGS. 22A & 22B together demonstrate the surveillance-point approach scenario.

0322.

[0322] In accordance with one aspect of the present invention, sensor-slave mode commands are generated by an autonomous line-of-sight driven function, in which the command objectives are generated by the necessities of the function rather than by an operator. For example, a function designed to command a raster-scan of a particular surveillance area, or a function designed to scan a long a roadway could be used to generate sensor slave commands. Another example is a function designed to generate line-of-sight commands for UAV-to-UAV rendezvous formation flying.

0353)

[0353] In one embodiment, the ground control station incorporates several specialized user interface concepts designed to effectively support a single operator tasked to control multiple vehicles. The GCS also illustratively supports manual control and sensor steering modes. In the manual control mode, the operator can assume control authority of the vehicles individually from the ground control station at any

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 25 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

time in flight. In the sensor steering mode, a vehicle will autonomously fly in the direction the operator is manually pointing the on-board imaging sensor (e.g., operator views video output from a digital camera on a TV interface, computer screen display, etc.). A custom data link is illustratively, utilized to support a two-way transfer of data between the ground control station and the UAV's. These design concepts together provide a flexible, multiple vehicle control system. The details of the concepts are discussed below.

when a synthetic vision (sec. 0356,

[0356] a synthetic vision display

0365,

[0365] The two video monitors are illustratively used to display real-time data linked camera imagery from two air vehicles having cameras (of course, fewer, more or none of the vehicles might have cameras and the number of monitor displays can be altered accordingly). In accordance with one embodiment, camera imagery is recorded on videotapes during a mission. In accordance with one embodiment, the two repeater displays are used to provide redundant views of the GUI and synthetic vision display. The laptop illustratively serves as a GUI backup in the event that the main GUI fails.

0388.

[0388] In one aspect of the present invention, synthetic vision display technical approach of the present invention is based upon integrating advanced simulated visuals, originally developed for training purposes, into UAV operational systems. In accordance with one embodiment, the simulated visuals are integrated with data derived from the ground control station during flight to enable real-time synthetic

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 26 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

visuals.

0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system

[0390] In one aspect of the present invention, through GUI display 2622, an operator can maintain a variable level of control over a UAV, from fully manual to fully autonomous, with simple user-friendly inputs. For example, if an operator decides to divert a UAV to a new route, the operator has a plurality of options to select from. The following are examples of some of the options that an operator has. Those skilled in the art should recognize that this is not an exhaustive list. In one embodiment, the operator could graphically edit the existing route on mission situation display 2629 by adding a waypoint or orbit pattern in the vicinity of a desired target region. Prior to accepting the edited route, the control system evaluates the revised route against the vehicle performance capability as well as terrain obstructions. If the route is within acceptable bounds, the control system registers the modified route and maneuvers the vehicle accordingly. In another embodiment, the operator could select a park mode on selections pane 2630. After selected, the control system queues the operator to click the location of and graphical size (via a mouse) the desired orbit pattern in which the vehicle will fly while "parked" over a desired target. In another embodiment, the operator can select a manual control mode on selections pane 2630. By selecting RDC (remote directional command), for example, the control system controls the UAV into a constant altitude, heading and speed flight until the operator instructs a maneuver. While in RDC mode, the operator can either pseudo-manually direct the UAV using the control stick (e.g. joystick) or the operator can program a fixed heading, altitude and speed using the control

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 27 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

options provided in selections pane 2630.

(autopilot, sec 0346 to 0350,

[0346] In accordance with one embodiment, an exemplary translation layer implementation will now be provided. After the guidance algorithms execute, the outputs are translated to the native vehicle autopilot commands. The equations below provide example kinematic translations from the guidance acceleration commands to native vehicle autopilot commands. These equations demonstrate the principal that vehicle motion is activated through acceleration. The methods that various vehicles employ to generate acceleration are numerous (bank angle autopilot, acceleration autopilot, heading control autopilot, altitude control autopilot, etc). Since the control algorithms described herein generate acceleration commands that can be kinematically translated into any of these native autopilot commands, the guidance algorithms truly provide a generalized library of control laws that can control any vehicle through that vehicle's native atomic functions. Ubiquitous acceleration control techniques enable VACS to synthesize control commands for any vehicle, including air, ground, or sea-based. 35 a v = vertical plane acceleration command a h = horizontal plane acceleration command = tan - 1 (a h a v) = bank angle command a T = a v 2 + a h 2 = total bodyacceleration command i = a h V = turn rate command i = i - 1+ . t = heading command . = (a v - g) V = flight path ratecommand i = i - 1 + .t = flight path angle command <math>h . = V $\sin () = \text{climb rate command h } i = \text{h } i = 1 + \text{h} . t = \text{altitude}$ command Eq. 57

[0347] Additional functionality that can be enabled in a translation layer is means for discouraging or preventing an

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 28 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

operator (e.g., the human or non-human operator interfacing the VACS architecture) from overdriving, stalling, or spinning the vehicle frame. This being said, limiting algorithms can also be employed in the guidance or autopilot functions.

[0348] X. Autopilot

[0349] As has been addressed, the present invention is not limited to, and does not require, a particular autopilot system. The control system and architecture embodiments of the present invention can be adapted to accommodate virtually any autopilot system.

[0350] For the purpose of providing an example, an illustrative suitable autopilot software system will now be described. The illustrative autopilot system incorporates a three-axis design (pitch and yaw with an attitude control loop in the roll axis) for vehicle stabilization and guidance command tracking. The autopilot software design incorporates flight control techniques, which allow vehicle control algorithms to dynamically adjust airframe stabilization parameters in real-time during flight. The flight computer is programmed directly with the airframe physical properties, so that it can automatically adjust its settings with changes in airframe configuration, aerodynamic properties, and/or flight state. This provides for a simple and versatile design, and possesses the critical flexibility needed when adjustments to the airframe configuration become necessary. The three-loop design includes angular rate feedback for stability augmentation, attitude feedback for closed-loop stiffness, and acceleration feedback for command tracking. In addition, an

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 29 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

integral controller in the forward loop illustratively provides enhanced command tracking, low frequency disturbance rejection and an automatic trim capability.

0390-0329).

{The Examiner may have meant 0390-0392. Otherwise the range is not credible}

[0390] In one aspect of the present invention, through GUI display 2622, an operator can maintain a variable level of control over a UAV, from fully manual to fully autonomous, with simple user-friendly inputs. For example, if an operator decides to divert a UAV to a new route, the operator has a plurality of options to select from. The following are examples of some of the options that an operator has. Those skilled in the art should recognize that this is not an exhaustive list. In one embodiment, the operator could graphically edit the existing route on mission situation display 2629 by adding a waypoint or orbit pattern in the vicinity of a desired target region. Prior to accepting the edited route, the control system evaluates the revised route against the vehicle performance capability as well as terrain obstructions. If the route is within acceptable bounds, the control system registers the modified route and maneuvers the vehicle accordingly. In another embodiment, the operator could select a park mode on selections pane 2630. After selected, the control system queues the operator to click the location of and graphical size (via a mouse) the desired orbit pattern in which the vehicle will fly while "parked" over a desired target. In another embodiment, the operator can select a manual control mode on selections pane 2630. By selecting RDC (remote directional command), for example, the control system controls the UAV into a constant altitude, heading and speed

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 30 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

flight until the operator instructs a maneuver. While in RDC mode, the operator can either pseudo-manually direct the UAV using the control stick (e.g. joystick) or the operator can program a fixed heading, altitude and speed using the control options provided in selections pane 2630.

[0391] The described Intelligent displays with smart variables represent an effective approach to actively displaying information for different types of vehicles. However, a problem can arise when a new vehicle is integrated into the ground control station with a completely foreign command and control interface. Under these circumstances, the ground control station is not concerned about displaying data, but is tasked to provide a command and control interface for the operator to perform the required operations. This conundrum is the motivation for another embodiment of the present invention, namely, the integration of vehicle specific panels in the ground control station.

[0392] In one embodiment, a generic vehicle class (GVC) is illustratively a software component that provides a rapid development environment API to add new vehicle classes and types to the ground control station. The GVC also illustratively serves as a software construct that allows the inclusion of multiple vehicles within the ground control station framework. One of the variables in the application is a vector of pointers to a generic vehicle class. This list is constructed by allocating new specific vehicles and returning a type case to the base generic vehicle class. When a new vehicle is integrated into the ground control station, the generic vehicle class provides all of the virtual functions to

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 31 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

integrate with system control components (e.g., to integrate with a map display, a communications package, PCIG imagery and/or appropriate display windows). An important object in the application framework is illustratively a pointer to the current vehicle generic class. When the user switches vehicles, this pointer is updated and all displays grab the appropriate smart variables from the pointer to the new base class. This is the mechanism by which windows immediately update to the current vehicle information whenever the user switches vehicles. The default windows use the pointer to the current vehicle to grab information. In this manner, if the user switches to a new vehicle with a different set of datalink variables, that fact is immediately apparent on the display windows.

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggna abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne[sic] having ordinary skill in the art.

Abstract

Embodiments are disclosed for a vehicle control system and related sub-components that together provide an operator with a plurality of specific modes of operation, wherein various modes of operation incorporate different levels of autonomous control. Through a control user interface, an operator can move between certain modes of control even after vehicle deployment. Specialized autopilot system components and methods are employed to ensure smooth transitions between

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 32 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

control modes. Empowered by the multi-modal control system, an operator can even manage multiple vehicles simultaneously.

[0014] Embodiments of the present invention pertain to a hierarchical control system, user interface system, and control architecture that together incorporate a broad range of userselectable control modes representing variable levels of autonomy and vehicle control functionality. A unified autopilot is provided to process available modes and mode transitions. An intelligence synthesizer is illustratively provided to assist in resolving functional conflicts and transitioning between control modes, although certain resolutions and transitions can be incorporated directly into the functional sub-components associated with the different control modes. In accordance with one embodiment, all modes and transitions are funneled through an acceleration-based autopilot system. Accordingly, control commands and transitions are generally reduced to an acceleration vector to be processed by a centralized autopilot system.

[0085] As will be discussed in greater detail below, the control system and architecture embodiments of the present invention essentially enable any autopilot design to support control of a vehicle in numerous control modes that are executed with switches between modes during flight. All control modes are supported even in the presence of sensor errors, such as accelerometer and gyro biases. This robustness is at least partially attributable to the fact that the closed-loop system, in all control modes, is essentially slaved to an inertial path and, hence, the sensor biases wash out in the closed loop,

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 33 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

assuming the biases are not so grossly large that they induce stability problems in the autopilot system. Furthermore, winds are generally not an issue in the overall control scheme in that the flight control system will regulate to the inertial path, adjusting for winds automatically in the closed loop. Given the precision afforded by inertial navigation aided by GPS technology, inertial path regulation offers a highly effective and robust UAV control approach. Generally speaking, the autopilot system functions such that winds, medium Dryden turbulence levels, sensor errors, airframe aerodynamic and mass model parameter uncertainties, servo non-linearity (slew rate limits, etc.), and various other atmospheric and noise disturbances will non have a critically negative impact on flight path regulation.

[0086] Component 408 receives commands generated by component 404 and filtered by autopilot component 406. The commands received by component 408 are executed to actually manipulate the vehicle's control surfaces. Autopilot component 406 then continues to monitor vehicle stabilization and/or command tracking, making additional commands to component 408 as necessary.

1 2

3

4

5

At the beginning of this subsection, the Examiner asserts, "Margolin did not disclose that the vehicle is flown using an autonomous control system. However, Duggan teach of a system for

safely flying an unmanned aerial vehicle in civilian airspace comprising: ..."

6 7

The Examiner's statement, "However, Duggan teach of a system for safely flying an unmanned

aerial vehicle in civilian airspace comprising: ..." is conclusory and is not supported by the

Examiner's citations to Duggan.

9 10

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 34 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

In addition, none of the Duggan citations teach the limitations in Applicant's Claim 5 that either synthetic vision or Duggan's Variable Autonomy System is used:

- 1. "during at least selected phases of the flight of said unmanned aerial vehicle"
- 2. that the selected phases comprise:
- (a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;
 - (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

9

3

4

5

6

7

8

- 10 Duggan fails to teach the limitation that his Variable Autonomy System is used during selected
- phases of a UAV's flight and Margolin '724 fails to teach the limitation that synthetic vision is used
- during selected phases of a UAV's flight. Therefore, the combination of Duggan and Margolin '724
- does not read on Applicant's Claim 5.

14

- As cited above by Applicant, MPEP 2143.03 "All Claim Limitations must be Considered" states:
- 16 "all words in a claim must be considered in judging the patentability of that claim against the prior
- 17 art." In re Wilson, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970)."

18

- 19 The Examiner has failed his duty under MPEP 2143.03 (and in view of Wehling) to present a prima
- 20 facie case of obviousness for rejecting Applicant's Claim 5.

21

25

- 22 **Examiner's Regarding Claim 6**, a claim dependent on Claim 5. Applicant has shown that Claim 5
- 23 is nonobvious. Therefore, under **2143.03** All Claim Limitations Must Be Considered, Claim 6 is
- 24 non-obvious.
 - 2143.03 All Claim Limitations Must Be **>Considered< [R-6]
- 26 ** "All words in a claim must be considered in judging the patentability of that claim against
- 27 the prior art." *In re Wilson*, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970). If an
- independent claim is nonobvious under <u>35 U.S.C. 103</u>, then any claim depending therefrom is
- 29 nonobvious. *In re Fine*, 837 F.2d 1071, 5 USPQ2d 1596 (Fed. Cir. 1988).

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 35 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 <u>Examiner's Regarding Claim 7</u>, a claim dependent on Claim 5. Applicant has shown that Claim 5

- 2 is nonobvious. Therefore, under **2143.03** All Claim Limitations Must Be Considered, Claim 7 is
- 3 non-obvious.

4

9

- 2143.03 All Claim Limitations Must Be **>Considered< [R-6]
- 5 ** "All words in a claim must be considered in judging the patentability of that claim against
- 6 the prior art." *In re Wilson*, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970). If an
- 7 independent claim is nonobvious under <u>35 U.S.C. 103</u>, then any claim depending therefrom is
- 8 nonobvious. *In re Fine*, 837 F.2d 1071, 5 USPQ2d 1596 (Fed. Cir. 1988).

10 **Examiner:**

Regarding claim 8, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose a method for safely flying an unmanned aerial vehicle as part of a unmanned aerial system equipped with a synthetic vision system in civilian airspace comprising the steps of-

- (a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle an autonomous control system is used to fly said unmanned aerial vehicle;
- (b) providing a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot.

11

- Applicant:
- 13 In Margolin '724: Column 3, lines 8-67; Column 4, lines 1-67; and Column 5, lines 1-67 form a
- 14 continuous passage from Column 3, line 8 to Column 5, line 67. This passage of approximately
- 15 1619 words forms the core of the Margolin '724 DETAILED DESCRIPTION. The remainder of the
- Margolin '724 DETAILED DESCRIPTION teaches additional topics such as **Flight Control** (with
- 17 headings Flight Control, Direct Control Non-Remotely Piloted Vehicles, Computer Mediated Non-
- 18 Remotely Piloted Vehicles, Second Order Flight Control Mode, First Order Flight Control Mode
- 19 {See Column 6, line 19 Column 8, line 3}, the features of a Control Panel (See Column 8, line 64
- Column 9, line 18}, the use of a Head-Mounted Display {See Column 9, lines 19 32}, the use of

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 36 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 the invention for training {See Column 9, lines 33 - 63}, and **The Database** {See Column 9, line 64 2 - Column 10, line 50.} 3 4 The Examiner cites Figures 1 - 7 in Margolin '724. These constitute all the figures in Margolin 5 [.]724. 6 7 The Examiner also cites the Abstract in Margolin '724. According to 608.01(b) Abstract of the 8 Disclosure [R-7]: 9 37 CFR 1.72 Title and abstract. **** 10 11 (b) A brief abstract of the technical disclosure in the specification must commence on a 12 separate sheet, preferably following the claims, under the heading "Abstract" or "Abstract of 13 the Disclosure." The sheet or sheets presenting the abstract may not include other parts of the 14 application or other material. The abstract in an application filed under 35 U.S.C. 111 may not 15 exceed 150 words in length. The purpose of the abstract is to enable the United States Patent 16 and Trademark Office and the public generally to determine quickly from a cursory inspection 17 the nature and gist of the technical disclosure.< 18 19 {Emphasis added} 20 21 The popular interpretation of 608.01(b) is that the purpose of the Abstract is to provide search 22 terms. In any event, the Abstract in Margolin '724 does not say anything about civilian airspace. 23 24 The Examiner has made a conclusory statement by repeating the title of Applicant's invention 25 (leaving out the words "and method") and citing the core of the DETAILED DESCRIPTION in 26 Margolin '724. 27 28 In the remaining sections of the Examiner's rejection of Applicant's Claim 8 he asserts that he has 29 found the elements and limitations of Applicant's invention. 30 (a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at 31 least selected phases of the flight of said unmanned aerial vehicle, and during those phases of 32 the flight of said unmanned aerial vehicle when said synthetic vision system is not used to

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 37 of 241 Examiner: Ronnie M. Mancho Art Unit: 3664

control said unmanned aerial vehicle an autonomous control system is used to fly said unmanned aerial vehicle;

(b) providing a system onboard said unmanned aerial vehicle for detecting the presence and

The Examiner has not even attempted to show where these limitations are taught in Margolin '724.

He has particularly failed to show where the following is taught:

position of nearby aircraft and communicating this information to said remote pilot.

(a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle an autonomous control system is used to fly said unmanned aerial vehicle;

As noted, he has cited the core of the Margolin '724 DETAILED DESCRIPTION, all of the drawings, and the abstract. His rejection is purely conclusory and does not follow the requirements for making a *prima facie* rejection required by MPEP § 2143.03 **All Claim Limitations Must Be Considered**, *KSR*, and *Wehling*, as well as MPEP § 2142 **ESTABLISHING A PRIMA FACIE CASE OF OBVIOUSNESS.**

The Examiner continues:

Margolin did not disclose that the vehicle is flown using an autonomous control system. However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0329).

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggna abstract, sec 0014, 0085, 0086).

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 38 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

The different embodiments in both prior arts are combinable as it would be obvious to ne having ordinary skill in the art.

3

Examiner	<u>Duggan</u>
Margolin did not disclose that the	[0352] In one aspect of the present invention, an operator
vehicle is flown using an	station (also referred to as the ground control station or GCS)
autonomous control system.	is designed to accommodate command and control of multiple
However, Duggan teach of a	vehicles or a single vehicle by a single operator. In accordance
system for safely flying an	with one embodiment, the ground control station is platform
unmanned aerial vehicle in civilian	independent and implements an application program interface
airspace comprising:	that provides windowing and communications interfaces (e.g.,
a ground station controlling an	the platform is implemented in Open Source wxWindows
unmanned aerial vehicle (sec.	API). The underlying operating system is illustratively
0352,	masked and enables a developer to code in a high level
	environment.
00353),	[0353] In one embodiment, the ground control station
	incorporates several specialized user interface concepts
	designed to effectively support a single operator tasked to
	control multiple vehicles. The GCS also illustratively supports
	manual control and sensor steering modes. In the manual
	control mode, the operator can assume control authority of the
	vehicles individually from the ground control station at any
	time in flight. In the sensor steering mode, a vehicle will
	autonomously fly in the direction the operator is manually
	pointing the on-board imaging sensor (e.g., operator views
	video output from a digital camera on a TV interface,
	computer screen display, etc.). A custom data link is
	illustratively, utilized to support a two-way transfer of data
	between the ground control station and the UAV's. These

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 39 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

design concepts together provide a flexible, multiple vehicle control system. The details of the concepts are discussed below.

wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, [0318] If the pilot chooses a surveillance location outside the total FOV, then the outer loop guidance will illustratively follow a command-to-LOS mode guide law until the UAV flight path points toward the target. Once the desired staring-point comes within a minimum range threshold, the guidance automatically trips into a loiter pattern (either constant-radius or elliptical) to maintain a station with a single key-click while he/she conducts other activities. FIGS. 22A & 22B together demonstrate the surveillance-point approach scenario.

0322.

[0322] In accordance with one aspect of the present invention, sensor-slave mode commands are generated by an autonomous line-of-sight driven function, in which the command objectives are generated by the necessities of the function rather than by an operator. For example, a function designed to command a raster-scan of a particular surveillance area, or a function designed to scan a long a roadway could be used to generate sensor slave commands. Another example is a function designed to generate line-of-sight commands for UAV-to-UAV rendezvous formation flying.

0353)

[0353] In one embodiment, the ground control station incorporates several specialized user interface concepts designed to effectively support a single operator tasked to control multiple vehicles. The GCS also illustratively supports manual control and sensor steering modes. In the manual control mode, the operator can assume control authority of the

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 40 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

vehicles individually from the ground control station at any time in flight. In the sensor steering mode, a vehicle will autonomously fly in the direction the operator is manually pointing the on-board imaging sensor (e.g., operator views video output from a digital camera on a TV interface, computer screen display, etc.). A custom data link is illustratively, utilized to support a two-way transfer of data between the ground control station and the UAV's. These design concepts together provide a flexible, multiple vehicle control system. The details of the concepts are discussed below.

when a synthetic vision (sec. 0356,

[0356] a synthetic vision display

0365.

[0365] The two video monitors are illustratively used to display real-time data linked camera imagery from two air vehicles having cameras (of course, fewer, more or none of the vehicles might have cameras and the number of monitor displays can be altered accordingly). In accordance with one embodiment, camera imagery is recorded on videotapes during a mission. In accordance with one embodiment, the two repeater displays are used to provide redundant views of the GUI and synthetic vision display. The laptop illustratively serves as a GUI backup in the event that the main GUI fails.

0388,

[0388] In one aspect of the present invention, synthetic vision display technical approach of the present invention is based upon integrating advanced simulated visuals, originally developed for training purposes, into UAV operational systems. In accordance with one embodiment, the simulated visuals are integrated with data derived from the ground

 Jed Margolin
 Serial Number: 11/736,356
 Filed: 04/17/2007
 Sheet 41 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

control station during flight to enable real-time synthetic visuals.

0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system

[0390] In one aspect of the present invention, through GUI display 2622, an operator can maintain a variable level of control over a UAV, from fully manual to fully autonomous, with simple user-friendly inputs. For example, if an operator decides to divert a UAV to a new route, the operator has a plurality of options to select from. The following are examples of some of the options that an operator has. Those skilled in the art should recognize that this is not an exhaustive list. In one embodiment, the operator could graphically edit the existing route on mission situation display 2629 by adding a waypoint or orbit pattern in the vicinity of a desired target region. Prior to accepting the edited route, the control system evaluates the revised route against the vehicle performance capability as well as terrain obstructions. If the route is within acceptable bounds, the control system registers the modified route and maneuvers the vehicle accordingly. In another embodiment, the operator could select a park mode on selections pane 2630. After selected, the control system queues the operator to click the location of and graphical size (via a mouse) the desired orbit pattern in which the vehicle will fly while "parked" over a desired target. In another embodiment, the operator can select a manual control mode on selections pane 2630. By selecting RDC (remote directional command), for example, the control system controls the UAV into a constant altitude, heading and speed flight until the operator instructs a maneuver. While in RDC mode, the operator can either pseudo-manually direct the UAV using the control stick (e.g. joystick) or the operator can

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 42 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

program a fixed heading, altitude and speed using the control options provided in selections pane 2630.

(autopilot, sec 0346 to 0350,

[0346] In accordance with one embodiment, an exemplary translation layer implementation will now be provided. After the guidance algorithms execute, the outputs are translated to the native vehicle autopilot commands. The equations below provide example kinematic translations from the guidance acceleration commands to native vehicle autopilot commands. These equations demonstrate the principal that vehicle motion is activated through acceleration. The methods that various vehicles employ to generate acceleration are numerous (bank angle autopilot, acceleration autopilot, heading control autopilot, altitude control autopilot, etc). Since the control algorithms described herein generate acceleration commands that can be kinematically translated into any of these native autopilot commands, the guidance algorithms truly provide a generalized library of control laws that can control any vehicle through that vehicle's native atomic functions. Ubiquitous acceleration control techniques enable VACS to synthesize control commands for any vehicle, including air, ground, or sea-based. 35 a v = vertical plane acceleration command a h =horizontal plane acceleration command = tan - 1 (a h a v) = bank angle command a T = a v 2 + a h 2 = total bodyacceleration command i = a h V = turn rate command i = i - 1+ . t = heading command . = (a v - g) V = flight path ratecommand i = i - 1 + .t = flight path angle command <math>h . = V $\sin () = \text{climb rate command h } i = \text{h } i = 1 + \text{h} . t = \text{altitude}$ command Eq. 57

[0347] Additional functionality that can be enabled in a

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 43 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

translation layer is means for discouraging or preventing an operator (e.g., the human or non-human operator interfacing the VACS architecture) from overdriving, stalling, or spinning the vehicle frame. This being said, limiting algorithms can also be employed in the guidance or autopilot functions.

[0348] X. Autopilot

[0349] As has been addressed, the present invention is not limited to, and does not require, a particular autopilot system. The control system and architecture embodiments of the present invention can be adapted to accommodate virtually any autopilot system.

[0350] For the purpose of providing an example, an illustrative suitable autopilot software system will now be described. The illustrative autopilot system incorporates a three-axis design (pitch and yaw with an attitude control loop in the roll axis) for vehicle stabilization and guidance command tracking. The autopilot software design incorporates flight control techniques, which allow vehicle control algorithms to dynamically adjust airframe stabilization parameters in real-time during flight. The flight computer is programmed directly with the airframe physical properties, so that it can automatically adjust its settings with changes in airframe configuration, aerodynamic properties, and/or flight state. This provides for a simple and versatile design, and possesses the critical flexibility needed when adjustments to the airframe configuration become necessary. The three-loop design includes angular rate feedback for stability augmentation, attitude feedback for closed-loop stiffness, and

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 44 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

acceleration feedback for command tracking. In addition, an integral controller in the forward loop illustratively provides enhanced command tracking, low frequency disturbance rejection and an automatic trim capability.

0390-0329).

{The Examiner may have meant 0390-0392. Otherwise the range is not credible}

[0390] In one aspect of the present invention, through GUI display 2622, an operator can maintain a variable level of control over a UAV, from fully manual to fully autonomous, with simple user-friendly inputs. For example, if an operator decides to divert a UAV to a new route, the operator has a plurality of options to select from. The following are examples of some of the options that an operator has. Those skilled in the art should recognize that this is not an exhaustive list. In one embodiment, the operator could graphically edit the existing route on mission situation display 2629 by adding a waypoint or orbit pattern in the vicinity of a desired target region. Prior to accepting the edited route, the control system evaluates the revised route against the vehicle performance capability as well as terrain obstructions. If the route is within acceptable bounds, the control system registers the modified route and maneuvers the vehicle accordingly. In another embodiment, the operator could select a park mode on selections pane 2630. After selected, the control system queues the operator to click the location of and graphical size (via a mouse) the desired orbit pattern in which the vehicle will fly while "parked" over a desired target. In another embodiment, the operator can select a manual control mode on selections pane 2630. By selecting RDC (remote directional command), for example, the control system

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 45 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

controls the UAV into a constant altitude, heading and speed flight until the operator instructs a maneuver. While in RDC mode, the operator can either pseudo-manually direct the UAV using the control stick (e.g. joystick) or the operator can program a fixed heading, altitude and speed using the control options provided in selections pane 2630.

[0391] The described Intelligent displays with smart variables represent an effective approach to actively displaying information for different types of vehicles. However, a problem can arise when a new vehicle is integrated into the ground control station with a completely foreign command and control interface. Under these circumstances, the ground control station is not concerned about displaying data, but is tasked to provide a command and control interface for the operator to perform the required operations. This conundrum is the motivation for another embodiment of the present invention, namely, the integration of vehicle specific panels in the ground control station.

[0392] In one embodiment, a generic vehicle class (GVC) is illustratively a software component that provides a rapid development environment API to add new vehicle classes and types to the ground control station. The GVC also illustratively serves as a software construct that allows the inclusion of multiple vehicles within the ground control station framework. One of the variables in the application is a vector of pointers to a generic vehicle class. This list is constructed by allocating new specific vehicles and returning a type case to the base generic vehicle class. When a new vehicle is integrated into the ground control station, the

 Jed Margolin
 Serial Number: 11/736,356
 Filed: 04/17/2007
 Sheet 46 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

generic vehicle class provides all of the virtual functions to integrate with system control components (e.g., to integrate with a map display, a communications package, PCIG imagery and/or appropriate display windows). An important object in the application framework is illustratively a pointer to the current vehicle generic class. When the user switches vehicles, this pointer is updated and all displays grab the appropriate smart variables from the pointer to the new base class. This is the mechanism by which windows immediately update to the current vehicle information whenever the user switches vehicles. The default windows use the pointer to the current vehicle to grab information. In this manner, if the user switches to a new vehicle with a different set of datalink variables, that fact is immediately apparent on the display windows.

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggna abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne[sic] having ordinary skill in the art.

Abstract

Embodiments are disclosed for a vehicle control system and related sub-components that together provide an operator with a plurality of specific modes of operation, wherein various modes of operation incorporate different levels of autonomous control. Through a control user interface, an operator can move between certain modes of control even after vehicle deployment. Specialized autopilot system components and methods are employed to ensure smooth transitions between

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 47 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

control modes. Empowered by the multi-modal control system, an operator can even manage multiple vehicles simultaneously.

[0014] Embodiments of the present invention pertain to a hierarchical control system, user interface system, and control architecture that together incorporate a broad range of userselectable control modes representing variable levels of autonomy and vehicle control functionality. A unified autopilot is provided to process available modes and mode transitions. An intelligence synthesizer is illustratively provided to assist in resolving functional conflicts and transitioning between control modes, although certain resolutions and transitions can be incorporated directly into the functional sub-components associated with the different control modes. In accordance with one embodiment, all modes and transitions are funneled through an acceleration-based autopilot system. Accordingly, control commands and transitions are generally reduced to an acceleration vector to be processed by a centralized autopilot system.

[0085] As will be discussed in greater detail below, the control system and architecture embodiments of the present invention essentially enable any autopilot design to support control of a vehicle in numerous control modes that are executed with switches between modes during flight. All control modes are supported even in the presence of sensor errors, such as accelerometer and gyro biases. This robustness is at least partially attributable to the fact that the closed-loop system, in all control modes, is essentially slaved to an inertial path and, hence, the sensor biases wash out in the closed loop,

 Jed Margolin
 Serial Number: 11/736,356
 Filed: 04/17/2007
 Sheet 48 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

assuming the biases are not so grossly large that they induce stability problems in the autopilot system. Furthermore, winds are generally not an issue in the overall control scheme in that the flight control system will regulate to the inertial path, adjusting for winds automatically in the closed loop. Given the precision afforded by inertial navigation aided by GPS technology, inertial path regulation offers a highly effective and robust UAV control approach. Generally speaking, the autopilot system functions such that winds, medium Dryden turbulence levels, sensor errors, airframe aerodynamic and mass model parameter uncertainties, servo non-linearity (slew rate limits, etc.), and various other atmospheric and noise disturbances will non have a critically negative impact on flight path regulation.

[0086] Component 408 receives commands generated by component 404 and filtered by autopilot component 406. The commands received by component 408 are executed to actually manipulate the vehicle's control surfaces. Autopilot component 406 then continues to monitor vehicle stabilization and/or command tracking, making additional commands to component 408 as necessary.

1

2

3

4

At the beginning of this subsection, the Examiner asserts, "Margolin did not disclose that the

vehicle is flown using an autonomous control system. However, Duggan teach of a system for

safely flying an unmanned aerial vehicle in civilian airspace comprising: ..."

5

6 The Examiner's statement, "However, Duggan teach of a system for safely flying an unmanned

7 aerial vehicle in civilian airspace comprising: ..." is conclusory and is not supported by the

8 Examiner's citations to Duggan.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 49 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 In addition, none of the Duggan citations teach the limitations in Applicant's Claim 8 that either 2 synthetic vision or Duggan's Variable Autonomy System comprises the step of: 3 (a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of 4 5 the flight of said unmanned aerial vehicle when said synthetic vision system is not used to 6 control said unmanned aerial vehicle an autonomous control system is used to fly said 7 unmanned aerial vehicle; 8 9 Duggan fails to teach the limitation that his Variable Autonomy System is used during selected 10 phases of a UAV's flight and Margolin '724 fails to teach the limitation that synthetic vision is used 11 during selected phases of a UAV's flight. Therefore, the combination of Duggan and Margolin '724 12 does not read on Applicant's Claim 8. 13 14 As cited above by Applicant, MPEP 2143.03 "All Claim Limitations must be Considered" states: 15 "all words in a claim must be considered in judging the patentability of that claim against the prior art." In re Wilson, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970)." 16 17 18 The Examiner has failed his duty under MPEP 2143.03 (and in view of Wehling) to present a prima 19 facie case of obviousness for rejecting Applicant's Claim 8. 20 21 Examiner's Regarding Claim 9, a claim dependent on Claim 8. Applicant has shown that Claim 8 22 is nonobvious. Therefore, under 2143.03 All Claim Limitations Must Be Considered, Claim 9 is 23 non-obvious. 24 2143.03 All Claim Limitations Must Be **>Considered< [R-6] 25 ** "All words in a claim must be considered in judging the patentability of that claim against 26 the prior art." In re Wilson, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970). If an independent claim is nonobvious under 35 U.S.C. 103, then any claim depending therefrom is 27 28 nonobvious. In re Fine, 837 F.2d 1071, 5 USPQ2d 1596 (Fed. Cir. 1988). 29 30 Examiner's Regarding Claim 10, a claim dependent on Claim 8. Applicant has shown that Claim 31 8 is nonobvious. Therefore, under 2143.03 All Claim Limitations Must Be Considered, Claim 10

32

is non-obvious.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 50 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 2143.03 All Claim Limitations Must Be **>Considered< [R-6]

- 2 ** "All words in a claim must be considered in judging the patentability of that claim against
- 3 the prior art." *In re Wilson*, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970). If an
- 4 independent claim is nonobvious under 35 U.S.C. 103, then any claim depending therefrom is
- 5 nonobvious. *In re Fine*, 837 F.2d 1071, 5 USPQ2d 1596 (Fed. Cir. 1988).

6

10

- 7 Examiner's Regarding Claim 11, a claim dependent on Claim 8. Applicant has shown that Claim
- 8 8 is nonobvious. Therefore, under **2143.03 All Claim Limitations Must Be Considered**, Claim 11
- 9 is non-obvious.
 - 2143.03 All Claim Limitations Must Be **>Considered< [R-6]
- ** "All words in a claim must be considered in judging the patentability of that claim against
- the prior art." *In re Wilson*, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970). If an
- independent claim is nonobvious under <u>35 U.S.C. 103</u>, then any claim depending therefrom is
- nonobvious. *In re Fine*, 837 F.2d 1071, 5 USPQ2d 1596 (Fed. Cir. 1988).

15

16

Examiner:

Regarding claim 12, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose a method for safely flying an unmanned aerial vehicle as part of a unmanned aerial system equipped with a synthetic vision system in civilian airspace comprising the steps of:

- (a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle an autonomous control system is used to fly said unmanned aerial vehicle;
- (b) providing a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot;

whereas said selected phases of the flight of said unmanned aerial vehicle comprise:

(a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 51 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

(b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

1

2

Applicant:

- 3 In Margolin '724: Column 3, lines 8-67; Column 4, lines 1-67; and Column 5, lines 1-67 form a
- 4 continuous passage from Column 3, line 8 to Column 5, line 67. This passage of approximately
- 5 1619 words forms the core of the Margolin '724 DETAILED DESCRIPTION. The remainder of the
- 6 Margolin '724 DETAILED DESCRIPTION teaches additional topics such as **Flight Control** (with
- 7 headings Flight Control, Direct Control Non-Remotely Piloted Vehicles, Computer Mediated Non-
- 8 Remotely Piloted Vehicles, Second Order Flight Control Mode, First Order Flight Control Mode
- 9 {See Column 6, line 19 Column 8, line 3}, the features of a Control Panel (See Column 8, line 64
- Column 9, line 18}, the use of a Head-Mounted Display {See Column 9, lines 19 32}, the use of
- the invention for training {See Column 9, lines 33 63}, and **The Database** {See Column 9, line 64
- 12 Column 10, line 50.}

13

- 14 The Examiner cites Figures 1 7 in Margolin '724. These constitute all the figures in Margolin
- 15 '724.

16

19

- 17 The Examiner also cites the Abstract in Margolin '724. According to **608.01(b)** Abstract of the
- 18 **Disclosure** [R-7]:
 - 37 CFR 1.72 Title and abstract.

20 *****

- 21 (b) A brief abstract of the technical disclosure in the specification must commence on a
- separate sheet, preferably following the claims, under the heading "Abstract" or "Abstract of
- 23 the Disclosure." The sheet or sheets presenting the abstract may not include other parts of the
- application or other material. The abstract in an application filed under 35 U.S.C. 111 may not
- 25 exceed 150 words in length. The purpose of the abstract is to enable the United States Patent
- 26 and Trademark Office and the public generally to determine quickly from a cursory inspection
- 27 <u>the nature and gist of the technical disclosure.</u><

28

29 {Emphasis added}

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 52 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 The popular interpretation of 608.01(b) is that the purpose of the Abstract is to provide search

terms. In any event, the Abstract in Margolin '724 does not say anything about civilian airspace.

3

- 4 The Examiner has made a conclusory statement by repeating the title of Applicant's invention
- 5 (leaving out the words "and method") and citing the core of the DETAILED DESCRIPTION in
- 6 Margolin '724.

7

- 8 In the remaining sections of the Examiner's rejection of Applicant's Claim 8 he asserts that he has
- 9 found the elements and limitations of Applicant's invention.

10

- 11 (a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at
 12 least selected phases of the flight of said unmanned aerial vehicle, and during those phases of
- the flight of said unmanned aerial vehicle when said synthetic vision system is not used
- to control said unmanned aerial vehicle an autonomous control system is used to fly said
- unmanned aerial vehicle;
- 16 (b) providing a system onboard said unmanned aerial vehicle for detecting the presence and
- position of nearby aircraft and communicating this information to said remote pilot;

18

- whereas said selected phases of the flight of said unmanned aerial vehicle comprise:
- 20 (a) when said unmanned aerial vehicle is within a selected range of an airport or other
- 21 designated location and is below a first specified altitude;
- 22 (b) when said unmanned aerial vehicle is outside said selected range of an airport or other
- designated location and is below a second specified altitude.

24

- 25 The Examiner has not even attempted to show where these limitations are taught in Margolin '724.
- He has particularly failed to show where the following is taught:
- 27 (a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at
- least selected phases of the flight of said unmanned aerial vehicle, and during those phases of
- 29 the flight of said unmanned aerial vehicle when said synthetic vision system is not used
- to control said unmanned aerial vehicle an autonomous control system is used to fly said
- 31 unmanned aerial vehicle;

Jed Margolin Serial Number: 11/736,356 Sheet 53 of 241 Filed: 04/17/2007

Examiner: Ronnie M. Mancho Art Unit: 3664

1
and
41111

2 whereas said selected phases of the flight of said unmanned aerial vehicle comprise:

- 3 (a) when said unmanned aerial vehicle is within a selected range of an airport or other 4 designated location and is below a first specified altitude;
 - (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

7

5

6

As noted, he has cited the core of the Margolin '724 DETAILED DESCRIPTION, all of the 8

9 drawings, and the abstract. His rejection is purely conclusory and does not follow the requirements

10 for making a prima facie rejection required by MPEP § 2143.03 All Claim Limitations Must Be

11

Considered, KSR, and Wehling, as well as MPEP § 2142 ESTABLISHING A PRIMA FACIE CASE OF OBVIOUSNESS.

12

13

14

18

19

20

21

22

23

24

25

26

27

The Examiner continues:

15 Margolin did not disclose that the vehicle is flown using an autonomous control system. 16 However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian 17 airspace comprising:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0329).

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggna abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne having ordinary skill in the art.

<u>Examiner</u>	<u>Duggan</u>
Margolin did not disclose that the	[0352] In one aspect of the present invention, an operator

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 54 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

vehicle is flown using an autonomous control system.

However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:
a ground station controlling an unmanned aerial vehicle (sec. 0352,

station (also referred to as the ground control station or GCS) is designed to accommodate command and control of multiple vehicles or a single vehicle by a single operator. In accordance with one embodiment, the ground control station is platform independent and implements an application program interface that provides windowing and communications interfaces (e.g., the platform is implemented in Open Source wxWindows API). The underlying operating system is illustratively masked and enables a developer to code in a high level environment.

00353),

[0353] In one embodiment, the ground control station incorporates several specialized user interface concepts designed to effectively support a single operator tasked to control multiple vehicles. The GCS also illustratively supports manual control and sensor steering modes. In the manual control mode, the operator can assume control authority of the vehicles individually from the ground control station at any time in flight. In the sensor steering mode, a vehicle will autonomously fly in the direction the operator is manually pointing the on-board imaging sensor (e.g., operator views video output from a digital camera on a TV interface, computer screen display, etc.). A custom data link is illustratively, utilized to support a two-way transfer of data between the ground control station and the UAV's. These design concepts together provide a flexible, multiple vehicle control system. The details of the concepts are discussed below.

wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318,

[0318] If the pilot chooses a surveillance location outside the total FOV, then the outer loop guidance will illustratively

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 55 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

follow a command-to-LOS mode guide law until the UAV flight path points toward the target. Once the desired staring-point comes within a minimum range threshold, the guidance automatically trips into a loiter pattern (either constant-radius or elliptical) to maintain a station with a single key-click while he/she conducts other activities. FIGS. 22A & 22B together demonstrate the surveillance-point approach scenario.

0322,

[0322] In accordance with one aspect of the present invention, sensor-slave mode commands are generated by an autonomous line-of-sight driven function, in which the command objectives are generated by the necessities of the function rather than by an operator. For example, a function designed to command a raster-scan of a particular surveillance area, or a function designed to scan a long a roadway could be used to generate sensor slave commands. Another example is a function designed to generate line-of-sight commands for UAV-to-UAV rendezvous formation flying.

0353)

[0353] In one embodiment, the ground control station incorporates several specialized user interface concepts designed to effectively support a single operator tasked to control multiple vehicles. The GCS also illustratively supports manual control and sensor steering modes. In the manual control mode, the operator can assume control authority of the vehicles individually from the ground control station at any time in flight. In the sensor steering mode, a vehicle will autonomously fly in the direction the operator is manually pointing the on-board imaging sensor (e.g., operator views video output from a digital camera on a TV interface, computer screen display, etc.). A custom data link is

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 56 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

illustratively, utilized to support a two-way transfer of data between the ground control station and the UAV's. These design concepts together provide a flexible, multiple vehicle control system. The details of the concepts are discussed below.

when a synthetic vision (sec. 0356,

[0356] a synthetic vision display

0365,

[0365] The two video monitors are illustratively used to display real-time data linked camera imagery from two air vehicles having cameras (of course, fewer, more or none of the vehicles might have cameras and the number of monitor displays can be altered accordingly). In accordance with one embodiment, camera imagery is recorded on videotapes during a mission. In accordance with one embodiment, the two repeater displays are used to provide redundant views of the GUI and synthetic vision display. The laptop illustratively serves as a GUI backup in the event that the main GUI fails.

0388.

[0388] In one aspect of the present invention, synthetic vision display technical approach of the present invention is based upon integrating advanced simulated visuals, originally developed for training purposes, into UAV operational systems. In accordance with one embodiment, the simulated visuals are integrated with data derived from the ground control station during flight to enable real-time synthetic visuals.

0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown [0390] In one aspect of the present invention, through GUI display 2622, an operator can maintain a variable level of control over a UAV, from fully manual to fully autonomous,

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 57 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

using an autonomous control system

with simple user-friendly inputs. For example, if an operator decides to divert a UAV to a new route, the operator has a plurality of options to select from. The following are examples of some of the options that an operator has. Those skilled in the art should recognize that this is not an exhaustive list. In one embodiment, the operator could graphically edit the existing route on mission situation display 2629 by adding a waypoint or orbit pattern in the vicinity of a desired target region. Prior to accepting the edited route, the control system evaluates the revised route against the vehicle performance capability as well as terrain obstructions. If the route is within acceptable bounds, the control system registers the modified route and maneuvers the vehicle accordingly. In another embodiment, the operator could select a park mode on selections pane 2630. After selected, the control system queues the operator to click the location of and graphical size (via a mouse) the desired orbit pattern in which the vehicle will fly while "parked" over a desired target. In another embodiment, the operator can select a manual control mode on selections pane 2630. By selecting RDC (remote directional command), for example, the control system controls the UAV into a constant altitude, heading and speed flight until the operator instructs a maneuver. While in RDC mode, the operator can either pseudo-manually direct the UAV using the control stick (e.g. joystick) or the operator can program a fixed heading, altitude and speed using the control options provided in selections pane 2630.

(autopilot, sec 0346 to 0350,

[0346] In accordance with one embodiment, an exemplary translation layer implementation will now be provided. After the guidance algorithms execute, the outputs are translated to

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 58 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

the native vehicle autopilot commands. The equations below provide example kinematic translations from the guidance acceleration commands to native vehicle autopilot commands. These equations demonstrate the principal that vehicle motion is activated through acceleration. The methods that various vehicles employ to generate acceleration are numerous (bank angle autopilot, acceleration autopilot, heading control autopilot, altitude control autopilot, etc). Since the control algorithms described herein generate acceleration commands that can be kinematically translated into any of these native autopilot commands, the guidance algorithms truly provide a generalized library of control laws that can control any vehicle through that vehicle's native atomic functions. Ubiquitous acceleration control techniques enable VACS to synthesize control commands for any vehicle, including air, ground, or sea-based. 35 a v = vertical plane acceleration command a h = horizontal plane acceleration command = tan - 1 (a h a v) = bank angle command a T = a v 2 + a h 2 = total bodyacceleration command i = a h V = turn rate command i = i - 1+ . t = heading command . = (a v - g) V = flight path ratecommand i = i - 1 + ... t = flight path angle command <math>h ... = V $\sin () = \text{climb rate command h } i = \text{h } i = 1 + \text{h} . t = \text{altitude}$ command Eq. 57

[0347] Additional functionality that can be enabled in a translation layer is means for discouraging or preventing an operator (e.g., the human or non-human operator interfacing the VACS architecture) from overdriving, stalling, or spinning the vehicle frame. This being said, limiting algorithms can also be employed in the guidance or autopilot functions.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 59 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

[0348] X. Autopilot

[0349] As has been addressed, the present invention is not limited to, and does not require, a particular autopilot system. The control system and architecture embodiments of the present invention can be adapted to accommodate virtually any autopilot system.

[0350] For the purpose of providing an example, an illustrative suitable autopilot software system will now be described. The illustrative autopilot system incorporates a three-axis design (pitch and yaw with an attitude control loop in the roll axis) for vehicle stabilization and guidance command tracking. The autopilot software design incorporates flight control techniques, which allow vehicle control algorithms to dynamically adjust airframe stabilization parameters in real-time during flight. The flight computer is programmed directly with the airframe physical properties, so that it can automatically adjust its settings with changes in airframe configuration, aerodynamic properties, and/or flight state. This provides for a simple and versatile design, and possesses the critical flexibility needed when adjustments to the airframe configuration become necessary. The three-loop design includes angular rate feedback for stability augmentation, attitude feedback for closed-loop stiffness, and acceleration feedback for command tracking. In addition, an integral controller in the forward loop illustratively provides enhanced command tracking, low frequency disturbance rejection and an automatic trim capability.

0390-0329).

{The Examiner may have meant 0390-0392. Otherwise the

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 60 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

range is not credible}

[0390] In one aspect of the present invention, through GUI display 2622, an operator can maintain a variable level of control over a UAV, from fully manual to fully autonomous, with simple user-friendly inputs. For example, if an operator decides to divert a UAV to a new route, the operator has a plurality of options to select from. The following are examples of some of the options that an operator has. Those skilled in the art should recognize that this is not an exhaustive list. In one embodiment, the operator could graphically edit the existing route on mission situation display 2629 by adding a waypoint or orbit pattern in the vicinity of a desired target region. Prior to accepting the edited route, the control system evaluates the revised route against the vehicle performance capability as well as terrain obstructions. If the route is within acceptable bounds, the control system registers the modified route and maneuvers the vehicle accordingly. In another embodiment, the operator could select a park mode on selections pane 2630. After selected, the control system queues the operator to click the location of and graphical size (via a mouse) the desired orbit pattern in which the vehicle will fly while "parked" over a desired target. In another embodiment, the operator can select a manual control mode on selections pane 2630. By selecting RDC (remote directional command), for example, the control system controls the UAV into a constant altitude, heading and speed flight until the operator instructs a maneuver. While in RDC mode, the operator can either pseudo-manually direct the UAV using the control stick (e.g. joystick) or the operator can program a fixed heading, altitude and speed using the control options provided in selections pane 2630.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 61 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

[0391] The described Intelligent displays with smart variables represent an effective approach to actively displaying information for different types of vehicles. However, a problem can arise when a new vehicle is integrated into the ground control station with a completely foreign command and control interface. Under these circumstances, the ground control station is not concerned about displaying data, but is tasked to provide a command and control interface for the operator to perform the required operations. This conundrum is the motivation for another embodiment of the present invention, namely, the integration of vehicle specific panels in the ground control station.

[0392] In one embodiment, a generic vehicle class (GVC) is illustratively a software component that provides a rapid development environment API to add new vehicle classes and types to the ground control station. The GVC also illustratively serves as a software construct that allows the inclusion of multiple vehicles within the ground control station framework. One of the variables in the application is a vector of pointers to a generic vehicle class. This list is constructed by allocating new specific vehicles and returning a type case to the base generic vehicle class. When a new vehicle is integrated into the ground control station, the generic vehicle class provides all of the virtual functions to integrate with system control components (e.g., to integrate with a map display, a communications package, PCIG imagery and/or appropriate display windows). An important object in the application framework is illustratively a pointer to the current vehicle generic class. When the user switches vehicles, this pointer is updated and all displays grab the

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 62 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

appropriate smart variables from the pointer to the new base class. This is the mechanism by which windows immediately update to the current vehicle information whenever the user switches vehicles. The default windows use the pointer to the current vehicle to grab information. In this manner, if the user switches to a new vehicle with a different set of datalink variables, that fact is immediately apparent on the display windows.

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggna abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne[sic] having ordinary skill in the art.

Abstract

Embodiments are disclosed for a vehicle control system and related sub-components that together provide an operator with a plurality of specific modes of operation, wherein various modes of operation incorporate different levels of autonomous control. Through a control user interface, an operator can move between certain modes of control even after vehicle deployment. Specialized autopilot system components and methods are employed to ensure smooth transitions between control modes. Empowered by the multi-modal control system, an operator can even manage multiple vehicles simultaneously.

[0014] Embodiments of the present invention pertain to a hierarchical control system, user interface system, and control architecture that together incorporate a broad range of user-

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 63 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

selectable control modes representing variable levels of autonomy and vehicle control functionality. A unified autopilot is provided to process available modes and mode transitions. An intelligence synthesizer is illustratively provided to assist in resolving functional conflicts and transitioning between control modes, although certain resolutions and transitions can be incorporated directly into the functional sub-components associated with the different control modes. In accordance with one embodiment, all modes and transitions are funneled through an acceleration-based autopilot system. Accordingly, control commands and transitions are generally reduced to an acceleration vector to be processed by a centralized autopilot system.

[0085] As will be discussed in greater detail below, the control system and architecture embodiments of the present invention essentially enable any autopilot design to support control of a vehicle in numerous control modes that are executed with switches between modes during flight. All control modes are supported even in the presence of sensor errors, such as accelerometer and gyro biases. This robustness is at least partially attributable to the fact that the closed-loop system, in all control modes, is essentially slaved to an inertial path and, hence, the sensor biases wash out in the closed loop, assuming the biases are not so grossly large that they induce stability problems in the autopilot system. Furthermore, winds are generally not an issue in the overall control scheme in that the flight control system will regulate to the inertial path, adjusting for winds automatically in the closed loop. Given the precision afforded by inertial navigation aided by GPS technology, inertial path regulation offers a highly effective

 Jed Margolin
 Serial Number: 11/736,356
 Filed: 04/17/2007
 Sheet 64 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

and robust UAV control approach. Generally speaking, the autopilot system functions such that winds, medium Dryden turbulence levels, sensor errors, airframe aerodynamic and mass model parameter uncertainties, servo non-linearity (slew rate limits, etc.), and various other atmospheric and noise disturbances will non have a critically negative impact on flight path regulation.

[0086] Component 408 receives commands generated by component 404 and filtered by autopilot component 406. The commands received by component 408 are executed to actually manipulate the vehicle's control surfaces. Autopilot component 406 then continues to monitor vehicle stabilization and/or command tracking, making additional commands to component 408 as necessary.

At the beginning of this subsection, the Examiner asserts, "Margolin did not disclose that the vehicle is flown using an autonomous control system. However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising: ..."

The Examiner's statement, "However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising: ..." is conclusory and is not supported by the Examiner's citations to Duggan.

In addition, none of the Duggan citations teach the limitations in Applicant's Claim 12 that either synthetic vision or Duggan's Variable Autonomy System comprises the step of:

(a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle an autonomous control system is used to fly said

and

unmanned aerial vehicle;

Serial Number: 11/736,356 Filed: 04/17/20 Examiner: Ronnie M. Mancho Art Unit: 3664 Jed Margolin Filed: 04/17/2007 Sheet 65 of 241

1	whereas said selected phases of the flight of said unmanned aerial vehicle comprise:
2	(a) when said unmanned aerial vehicle is within a selected range of an airport or other
3	designated location and is below a first specified altitude;
4	(b) when said unmanned aerial vehicle is outside said selected range of an airport or other
5	designated location and is below a second specified altitude.
6	
7	Duggan fails to teach the limitation that his Variable Autonomy System is used during selected
8	phases of a UAV's flight and Margolin '724 fails to teach the limitation that synthetic vision is used
9	during selected phases of a UAV's flight. Therefore, the combination of Duggan and Margolin '724
10	does not read on Applicant's Claim 12.
11	
12	As cited above by Applicant, MPEP 2143.03 "All Claim Limitations must be Considered" states:
13	"all words in a claim must be considered in judging the patentability of that claim against the prior
14	art." In re Wilson, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970)."
15	
16	The Examiner has failed his duty under MPEP 2143.03 (and in view of Wehling) to present a prima
17	facie case of obviousness for rejecting Applicant's Claim 12.
18	
19	Examiner's Regarding Claim 13, a claim dependent on Claim 12. Applicant has shown that Claim
20	12 is nonobvious. Therefore, under 2143.03 All Claim Limitations Must Be Considered, Claim
21	13 is non-obvious.
22	2143.03 All Claim Limitations Must Be **>Considered<[R-6]
23	** "All words in a claim must be considered in judging the patentability of that claim against
24	the prior art." In re Wilson, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970). If an
25	independent claim is nonobvious under 35 U.S.C. 103, then any claim depending therefrom is
26	nonobvious. In re Fine, 837 F.2d 1071, 5 USPQ2d 1596 (Fed. Cir. 1988).
27	
28	Examiner's Regarding Claim 14, a claim dependent on Claim 12. Applicant has shown that Claim
29	12 is nonobvious. Therefore, under 2143.03 All Claim Limitations Must Be Considered, Claim
30	14 is non-obvious.
31	2143.03 All Claim Limitations Must Be **>Considered< [R-6]

Jed Margolin Filed: 04/17/2007 Sheet 66 of 241

Serial Number: 11/736,356 Filed: 04/17/20 Examiner: Ronnie M. Mancho Art Unit: 3664

1	** "All words in a claim must be considered in judging the patentability of that claim against
2	the prior art." In re Wilson, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970). If an
3	independent claim is nonobvious under 35 U.S.C. 103, then any claim depending therefrom is
4	nonobvious. In re Fine, 837 F.2d 1071, 5 USPQ2d 1596 (Fed. Cir. 1988).
5	
6	Part B - The Present Applicant is the named inventor on 5,904,724.
7	The present Applicant (Jed Margolin) is the named inventor on U.S. Patent 5,904,724. See the
8	attached DECLARATION OF JED MARGOLIN. The Examiner is barred from citing '724 as prior
9	art in a 35 U.S.C. §103 rejection. See ISCO INTERN v. Conductus, Inc, 279 F.Supp.2d 489 (D.Del.
10	2003) Footnote 4:
11	[4] Although § 102 relates to prior invention by another, anticipation, and abandonment, its
12	standard for determining prior art is applied to the § 103 obviousness inquiry as well. See, e.g.,
13	Panduit Corp. v. Dennison Mfg. Co., 810 F.2d 1561, 1568 (Fed.Cir.1987), cert. denied, 481
14	U.S. 1052, 107 S.Ct. 2187, 95 L.Ed.2d 843 (1987) ("Before answering Graham's `content'
15	inquiry, it must be known whether a patent or publication is in the prior art under 35 U.S.C. §
16	102.") (citing <i>Graham v. John Deere Co.</i> , 383 U.S. 1, 86 S.Ct. 684, 15 L.Ed.2d 545 (1966)); Ex
17	parte Andresen, 212 U.S.P.Q. 100, 102 (Pat.& Tr. Office Bd.App. 1981) (citing congressional
18	committee record and commentary and concluding that Congress intended § 103 to "includ[e]
19	all of the various bars to a patent as set forth in section 102").
20	
21	As MPEP 2129 explains, "However, even if labeled as "prior art," the work of the same inventive
22	entity may not be considered prior art against the claims unless it falls under one of the statutory
23	categories."
24	2129 Admissions as Prior Art [R-6]
25	I. ADMISSIONS BY APPLICANT CONSTI-TUTE PRIOR ART
26	A statement by an applicant >in the specification or made< during prosecution identifying the
27	work of another as "prior art" is an admission **>which can be relied upon for both
28	anticipation and obviousness determinations, regardless of whether the admitted prior art would

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 67 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 otherwise qualify as prior art under the statutory categories of 35 U.S.C. 102. Riverwood Int'l 2 Corp. v. R.A. Jones & Co., 324 F.3d 1346, 1354, 66 USPO2d 1331, 1337 (Fed. Cir. 2003); 3 Constant v. Advanced Micro-Devices Inc., 848 F.2d 1560, 1570, 7 USPQ2d 1057, 1063 (Fed. Cir. 1988).< However, even if labeled as "prior art," the work of the same inventive entity may 4 5 not be considered prior art against the claims unless it falls under one of the statutory 6 categories. Id.; see also Reading & Bates Construction Co. v. Baker Energy Resources Corp., 7 748 F.2d 645, 650, 223 USPQ 1168, 1172 (Fed. Cir. 1984) ("[W]here the inventor continues to 8 improve upon his own work product, his foundational work product should not, without a 9 statutory basis, be treated as prior art solely because he admits knowledge of his own work. It is 10 common sense that an inventor, regardless of an admission, has knowledge of his own work."). 11 Consequently, the examiner must determine whether the subject matter identified as "prior art" 12 is applicant's own work, or the work of another. In the absence of another credible explanation, 13 examiners should treat such subject matter as the work of another. 14 15 Part D - Applicant's invention meets a long felt but unmet need. 16 According to the article **NASA Plans UAS Push** (Exhibit 1 at 81): 17 NASA is seeking industry feedback on its plans for a new five-year, \$150-million program to 18 help integrate unmanned aircraft into civil airspace. The feedback is likely to be mixed, as the 19 agency's last major unmanned aircraft research program was canceled before it got off the 20 ground, despite industry backing. 21 22 Briefed to industry experts in early August, the Unmanned Air Systems (UAS) Integration in 23 the National Airspace System (NAS) project is planned to begin in Fiscal 2011. It would be 24 NASAs first major unmanned aircraft effort since the High-Altitude Long-Endurance Remotely 25 Operated Aircraft (HALE ROA) project was killed in 2005. 26 27 The new program would focus on separation assurance and collision avoidance, pilot-aircraft 28 interface, certification requirements and communications, involving a series of increasingly 29 complex flight demonstrations. The main goal is to generate data to help the FAA and

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 68 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

standards organizations develop guidelines and regulations for the design and operation of

UASs in the NAS. The research is expected to have an impact in the 2015-25 timeframe.

3

2

- 4 Applicant's invention solves a long-felt unmet need to safely fly UAVs in civilian airspace. (See
- 5 MPEP 716.04 Long-Felt Need and Failure of Others.) Otherwise it would not be necessary for
- 6 NASA to set up "a new five-year, \$150-million program to help integrate unmanned aircraft into
- 7 civilian airspace."

8

9

Part E - The Duggan Application.

- The Examiner's choice of Duggan Patent Application US 2005004723 as a reference is interesting.
- By a coincidence Applicant ("Margolin") discovered the Duggan Application not long after the
- 12 USPTO published it.

13

Margolin analyzed the Dugan claims and found some deficiencies. For example, Duggan Claim 1:

15 16

18

19

20

21

22

23

24

25

26

27

28

1. A computer-implemented method for providing an operator of a vehicle with a plurality of

17 control modes, wherein the system is configured to support transitioning between control

modes during operation of the vehicle, the method comprising: receiving a first operator input

that corresponds to a first control mode; generating a first directional representation of the first

operator input; processing the first <u>directional representation</u> through a unified <u>autopilot system</u>

so as to generate a first control output; mechanically adjusting a control component associated

with the vehicle based on the first control output; receiving a second operator input that

corresponds to a request to transition from the first control mode to a second control mode;

transitioning from the first control mode to the second control mode; receiving a third operator

input that corresponds to the second control mode; generating a second directional

<u>representation</u> of the third operator input; processing the second <u>directional representation</u>

through the unified autopilot system so as to generate a second control output; and

mechanically adjusting a control component associated with the vehicle based on the second

29 control output.

{Emphasis added}

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 69 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 This claims a method where the operator of a vehicle is able to select two or more control modes 2 and the system transitions between them. The claim does not say how the system transitions 3 between them other than that the autopilot does it. The term "directional representation" does not 4 appear in the Specification. What is the "directional representation" of an operator input? Common 5 English usage suggests that it is the line or course along which the operator moves the joystick or 6 mouse. Also, by definition an autopilot mechanically adjusts control components so this part of the 7 claim is redundant. 8 9 Duggan's Dependent claim 2 is redundant. Duggan's Claim 1 already specifies the use of a unified 10 autopilot. 11 2. The method of claim 1, wherein said transitioning comprises processing a transition 12 command through the unified autopilot system. 13 14 Duggan Dependent claim 3: 15 3. The method of claim 1, wherein generating a first directional representation comprises 16 generating a first set of acceleration and bank angle commands. 17 18 Finally, something real. A directional representation can be a set of acceleration and bank angle 19 commands. What else can a "directional representation" be? Duggan does not teach it, so Claim 1 is 20 indistinct. 21 22 Even so, this may have already been done. For example see U.S. Patent 4,155,525 Maneuver 23 detector circuit for use in autothrottle control systems having thrust and flight path control 24 decoupling issued May 22, 1979 to Peter-Contesse (assigned to Boeing). From Column 1, lines 15-25 28: It is an object of this invention to provide a flight control system having thrust and flight path 26 27 control decoupling utilizing maneuver detector and limited integrator circuit means in lieu of 28 the aforementioned time-constant programmer circuit means. 29 30 It is yet another object of this invention to provide circuit means responsive to elevator, normal 31 acceleration, and pitch attitude signals for providing a signal having a first predetermined 32 polarity when a purposeful maneuver of the aircraft is effected and a further signal having a

polarity opposite to said first predetermined polarity when a non-maneuver is indicated, a

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 70 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 purposeful maneuver being defined as one initiated by the pilot as contrasted to non-pilot 2 initiated aircraft maneuvers. 3 4 There is also U.S. Patent 6,062,513 Total energy based flight control system issued May 16, 2000 5 to Lambregts (also assigned to Boeing). From Column 6, line 65 - Column 7, line 14: 6 The present invention modifies the known TEC system by using an alternate control strategy 7 and flight path command .gamma..sub.C processing scheme. This alternate strategy is used 8 during manual control mode (using a control column or the like) when the thrust has been 9 driven to a preset value (such as a maximum or minimum thrust limit) or when the automatic 10 throttle is disengaged. Under these circumstances, instead of reverting to a pure path priority 11 scheme for stick or control column inputs (by opening switch 30 and letting the airspeed 12 increase or decreases until a speed limit is reached as is done in the known TEC system), the 13 present invention transitions to a combined speed and path priority scheme, where flight path 14 angle is the short term control priority and the set speed command is the long term priority. In 15 this scheme, switch 30' remains closed and the normal speed control feedback is continued after 16 thrust reaches a limit. 17 18 Duggan Claim 31: 19 31. A multi-modal variable autonomy control system, the system comprising: 20 21 a plurality of control mode components each corresponding to a different mode of control and 22 being configured to respond to command inputs by generating directionally descriptive control 23 commands; and 24 25 a unified autopilot component for processing said directionally descriptive control commands. 26 27 an vehicle control component for receiving processed commands from the unified autopilot 28 system and actuating control devices accordingly. 29 30 This claim contains inexcusable punctuation errors. These errors were not introduced by the Patent 31 Office; they are in the Application in the File Wrapper. See Exhibit 2 at 83.

Jed Margolin Serial Number: 11/736,356 Sheet 71 of 241 Filed: 04/17/2007

Examiner: Ronnie M. Mancho Art Unit: 3664

1 Margolin gave his analysis to Optima Technology, Inc. (now Optima Technology Group) who was 2 then acting as Margolin's agent for selling or licensing his patents. Optima contacted Geneva 3 Aerospace, the assignee of the Duggan application. 4 5 Geneva responded by filing a Supplemental IDS listing all of Margolin's patents (even though only 6 5,566,073 and 5,904,724 were relevant), U.S. Patents 4,155,525 and 6,062,513, along with some of 7 the non-patent literature that Margolin had presented, such as: 8 9 Beringer, D.; Applying Performance-Controlled Systems, Fuzzy Logic, and Fly-By-Wire 10 Controls to General Aviation, Office of Aerospace Medicine, May 2002. 11 12 Abernathy, M.; "Virtual Cockpit Window" for a Windowless Aerospacecraft. 13 http://www.nasatech.com/Briefs/Jan03/MSC23096.html Jan. 2003. 14 15 See Exhibit 2 at 84-88. 16 17 Geneva also licensed Margolin Patents 5,566,073 and 5,904,724. See Exhibit 3 at 91. 18 19 It came as a complete surprise to Applicant when the Duggan Application was allowed as filed 20 (despite its defects) in the FOAM. Geneva's attorneys may have been surprised as well. They had to 21 ask the Duggan Examiner to correct the punctuation errors in Duggan Claim 31. See Exhibit 2 at 89. 22 23 Perhaps the Duggan Examiner was preoccupied with financial problems. See Exhibit 4 at 109. But 24 where were the Second Set of Eyes? Perhaps they were sleeping that day. 25 26 Margolin wishes to note that the Examiner in the present case cited the Duggan Application even 27 though it had already issued as U.S. Patent 7,343,232 ('232) Vehicle control system including 28 related methods and components on March 11, 2008. 29 30 The Duggan Application may have other problems as well. The Duggan Application claims priority 31 from Provisional Application Ser. No. 60/480,192, filed Jun. 20, 2003. According to 35 U.S.C. 102 32 Conditions for patentability; novelty and loss of right to patent. 33

A person shall be entitled to a patent unless -

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 72 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 (b) the invention was patented or described in a printed publication in this or a foreign country 2 or in public use or on sale in this country, more than one year prior to the date of application for 3 patent in the United States. 4 5 There is evidence that this might have occurred. The paper UCAV Distributed Mission Training 6 **Testbed:** Lessons Learned and Future Challenges by Dr. Dutch Guckenberger and Matt Archer; 7 The Interservice/Industry Training, Simulation & Education Conference (I/ITSEC), Volume: 2000 8 (Conference Theme: Partnerships for Learning in the New Millennium) was presented at the 9 I/ITSEC Conference in 2000. The title page and page 7 are reproduced in Exhibit 5 at 180. On 10 document page 7 (Exhibit 5 at 183), under the heading Variable Autonomy Control System 11 (VACS) it refers to Geneva Aerospace's Variable Autonomy Control System: 12 13 As a portion of the DMT UCAV Testbed development, the Geneva AeroSpace Variable 14 Autonomy Control System (VACS) was added to LiteFlite. The VACS is designed to be 15 effective for UAV and UCAV systems as usable to individuals whose training is focused 16 on the requirements of a given mission or the usability of the payload, rather than on the 17 aviation of the vehicle. As the dependence on UAVs for military operations grows and UAV 18 technology is integrated into the emerging global command and control architecture, the cost 19 and complexity of managing and controlling these assets can easily become substantial. The 20 VACS solution to this UAV control problem lies in the appropriate functional allocation 21 between the human and the machine. By merging modern stand-off missile flight control, 22 advanced aircraft flight control, and state-of-the-art communications technologies, Geneva has 23 developed a novel hierarchical flight control structure with varied levels of remote 24 operator input to address the human-machine functional allocation problem. 25 26 The VACS has been successfully demonstrated enabling a diverse range of users to 27 effectively operate UAVs. Furthermore, the VACS solution eliminates the requirement for 28 UAVs to be controlled by highly trained, rated pilots. In a continuing development and 29 demonstration effort VACS is to be used Joint STARS MTE workstation and the Freewing 30 Scorpion 100-50 UAV and conduct a flight test demonstration. This program will demonstrate 31 the benefits of the variable autonomy flight control system design with simplified manual 32 control modes, demonstrate the compatibility of such a system with the military s emerging C4I

Jed Margolin Serial Number: 11/736,356 Sheet 73 of 241 Filed: 04/17/2007 Examiner: Ronnie M. Mancho Art Unit: 3664 architecture, and demonstrate the synergism between Joint STARS and UAVs using the simplified UAV flight control technology. {Emphasis added} Geneva Aerospace filed a trademark application with the USPTO on 1/22/2004 for the trademark "Variable Autonomy Control System." See Exhibit 6 at 185. In the application Geneva Aerospace declared, under penalty of perjury: The applicant, or the applicant's related company or licensee, is using the mark in commerce, and lists below the dates of use by the applicant, or the applicant's related company, licensee, or predecessor in interest, of the mark on or in connection with the identified goods and/or services. 15 U.S.C. Section 1051(a), as amended. International Class 009: computer software for autonomous aerial vehicle guidance and control systems In International Class 009, the mark was first used at least as early as 09/01/1998, and first used in commerce at least as early as 09/01/1998, and is now in use in such commerce. The applicant is submitting or will submit one specimen for each class showing the mark as used in commerce on or in connection with any item in the class of listed goods and/or services, consisting of a(n) Portion of company website describing product.

23 24

25

1

2

3 4

5

6

7

8

9 10

11

12

13

14 15

16

17 18

19

20

21

22

{Emphasis added}

26 27

The mark "Variable Autonomy Control System" is for "computer software for autonomous aerial vehicle guidance and control systems".

28 29

30

Geneva declares that the "Variable Autonomy Control System" was first used in commerce as early as 09/01/1998, which is more than one year prior to the 6/20/2003 filing date of the provisional application.

32

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 74 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 Is the "Variable Autonomy Control System" in the Duggan '232 patent the same "Variable 2 Autonomy Control System" that Geneva wished to trademark? Their trademark application 3 included a portion of the company website describing the product, which states (Exhibit 6 at 188): 4 **Products: Variable Autonomy Control System (VACS)**TM 5 6 7 <u>Under Air Force Research Lab funding</u> Geneva has developed an innovative UAV control 8 design that combines state-of-the-art missile technologies with fixed-wing aircraft control. Our 9 design balances autonomous flight control With manual control to provide variable levels of 10 <u>directional independence</u> and minimizes the personnel and training requirements for the 11 operation of the UAV, The truly enabled UAV operator is not required to be a trained aviator, 12 but still retains a wide range of control flexibility in order to successfully execute the mission 13 objectives that call upon his/her specialized expertise. 14 15 Our solution is a hierarchical flight control structure with multiple levels of remote 16 operator input combined with an off-board controller software package and intuitive 17 human system interface. Research of the UAV control problem has indicated that the best 18 solution lies in the appropriate functional allocation between the human and the machine, 19 leading to the organization of the control problem between the two fundamental categories: 20 flight governance and flight management. 21 22 {Emphasis added} 23 24 It sounds like it is. 25 26 Therefore, the Duggan '232 patent is invalid for failing to meet the requirements of 35 U.S.C 102. 27 28 Note that the Duggan "Variable Autonomy Control System" was developed under Air Force 29 Research Lab funding. That would give the Government certain patent rights in the invention. This 30 is not stated in the Duggan '232 patent. 31 32 Geneva also filed an application to trademark "VCAS". They made the same declaration as they did 33 for "Variable Autonomy Control System" and included the same company website page. See

34

Exhibit 7 at 190.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 75 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 Dave Duggan of Geneva Aerospace and Luis A. Piñeiro of AFRL presented a paper at the 2002 2 AUVSI Symposium. The paper from the Proceedings is reproduced as Exhibit 8 at 195. From 3 Exhibit 8 at 196, last paragraph under the heading VACS Overview: 4 5 Funding for the variable autonomy control concept was provided under the Small Business 6 Innovative Research (SBIR) program Phase I, Phase II, and Phase III funding vehicles through 7 the Air Force Research Laboratory (AFRL) Human Effectiveness and Air Vehicles Integration 8 Directorates (Reference 1). 9 10 Reference 1 says: 11 1. Duggan, David S., "Demonstration of an Integrated Variable Autonomy UAV Flight 12 Control System", Phase II SBIR Final Report, AFRL-HE-WP-TR-2001-0035, January 2001 13 14 Applicant has not been able to obtain this reference from DTIC. 15 16 However, Duggan/Geneva Aerospace's Provisional Application (Application Number 60/480,192) 17 contains Geneva Aerospace's Small Business Innovation Research (SBIR) Program Projects 18 Summary, Topic Number AF98-179 (Exhibit 9 at 211), which shows that Geneva Aerospace had 19 the invention described in '232 in its possession as early as the date the SBIR Project Summary for 20 AF98-179 was submitted. According to the Air Force SBIR Web site at 21 http://www.afsbirsttr.com/TechMall/Default.aspx?kwa=AF98-179 the SBIR Phase I Contract 22 started 5/14/1998, ended 2/14/1999, and the date of the DTIC report is 3/20/2001. See Exhibit 10 at 23 235. 24 25 This suggests that Geneva Aerospace was being truthful in their Trademark Applications, that the 26 products named Variable Autonomy Control Systems and VACS were first used commercially as 27 early as 09/01/1998. 28 29 The '232 patent claims priority from Provisional Application 60/480,192 filed June 20, 2003 and 30 incorporates the Provisional Application in its entirety in the '232 patent. See '232 Column 1, lines 31 6 - 9. However, Provisional Application 60/480,192 was not made available to the public on PAIR 32 until November 22, 2010. See Margolin Declaration § 14. As a result, the public was not able to

33

read the entire '232 patent until November 22, 2010.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 76 of 241 Serial Number: 11/736,356 Filed: 04/17/20 Examiner: Ronnie M. Mancho Art Unit: 3664

1	
2	The Duggan Provisional Application contains an Information Disclosure Statement (PTO-1449),
3	filed July 29, 2004 listing a number of patent references. See Exhibit 11 at 237. With the exception
4	of U.S. Patent 5,904,724 none of the other patent references are listed on the '232 patent. And, with
5	the exception of 5,904,724 none of the references cited by Duggan in his Provisional Application
6	are marked as having been considered by the Duggan Examiner.
7	
8	The irregularities surrounding the '232 patent would call for an investigation by the USPTO's
9	Inspector General, but the USPTO does not seem to have an Inspector General.
10	
11	Section 3.
12	
13	For the foregoing reasons, Applicant submits that all objections and rejections have been overcome.
14	Applicant requests that the rejection of pending claims 1-14 be withdrawn and that the application
15	be allowed as filed.
16	
17	Respectfully submitted,
18	
19	/Jed Margolin/ Date: November 29, 2010
20	Jed Margolin
21	
22	
23	Jed Margolin
24	1981 Empire Rd.
25	Reno, NV 89521-7430
26	(775) 847-7845
27	
28	
29	

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 77 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 IN THE UNITED STATES PATENT AND TRADEMARK OFFICE 2 In re Application of Jed Margolin 3 4 Serial No.: 11/736,356 Examiner: Ronnie M. Mancho 5 Filed: 04/17/2007 Art Unit: 3664 6 For: SYSTEM AND METHOD FOR SAFELY FLYING UNMANNED AERIAL VEHICLES 7 IN CIVILIAN AIRSPACE 8 9 **DECLARATION OF JED MARGOLIN** 10 11 I, Jed Margolin, declare as follows: 12 1. I am the Applicant in the above patent application. 13 14 2. I am the named inventor (Jed Margolin) on U.S. Patent 5,904,724 Method and apparatus for 15 remotely piloting an aircraft issued May 18, 1999. 16 17 3. Exhibit 1 is a true and accurate reproduction of the article NASA Plans UAS Push by Graham 18 19 Warwick that appeared in Aviation Week & Space Technology, August 16, 2010, page 13. 20 4. Exhibit 2 is a true and accurate reproduction of documents from the image filewrapper for the 21 Duggan Application 10/871,612 that I downloaded from the USPTO's PAIR Web site on or about 22 November 1, 2010. 23 24 5. Exhibit 3 is a true and accurate reproduction of the License Agreement between Geneva 25 Aerospace, Optima Technology, Inc., and myself. I have redacted financial information as per 26 Federal Rules of Civil Procedure Rule 5.2. I have also redacted other sensitive information. (Note 27 that Optima Technology, Inc. subsequently changed their name to Optima Technology Group.) 28 29 6. Exhibit 4 is a true and accurate reproduction of public documents that I downloaded from the 30 Palm Beach County, Florida Web site at http://oris.co.palm-beach.fl.us/or web1/or sch 1.asp 31 between approximately August 30, 2010 and September 13, 2010. 32

Evidence Appendix - 269

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 78 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 7. Exhibit 5 is a true and accurate reproduction of the Web page that I downloaded from

- 2 http://ntsa.metapress.com/link.asp?id=4mrrc0aupmjpf8e6 on or about November 16, 2010, showing
- 3 the availability of the paper Lessons Learned and Future Challenges by Dr. Dutch Guckenberger
- 4 and Matt Archer presented at the 2000 Interservice/Industry Training, Simulation & Education
- 5 Conference (I/ITSEC), and part of Volume: 2000 (Conference Theme: Partnerships for Learning in
- 6 the New Millennium, followed by the title page and the seventh page from the paper that I
- 7 purchased from Meta Press on or about November 16, 2010.

8

- 9 8. Exhibit 6 is a true and accurate reproduction of documents filed by Geneva Aerospace in
- 10 Trademark Application, Serial Number 78355947 for "Variable Autonomy Control System" that I
- downloaded from the USPTO Trademark Document Retrieval (TDR) Web site at
- http://tmportal.uspto.gov/external/portal/tow on or about November 17, 2010.

13

- 9. Exhibit 7 is a true and accurate reproduction of documents filed by Geneva Aerospace in
- 15 Trademark Application, Serial Number 78355939 for "VACS" that I downloaded from the USPTO
- 16 Trademark Document Retrieval (TDR) Web site at http://tmportal.uspto.gov/external/portal/tow on
- or about November 17, 2010.

18

- 19 10. Exhibit 8 is a true and accurate reproduction of the paper Development and Testing of a
- 20 Variable Autonomy Control System (VACS) for UAVs by Dave Duggan of Geneva Aerospace
- and Luis A. Piñeiro of AFRL contained in the Proceedings AUVSI Symposium, 2002, that was
- given to me by AUVSI (Association of Unmanned Vehicles International) on November 18, 2010.

23

- 24 11. Exhibit 9 is a true and accurate reproduction of the document contained in Geneva Aerospace
- 25 Provisional Application 60/480,192 Small Business Innovation Research (SBIR) Program
- Projects Summary, Topic Number AF98-179, that I downloaded from PAIR on November 22.
- 27 2010.

- 29 12. Exhibit 10 is a true and accurate reproduction of the Web page containing Geneva Phase I
- 30 Contract information for AF98-179 that I downloaded from the Air Force SBIR Web site at
- 31 http://www.afsbirsttr.com/TechMall/Default.aspx?kwa=AF98-179 on November 26, 2010.

 Jed Margolin
 Serial Number: 11/736,356
 Filed: 04/17/2007
 Sheet 79 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 13. Exhibit 11 is a true and accurate reproduction of the Information Disclosure Statement in the

2 Duggan Provisional Application 60/480,192 that I downloaded from PAIR on November 22, 2010.

3

- 4 14. November 22, 2010 was the first day that Provisional Application 60/480,192 became available
- 5 to the public on PAIR. Provisional Application 60/480,192 became available to the public on PAIR
- 6 only as a result of my telephone conversations with Mr. Don Levin (Director of SEARCH AND
- 7 INFORMATION RESOURCES ADMINISTRATION) and Mr. Richard Fernandez (of that same
- 8 office) the previous week.

9 10

I hereby declare under the penalty of perjury that the foregoing is true and correct to the best of my

Jed Mongolin Jed Margolin

12 knowledge and belief.

13

14

Dated: November 29,2010

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 80 of 241

Serial Number: 11/736,356 Filed: 04/17/20 Examiner: Ronnie M. Mancho Art Unit: 3664

1 2

Exhibit 1 – AWST Article **NASA Plans UAS Push**

Examiner: Ronnie M. Mancho


LEADING EDGE

Filed: 04/17/2007 Art Unit: 3664

BY GRAHAM WARWICK

Senior Editor-Technology
Graham Warvick blogs at:
AviationWeek.com/leadingedge
warvick@aviationweek.com



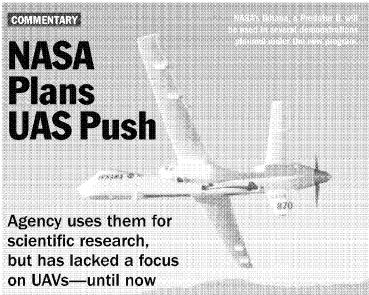

NASA/IIM ROSS

ASA is seeking industry feedback on its plans for a new five-year, \$150-million program to help integrate unmanned aircraft into civil airspace. The feedback is likely to be mixed, as the agency's last major unmanned aircraft research program was canceled before it got off the ground, despite industry backing.

Briefed to industry experts in early August, the Unmanned Air Systems (UAS) Integration in the National Airspace System (NAS) project is planned to begin in Fiscal 2011. It would be NASA's first major unmanned aircraft effort since the High-Altitude Long-Endurance Remotely Operated Aircraft (HALE ROA) project was killed in 2005.

The new program would focus on separation assurance and collision avoidance, pilot-aircraft interface, certification requirements and communications, involving a series of increasingly complex flight demonstrations. The main goal is to generate data to help the FAA and standards organizations develop guidelines and regulations for the design and operation of UASs in the NAS. The research is expected to have an impact in the 2015-25 timeframe.

NASA has tried to avoid duplication with, and identify gaps in, UAS civil-airspace integration efforts already underway, says Jeff Bauer, project planning lead. "Scope has been the biggest thing we have struggled with—what are the right things to do," he says. The result is a hodge-podge, lacking the singular vision of the HALE ROA project, which was the intended centerpiece of a government-industry plan to enable routine operations by long-endurance UAVs in airspace above 18,000 ft.

Some industry experts believe the new program is too near-term and that NASA should focus on longer-term challenges such as autonomy. Others think the program is "late to need" and that some of the data to be generated are required urgently to support efforts in progress to certify small unmanned aircraft and secure

UAS command-and-control links.

NASA did not have free rein in
scoping out the program as its direction from Congress and the Obama
administration was to coordinate with
the FAA and Defense and Homeland
Security departments to address
operational and safety issues with

dedicated frequency spectrum for

UAS integration into the NAS while avoiding duplication.

As a result, the separation assurance and collision-avoidance project will focus on real-time trajectory and contingency monitoring to provide an additional layer of safety for air traffic controllers and UAS operators. NASA will also develop mission planning tools to automate contingency procedures after communications or systems failures while minimizing the impact of UAS operations on air transport system capacity and delays.

The pilot-aircraft interface project will develop guidelines for designing or modifying ground control stations to be compliant with NAS requirements. This could involve adding audible, tactile and visual cues, and will culminate in a proof-of-concept demonstration using a Predator B ground station modified for NAS compliance.

Initially, the communications project will support work underway to secure dedicated "safety of flight" spectrum for UAS command-and-control links at the 2012 World Radiocommunication Conference. Subsequently, the project will develop and test prototypes of a data link radio that meets safety, security and scalability requirements.

Finally, NASA plans to provide the FAA with a methodology for developing airworthiness requirements for the certification of UAS. While some argue that manned aircraft certification rules should be the starting point, the agency believes the balance between probability of failure and severity of consequences used to define airworthiness requirements for passenger-carrying aircraft needs to be reassessed for unmanned aircraft. NASA also plans to assess UAS-specific hazards and risks and develop guidance for type design, focusing on the automation aspects. ©

AviationWeek.com/awst

AVIATION WEEK & SPACE TECHNOLOGY/AUGUST 16, 2010 13

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 82 of 241

Serial Number: 11/736,356 Filed: 04/17/20 Examiner: Ronnie M. Mancho Art Unit: 3664

2 <u>Exhibit 2</u> – Duggan Filewrapper Documents

Examiner: Ronnie M. Mancho Art Unit: 3664

-154-

to support transition between the first and second modes of control.

- 31. A multi-modal variable autonomy control system, the system comprising:
 - a plurality of control mode components each corresponding to a different mode of control and being configured to respond to command inputs by generating directionally descriptive control commands; and
 - a unified autopilot component for processing said directionally descriptive control commands.
 - an vehicle control component for receiving processed commands from the unified autopilot system and actuating control devices accordingly.
- 32. The system of claim 31, wherein said plurality of control mode components are associated with more than three different modes of control.
- 33. The system of claim 31, wherein said plurality of control mode components are associated with both autonomous and user-input-based modes of control.
- 34. The system of claim 31, wherein said plurality of control modes are further configured to respond to

Jed Margolin

NOV 2 1 2005

Serial Number: 11/736,356

Filed: 04/17/2007

Sheet 84 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

IFW

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

First Named

Inventor : David S. Duggan et al.

Appln. No.: 10/871,612

Filed : June 18, 2004

Group Art Unit: 3661

For

VEHICLE CONTROL SYSTEM INCLUDING RELATED METHODS

AND COMPONENTS

Docket No.: G46.12-0001

Examiner:

SUPPLEMENTAL INFORMATION DISCLOSURE STATEMENT

Commissioner for Patents P.O. Box 1450 Alexandria, VA 22313-1450 I HEREBY CERTIFY THAT THIS PAPER IS BEING SENT BY U.S. MAIL, FIRST CLASS, TO THE COMMISSIONER FOR PATENTS, P.O. BOX 1450, ALEXANDRIA, VA 22313-1450, THIS

8 DAY OF NOV EMBER

Jes Jes

Sir:

The patents or publications listed on the enclosed PTO Form-1449 are submitted pursuant to 37 C.F.R. § 1.97. Copies of the foreign references or "other art" references are included.

LIST REFERENCES NOT SUBMITTED

TIME OF FILING

The information disclosure statement is being filed:

- X
 Within three months of the filing date of a national application other that a Continued Prosecution Application (CPA);
 - Within three months of the date of entry of the National Stage international application;
 - 3. Before the mailing date of a first Office Action on the merits; or
 - Before the mailing of a first Office Action after the filing of a Request for Continue Examination (RCE).

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 85 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

-2-

after the time period specified in paragraph 1 above, but before the mailing date of a final action under 37 C.F.R. § 1.113 or notice of allowance under 37 C.F.R. § 1.311. Therefore, in accordance with 37 C.F.R. § 1.97(c), submitted herewith is:

(check either A or B below)

- A. ___ a statement as specified in 37 C.F.R. § 1.97(e).
- B. ___ the fee set forth in 37 C.F.R. § 1.17(p) for submission of an information disclosure statement under 37 C.F.R. § 1.97(c).
- after the mailing date of either a final action under 37 C.F.R. § 1.113 or a notice of allowance under 37 C.F.R. § 1.311, whichever occurs first, but before payment of the issue fee. Therefore, Applicant petitions for consideration and submits herewith:
 - A. a statement as specified in 37 C.F.R. § 1.97(e);
 - B. the petition fee set forth in 37 C.F.R. § 1.17(p).

STATEMENT

(only used if No. 2(A) or No. 3 above is checked) The person(s) signing below certify

(check appropriate paragraph)

that each item of information contained in this Information Disclosure Statement was first cited in any communication from a foreign patent office in a counterpart foreign application not more than three months prior to the filing of this statement. 37 C.F.R. § 1.97(e)(1).

OR

that no item of information contained in this Information Disclosure Statement was cited in a communication from a foreign patent office in a counterpart foreign application or, to the knowledge of the person signing the certification after making reasonable inquiry, was known to any individual designated in 37 C.F.R. § 1.56(c) more than

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 86 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

-3-

three months prior to the filing of this statement. 37 C.F.R. § 1.97 (e) (2).

METHOD OF PAYMENT

X No fee is required.
Attached is a check in the amount of \$____.

The Director is authorized to charge any fee deficiency required by this paper or credit any overpayment to Deposit Account No. 23-1123.

Respectfully submitted,

WESTMAN, CHAMPLIN & KELLY, P.A.

By: Christopher L. Holt, Reg. No. 45,844

Suite 1400 - International Centre

900 Second Avenue South

Minneapolis, Minnesota 55402-3319

Phone: (612) 334-3222 Fax: (612) 334-3312

CLH:rkp

Examiner: Ronnie M. Mancho Art Unit: 3664

Filed: 04/17/2007

Sheet 1 of 1

FORM PTO-1449	Atty. Docket No.: G46.12-0001	Appl. No.: 10/871,612		
LIST OF PATENTS AND PUBLICATIONS FOR APPLICANT'S INFORMATION DISCLOSURE STATEMENT	First Named Invent	or:		
OIPE	David S. Duggan et al.			
NOW D. 7 2005 A	Filing Date	Group Art:		
NOV 2 1 2005 U.S. PATENT DOCUM	June 18, 2004	3661		

U.S. PATENT DOCUMENTS

Examiner Initial	Document No.	Date	Name	Class	Sub Class	Filing Date If Appropriate
AA	U.S. Patent Pub. No. US 2005- 0256938 A1	Patent Pub. No. US 2005-	Margolin	709	218	
AB	5,666,531	09/1997	Martin	395	620	
AC	5,422,998	06/1995	Margolin	395	166	
AD	5,553,229	09/1996	Margolin	395	166	
AE	5,933,156	08/1999	Margolin	345	509	
AF	5,566,073	10/1996	Margolin	364	449	
AG	5,904,724	05/1999	Margolin	701	120	
АН	5,974,423	10/1999	Margolin	707	104	
AI	6,023,278	02/2000	Margolin	345	419	
AJ	6,377,436	04/2002	Margolin	361	230	
AK	6,177,943	01/2001	Margolin	345	419	
AL	5,978,488	11/1999	Margolin	381	61	

FOREIGN PATENT DOCUMENTS

		Document No.	Date	Country	Class	Sub Class	Translat Yes	ion No
-	AM						,	

OTHER ART (Including Author, Title, Date, Pertinent Pages, Etc.)

	AN			
	AO			
	AP			
EXAMIN	VER:	DATE	CONSIDERED:	•

Initial if citation considered, whether or not citation is in conformance with MPEP 609; draw line through citation if not in conformance and not considered. copy of this form with next communication to applicant.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007

Examiner: Ronnie M. Mancho Art Unit: 3664

-5*-*

Sheet 2 of 2 Appl. No.: 10/871,612 Atty. Docket No.: **G46.12-0001** FORM PTO-1449 First Named Inventor: LIST OF PATENTS AND PUBLICATIONS FOR APPLICANT'S INFORMATION DISCLOSURE STATEMENT David S. Duggan et al. Filing Date Group Art: June 18, 2004 3661

U.S. PATENT DOCUMENTS

Examiner Initial	Document No.	Date	Name	Class	Sub Class	Filing Date If Appropriate
AQ	AQ 6,862,501 03/2005		Не	701	3	
AR	6,062,513	05/2000	Lambregts Peter-Contesse	244 244	175 182	
AS	4,155,525	05/1979				
AT	6,304,819 10/2001	Agnew et al.	701	207		
AU	6,064,939	05/2000	Nishida et al.	701	120	
AV	6,498,984	12/2002	Agnew et al.	701	207	
AW						

FOREIGN PATENT DOCUMENTS

	Document No.	Date	Country	Class	Sub Class	Translation Yes No
ΑX						

OTHER ART (Including Author, Title, Date, Pertinent Pages, Etc.)

AY	RIS Press Releases - http://www.landform.com/pages/PressReleases.htm. 4 pgs.
AZ	Beringer, D.; "Applying Performance-Controlled Systems, Fuzzy Logic, and Fly-By-Wire Controls to General Aviation Office of Aerospace Medicine, May 2002, pgs. 1-8.
ВА	R. Parrish et al.; "Spatial Awareness Comparisons Between Large-Screen, Integrated Pictorial Displays and Conventional EFIS Displays During Simulated Landing Approaches," NASA Technical Paper 3467, CECOM Technical Report 94-E-1, October 1994, 1-22.
ВВ	Office of the Secretary of Defense, Airspace Integration Plan for Unmanned Aviation November 2004.
BC	Abernathy, M.; "Virtual Cockpit Window" for a Windowless Aerospacecraft. http://www.nasatech.com/Briefs/Jan03/MSC23096.html, Jan. 2003. 2 pgs.
XAMINER:	DATE CONSTDERED.

1

EXAMINER: Initial if citation considered, whether or not citation is in conformance with MPEP 609; draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

Sheet 88 of 241

Jed Margolin

Filed: 04/17/2007

Sheet 89 of 241

Serial Number: 11/736,356 Filed: 04/17/20 Examiner: Ronnie M. Mancho Art Unit: 3664

	Application N	Application No. Applicant(s)					
Interview Summary	10/871,612		DUGGAN ET AL				
interview Summary	Examiner		Art Unit				
	Gertrude Arthu	r-Jeanglaude	3661				
. All participants (applicant, applicant's representative, PTO	personnel):						
(1) Gertrude Arthur-Jeanglaude.	(3)						
(2) <u>Christopher Holt (Reg # 45,844)</u> .	(4)						
Date of Interview: 26 November 2007.							
Type: a)⊠ Telephonic b)□ Video Conference c)□ Personal [copy given to: 1)□ applicant 2	2)∏ applicant's	s representative	:]				
Exhibit shown or demonstration conducted: d) Yes If Yes, brief description:	e)⊠ No.						
Claim(s) discussed: 31.							
Identification of prior art discussed: none.	,						
Agreement with respect to the claims f)⊠ was reached. g	j)⊡ was not re	ached. h)⊡ N	I/A.				
Substance of Interview including description of the general reached, or any other comments: <u>To amned claim 31 to co</u>			if an agreement	was ·			
(A fuller description, if necessary, and a copy of the amend allowable, if available, must be attached. Also, where no callowable is available, a summary thereof must be attached	opy of the ame						
THE FORMAL WRITTEN REPLY TO THE LAST OFFICE ACTION MUST INCLUDE THE SUBSTANCE OF THE INTERVIEW. (See MPEP Section 713.04). If a reply to the last Office action has already been filed, APPLICANT IS GIVEN A NON-EXTENDABLE PERIOD OF THE LONGER OF ONE MONTH OR THIRTY DAYS FROM THIS INTERVIEW DATE, OR THE MAILING DATE OF THIS INTERVIEW SUMMARY FORM, WHICHEVER IS LATER, TO FILE A STATEMENT OF THE SUBSTANCE OF THE INTERVIEW. See Summary of Record of Interview requirements on reverse side or on attached sheet.							
•							
`							
Examiner Note: You must sign this form unless it is an Attachment to a signed Office action.	. (Examiner's sign	ature, if required				

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 90 of 241 Serial Number: 11/736,356 Filed: 04/17/20 Examiner: Ronnie M. Mancho Art Unit: 3664

1

Exhibit 3 – Geneva License Agreement 2

Examiner: Ronnie M. Mancho Art Unit: 3664

Filed: 04/17/2007

1



Geneva Aerospace, Inc. 4240 International Parkway, Suite 100 Carrollton, TX 75007 469-568-2376 Fax 469-568-2101

May 17th, 2006

SAMUELS, GREEN, STEEL & ADAMS, LLP Mr. Scott Albrecht, Esq. 19800 MacArthur Blvd, Suite 1000 IRVINE, CA, 92612

SUBJECT: RPV NON-EXCLUSIVE LICENSE AGREEMENT

Dear Mr. Albrecht,

I am enclosing two (2) originals of a "RPV NON-EXCLUSIVE LICENSE AGREEMENT". Please, have both copies signed and dated. Retain one executed original for your files and return one executed copy to Mr. Alan Barker at the above address.

Best regards,

Corinne Leroux Assistant

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 92 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

RPV NON-EXCLUSIVE LICENSE AGREEMENT

This Agreement is made this 01day of May, 2006 ("Effective Date") by and between Optima Technology Inc. (hereinafter referred to as "Licensor"), a Delaware corporation, Mr. Jed Margolin (hereinafter referred to as "Inventor"), an individual, both having a place of business at 2222 Michelson Drive, Suite 1830, Irvine, California 92612 USA, and Geneva Aerospace®, Inc., a Texas corporation (hereinafter referred to as "Licensee"), having its principal place of business at 4240 International Parkway, Suite 100, Carrollton, TX 75007, individually referred to as "Party" and collectively as the "Parties."

WITNESSED THAT

WHEREAS, as is demonstrated by the document(s) attached hereto as Exhibit A, Licensor has obtained from Inventor the right to provide a license under certain patents as herein identified; and

WHEREAS, Inventor is the named inventor in one or more of said patents; and

WHEREAS, Licensee desires to obtain, and Licensor is willing to grant Licensee, a non-exclusive license as hereafter defined and under the terms and provisions herein specified.

NOW, THEREFORE, in consideration of the promises and mutual agreements herein contained Licensor, Inventor and Licensee agree as follows:

TERMS

1. DEFINITIONS

- 1.1 The term "consist" limits and covers only the elements expressly recited. By contrast, the utilization of the terms "include," "such as," and "for example" are not limited and therefore cover more elements than those recited.
- 1.2 "Affiliate" shall mean any corporation or the like at least fifty percent (50%) of whose voting share capital is owned or directly or indirectly controlled by or under common control with a Party as of the Effective Date of this Agreement or at any time during the term of this Agreement and any other entity over which a Party exercises effective managerial control.
- 1.3 "Days" shall mean calendar days.
- 1.4 "RPV" shall mean "remotely piloted vehicle." A "remotely piloted aircraft" is an RPV. "UAV" shall mean "unmanned aerial vehicle." RPV is an older term for UAV. "UCAV" shall mean "Unmanned Combat Aerial Vehicle." UCAV is also sometimes defined as an "Uninhabited Combat Aerial Vehicle." UCAV is a UAV

Page 1 of 14

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 93 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

that is intended for use in combat. UCAS means "Unmanned Combat Air System."

- 1.5 "Synthetic Vision" is the current term for "Synthetic Environment" and is the three dimensional projected image data presented to the pilot or other observer.
- 1.6 "Patent Portfolio" shall mean the portfolio consisting of United States Patent Numbers 5,904,724 (Method and Apparatus for Remotely Piloting an Aircraft), 5,566,073 (Pilot Aid Using a Synthetic Environment), and those future United States patents that may be added in accordance with the covenants and warranties set forth in Section 8.1.
- 1.7 "Royalty Products" shall mean only the product identified as Licensee Part Number 606-0069-001 missionTEK Synthetic Image Module described as situational awareness aid for a UAV operator using missionTEK. This Part Number excludes the SDS Acuity IG software package hosted on a rack mount computer. This Part Number interfaces to mission TEK through an Ethernet connection and creates a synthetic image of a UAV that is driven by the current vehicle telemetry stream on the product order form attached hereto as Exhibit B. The other products and options identified in Exhibit B are specifically excluded from the definition of "Royalty Products." It is to be understood that Royalty Products shall include systems or components that are manufactured outside the United States, its territories, or possessions and which can reasonably be expected to be used or sold within the United States, its territories, or possessions and/or including and covering all countries on planet Earth and surrounding planets/systems, so long as those systems or components are also identified in Exhibit B as Licensee Part Number 606-0069-001 missionTEK Synthetic Image Module described as situational awareness aid for a UAV operator using missionTEK. This Part Number excludes the SDS Acuity IG software package hosted on a rack mount computer. This Part Number interfaces to mission TEK through an Ethernet connection and creates a synthetic image of a UAV that is driven by the current vehicle telemetry stream.
- 1.8 "Sale or Sold" shall mean selling, leasing, or otherwise transferring ownership, possession, or use to another party, of a Royalty Product (except as scrap), either directly or through a chain of distribution, and shall be deemed to have occurred upon invoicing of a Royalty Product to a third party, or if not invoiced, when ownership, possession, or use is transferred to a third party directly or indirectly.
- 1.9 "Claims" shall mean one or more patent claims identified within the body of a Patent (s).
- 1.10 "Claims in the Patent Portfolio" shall mean Claims identified within the body of a Patent(s) included in the Patent Portfolio (defined in Section 1.6 of this Agreement).

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 94 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

2. LICENSE GRANT

- 2.1 Subject to the terms and provisions of this Agreement, and to Licensee making the payments required under Section 4.1, Licensor and Inventor grants to Licensee a royalty bearing non-exclusive, personal, non-transferable, worldwide right and license under the Claims in the Patent Portfolio to test, make, have made, use, import, export, distribute, offer for sale, sell, lease, and/or otherwise dispose of products in, or for, the United States and its territories and possessions, subject to any applicable export laws and regulations of the United States.
- 2.2 Subject to the terms and provisions of this Agreement, and to Licensee making the payments required under Section 4.1, Licensor and Inventor grants to Licensee the right to extend to its direct and indirect distributors, suppliers, dealers, and customers its right, under the Claims in the Patent Portfolio, to test, make, have made, use, import, export, distribute, offer for sale, sell, lease, and/or otherwise dispose of products in, or for, the United States and its territories and possessions subject to any applicable exports laws and regulations of the United States.
- 2.3 Subject to execution of this agreement by the Parties, Licensor and Inventor release and forever discharge Licensee (and its direct and indirect distributors, suppliers, dealers and customers) from any and all claims, liens, demands, causes of action, obligations, losses, damages, and liabilities, known or unknown, suspected or unsuspected, liquidated or unliquidated, fixed or contingent, that they have had in the past or now have or may have in the future under any of the Claims in the Patent Portfolio based on or arising out of products Sold, prior to and including May 01, 2006 by Licensee in, or for, the United States and its territories and possessions.
- 2.4 Subject to the terms and provisions of this Agreement, and to Licensee making the payment required under Section 4.1 and during the term of the life of this Agreement, Licensor and Inventor further represent, covenant and agree that neither they nor any entity directly or indirectly controlled by either will bring suit or otherwise assert a claim for infringement against Licensee (or its direct and indirect distributors, suppliers, dealers or customers) before any court or administrative agency in any country of the world based on or arising out of products Sold by Licensee in, or for, the United States and its territories and possessions.
- 2.5 The release and covenant not to sue provided in Sections 2.3 and 2.4, as well as any other releases or covenants not to sue set out in this Agreement, shall bind any assignee or other person to whom the Assignor or Inventor may assign ownership or control of Claims in the Patent Portfolio.
- 2.6 Licensor and Inventor grants to Licensee the right to sublicense to an Affiliate of Licensee the rights granted to Licensee under this Agreement; provided that the

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 95 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

Affiliate is bound by the terms and provisions of this Agreement as if it were named in the place of Licensee, and provided that the Affiliate shall pay and account, directly or through Licensee, to the Licensor the royalties payable under this Agreement as a result of the activities of the Affiliate as if it were named in the place of Licensee. Any rights granted to an Affiliate shall terminate automatically and without notice on the date such Affiliate ceases to be an Affiliate; provided, however, that such termination shall not affect the rights granted to the Affiliate for acts occurring prior to the effective date of such termination. Upon written request from Licensor as to whether a particular entity or entities is an Affiliate, Licensee will answer such request in writing within thirty (30) Days from receipt of the request.

- 2.7 The rights, grants, covenants, and terms of Section 2.1, 2.2, 2.4, and 4.1 shall not apply to Royalty Products Sold by Licensee to a third party after Licensee was notified by Licensor that such third party has or had, directly or through others, asserted in any judicial proceeding or judicial document, at any time during the lifetime of this Agreement, that any of the Claims in the Patent Portfolio are invalid and/or not infringed.
- 2.8 The rights, grants, covenants, and terms of Sections 2.1, 2.2, 2.3, 2.4, and 4.1 shall not apply to Royalty Products Sold by Licensee to a third party for sale under a brand not owned or controlled by Licensee unless: (i) such third party has executed with Licensor a License Agreement; and/or (ii) Licensee pays the Royalty, under Sections 4.1 and 4.2, to Licensor for every Royalty Product Sold by such third party in, or for, the United States and its territories and possessions.
- 3. LIMITS ON SCOPE OF LICENSE GRANT
- 3.1 Any license grant or other authorization that may be provided by Licensor or Inventor to Licensee under this Agreement or to a third party does not provide, directly, by implication, or otherwise, any license grant, or authorization to Licensee to make, have made, use, import, export, distribute, offer for sale, sell, rent, or otherwise dispose of RPV systems for use by R/C hobbyists; and/or to make, have made, test, use, import, export, distribute, offer for sale, sell or lease, or otherwise dispose of equipment used to product or manufacture RPV systems for use by R/C hobbyists.
- 3.2 Any third party which acquires rights under this agreement is bound by the requirements of section 3.1.
- 4. ROYALTY AND PAYMENTS
- 4.1 In consideration for the licenses, covenants not to sue, and other rights granted by Licensor and Inventor to Licensee under this Agreement relative to Royalty Products Sold by Licensee in, or for, the United States and its territories and possessions and/or including and covering all countries on planet Earth and

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 96 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

surrounding planets/systems after May, 01, 2006, Licensee agrees to pay Licensor a continuing "Royalty" throughout the term of this Agreement equal to five percent (5%) for each such Royalty Product.

4.2 [DELETED BY PARTIES DURING NEGOTIATION]

- 4.3 Only one Royalty shall be paid on any Royalty Product with respect to the Claims in the Patent Portfolio regardless as to whether the Royalty Product is encompassed by one or more of the Claims in the Patent Portfolio. Licensee shall not be required to make payments under Section 4.1 as to Royalty Products Sold by Licensee where the Royalty due has been paid to Licensor by a third party. Licensee shall not be required to make payments under Section 4.1 as to Royalty Products Sold by Licensee and subsequently found defective and returned to Licensee for full credit, and not thereafter Sold by Licensee in, or for, the United States and its territories and possession and/or including and covering all countries on planet Earth and surrounding planets/systems.
- 4.4 The Parties understand that there should be no taxes imposed by any foreign country on the income of Licensor paid under this Agreement. However, to the extent, if any, that such taxes are imposed for any reason: (i) such taxes shall be borne by Licensor; (ii) Licensee will deduct such tax from the amounts payable to Licensor and pay such tax to the appropriate authority in the name of and on behalf of Licensor; (iii) Licensee shall send to Licensor certificates of tax payment in due course after each payment of the tax; and (iv) Licensee agrees to submit and to file any document to the competent foreign revenue office, that is required to have such certificate issued.
- 4.5 If any other entity is granted a license under any of the Claims in the Patent Portfolio with respect to Royalty Products under any more favorable economic terms than those granted to Licensee under this Agreement, then Licensor shall disclose, in writing, to Licensee the terms and provisions of each such license within thirty (30) Days of its execution, and Licensee shall have the right, within ninety (90) Days of receipt of such disclosure, to substitute all of the terms and provisions in this Agreement with all of the terms and provisions of the subsequent license, retroactive to the date that the subsequent license agreement was executed.

5. REPORTS

5.1 Licensee shall keep sales records of all Royalty Products Sold by Licensee during the term of this Agreement in, or for, the United States and its territories and possessions and/or including and covering all countries on planet Earth and surrounding planets/systems. These sales records shall be of sufficient detail to permit verification in accordance with the accuracy and completeness of the information and the royalties required to be reported and paid under this

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 97 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

Agreement. Licensee shall keep such records for at least five (5) years after each due date for royalty payments under this Agreement.

- 5.2 Licensee shall send Licensor a written "Royalty Report", accompanied in the manner provided for in Section 5.7 by the proper amount then payable to Licensor as shown in such Royalty Report,:
 - (a) on or before the thirtieth (30th) day after termination of this Agreement;
 and
 - (b) on or before the last day of the months of January, April, July and October of each year during the term of this Agreement. However, if less than one thousand Royalty Products are Sold by Licensee in, or for, the United States and its territories and possessions and/or including and covering all countries on planet Earth and surrounding planets/systems during a calendar year, then the four (4) quarterly reports and payments for the next calendar year immediately following may be combined in a single annual Royalty Report and payment made on or before the last day of January immediately following such next calendar year.
- 5.3 The Royalty Report shall be certified in its correctness by Licensee's representative responsible for paying such on Licensee's behalf in the normal course of Licensee's business, and providing information such as:
 - (a) the total number of Royalty Products, by product category, Sold by Licensee in; or for, the United States and its territories and possessions and/or including and covering all countries on planet Earth and surrounding planets/systems during the preceding calendar quarter;
 - (b) the royalty amount due for such calendar quarter; and
 - (c) the total number of Royalty Products, by product category, Sold by Licensee in, or for, the United States and its territories and possessions and/or including and covering all countries on planet Earth and surrounding planets/systems during such calendar quarter for which the Royalty due from Licensee was paid for by a third party and an identification of each such third party.
- 5.4 In the event that any Royalty Report and payment are not made by or on behalf of Licensee by the date provided under this Agreement, interest shall be payable on the past due amounts at the rate of the prime lending rate as published in the Wall Street Journal from time to time plus 2%, compounded semi-annually. This interest shall be calculated from the date payment was due to the payment date. This interest payment shall be in addition to any other remedy provided to Licensor by law or by this Agreement.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 98 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

5.5 Licensor shall maintain Royalty Reports of Licensee as "Confidential Information" in accordance with Article 9 of this Agreement. Confidential Information shall also include any other information provided by Licensee to Licensor and which is designated in good faith as confidential by Licensee.

- 5.6 Licensor shall have the right, during reasonable business hours and at the reasonable convenience of Licensee, to have the correctness of any Royalty Report of Licensee audited, at licensor's expense, by a firm of independent public accountants, selected by Licensor, and reasonably acceptable to Licensee. The independent public accountants shall examine Licensee's records only on matters pertinent to this Agreement. Nor more than one such audit shall be performed per year, unless Licensee has underreported as provided in the following sentence. In the event it is determined by the independent public accountants, at any time, that Licensee has underreported in an amount in excess of five percent (5%) of the royalties properly due with respect to one or more Royalty Reports, then Licensee, in addition to any other remedy provided Licensor by law or by this Agreement, agrees and is bound to:
 - (a) Reimburse Licensor's full cost and expense associated with the audit; and
 - (b) Pay Licensor an amount equal to one hundred and twenty-five (125%) of the amount that Licensee has failed to report or pay, along with interest at the rate of the prime lending rate as published in the Wall Street Journal from time to time plus two percent (2%), compounded semi-annually, calculated from the date each royalty accrued to the date of payment under this Section.

Any payments due under this Section shall be due and payable within thirty (30) Days following notice from Licensor of such failure, breach or default.

5.7 All royalty payments under this Agreement shall be paid in United States currency, without deductions of taxes of any kind other than as provided for in Section 4.4, payable to Licensor c/o SAMUELS, GREEN, STEEL & ADAMS, LLP, Scott Albrecht, Esq.; at 19800 Macarthur Blvd., Suite 1000, Irvine, California 92612-2433, U.S.A. by wire transfer to:

SAMUELS, GREEN, STEEL & ADAMS, LLP Scott Albrecht, Esq.; P.C. Client Trust

[Financial Information Redacted]

or to any other U.S.A. accounts, as instructed jointly and in writing by Licensor and Scott Albrecht, Esq.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 99 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

5.8 In the event applicable exchange control regulations shall prevent remittance of United States currency payment hereunder by Licensee, Licensee agrees, at Licensor's option and in accordance with the requirement to make payments without deductions of taxes of any kind other than as provided for in Section 4.4, to deposit an equivalent amount in a currency as designated by Licensor, in a bank designated by Licensor for the account of Licensor, such equivalent amounts to be calculated using currency tables published in the Wall Street Journal.

6. TERM AND TERMINATION

- 6.1 This Agreement shall continue in full force and effect, unless sooner terminated by specific provisions in this Agreement, until the expiration date of the last remaining of the Claims in the Patent Portfolio, or until a final decree of invalidity from which no appeal or other judicial recourse can be, or is, taken of the last remaining of the Claims in the Patent Portfolio.
- 6.2 Licensee may terminate this Agreement at any time by sixty (60) Days written notice to Licensor.
- 6.3 Licensor may terminate this Agreement forthwith upon written notice to Licensee if:
 - (a) Licensee remains in default in making any payment or supplying a Royalty report or fails to comply with any other provision for a period of thirty (30) Days, in each case after written notice of such default or failure is given by Licensor to Licensee, unless a genuine and good faith dispute exists as to the amount due and any amounts not in dispute are timely paid;
 - (b) Licensee shall make an assignment for the benefit of creditors, or any order for the compulsory liquidation of Licensee shall be made by any court.
 - (c) Licensee shall be finally determined by a court of competent jurisdiction to have (i) willfully or deliberately violated any material provision of this Agreement; (ii) concealed from Licensor any failure to comply with this Agreement including, but not limited to, the deliberate or willful understatement of royalties payable or the express refusal to timely pay royalties; and/or (iii) acted in bad faith in breaching any material provision of this Agreement. In such an event, the termination shall be effective as of the date of notice given by Licensor; and
 - (d) Licensee and/or any of its Affiliates, during the term of the Agreement, directly or through others, assert in any judicial proceeding or judicial document that any of the Claims in the Patent Portfolio are invalid.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 100 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

6.4 Any termination of this Agreement shall not relieve Licensee of its liability for any payments accrued or owing prior to the effective date of such termination, or for any payments on Royalty Products manufactured by Licensee, in whole or in part, and located in the United States and its territories and possessions and/or including and covering all countries on planet Earth and surrounding planets/systems, prior to the effective date of such termination and Sold after the termination date.

ASSIGNMENTS

- 7.1 This Agreement may be assigned by Licensor provided that the assignment does not operate to terminate, impair or in any way change any obligations or rights that Licensor currently has under this Agreement, or any of the obligations or rights that Licensee would have had, if the assignment has not occurred. In the event the assignment is to a competitor of Licensee, Licensor and Inventor will continue to receive Royalty Reports made by Licensee on a confidential basis and will not reveal the contents of the Royalty Reports to the assignee.
- 7.2 This Agreement shall inure to the benefit of, and be binding upon, the successors and assigns of the Parties, but no purported assignment or transfer by Licensee of this Agreement or any part thereof shall have any force or validity whatsoever unless and until approved in writing by Licensor, except an assignment to a direct or indirect wholly-owned subsidiary of Licensee, or to a buyer of all or substantially all of an entire business unit or product line of Licensee to which this license pertains. However, any purported conveyance or any attempt by Licensee to confer or extend the benefits and privileges of this Agreement upon or to any entity shall be void and ineffective if that entity: (I) shall have, directly or indirectly, rejected or declined to accept a license from Licensor upon like, similar or more favorable terms as embodiment herein; and/or (ii) directly or through others, asserted in any judicial proceeding or document that any of the Claims in the Patent Portfolio are invalid.

8. COVENNANTS, REPRESENTATIONS AND WARRANTIES

8.1 Licensor and Inventor warrant and covenant that: (i) if during the term of this Agreement, they own, control or acquire additional Claim(s), this Agreement will be supplemented to include such additional Claim(s) without the payment by Licensee of any royalties other than those required to be paid under this Agreement; (ii) they have the entire right, title and interest in and to the Claims in the Patent Portfolio; (iii) they have the right and authority to enter into this Agreement; (iv) they do not own or control any foreign issued patents or foreign pending patent applications; and (v) there are no liens, conveyances, mortgages, assignments, encumbrances or other agreements to which Licensor or Inventor are a party, or by which they are bound, that would prevent or impair the full exercise

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 101 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

of all substantive rights granted to Licensee by Licensor pursuant to the terms and provisions of this Agreement.

- 8.2 Licensor and inventor make no representation or warranty that Royalty Products will not infringe, directly, contributorily or by inducement under the laws of the United States or any foreign country, any patent or other intellectual property right of a third party.
- 8.3 Any dispute arising under or relating to this Agreement or in any dispute arising with respect or related to the subject matter of the Claims in the Patent Portfolio, which cannot be resolved by negotiation in good faith between the parties hereto, shall be resolved by an action brought in, and the Parties and their Affiliates who have agreed to be bound by this Agreement consent to the jurisdiction and venue of a court in the State of Delaware, U.S.A. Without regard to those laws relating to conflict of laws and the parties to this agreement hereby submit to the jurisdiction of the courts in the State of Delaware, U.S.A. in connection with any disputes arising out of this Agreement.
- 8.4 Licensee hereby submits for itself and its property in any legal action or proceeding relating to this Agreement, or for recognition and any enforcement of any judgment in respect thereof, to the non-exclusive general jurisdiction and forum of the courts of the State of Delaware in the United States of America, the courts of the United States of America for the District of Delaware, and appellate courts from any thereof. Licensee agrees not to raise, and waives, any objections or defenses based upon venue or forum non conveniens, except that Licensor may seek temporary injunctive relief in any venue of its choosing.
- 8.5 Licensee hereby designates the following agent in the United States for any service of any summons, complaint or other process in connection with any litigation arising out of this Agreement and Licensee agrees and certifies that such agent shall have full authority to accept the same on behalf of Licensee:

Name: W. Alan Barker, Geneva Legal Counsel

Address: 4240 International Parkway

Suite 100

Carrollton, Texas 75007 (469) 568-2376 x112

Tel.: (469) 568-2376

Fax: (469) 568-2100

Email: abarker@genevaaerospace.com

8.6 Licensee represents and warrants that Licensee assumes responsibility for obtaining all necessary official government approval, validation, and/or consent from the appropriate governmental authorities for the performance of this Agreement and for remittance of payment pursuant hereto and for registering or recording this Agreement as required; provided, however, that Licensee shall use its best efforts to provide that Licensor shall have the right to participate or be

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 102 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

represented in any proceeding, hearing, negotiation or the like with governmental authorities relating to such approval, validation and/or consent.

- 8.7 Licensee and its Affiliates shall, upon request, grant to Licensor, Inventor, and/or their Affiliates a non-exclusive license to and release from any and all claims of infringement of any patents that are necessarily infringed when implementing the Intellectual Property or claiming technologies for which there is no realistic alternative in implementing the Intellectual Property and with respect to which Licensee has or may in the future obtain rights or controls, directly or indirectly, to grant such a license and release. Any such licenses and release shall be granted upon fair, reasonable, and non-discriminatory terms and provisions.
- 8.8 Every Party represents and warrants that in executing this Agreement, other than the promises, warranties and representations expressly made in this Agreement, it does not rely on any promises, inducements, or representations made by any Party or third party with respect to this Agreement or any other business dealings with any Party or third party, now or in the future.
- 8.9 Every Party represents and warrants that it is not presently the subject of a voluntary or involuntary petition in bankruptcy or the equivalent thereof, is not presently contemplating filing any such voluntary petition, and does not presently have reason to believe that such an involuntary petition will be filed against it.
- 8.10 Other than the express warranties of this Article, there are no other warranties, express or implied.

CONFIDENTIAL INFORMATION

- 9.1 For a period of five (5) years as measured from the first date of disclosure of Confidential Information pursuant to this Agreement, Licensor and Inventor agree to use reasonable care and discretion, at least commensurate with that degree of reasonable care they use to protect similar information of their own, to avoid disclosure, publication or dissemination of Confidential Information, outside of those employees, attorneys or consultants of Licensor, and independent public accountants selected by Licensor pursuant to Section 5.6, who have a need to know Confidential Information, and are bound by the terms of this Article to keep Confidential Information in confidence.
- 9.2 Disclosure by Licensor or Inventor of Confidential Information under Section 9.1 of this Agreement shall be permitted in the following circumstances; provided, that Licensor and Inventor shall have first given reasonable notice to Licensee that such disclosure is to be made:
 - (a) in response to an order of a court, government or governmental body;
 - (b) otherwise as required by law; or

- (c) to the independent public accountants selected in accordance with Section 5.6 who agree in writing to maintain Confidential Information in confidence.
- 9.3 Notwithstanding any other provisions of this Agreement, the obligations specified in Section 9.1 of this Agreement will not apply to any Confidential Information that:
 - (a) is or become publicly available without breach of this Agreement;
 - (b) is released for disclosure by written consent of Licensee;
 - (c) can be shown by written documentation to have already been in Licensor's or Inventor's possession at the time of its receipt from Licensee; or
 - (d) is disclosed to Licensor or Inventor by a third party without Licensor's or Inventor's knowledge of any breach of any obligation or confidentiality owed to Licensee.

10. MISCELLANEOUS

10.1 All notices to, demands, consents, and communications that any Party may desire to give to the other, and/or may be required under this Agreement, must be in writing. The notice shall be effective upon receipt in the United States after having been sent by registered or certified mail or sent by facsimile transmission; and shall be effective upon receipt outside the United States after having been delivered prepaid to a reputable international delivery service or courier or sent by facsimile transmission; and addressed to the address designated below:

For notice to Licensor:

SAMUELS, GREEN, STEEL & ADAMS, LLP, Mr. Mark Adams, Esq. 19800 MacArthur Blvd., Suite 1000 Irvine, CA 92612

For notice to Licensee:

W. Alan Barker, Geneva Legal Counsel 4240 International Parkway Suite 100 Carrollton, Texas 75007

Tel: (469) 568-2376 x112 Fax: (469) 568-2100

Email: abarker@genevaaerospace.com

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 104 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

Or to such address that the Party to whom notices are to be sent may from time to time designate in writing.

- 10.2 No failure or delay to act upon any default or to exercise any right, power or remedy under this Agreement will operate as a waiver of any such default, right, power or remedy.
- 10.3 This Agreement constitutes the entire understanding of the Parties with respect to its subject matter and supersedes all prior oral or written negotiations, agreements and understandings. This Agreement may not be modified or amended except in writing duly signed by authorized persons on behalf of the Parties.
- 10.4 The validity, construction, interpretation and performance of this Agreement, and any disputes or legal actions arising under or from this Agreement, shall be governed by the laws and regulations of the United States of America as to patent law, and the State of Delaware as applied to contracts.
- 10.5 Each of the terms and provisions of this Agreement is material. Without such terms and provisions the Parties would not have entered into this Agreement. If any term or provision of this Agreement is, becomes, or is deemed invalid, illegal or unenforceable under the applicable laws or regulations in the United States or any of its jurisdictions including, for example, the State of Delaware, such term or provision may be amended, by mutual agreement between Licensor and Licensee, to the extent necessary to conform to applicable laws or regulations without materially altering the intention of the parties or, if it cannot be so amended by good-faith negotiations and agreement between Licensor and Licensee then this Agreement shall be terminated sixty (60) days following such term or provision becoming or being deemed invalid, illegal or unenforceable.
- 10.6 This Agreement does not constitute either Party the agent of the other Party for any purpose whatsoever, nor does either Party have the right or authority to assume, create or incur any liability of any kind, express or implied, against or in the name or on behalf of the other Party.
- 10.7 The English language form of this Agreement shall control and determine its interpretation.

IN WITNESS WHEREOF, the parties hereto have caused this RPV License Agreement to be executed by their respective duly authorized officers as of the Effective Date.

OPTIMA TECHNOLOGY INC

Date: May 01, 2006

Poloset Mass

As CEO, Optima Technology Inc.

Date: May 25, 2006.

By: Jed Margoli

Inventor

GENEVA AEROSPACE®, INC

Date: 1, 2006.

David Helio
As CEO/President

Geneva Aerospace, Inc.

This Agreement shall not be effective unless an original or a fax copy of this signature page fully executing this Agreement is received by Licensor within twenty-one (21) Days of the Effective Date.

Jed Margolin

Serial Number: 11/736,356

Filed: 04/17/2007

Sheet 106 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

Exhibit A

Optima Technology
Proprietary & Confidential
Information

[Redacted]

Serial Number: 11/736,356 Filed: 04/17/2007 Examiner: Ronnie M. Mancho Art Unit: 3664 Jed Margolin Sheet 107 of 241

	neva Aerospace' as eo as di JAV dontra	Commercial Price List <u>Exhibit B</u>		
Geneva P/N	Name	Deactiption and the result of the second sec		ist Price
للتاتييا	Flight Controls			
606-0022-001	flightTEK for Fixed Wing No Navigator	flightTEK computer with internal GPS and fixed wing VACS software. No cabling or GPS antenna.	\$	11,900.00
606-0023-001	flightTEK for Airship No Navigator	flightTEK computer with internal GPS and airship VACS software. No cabling or GPS antenna.	s	20,500.00
606-0022-002	flightTEK Extended Use	Same as above with the addition of a web interface that permits the customer to modify the autopilot gains.	ş	11,900.00
606-0023-002	flightTEK Airship Extended Use	Same as above with the addition of a web interface that permits the customer to modify the autopilot gains.	S	20,500.00
606-0024-001	flightTEK Standard Cable Set	Standard cable set not including the GPS RF cable. Cable is based on Dakota configuration.	s	2,900.00
606-0025-001 606-0026-001	flightTEK PIL Cable Set flightTEK Custom Cable Set Design	Standard bench cable that breaks out all of the flightTEK interfaces. Non-standard cable set idesign to interface to special payloads or other airborne components. Comes with a single cable set to air in it checks and integration.	\$ \$	1,200.00 23,000.00
Defined at design	flightTEK Custom Cable Set	Single cable set designed to specifications from the custom cable set design effort	S	3,100.00
606-0027-002	flightTEK GPS Antenna	Active GPS antenna and TBD ft. RF cable	\$	490.00
and arms	RightTEK VACS Software Options	A A BROOK A REALTY F. F. T.		**************************************
820-0011-001 606-0068-001	Navigator Software SIL 6DOF SDK	15 state Kalman filter that provides the full navigation state. Development environment that supports the extended use flightTEK. Allows the user to create a model of the aircraft and test the flightTEK gain settings against the airframe model. Includes a pre-compiled library for use on a ??? OS and Visual C++ compiler environment.	5	1,000.00 15,000.00
606-0050-001	PIUHIL 6DOF SDK System	Development environment that supports the extended use flightTEK. Allows the user to create a model of the aircraft and test the flightTEK gain settings against the airframe model in a real-time PIL/HIL environment. Includes a pre-compiled library for use on a Linux OS and a preloaded Boox PC.	\$	5,000.00
L. L. Smikre, Br	HighiTEK IMUINS		abei	Edition de it
606-0028-001	Systron Donner CMIGITS III INS CMIGITS Mount w/ 12v/28v DC-DC converter	Includes the CMIGITS hardware and the software interface driver		30,850.00
606-0029-001	CMIGITS Mount (28v)	Standard Dakota mount with interface cable and 12v/28v DC-DC power converter Standard Dakota mount with interface cable without power converter (28v)	\$	1,500.00
606-0031-001	Systron Donner MMQ IMU Assembly	Includes the MMQ hardware, LVDS board converter, TBD in, cable between MMQ and LVDS board, and the software interface driver	\$	7,200.00
606-0032-001	Crossbow IMU	Includes the Crossbow hardware and the software interface driver	\$	4,900.00
606-0033-001 606-0065-001	Microstrain IMU Interface Panel	Includes Microstrain hardware and the software interface driver Includes ADS sensor, RC to autonomous flight switching, FTS interface	S	1,900.00
606-0035-001	ADS Sensor - Setra	ADS sensor w/ tubing - Setra	\$	7,000.00 550.00
606-0035-002	ADS Sensor - All Sensors	ADS sensor w/ tubing - All Sensors	8	550.00
C. J. Street took	Data Link for Air Vehicles			
N. H. T. W. B. D.	Data Tiuk ich wil Abuiciez			
606-0036-001	UNIO LIURI IOF AUT VORILCINS IINKYEK DV	Transmits data & wideo via 802.11b for LOS or via optional satcom link for BLOS. Video is transmitted as digital data compressed using JPEG2000 compression. A ethernel ports on an internal switch are provided. If flightTEK is used, one ethernel port will be used. 1 watt internal power amp for 802.11b is included.	S	9,950.00
606-0036-001 606-0036-002	linkTEK DV linkTEK DV No Amp	transmitted as digital data compressed using JPEG2000 compression. 4 ethernet ports on an internal switch are provided. If flightTEK is used, one ethernet port will be used. 1 watt internal power amp for 802.11 b; included. Same as linkTEK DV but does not include internal 802.11b power amp.	s	8,600.00
606-0036-001 606-0036-002 606-0037-001	inkTEK DV linkTEK DV No Amp linkTEK D	transmitted as digital data compressed using JPEG2000 compression. 4 ethernet ports on an internal switch are provided. If flightTEK is used, one ethernet port will be used. 1 watt internal power amp for 802.11b is included. Same as linkTEK DV but does not include internal 802.11b power amp. Same as linkTEK DV but does not include video.	\$	8,600.00 9,200.00
606-0036-001 606-0036-002	linkTEK DV linkTEK DV No Amp	transmitted as digital data compressed using JPEG2000 compression. 4 ethernet ports on an internal switch are provided. If flightTEK is used, one ethernet port will be used. 1 watt internal power amp for 802,116 is included. Same as linkTEK DV but does not include internal 802,116 power amp. Same as linkTEK DV but does not include video. Same as linkTEK DV No Amp but does not include video. Satcom modem enclosure with a single GlobalSitar modem, TBD in. of RF cable, 24 in. serial	s	8,600.00
606-0036-001 606-0036-002 606-0037-001 606-0037-002	linkTEK DV linkTEK DV No Amp linkTEK D linkTEK D No Amp	Iransmitted as digital data compressed using JPEGZ000 compression. 4 ethernet ports on an internal switch are provided. If flightTEK is used, one ethernet port will be used. 1 watt internal power amp for 802.11b is included. Same as linkTEK DV but does not include internal 802.11b power amp. Same as linkTEK DV but does not include video. Same as linkTEK DV No Amp but does not include video. Satcom modem enclosure with a single GlobalStar modem, TBD in. of RF cable, 24 in. serial interface cable, and a single GlobalStar antenna. Satcom modem enclosure with two GlobalStar modems, TBD in. of RF cables, 24 in. serial interface cable, and a single GlobalStar antenna.	\$ \$	8,600.00 9,200.00 8,000.00
606-0036-001 606-0036-002 606-0037-001 606-0038-001	linkTEK DV linkTEK DV No Amp linkTEK D No Amp SATCOM - 1	transmitted as digital data compressed using JPEG2000 compression. 4 ethernet ports on an Internal switch are provided. If flightTEK is used, one ethernet port will be used. 1 watt internal power amp for 802.11b is included. Same as InkTEK DV but does not include internal 802.11b power amp. Same as InkTEK DV but does not include video. Same as InkTEK DV No Amp but does not include video. Sattom modem enclosure with a single GlobalStar modem, TBD in. of RF cable, 24 in. serial interface cable, and a single GlobalStar antenna.	\$ \$ \$	8,600.00 9,200.00 8,000.00 4,400.00
606-0036-001 606-0036-002 606-0037-001 606-0038-001 606-0038-002 606-0038-002	linkTEK DV No Amp linkTEK DV No Amp linkTEK D linkTEK D No Amp SATCOM - 1 SATCOM - 2 linkTEK Developer Kit Senal Datalink 225-400 MHz	transmitted as digital data compressed using JPEGZ000 compression. 4 ethernet ports on an internal switch are provided. If flightTEK is used, one ethernet port will be used. 1 watt internal power amp for 802.11b is included. Same as linkTEK DV but does not include internal 802.11b power amp. Same as linkTEK DV but does not include video. Same as linkTEK DV No Amp but does not include video. Satcom modem enclosure with a single GlobalStar modem, TBD in. of RF cable, 24 in. serial interface cable, and a single GlobalStar antenna. Satcom modem enclosure with two GlobalStar antenna. Power cable, power supply, and Ru45 cable, and 3"rubber duck antenna. Radio hardware with TBD in. RF cable and vehicle antenna.	\$ \$ \$ \$ \$	8,600,00 9,200,00 8,000,00 4,400,00 7,200,00 950,00 5,200,00
606-0036-001 606-0036-002 506-0037-001 606-0038-001 606-0038-002 606-0038-002 606-0038-001 606-0038-001 606-0038-001	linkTEK DV No Amp linkTEK DV No Amp linkTEK D linkTEK D No Amp SATCOM - 1 SATCOM - 2 linkTEK Developer Kit Senal Datalink 225-400 MHz Senal Datalink 900 MHz	transmitted as digital data compressed using JPEG2000 compression. 4 ethernet ports on an internal switch are provided. If flightTEK is used, one ethernet port will be used. 1 watt internal power amp for 802,11 b is included. Same as linkTEK DV but does not include internal 802,11 b power amp. Same as linkTEK DV but does not include video. Same as linkTEK DV No Amp but does not include video. Satcom modern enclosure with a single GlobalStar modern, TBD in. of RF cable, 24 in. serial interface cable, and a single GlobalStar antenna. Satcom modern enclosure with two GlobalStar moderns, TBD in. of RF cables, 24 in. serial interface cable, and low GlobalStar antennas. Power cable, power supply, and RJ45 cable, and 3" nubber duck antenna. Radio hardware with TBD in. RF cable and vehicle antenna Radio hardware with TBD in. RF cable and vehicle antenna	\$ \$ \$ \$ \$ \$	8,600,00 9,200,00 8,000,00 4,400,00 7,200,00 950,00 5,200,00 1,750,00
606-0036-001 606-0036-002 606-0037-001 606-0038-001 606-0038-002 606-0038-001 606-0038-001 606-0041-001 606-0040-001 606-0040-001	linkTEK DV No Amp linkTEK DV No Amp linkTEK D linkTEK D No Amp SATCOM - 1 SATCOM - 2 linkTEK Developer Kit Senal Datalink 900 MHz Senal Datalink 900 MHz Senal Datalink 900 MHz	transmitted as digital data compressed using JPEGZ000 compression. 4 ethernet ports on an internal switch are provided. If flightTEK is used, one ethernet port will be used. 1 watt internal power amp for 802.11b is included. Same as linkTEK DV but does not include internal 802.11b power amp. Same as linkTEK DV but does not include video. Same as linkTEK DV No Amp but does not include video. Satcom modem enclosure with a single GlobalStar modem, TBD in. of RF cable, 24 in. serial interface cable, and a single GlobalStar antenna. Satcom modem enclosure with two GlobalStar antenna. Power cable, power supply, and Ru45 cable, and 3"rubber duck antenna. Radio hardware with TBD in. RF cable and vehicle antenna.	\$ \$ \$ \$ \$	8,600,00 9,200,00 8,000,00 4,400,00 7,200,00 950,00 5,200,00
606-0036-001 606-0036-002 606-0037-001 606-0038-001 606-0038-002 606-0038-001 606-0038-001 606-0041-001 606-0040-001 606-0040-001	linkTEK DV No Amp linkTEK DV No Amp linkTEK D linkTEK D No Amp SATCOM - 1 SATCOM - 2 linkTEK Developer Kil Serial Datalink 205-400 MHz Serial Datalink 900 MHz Serial Datalink 900 MHz Serial Datalink Developer Kil Gontrol Stations	transmitted as digital data compressed using JPEG2000 compression. 4 ethernet ports on an internal switch are provided. If flightTEK is used, one ethernet port will be used. 1 watt internal power amp for 802,11 b is included. Same as linkTEK DV but does not include internal 802,11 b power amp. Same as linkTEK DV but does not include video. Same as linkTEK DV No Amp but does not include video. Satcom modern enclosure with a single GlobalStar modern, TBD in. of RF cable, 24 in. serial interface cable, and a single GlobalStar antenna. Satcom modern enclosure with two GlobalStar moderns, TBD in. of RF cables, 24 in. serial interface cable, and low GlobalStar antennas. Power cable, power supply, and RJ45 cable, and 3" nubber duck antenna. Radio hardware with TBD in. RF cable and vehicle antenna Radio hardware with TBD in. RF cable and vehicle antenna	\$ \$ \$ \$ \$ \$	8,600,00 9,200,00 8,000,00 4,400,00 7,200,00 950,00 5,200,00 1,750,00
606-0036-001 606-0036-002 606-0037-002 606-0038-001 606-0038-002 606-0038-002 606-0041-001 606-0040-001 606-0042-001 606-0012-001 606-0012-001	linkTEK DV No Amp linkTEK DV No Amp linkTEK D No Amp SATCOM - 1 SATCOM - 2 linkTEK Developer Kit Serial Datalink 295-400 MHz Serial Datalink 900 MHz Serial Datalink 900 MHz Serial Datalink Developer Kit Gontrol Stations:	transmitted as digital data compressed using JPEGZ000 compression. 4 ethernel ports on an internal switch are provided. If flightTEK is used, one ethernel port will be used. 1 wait internal power amp for 802.1 to sincluded. Same as linkTEK DV but does not include internal 802.1 to power amp. Same as linkTEK DV but does not include video. Same as linkTEK DV No Amp but does not include video. Satcom modem enclosure with a single GlobalStar modem, TBD in. of RF cable, 24 in. serial interface cable, and a single GlobalStar anternae. Satcom modem enclosure with a video GlobalStar modems, TBD in. of RF cables, 24 in. serial interface cable, and interface video GlobalStar anternae. Satcom modem enclosure with two GlobalStar modems, TBD in. of RF cables, 24 in. serial interface cable, and two GlobalStar anternas. Power cable, power supply, and RJ45 cable, and 3" nubber duck anterna. Radio hardware with TBD in. RF cable and vehicle anterna Radio hardware with TBD in. RF cable and vehicle anterna. Radio hardware with TBD in. RF cable and vehicle anterna. Runs on Windows 2000, NT, or XP. Capable of commanding all available flight modes. Includes a Panasonic Toughbook, mouse, and joystick.	\$ \$ 5 5 5 5 5 5	8,600,00 9,200,00 8,000,00 4,400,00 7,200,00 950,00 1,750,00 950,00 15,000,00 4,500,00
606-0036-001 606-0037-001 606-0037-001 606-0038-001 606-0038-002 506-0041-001 606-0039-001 606-0042-001 606-0042-001	linkTEK DV No Amp linkTEK DV No Amp linkTEK D linkTEK D No Amp SATCOM - 1 SATCOM - 2 linkTEK Developer Kil Serial Datalink 205-400 MHz Serial Datalink 900 MHz Serial Datalink 900 MHz Serial Datalink Developer Kil Gontrol Stations	transmitted as digital data compressed using JPEG2000 compression. 4 ethernet ports on an internal switch are provided. If flightTEK is used, one ethernet port will be used. 1 wait internal power amp for 802.11 b is included. Same as linkTEK DV but does not include internal 802.11 b power amp. Same as linkTEK DV but does not include video. Same as linkTEK DV No Amp but does not include video. Satcom modern enclosure with a single GlobalStar modern, TBD in. of RF cable, 24 in. serial interface cable, and a single GlobalStar antenna. Satcom modern enclosure with two GlobalStar moderns, TBD in. of RF cables, 24 in. serial interface cable, and two GlobalStar antennas. Power cable, power supply, and RJ45 cable, and 3" rubber duck antenna. Radio hardware with TBD in. RF cable and vehicle antenna Radio hardware with TBD in. RF cable and vehicle antenna Radio hardware with TBD in. RF cable, and 3" rubber duck antenna. Rams on Windows 2000, NT, or XP. Capable of commanding all available flight modes.	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	8,600.00 9,200.00 8,000.00 4,400.00 7,200.00 950.00 5,200.00 1,750.00 950.00
606-0036-001 606-0037-002 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-002	linkTEK DV No Amp linkTEK DV No Amp linkTEK D No Amp SATCOM - 1 SATCOM - 2 linkTEK Developer Kil Serial Datalink 205-400 MHz Serial Datalink 900 MHz Serial Datalink 900 MHz Serial Datalink Developer Kil Gentrol Stations missionTEK Software missionTEK Software missionTEK Computer missionTEK Synthetic Image Module	iransmitted as digital data compressed using JPEGZ000 compression. A ethernet ports on an internal switch are provided. If flightTEK is used, one ethernet port will be used. 1 wast internal power amp for 802.1 to s included. Same as linkTEK DV but does not include internal 802.1 to power amp. Same as linkTEK DV but does not include video. Same as linkTEK DV but does not include video. Same as linkTEK DV No Amp but does not include video. Satcom modern enclosure with a single GlobalStar modern, TBD in. of RF cable, 24 in. serial interface cable, and a single GlobalStar anterna. Satcom modern enclosure with a single GlobalStar modern, TBD in. of RF cables, 24 in. serial interface cable, and two GlobalStar anternas. Power cable, power supply, and RL45 cable, and 3" nubber duck anterna. Radio hardware with TBD in. RF cable and vehicle anterna. Radio hardware with TBD in. RF cable and vehicle anterna. Radio hardware with TBD in. RF cable and vehicle anterna. Runs on Windows 2000, NT, or XP. Capable of commanding all available flight modes. Includes a Panasonic Toughbook, mouse, and joystick. This product is an interface module that enables mission TEK support unmanned vehicle operator situational awareness aids. The product provides an interface to the AAculy® PC-IG System sold by SDS International. The product requires missionTEK to be connected to the PC-IG System sold by SDS International. The product requires missionTEK to be connected to the PC-IG System sold by SDS International. The product requires missionTEK to be connected to the PC-IG System sold by SDS International. The product requires missionTEK to be connected to the PC-IG System sold by SDS International. The product requires missionTEK to be connected to the PC-IG System sold by SDS International. The product requires missionTEK to be connected to the PC-IG System sold by SDS International.	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	8.600.00 9.200.00 8.000.00 4.400.00 7.200.00 950.00 5.200.00 1.750.00 950.00 4.500.00 2.000.00
606-0036-001 606-0037-001 606-0037-002 606-0038-001 606-0038-002 606-0038-002 606-0041-001 606-0049-001 608-0012-001 608-0012-001 608-0012-001	linkTEK DV No Amp linkTEK DV No Amp linkTEK D No Amp SATCOM - 1 SATCOM - 2 linkTEK Developer Kit Senal Datalink 2054-400 MHz Senal Datalink 900 MHz Senal Datalink 900 MHz Senal Datalink Developer Kit Gontrol Stations missionTEK Software missionTEK Computer missionTEK Synthetic Image Module	iransmitted as digital data compressed using JPEGZ000 compression. A ethernet ports on an internal switch are provided. If flightTEK is used, one ethernet port will be used. 1 wait internal power amp for 802.1 to s included. Same as InkTEK DV but does not include internal 802.1 to power amp. Same as InkTEK DV but does not include video. Same as InkTEK DV No Amp but does not include video. Satcom modern enclosure with a single GlobalStar modem, TBD in. of RF cable, 24 in. serial interface cable, and a single GlobalStar anternas. Satcom modern enclosure with two GlobalStar modems, TBD in. of RF cables, 24 in. serial interface cable, and as interface cable, and with GlobalStar anternas. Power cable, power supply, and RL45 cable, and 3" rubber duck anterna. Radio hardware with TBD in. RF cable and vehicle anterna Radio hardware with TBD in. RF cable and vehicle anterna Power cable, power supply, and RL45 cable, and 3" rubber duck anterna. Runs on Windows 2000, NT, or XP. Capable of commanding all available flight modes. Includes a Panasonic Toughbook, mouse, and joystick. This product is an interface module inat enables mission TEK support unmanned vehicle operator situational awareness aids. The product requires missionTEK support unmanned vehicle operator situational awareness aids. The product requires missionTEK to be connected to the PC-IG system through an Ethernet connection and provides an interface to the AAculy® PC-IG system through an Ethernet connection and provides the PC-IG system periodic vehicle data that is used to generate a synthetic image of the vehicle ralative to a 3-D terrain environment. Same as InkTEK D GCS except no 802.11b power amp. Same as InkTEK D GCS except no 802.11b power amp.	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	8,600,00 9,200,00 4,400,00 7,200,00 5,200,00 1,780,00 950,00 15,000,00 2,000,00
606-0036-001 606-0037-003 606-0037-003 606-0038-001 606-0038-002 606-0038-001 606-0038-001 606-0038-001 606-0038-001 606-0038-001 606-0038-001 606-0038-001 606-0038-001	linkTEK DV No Amp linkTEK DV No Amp linkTEK D No Amp SATCOM - 1 SATCOM - 2 linkTEK Developer Kit Serial Datalink 225-400 MHz Serial Datalink 900 MHz Serial Datalink 900 MHz Serial Datalink Developer Kit Gontrol Stations: missionTEK Software missionTEK Software missionTEK Computer missionTEK Synthetic Image Module	inansmitted as digital data compressed using JPEGZ000 compression. 4 ethernet ports on an internal switch are provided. If flightTEK is used, one athernet port will be used. 1 wait internal power amp for 802.11b is included. Same as linkTEK DV but does not include video. Same as linkTEK DV but does not include video. Same as linkTEK DV but does not include video. Same as linkTEK DV but does not include video. Satcom modern enclosure with a single GlobalStar modem, TBD in. of RF cable, 24 in. serial interface cable, and a single GlobalStar antenna. Satcom modern enclosure with two GlobalStar antenna. Satcom modern enclosure with two GlobalStar antenna. Satcom modern enclosure with two GlobalStar antenna. Radio hardware with TBD in. RF cable and 3" rubber duck antenna. Radio hardware with TBD in. RF cable and vehicle antenna Radio hardware with TBD in. RF cable and vehicle antenna Radio hardware with TBD in. RF cable and vehicle antenna Runs on Windows 2000, NT, or XP. Capable of commanding all available flight modes. Includes a Panasonic Toughbook, mouse, and joystick. This product is an interface module that enables missionTEK support unmanned vehicle operator situational awareness aids. The product requires missionTEK to be connected to the CA-Ci system strough an Ethernet connection and provides the PC-IG system periodic vehicle data that is used to generate a synthetic image of the vehicle relative to a 3-D terrain environment. Same as InkTEK D or the air vehicle and includes power supply, power cable, interface cables, and 3" quarter wave rubber duck antenna. Same as InkTEK D or the air vehicle and includes power supply, power cable, interface cables, and a single GlobalStar modern, RF cable, and antenna is	\$ 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	8,600,00 9,200,00 4,400,00 7,200,00 5,200,00 1,780,00 950,00 2,000,00 9,700,00
606-0036-001 606-0038-002 606-0038-001 606-0038-002 606-0038-001 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-003 606-0038-003 606-0037-003 606-0037-003	linkTEK DV No Amp linkTEK DV No Amp linkTEK D No Amp SATCOM - 1 SATCOM - 2 linkTEK D No Amp SATCOM - 2 linkTEK Developer Kit Serial Datalink 205-400 MHz Serial Datalink 900 MHz Serial Datalink 900 MHz Serial Datalink 900 MHz Serial Datalink 900 MHz MissionTEK Software missionTEK Computer missionTEK Computer missionTEK Synthetic Image Module linkTEK D - GCS linkTEK D No Amp - GCS SATCOM - 1 - GCS	iransmitted as digital data compressed using JPEGZ000 compression. 4 ethernet ports on an internal switch are provided. If flightTEK is used, one ethernet port will be used. 1 wast internal power amp for 802.11b is included. Same as linkTEK DV but does not include internal 802.11b power amp. Same as linkTEK DV but does not include video. Same as linkTEK DV No Amp but does not include video. Satcom modern enclosure with a single GlobalStar modem, TBD in. of RF cable, 24 in. serial interface cable, and is nigle GlobalStar anternae. Satcom modern enclosure with two GlobalStar modems, TBD in. of RF cables, 24 in. serial interface cable, and two GlobalStar anternae. Satcom modern enclosure with two GlobalStar modems, TBD in. of RF cables, 24 in. serial interface cable, and two GlobalStar anternas. Power cable, power supply, and RJ45 cable, and 3" nubber duck anternae. Radio hardware with TBD in. RF cable and vehicle anternae. Radio hardware with TBD in. RF cable and vehicle anternae. Runs on Windows 2000, NT, or XP. Cepable of commanding all available flight modes. Includes a Panasonic Toughbook, mouse, and joystick. This product is an interface module that enables mission TEK support unmanned vehicle operator situational awareness aids. The product provides an interface to the AAculyty PC-LiC System sold by SDS International. The product requires missionTEK to be connected to the PC-IG system sold by SDS International. The product requires missionTEK to be connected to the PC-IG system sold to generate a synthetic image of the vehicle raistive to a 3-D terrain environment. Same as linkTEK D for the air vehicle and includes power supply, power cable, interface cables, and 3" quarter wave rubber duck antenna. Same as linkTEK D - GCS except no 802.11b power amp. Satcom modern enclosure with a single GlobalStar modem, TBD in. of RF cable, 24 in. serial interface cable, and a single GlobalStar antenna.	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	8.600.00 9.200.00 4.400.00 7.200.00 950.00 5.200.00 1.750.00 950.00 2.000.00 9.700.00 9.700.00 5.200.00
606-0036-001 606-0037-001 606-0038-001 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-001 606-0038-001 606-0038-001 606-0038-001 606-0038-001 606-0038-001 606-0038-001	IIINKTEK DV No Amp IINKTEK DV No Amp IINKTEK D No Amp SATCOM - 1 SATCOM - 2 IINKTEK Developer Kil Senal Datalink 225-400 MHz Senal Datalink 900 MHz Senal Datalink 900 MHz Senal Datalink Boveloper Kil Gentrol Stations mission TEK Software mission TEK Computer missionTEK Synthetic Image Module tinkTEK D - GCS IINKTEK D No Amp - GCS SATCOM - 1 - GCS SATCOM - 2 - GCS IINKTEK Comm Kil Senal Datalink 225-400 MHz - GCS	inansmitted as digital data compressed using JPEG2000 compression. 4 ethernel ports on an internal switch are provided. If flightTEK is used, one ethernel port will be used. 1 watt internal power amp for 802.11b is included. Same as linkTEK DV but does not include video. Same as linkTEK DV but does not include video. Same as linkTEK DV but does not include video. Satcom modem enclosure with a single GlobalStar modem, TBD in. of RF cable, 24 in. serial interface cable, and a single GlobalStar antenna. Satcom modem enclosure with two GlobalStar antenna. Satcom modem enclosure with two GlobalStar modems, TBD in. of RF cables, 24 in. serial interface cable, and two GlobalStar antennas. Power cable, power supply, and RJ45 cable, and 3" rubber duck antenna. Radio hardware with TBD in. RF cable and vehicle antenna Radio hardware with TBD in. RF cable, and 3" rubber duck antenna. Runs on Windows 2000, NT, or XP. Capable of commanding all available flight modes. Includes a Panasonic Toughbook, mouse, and joystick. This product is an interface module that enables mission TEK support unmanned vehicle operator situational awareness aids. The product provides an interface to the AAculyte PC-IC System slid by SSS International. The product requires mission TEK to be connected to the PC-IC system through an Ethernel connection and provides the PC-IG system periodic vehicle data that is used to generate a synthetic image of the vehicle relative to a 3-D terrain environment. Same as InkTEK D for the air vehicle and includes power supply, power cable, interface cables, and 3" quarter wave rubber duck antenna. Same as InkTEK D for the air vehicle and includes power supply, power cable, interface cables, and 3" quarter wave rubber duck antenna. Same as InkTEK D for the air vehicle and includes power supply, power cable, interface cables, and a single GlobalStar modern, RF cable, and antenna is included.	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	9,000,00 9,000,00 4,400,00 7,200,00 9,500,00 1,750,00 9,500,00 15,000,00 2,000,00 9,700,00 9,700,00 9,000,00 6,600,00
606-0036-001 606-0038-001 606-0038-001 606-0038-001 606-0038-002 606-0038-001 606-0038-002 606-0038-001 606-0038-001 606-0038-001 606-0038-001 606-0038-001 606-0038-001 606-0038-004 606-0038-004 606-0038-004 606-0038-004	linkTEK DV No Amp linkTEK DV No Amp linkTEK D No Amp linkTEK D No Amp SATCOM - 1 SATCOM - 2 linkTEK Developer Kil Serial Datalink 900 MHz Serial Datalink 900 MHz Serial Datalink 900 MHz Serial Datalink 900 MHz Serial Datalink 900 MHz InkTEK D No Amp Sort Datalink 900 MHz Serial Datalink 900 MHz InkTEK D No Amp - GCS SATCOM - 2 - GCS InkTEK Datalink 900 MHz - GCS Serial Datalink 900 MHz - GCS	iransmitted as digital data compressed using JPEGZ000 compression. 4 ethernet ports on an internal switch are provided. If flightTEK is used, one ethernet port will be used. 1 wast internal power amp for 802.1 to s included. Same as linkTEK DV but does not include internal 802.1 to power amp. Same as linkTEK DV but does not include video. Same as linkTEK DV but does not include video. Same as linkTEK DV No Amp but does not include video. Satcom modern enclosure with a single GlobalStar modem, TBD in. of RF cable, 24 in. serial interface cable, and a single GlobalStar anternas. Satcom modern enclosure with two GlobalStar modems, TBD in. of RF cables, 24 in. serial interface cable, and a single GlobalStar anternas. Power cable, power supply, and RL45 cable, and 3" rubber duck anterna. Radio hardware with TBD in. RF cable and vehicle anterna Radio hardware with TBD in. RF cable and vehicle anterna Power cable, power supply, and RL45 cable, and 3" rubber duck anterna. Runs on Windows 2000, NT, or XP. Cepable of commanding all available flight modes. Includes a Panasonic Toughbook, mouse, and joystick. This product is an interface module that enables mission TEK support unmanned vehicle operator situational awareness aids. The product requires missionTEK to be connected to the PC-IC system sold by SDS International. The product requires missionTEK to be connected to the PC-IC system through an Ethernet connection and provides the PC-IC system periodic vehicle data that is used to generate a synthetic image of the vehicle relative to a 3-D terrain environment. Same as InkTEK D for the air vehicle and includes power supply, power cable, interface cables, and 3" quarter wave rubber duck antenna. Same as InkTEK D in the air vehicle and includes power supply, power cable, interface cables, and a single GlobalStar modern, TBD in. of RF cable, 24 in. serial interface cable, and a single GlobalStar antenna. Same as InkTEK D in Expert and includes power supply, power cable, interface cables, and a single Glob	\$ \$ 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	9,000,00 9,000,00 7,200,00 9,500,00 5,200,00 1,750,00 950,00 4,500,00 9,000,00 9,000,00 1,250,00 9,000,00 1,250,00 1,250,00 4,600,00 1,250,00 4,600,00 1,250,00 1,250,00 1,250,00 1,250,00 1,250,00
606-0036-001 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-003 606-0038-003 606-0038-003 606-0038-003 606-0038-003 606-0038-004	linkTEK DV No Amp linkTEK DV No Amp linkTEK D No Amp SATCOM - 1 SATCOM - 2 linkTEK Developer Kit Serial Datalink 205-400 MHz Serial Datalink 900 MHz linkTEK D - GCS linkTEK Communication of the Serial S	inansmitted as digital data compressed using JPEGZ000 compression. 4 ethernet ports on an internal switch are provided. If flightTEK is used, one ethernet port will be used. 1 watt internal power amp for 802.11b is included. Same as linkTEK DV but does not include internal 802.11b power amp. Same as linkTEK DV but does not include video. Same as linkTEK DV No Amp but does not include video. Satcom modern enclosure with a single GlobalStar modem, TBD in. of RF cable, 24 in. serial interface cable, and the GlobalStar anternae. Satcom modern enclosure with two GlobalStar modems, TBD in. of RF cables, 24 in. serial interface cable, and two GlobalStar anternae. Satcom modern enclosure with two GlobalStar modems, TBD in. of RF cables, 24 in. serial interface cable, and two GlobalStar anternae. Power cable, power supply, and RJ45 cable, and 3" nubber duck anternae. Radio hardware with TBD in. RF cable and vehicle anternae. Radio hardware with TBD in. RF cable and vehicle enternae. Runs on Windows 2000, NT, or XP. Cepable of commanding all available flight modes. Includes a Panasonic Toughbook, mouse, and joystick. This product is an interface module that enables missionTEK support unmanned vehicle operator situational awareness aids. The product provides an interface to the AAcuity® PC-IG system sold by SDS International. The product provides the PC-IG system periodic vehicle data that is used to generate a synthetic image of the vehicle relative to a 3-D terrain environment. Same as InkTEK D for the air vehicle and includes power supply, power cable, interface cables, and 3" quarter wave rubber duck antenna. Same as InkTEK D or the air vehicle and includes power supply, power cable, interface cables, and 3" quarter wave rubber duck antenna. Same as InkTEK D or the air vehicle and includes power supply, power cable, interface cables, and 3" quarter wave rubber duck antenna. Same as InkTEK D or GCS except no 802.11b power amp. Satcom modern enclosure with a single GlobalStar modern, RF cable, and antenn	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	8.600.00 9.200.00 4.400.00 7.200.00 950.00 5.200.00 1.750.00 2.000.00 4.500.00 2.000.00 9.700.00 9.700.00 8.600.00 1.250.00 4.600.00 1.250.00 2.000.00
606-0036-001 606-0038-001 606-0038-001 606-0038-002 606-0038-002 606-0038-001 606-0038-002 606-0038-002 606-0038-003	linkTEK DV No Amp linkTEK DV No Amp linkTEK D No Amp SATCOM - 1 SATCOM - 2 linkTEK D No Amp SATCOM - 2 linkTEK Developer Kill Serial Datalink 900 MHz Serial Datalink 900 MHz Serial Datalink Developer Kil Gentrol Stations missionTEK Software missionTEK Software missionTEK Compuler missionTEK Software linkTEK D - GCS linkTEK D No Amp - GCS SATCOM - 1 - GCS SATCOM - 2 - GCS linkTEK Comm Kil Serial Datalink 900 MHz - GCS linkTEK J Serial Datalink Interface Cable Serial Datalink S00 MHz - GCS linkTEK J Serial Datalink Interface Cable Serial Datalink Comm Kil	iransmitted as digital data compressed using JPEGZ000 compression. 4 ethernet ports on an Internal switch are provided. If flightTEK is used, one ethernet port will be used. 1 wast internal power amp for 802.1 to sincluded. Same as linkTEK DV but does not include internal 802.1 to power amp. Same as linkTEK DV but does not include video. Same as linkTEK DV but does not include video. Same as linkTEK DV No Amp but does not include video. Satcom modem enclosure with a single GlobalStar modem, TBU in. of RF cable, 24 in. serial interface cable, and a single GlobalStar anternae. Satcom modem enclosure with two GlobalStar modems, TBO in. of RF cables, 24 in. serial interface cable, and a single GlobalStar anternae. Satcom modem enclosure with two GlobalStar modems, TBO in. of RF cables, 24 in. serial interface cable, and two GlobalStar anternaes. Power cable, power supply, and RL45 cable, and 3" nubber duck anternae. Radio hardware with TBO in. RF cable and vehicle anternae. Radio hardware with TBO in. RF cable and vehicle anternae. Runs on Windows 2000, NT, or XP. Capable of commanding all available flight modes. Includes a Panasonic Toughbook, mouse, and joystick. This product is an interface module that enables mission TEK support unmanned vehicle operator situational awareness aids. The product provides an interface to the AAculy® PC-IG System sold by SDS International. The product requires mission TEK to be connected to the PC-IG System sold by SDS International. The product requires mission TEK to be connected to the PC-IG System sold by SDS International. The product requires mission TEK to be connected to the PC-IG System sold by SDS International. The product requires mission TEK to be connected to the PC-IG System sold by SDS International. The product requires mission TEK to be connected to the PC-IG System sold by SDS International. The product requires mission TEK to be connected to the PC-IG System sold by SDS International. The product requires mission TEK to be connected to the PC-IG Sys	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	9,000,00 9,000,00 4,400,00 7,200,00 9,500,00 1,750,00 9,700,00 9,700,00 9,700,00 1,250,
606-0036-001 606-0038-001 606-0038-001 606-0038-002 606-0038-002 606-0038-001 606-0038-001 606-0038-001 606-0038-001 606-0038-001 606-0038-003 606-0038-004 606-0038-004 606-0038-004 606-0038-003 606-0038-004 606-0038-004	IIINKTEK DV No Amp IINKTEK DV No Amp IINKTEK D No Amp SATCOM - 1 SATCOM - 2 IINKTEK Developer Kit Senal Datalink 225-400 MHz Senal Datalink 900 MHz Senal Datalink 900 MHz Senal Datalink Boveloper Kit Centrol Stations missionTEK Software missionTEK Computer missionTEK Computer missionTEK Synthetic Image Module IIINKTEK D No Amp - GCS SATCOM - 1 - GCS SATCOM - 2 - GCS IINKTEK Comm Kit Senal Datalink 225-400 MHz - GCS Senal Datalink 225-400 MHz - GCS Senal Datalink 225-400 MHz - GCS Senal Datalink Soft MHz - GCS Senal Datalink Comm Kit Ground Control Station - Packaged Option	internal switch are provided. If flightTEK is used, one athernet port will be used. 1 watt internal switch are provided. If flightTEK is used, one athernet port will be used. 1 watt internal power amp for 802.11b is included. Same as linkTEK DV but does not include video. Same as linkTEK DV but does not include video. Same as linkTEK DV but does not include video. Saticom modern enclosure with a single GlobalStar modem, TBD in. of RF cable, 24 in. serial interface cable, and a single GlobalStar antenna. Saticom modern enclosure with two GlobalStar modems, TBD in. of RF cable, 24 in. serial interface cable, and it wo GlobalStar antenna. Saticom modern enclosure with two GlobalStar modems, TBD in. of RF cables, 24 in. serial interface cable, and two GlobalStar antennas. Power cable, power supply, and RJ45 cable, and 3" rubber duck antenna. Radio hardware with TBD in. RF cable and vehicle antenna Radio hardware with TBD in. RF cable and vehicle antenna Radio hardware with TBD in. RF cable and vehicle antenna Runs on Windows 2000, NT, or XP. Capable of commanding all available flight modes. Includes a Panasonic Toughbook, mouse, and joystick. This product is an interface module that enables missionTEK support unmanned vehicle operator situational awareness aids. The product requires missionTEK to be connected to the C-IC system through an Ethernet connection and provides the PC-IG system periodic vehicle data that is used to generate a synthetic image of the vehicle raiative to a 3-D terrain environment. Same as InkTEK D for the air vehicle and includes power supply, power cable, interface cables, and 3" quarter wave rubber duck antenna. Same as InkTEK D i Gribe air vehicle and includes power supply, power cable, interface cables, and a single GlobalStar modern, RF cable, and antenna is included. Some as InkTEK D i Gribe air vehicle and includes power supply, power cable, interface cables, and a single GlobalStar antenna. Same as InkTEK D i Gribe air vehicle and includes power with ground power cor	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	8.600.00 9.200.00 4.400.00 7.200.00 950.00 5.200.00 1.750.00 2.000.00 4.500.00 2.000.00 9.700.00 9.700.00 8.600.00 1.250.00 4.600.00 1.250.00 2.000.00
606-0036-001 606-0038-001 606-0038-001 606-0038-002 606-0038-002 606-0038-001 606-0038-001 606-0038-001 606-0038-001 606-0038-001 606-0038-003 606-0038-004 606-0038-004 606-0038-004 606-0038-003 606-0038-004 606-0038-004	linkTEK DV No Amp linkTEK DV No Amp linkTEK D No Amp SATCOM - 1 SATCOM - 2 linkTEK D No Amp SATCOM - 2 linkTEK Developer Kill Serial Datalink 900 MHz Serial Datalink 900 MHz Serial Datalink Developer Kil Gentrol Stations missionTEK Software missionTEK Software missionTEK Compuler missionTEK Software linkTEK D - GCS linkTEK D No Amp - GCS SATCOM - 1 - GCS SATCOM - 2 - GCS linkTEK Comm Kil Serial Datalink 900 MHz - GCS linkTEK J Serial Datalink Interface Cable Serial Datalink S00 MHz - GCS linkTEK J Serial Datalink Interface Cable Serial Datalink Comm Kil	iransmitted as digital data compressed using JPEGZ000 compression. 4 ethernet ports on an Internal switch are provided. If flightTEK is used, one ethernet port will be used. 1 wast internal power amp for 802.1 to sincluded. Same as linkTEK DV but does not include internal 802.1 to power amp. Same as linkTEK DV but does not include video. Same as linkTEK DV but does not include video. Same as linkTEK DV No Amp but does not include video. Satcom modem enclosure with a single GlobalStar modem, TBU in. of RF cable, 24 in. serial interface cable, and a single GlobalStar anternae. Satcom modem enclosure with two GlobalStar modems, TBO in. of RF cables, 24 in. serial interface cable, and a single GlobalStar anternae. Satcom modem enclosure with two GlobalStar modems, TBO in. of RF cables, 24 in. serial interface cable, and two GlobalStar anternaes. Power cable, power supply, and RL45 cable, and 3" nubber duck anternae. Radio hardware with TBO in. RF cable and vehicle anternae. Radio hardware with TBO in. RF cable and vehicle anternae. Runs on Windows 2000, NT, or XP. Capable of commanding all available flight modes. Includes a Panasonic Toughbook, mouse, and joystick. This product is an interface module that enables mission TEK support unmanned vehicle operator situational awareness aids. The product provides an interface to the AAculy® PC-IG System sold by SDS International. The product requires mission TEK to be connected to the PC-IG System sold by SDS International. The product requires mission TEK to be connected to the PC-IG System sold by SDS International. The product requires mission TEK to be connected to the PC-IG System sold by SDS International. The product requires mission TEK to be connected to the PC-IG System sold by SDS International. The product requires mission TEK to be connected to the PC-IG System sold by SDS International. The product requires mission TEK to be connected to the PC-IG System sold by SDS International. The product requires mission TEK to be connected to the PC-IG Sys	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	9,000,00 9,000,00 4,400,00 7,200,00 9,500,00 1,750,00 9,700,00 9,700,00 9,700,00 1,250,
606-0036-001 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-002 606-0038-003 606-0038-003 606-0038-003 606-0037-003 606-0038-003 606-0038-004 606-0038-003 606-0038-004 606-0038-003 606-0038-004 606-0038-004 606-0038-004 606-0038-004 606-0038-004 606-0038-004 606-0038-004 606-0038-004 606-0038-004 606-0038-004 606-0038-004 606-0038-004	linkTEK DV No Amp linkTEK DV No Amp linkTEK D No Amp SATCOM - 1 SATCOM - 2 linkTEK D No Amp SATCOM - 2 linkTEK Developer Kil Serial Datalink 290-400 MHz Serial Datalink 900 MHz Serial Datalink 900 MHz Serial Datalink Developer Kil Gentrol Stations missionTEK Software missionTEK Software missionTEK Compuler missionTEK Software linkTEK D - GCS linkTEK D No Amp - GCS SATCOM - 1 - GCS SATCOM - 2 - GCS linkTEK Comm Kil Serial Datalink 900 MHz - GCS linkTEK J Serial Datalink Interface Cable Serial Datalink 900 MHz - GCS linkTEK J Serial Datalink Interface Cable Serial Datalink Comm Kil Ground Control Station - Packaged Option Filight Termination	inansmitted as digital data compressed using JPEGZ000 compression. 4 ethernet ports on an internal switch are provided. If flightTEK is used, one athernet port will be used. 1 wast internal power amp for 802.1 to sincluded. Same as linkTEK DV but does not include internal 802.1 to power amp. Same as linkTEK DV but does not include video. Same as linkTEK DV No Amp but does not include video. Satcom modem enclosure with a single GlobalStar modem, TBD in. of RF cable, 24 in. serial interface cable, and a single GlobalStar anternae. Satcom modem enclosure with two GlobalStar modems, TBD in. of RF cables, 24 in. serial interface cable, and a single GlobalStar anternae. Satcom modem enclosure with two GlobalStar modems, TBD in. of RF cables, 24 in. serial interface cable, and two GlobalStar anternas. Power cable, power supply, and RJ45 cable, and 3" nubber duck anterna. Radio hardware with TBD in. RF cable and vehicle anterna Radio hardware with TBD in. RF cable and vehicle anterna Radio hardware with TBD in. RF cable and vehicle anterna Radio hardware with TBD in. RF cable and vehicle anterna Radio hardware with TBD in. RF cable and vehicle anterna Runs on Windows 2000, NT, or XP. Capable of commanding all available flight modes. Includes a Panasonic Toughbook, mouse, and joystick. This product is an interface module that enables missionTEK support unmanned vehicle operator situational awareness aids. The product provides an interface to the AAculyte PC-IG System sold by SDS International. The product requires missionTEK to be connected to the PC-IG system for understance of the AAculyte PC-IG System sold by SDS International. The product requires missionTEK to be connected to the PC-IG system for update as interface cable data that is used to generate a synthetic image of the vehicle ralative to a 3-D terrain environment. Same as InkTEK D for the air vehicle and includes power supply, power cable, interface cables, and a single GlobalStar modern, RF cable, and antenna is included. Satcom modem encl	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	8.600.00 9.200.00 4.400.00 7.200.00 950.00 5.200.00 1.750.00 950.00 2.000.00 9.700.00 9.700.00 9.700.00 1.250.00 4.600.00 1.250.00 4.600.00 1.250.00 1.300.00 1.300.00 1.300.00 1.300.00 1.300.00 1.300.00 1.300.00

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 108 of 241

Serial Number: 11/736,356 Filed: 04/17/20 Examiner: Ronnie M. Mancho Art Unit: 3664

1 2

Exhibit 4 - Public Records from Palm Beach County, Florida

1

Filed: 04/17/2007

 \odot

PLETURN TO: NOVA TITLE COMPANY 1401 UNIVERSITY DR. SUITE 402 CORAL SPRINGS, FL 33071-8909 (954) 755-9889

CFN 20060462327 OR BK 20706 PG 0325 RECORDED 08/08/2006 15:46:06 Palm Beach County, Florida AMT 1,012,602.00 Doc Stamp 7,088.90 Sharon R. Bock, CLERK & COMPTROLLER

Pgs 0325 - 326; (2pgs)

SPECIAL WARRANTY DEED

THIS INDENTURE is made this day of August, 2006, between BOYNTON BEACH ASSOCIATES XVI, LLLE Formal limited liability limited partnership ("Seller") whose post office address is 1600 Sawgrass Corporate Parkway, Suite 300, Sunrise, Florida 33323, and Jean Bruner Jeanglaude and Gertrude Arthur—Jeanglaude, husband and wife ("Buyer"), whose Social Security Numbers are (and respectively, and whose post office address is 8671 Thombrook Terrace Point, Boynton Beach, Florida 33437.

WITNESSETH, that Seller, for and in consideration of the sum of TEN AND NO/100 DOLLARS (\$10.00) and other good and valuable consideration to Seller in hand paid by Buyer, the receipt and sufficiency of which are hereby acknowledged, has granted, bargained and sold, and hereby grants, bargains and sells to Buyer, and Buyer's heirs, successors and assigns forever, the following described land, with a Property Appraiser's Identification Number of 00 42 45 32 03 000 1170.

Lot 117 , CANYON SEES PLAT ONE, according to the plat thereof, as recorded in Plat Book 105 at Page 1, of the Public Records of Palm Beach County, Florida.

THIS CONVEYANCE AND TITLE TO SAID PROPERTY is subject to: (a) taxes and assessments for the present year and subsequent years, including, but not implications, easements and other matters of record or imposed by governmental authorities having jurisdiction or control over the subject property, but this reference shall not operate to reimpose any of same; (c) all laws, ordinances, regulations, restrictions, prohibitions and other requirements imposed by governmental authorities, including, but not limited to, all applicable zoning, building, buildhead, land use and environmental ordinances, rules and regulations, and rights or interests vested in the United States of America and/or the State of Florida; (d) those certain covenants, restrictions, agrieuments and lien rights set forth in Exhibit "A" attached hereto and by this reference made a part hereof; (e) the Declaration of Covenants, Restrictions and Easements for Canyon Isles and as a control of the Canyon Isles and reputations. The Canyon Isles are recorded in Plat Book 105, at Page 1 of the Public Records of Palm Beach County, Florida, (g) the plat of Canyon Isles — Plat Two, as recorded in Plat Book 105, at Page 1 of the Public Records of the Public Records of Palm Beach County, Florida; (g) the plat of Canyon Isles — Plat Two, as recorded in Plat Book 105, at Page 40 of the Public Records of Palm Beach County, Florida; (g) the plat of Canyon Isles — Plat Three, as recorded in Plat Book 106, at Page 61 of the Public Records of Palm Beach County, Florida.

SELLER does hereby specially warrant the title to said land, subject to the foregoing matters, and will defend same against the lawful claims of all persons claiming by, through or under Seller and no others.

IN WITNESS WHEREOF, Seller has hereunto set Seller's hand and seal the day and year first above written.

WITNESSES

BOYNTON BEACH ASSOCIATES XVI, LLLP, a Florida limited liability limited partnership

Boynton Beach XVI Corporation, a Florida corporation, its general partner

are NENENDS. N. Maria Menendez, Vise President

STATE OF FLORIDA COUNTY OF BROWARD

Print Name of Witness: Evelyo Duenas

The foregoing instrument was acknowledged before me this 0.3 day of August, 2006, by N. Maria Menendez, as Vice President of Boynton Beach XVI Corporation, a Florida corporation, the general partner of Boynton Beach Associates XVI, LLLP, a Florida limited liability limited partnership, on behalf of said corporation and limited liability limited partnership. She is personally known to me.

36low Ar

y Public

My Commission Expires:

This instrument prepared by: HENRY W. JOHNSON, ESQ. HUME & JOHNSON, P.A. 1401 University Drive, #301 Coral Springs, Florida 33071 (954) 755-9880

EVELYN DUENAS Notary Public - State of Florida My Commission Expires Aug 8, 2009 Commission # DD459453 Bonded By National Notary Assn

Book20706/Page325

Page 1 of 2

EXHIBIT "A" COVENANTS, RESTRICTIONS, AGREEMENTS AND LIEN RIGHTS

The title to the property described in the Special Warranty Deed to which this <u>Exhibit "A"</u> is attached (the "bed") shall be subject to and burdened by the covenants, restrictions, agreements and lien rights set forth below:

1. <u>Capitalized Terms and Definitions</u>. All initial capitalized terms used in this <u>Exhibit "A"</u> but not defined herein shall have the meanings given to such terms as set forth in the Deed. The following terms as used in this <u>Exhibit "A"</u> shall have the meanings given to such terms as set forth below.

"Gain" statement and refer to the amount, if any, by which: (i) the gross selling price of the Property (less and except: (y) the actual, documented costs of any physical improvements made by Buyer after the date of the Deed to the exterior of the home on the Property such as pools, patios, screen enclosures and extensions, and (z) the actual documented closing costs required to be paid by Buyer in connection with the sale of the Property such as documentary stamp taxes, recording fees and/or brokerage commissions), exceeds (ii) the "Total Purchase Price" paid to Seller by Buyer pursuant to and as defined in the Purchase Contract executed by Seller and Buyer.

"Hardship Event" (hall mean and refer to a sale, transfer, lease or sublet of the Property, as appropriate, following a divorce of the Buyers (if married to each other), death or serious disability of one or more of the Buyers, job transfer of one or more of the Buyers to a location greater than fifty (50) miles from the Property, or other reason acceptable of Seller in Seller's sole and absolute discretion, as evidenced by a written waiver of this provision given by Seller.

"Property" shall mean and refer to the property described in the Deed together with the improvements thereon.

"Transfer Advertisement or Agreement" shall mean and refer to any or all of the following: (i) any listing or advertisement for the sale or least of the Property or any portion thereof made with a broker, in any multiple listing service, in any classified or other advertisement, or otherwise (including, without limitation, "by owner"), (ii) any agreement (verbal or written) for transfer of title to the Property to any third party, and/or (iii) any agreement (verbal or written) for the leasing and/or subletting of the Property or any portion thereof, notwithstanding anything to the contrary in the Declaration.

- 2. <u>Sales/Transfers of the Property</u> (Thite event that Buyer sells or transfers title to the Property (directly or indirectly): (a) at any time within one (1) year following the date of the Deed, and/or (b) at any time thereafter if such sale or transfer results from a Transfer Advertisement or Agreement made or entered into within one (1) year following the date of the Deed, then except only in the event of a Hardship Event released by Seller as provided in Paragraph 4 below, Buyer shall pay to Seller from the proceeds of such sale or transfer, an amount equal to one-hundred percent (100%) of the Gain realized from such sale or transfer.
- 3. No Leasing of the Property. Notwithstanding anything to the contrary in the Declaration, for a period of one (1) year following the date of the Deed, except only in the event of a Hardship Event released by Seller as provided in paragraph 4 below, Buyer shall not lease and/or sublet the Property or any portion thereof. Any such lease and/or sublet shall be void and unenforceable. All other leases or sublets, including those resulting from such a Hardship Event, shall be subject to the terms and conditions of the Declaration.
- 4. <u>Lien Rights: Releases</u>. There is and shall be a lien against the Property to secure Buyer's obligations set forth in this <u>Exhibit "A"</u>, which lien may be foreclosed on by Seller if Buyer breaches any of its obligations hereunder. In the event of a proposed sale, transfer, lease or sublet of the Property due to a Hardship Event, Buyer must first provide to Seller evidence of such Hardship Event acceptable to Seller in Seller's sole and absolute discretion, and if acceptable to Seller, Seller shall deliver to Buyer a written acknowledgment of the Hardship Event and waiver of Seller's rights hereunder with respect only to such sale, transfer, lease or sublet. In addition, upon written request from Buyer to Seller and payment of the Gain due to Seller in connection with any sale or transfer of the Property as provided in this <u>Exhibit "A"</u>, then Seller shall provide to Buyer a written acknowledgment of such payment and release of Seller's lien rights with respect only to such sale or transfer provided that Buyer provides Seller with evidence satisfactory to Seller in Seller's sole and absolute discretion of the amount of the Gain due, including, without limitation closing or other settlement statements. Any release provided by Seller shall be specific only to the particular sale, transfer, lease or sublet described in the release and not to any subsequent sale, transfer, lease or sublet which shall remain subject to this <u>Exhibit "A"</u>.
- 5. <u>Binding and Running with Title to the Property.</u> The covenants, restrictions, agreements and lien rights set forth in this <u>Exhibit "A"</u> shall burden and run with title to the Property.
- 6. <u>Remedies</u>. In addition to its right of foreclosure, Seller shall have all remedies at law and/or in equity for a breach by Buyer under this <u>Exhibit "A"</u>. In the event that Seller prevails in any action (legal or otherwise) to enforce its rights and/or Buyer's obligations, Seller shall be entitled to recover all of its costs incurred including, without limitation, reasonable attorneys' fees, through and including all appellate levels. By acceptance of the Deed to the Property, Buyer, for itself, and its successors and assigns waives any homestead or other exemption now or hereafter existing or enacted under either Florida or federal law as same may relate to Seller's nights hereunder.
- 7. <u>Subordination.</u> This <u>Exhibit "A"</u> shall be subordinate to the right of any holder of an institutional first mortgage on the Property and shall not apply to any sales or leases by an institutional first mortgagee who acquires title to the Property by foreclosure or deed in lieu of foreclosure.
- 8. <u>Miscellaneous</u>. This <u>Exhibit "A"</u> shall be construed in accordance with the laws of the State of Florida and shall be binding on Buyer and Buyer's heirs, successors and assigns. In that regard, all references to Buyer in this <u>Exhibit "A"</u> shall also mean and refer to each and every of Buyer's heirs, successors and/or assigns. Should any term or provision of this <u>Exhibit "A"</u> be ruled to be illegal or otherwise invalid by a court of competent jurisdiction, such term or provision shall be given its nearest legal meaning or be construed as deleted as such court determines, and the same will not invalidate the remaining terms and provisions of this <u>Exhibit "A"</u>, which terms, provisions and portions of this Contract will remain in full force and effect. This <u>Exhibit "A"</u> may not be amended or modified except by an instrument in writing executed by Seller.

84 2/4/2

Sheet 111 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

- F 1888 | F 1887 | 18 100 | F 18 100 | F 18 100 | F 18 100 | F 18 100 | F 18 100 | F 18 100 | F 18 100 | F 18

RETURN 1Q NOVA TITLE COMPANY 1401 UNIVERSITY DR. SUITE 402 CORAL SPRINGS, FL 33071-8909 (954) 755-9669

CFN 20060518682 OR BK 20826 PG 1476 RECORDED 09/08/2006 13:31:09 Palm Beach County, Florida ANT 10.00 Doc Stamp 0.70 Sharon R. Bock, CLERK & COMPTROLLER Pgs 1476 - 1477; (2pgs)

CORRECTIVE

SPECIAL WARRANTY DEED

THIS INDENTURE is made this day of September, 2006, between BOYNTON BEACH ASSOCIATES XVI, LLLP, a Florida limited liability limited partnership ("Seller") whose post office address is 1600 Sawgrass Oprporate Parkway, Suite 300, Sunrise, Florida 33323, and Jean Bruner Jeanglaude and Gertrude Arthur Jeanglaude, husband and wife ("Buyer"), whose Social Security Numbers are and and properties of the security of the securit Terrace Point, Boypton Beach, Florida 33437.

WITNESSETH, that & for and in consideration of the sum of TEN AND NO/100 DOLLARS (\$10.00) and other good and valuable consideration to Seller in hand paid by Buyer, the receipt and sufficiency of which are hereby acknowledged, has granted, bargained and sold, and hereby grants, bargains and sells to Buyer, and Buyer's heirs, successors and assigns forever, the following described land, with a Property Appraiser's Identification Number of 00 42 45 32 03 000 1170.

117 , CANYON ISLES PLAT TWO, according to the plat thereof, as recorded in Plat Book 40 at Page 43, of the Public Records of Palm Beach County, Florida.

THIS CONVEYANCE AND TITLE TO SAID PROPERTY is subject to: (a) taxes and assessments for the present year and subsequent years, including, but hist limited to, pending and certified county or municipal improvement liens; (b) restrictions, reservations, conditions, limitations, easements and other matters of record or imposed by governmental authorities having jurisdiction or control over the subject property, but this reference shall not operate to reimpose any of same; (c) all laws, ordinances, regulations, restrictions, prohibitions and other requirements imposed by governmental authorities, including, but not limited to, ally applicable zoning, butliding, butlond, and use and environmental authorities, rules and regulations, and rights 6r interests vested in the United States of America andor the State of Florida; (d) those certain covenants, restrictions, agreements and lien rights set forth in Exhibit "A" attached hereto and by this reference made a part hereof; (e) the Dectariation of Covenants, Restrictions and Essements for Camyon Isles, dated January 18, 2006 and recorded January 20, 2006 in Official Records Book 19820, at Page 216 of the Public Records of Palm Beach County, Florida, as amended and/or supplemented from time to time; (f) the plat of Canyon Isles — Plat Two, as recorded in Plat Book 105, at Page 1 of the Public Records of Palm Beach County, Florida; (g) the plat of Canyon Isles — Plat Two, as recorded in Plat Book 105, at Page 40 of the Public Records of Palm Beach County, Florida.

SELLER does hereby specially warrant the title to said land, subject to the foregoing matters, and will defend same against the lawful claims of all persons claiming by, through or under Seller and no others

IN WITNESS WHEREOF, Seller has hereunto set Seller's hand and seal the day and year first above

WITNESSES:

BOYNTON BEACH ASSOCIATES XVI, LLLP, a Florida limited liability limited partnership

Boynton Beach XVI Corporation, a Florida corporation, its general partner

Witness: Kathken Brows tuu) M. Coffmun Name of Witness: KAPALEM M. Coffman

STATE OF FLORIDA COUNTY OF BROWARD

The foregoing instrument was acknowledged before me this <u>f</u> day of September, 2006, by N. Maria Menendez, as Vice President of Boynton Beach XVI Corporation, a Florida corporation, the general partner of Boynton Beach Associates XVI, LLLP, a Florida limited liability limited partnership, on behalf of said corporation and limited liability limited partnership. She is personally known to me.

Kltluw M Coffner

My Commission Expires:

This instrument prepared by HENRY W. JOHNSON, ESQ. HUME & JOHNSON, P.A. 1401 University Drive, #301 Coral Springs, Florida 33071 (954) 755-9880

KATHLEEN M. COFFMAN Notary Public - State of Florida Commission Expires Mar 18, 2009 Commission # DD 391078 Bonded By National Notary Assn

THIS DEED IS BEING RECORDED TO CORRECT THE LEGAL DESCRIPTION CONTAINED IN THE ORIGINAL DEED DATED 08/03/06 AND RECORDED 08/08/06 IN OFFICIAL RECORDS BOOK 20706 AT PAGE 325 OF THE PUBLIC RECORDS OF PALM BEACH COUNTY, FLORIDA

Book20826/Page1476

Page 1 of 2

<u>EXHIBIT "A"</u> COVENANTS, RESTRICTIONS, AGREEMENTS AND LIEN RIGHTS

The title to the property described in the Special Warranty Deed to which this <u>Exhibit "A"</u> is attached (the "Deed") shall be subject to and burdened by the covenants, restrictions, agreements and lien rights set forth below:

1. <u>Cepitalized Terms and Definitions</u>. All initial capitalized terms used in this <u>Exhibit "A"</u> but not defined herein stiall have the meanings given to such terms as set forth in the Deed. The following terms as used in this <u>Exhibit "A"</u> shall have the meanings given to such terms as set forth below.

"Gain" shall mean and refer to the amount, if any, by which: (i) the gross selling price of the Property (less and except: (y) the actual, documented costs of any physical improvements made by Buyer after the date of the Deed to this exterior of the home on the Property such as pools, patios, screen enclosures and extensions, and (z) the actual; documented closing costs required to be paid by Buyer in connection with the sale of the Property such (as' documentary stamp taxes, recording fees and/or brokerage commissions), exceeds (ii) the "Total Purchase Price" paid to Seller by Buyer pursuant to and as defined in the Purchase Contract executed by Seller and Buyer.

"Hardship Event" shall mean and refer to a sale, transfer, lease or sublet of the Property, as appropriate, following a divorce of the Buyers (if married to each other), death or serious disability of one or more of the Buyers, job transfer of one or more of the Buyers to a location greater than fifty (50) miles from the Property, or other reason acceptable of Seller in Seller's sole and absolute discretion, as evidenced by a written waiver of this provision given by Seller.

"Property" shall mean and refer to the property described in the Deed together with the improvements thereon.

"Transfer Advertisement or Agricument" shall mean and refer to any or all of the following: (i) any listing or advertisement for the sale or fease of the Property or any portion thereof made with a broker, in any multiple listing service, in any classified protiber advertisement, or otherwise (including, without limitation, "by owner"), (ii) any agreement (verbal or written) for transfer of title to the Property to any third party, and/or (iii) any agreement (verbal or written) for the leasing and/or subletting of the Property or any portion thereof, notwithstanding anything to the contrary in the Declaration.

- 2. <u>Sales/Transfers of the Property.</u> In the event that Buyer sells or transfers title to the Property (directly or indirectly): (a) at any time within one (1) year following the date of the Deed, and/or (b) at any time thereafter if such sale or transfer results from a Transfer/Advertisement or Agreement made or entered into within one (1) year following the date of the Deed, then except only in the event of a Hardship Event released by Seller as provided in Paragraph 4 below, Buyer shall pay to Seller from the proceeds of such sale or transfer, an amount equal to one-hundred percent (100%) of the Qain realized from such sale or transfer.
- 3. No Leasing of the Property. Notwithstanding anything to the contrary in the Declaration, for a period of one (1) year following the date of the Deed, except only in the event of a Hardship Event released by Seller as provided in paragraph 4 below, Buyer shall not lease and/or sublet the Property or any portion thereof. Any such lease and/or sublet shall be void and unenforceable. All other leases or sublets, including those resulting from such a Hardship Event, shall be subject to the terms and conditions of the Declaration.
- 4. <u>Lien Rights; Releases</u>. There is and shall be a lien against the Property to secure Buyer's obligations set forth in this <u>Exhibit "A"</u>, which lien may be foreclosed on by Seller if Buyer breaches any of its obligations hereunder. In the event of a proposed sale, transfer, lease or sublet of the Property due to a Hardship Event, Buyer must first provide to Seller evidence of such Hardship Event acceptable to Seller in Seller's sole and absolute discretion, and if acceptable to Seller, Seller shall deliver to Buyer a written acknowledgment of the Hardship Event and waiver of Seller's rights hereunder with respect only to such sale, transfer, lease or sublet. In addition, upon written request from Buyer to Seller and payment of the Gain due to Seller in connection with any sale or transfer of the Property as provided in this <u>Exhibit "A"</u>, then Seller shall provide to Buyer a written acknowledgment of such payment and release of Seller's lien rights with respect only to such sale or transfer provided that Buyer provides Seller with evidence satisfactory to Seller in Seller's sole and absolute discretion of the amount of the Gain due, including, without limitation closing or other settlement statements. Any release provided by Seller shall be specific only to the particular sale, transfer, lease or sublet described in the release and not to any subsequent sale, transfer, lease or sublet which shall remain subject to this <u>Exhibit "A"</u>.
- Binding and Running with Title to the Property. The covenants, restrictions, agreements and lien rights set forth in this <u>Exhibit "A"</u> shall burden and run with title to the Property.
- 6. <u>Remedies.</u> In addition to its right of foreclosure, Seller shall have all remedies at law and/or in equity for a breach by Buyer under this <u>Exhibit "A"</u>. In the event that Seller prevails in any action (legal or otherwise) to enforce its rights and/or Buyer's obligations, Seller shall be entitled to recover all of its costs incurred including, without limitation, reasonable attorneys' fees, through and including all appellate levels. By acceptance of the Deed to the Property, Buyer, for itself, and its successors and assigns waives any homestead or other exemption now or hereafter existing or enacted under either Florida or federal law as same may relate to Seller's rights hereunder.
- 7. <u>Subordination</u>. This <u>Exhibit "A"</u> shall be subordinate to the right of any holder of an institutional first mortgage on the Property and shall not apply to any sales or leases by an institutional first mortgagee who acquires title to the Property by foreclosure or deed in lieu of foreclosure.
- 8. <u>Miscellaneous</u>. This <u>Exhibit "A"</u> shall be construed in accordance with the laws of the State of Florida and shall be binding on Buyer and Buyer's heirs, successors and assigns. In that regard, all references to Buyer in this <u>Exhibit "A"</u> shall also mean and refer to each and every of Buyer's heirs, successors and/or assigns. Should any term or provision of this <u>Exhibit "A"</u> be ruled to be illegal or otherwise invalid by a court of competent jurisdiction, such term or provision shall be given its nearest legal meaning or be construed as deleted as such court determines, and the same will not invalidate the remaining terms and provisions of this <u>Exhibit "A"</u>, which terms, provisions and portions of this Contract will remain in full force and effect. This <u>Exhibit "A"</u> may not be amended or modified except by an instrument in writing executed by Seller.

ξĊ

RETURN TO NOVA TITLE COMPANY 401 UNIVERSITY DR. SUITE 408 CORAL SPRINGS, FL 33071-8909 (954) 755-9886

CORRECTIVE

CFN 20060567208 OR BK 20927 PG 0647 RECORDED 10/04/2006 12:56:16 Paim Beach County, Florida ART 10.00 Doc Stamp 0.70 Sharon R. Bock, CLERK & COMPTROLLER

Pgs @647 - 648; (2pgs)

SPECIAL WARRANTY DEED

ASSOCIATES XVI, LLLP, a Florida limited liability limited partnership ("Seller") whose post office address is 1600 Sawgrass Corporate Parkway, Suite 300, Surrise, Florida 33323, and Jean Bruner Jeanglaude and Gertrude Aithur) Jeanglaude, husband wife ("Buyer"), whose Social Security Niceband Arraur) Jeanglaude, husband and wife ("Buyer"), whose Social Security Numbers are and Terrace Point, Boynton Beach, Florida 33437.

WITNESSETH, that Seller, for and in consideration of the sum of TEN AND NO/100 DOLLARS (\$10.00) and other good and valuable consideration to Seller in hand paid by Buyer, the receipt and sufficiency of which are hereby acknowledged has granted, bargained and sold, and hereby grants, bargains and sells to Buyer, and Buyer's heirs, successors and assigns forever, the following described land, with a Property Appraiser's Identification Number of the 45 2 2 2 20 20 44 70. Identification Number of 00.42.45 32 03 000 1170.

117 , CANYON SLES - PLAT TWO, according to the plat thereof, as recorded in Plat Book 105 at Page 40, of the Public Records of Palm Beach County, Florida.

THIS CONVEYANCE AND TITLE TO SAID PROPERTY is subject to: (a) taxes and assessments for the present year and subsequent years, including, but not limited to, pending and certified county or municipal improvement liens; (b) restrictions, reservations, conditions, limitedions, easements and other matters of record or imposed by governmental authorities having jurisdiction or control over the subject property, but this reference shall not operate to reimpose any of same; (c) et laws, ordinances, regulations (restrictions, prohibitions and other requirements imposed by governmental ordinances, rules and regulations, and rights or interests vested in the United States of America and/or the State of Florida; (d) those certain covenants, restrictions agreements and lien rights set forth in Exhibit "A" attached hereto and by this reference made a part hereof; (e) the Declaration of Covenants, Restrictions and Easements for Canyon Isles, dated January 18, 2006 and recorded January 29, 2006 in Official Records Book 19820, at Page 216 of the Public Records of Palm Beach County, Florida, as amended and/or supplemented from time to time; (f) the plat of Canyon Isles, Plat One, as recorded in Plat Book 105, at Page 40 of the Public Records of Palm Beach County, Florida; (g) the plat of Canyon Isles – Plat Two, as recorded in Plat Book 105, at Page 40 of the Public Records of Palm Beach County, Florida; (g) the plat of Canyon Isles – Plat Two, as recorded in Plat Book 105, at Page 40 of the Public Records of Palm Beach County, Florida; (g) the plat of Canyon Isles – Plat Two, as recorded in Plat Book 105, at Page 40 of the Public Records of Palm Beach County, Florida; (g) the plat of Canyon Isles – Plat Two, as recorded in Plat Book 105, at Page 61 of the Public Records of Palm Beach County, Florida; (g) the plat of Canyon Isles – Plat Two, as recorded in Plat Book 106, at Page 61 of the Public Records of Palm Beach County, Florida; (g) the plat of Canyon Isles – Plat Two as recorded in Plat Book 106, at Page 61 of the Public

SELLER does hereby specially warrant the title to said land, subject to the foregoing matters, and will defend same against the lawful claims of all persons claiming by, through or under Seller and no others.

IN WITNESS WHEREOF, Seller has hereunto set Seller's hand and seal the day and year first above

WITNESSES:

BOYNTON BEACH ASSOCIATES XVI, LLLP, a Florida limited liability limited partnership

Boynton Beach XVI Corporation, a Florida corporation, its general partner

N. Maria Menondez, Vice President

EKEKA

HALLUN M COSTMEN H CO FEMINION

8 Clory DAD

STATE OF FLORIDA COUNTY OF BROWARD

My Commission Expires:

This instrument prepared by: HENRY W. JOHNSON, ESQ. HUME & JOHNSON, P.A. 1401 University Drive, #301 Coral Springs, Florida 33071 (954) 755-9880

THIS DEED IS BEING RECORDED TO CORRECT TEH LEGAL DESCRIPTION CONTAINED IN THE CORRECTIVE DEED DATED SEPTEMBER 5, 2006 AND RECORDED SEPTEMBER 8, 2006 in ORBOOK 20826 AT PAGE 1476 OF THE PUBLIC RECORDS OF PALM BEACH COUNTY, FLORIDA

KATHLEEN M. COFFMA Notary Public - State of Florida My Commission Expires Mar 18, 2009 Commission # DD 391078 ided By National Notary Assn

Book20927/Page647

Page 1 of 2

EXHIBIT "A" COVENANTS, RESTRICTIONS, AGREEMENTS AND LIEN RIGHTS

The title to the property described in the Special Warranty Deed to which this <u>Exhibit "A"</u> is attached (the "Deed") shall be subject to and burdened by the covenants, restrictions, agreements and lien rights set forth below:

1. <u>Capitalized Terms and Definitions</u>. All initial capitalized terms used in this <u>Exhibit "A"</u> but not defined herein shall have the meanings given to such terms as set forth in the Deed. The following terms as used in this <u>Exhibit "A"</u> shall have the meanings given to such terms as set forth below.

"Gain" shall mean and refer to the amount, if any, by which: (i) the gross selling price of the Property (less and except: (ii) the actual, documented costs of any physical improvements made by Buyer after the date of the Deed to the exterior of the home on the Property such as pools, patios, screen enclosures and extensions, and (z) the actual documented closing costs required to be paid by Buyer in connection with the sale of the Property such as documentary stamp taxes, recording fees and/or brokerage commissions), exceeds (ii) the "Total Purchase Price" paid to Seller by Buyer pursuant to and as defined in the Purchase Contract executed by Seller and Buyer.

"Hardship Event" shall mean and refer to a sale, transfer, lease or sublet of the Property, as appropriate, following a divorce of the Buyers (if married to each other), death or serious disability of one or more of the Buyers, job transfer of one or more of the Buyers to a location greater than fifty (50) miles from the Property, or other reason acceptable to Seller in Seller's sole and absolute discretion, as evidenced by a written waiver of this provision given by Seller.

"Property" shall mean and refer to the property described in the Deed together with the improvements thereon.

"Transfer Advertisement or Agreement" shall mean and refer to any or all of the following: (i) any listing or advertisement for the sale or lease of the Property or any portion thereof made with a broker, in any multiple listing service, in any classified by other advertisement, or otherwise (including, without limitation, "by owner"), (ii) any agreement (verbal or written) for transfer of title to the Property to any third party, and/or (iii) any agreement (verbal or written) for the leasing and/or subletting of the Property or any portion thereof, notwithstanding anything to the contrary in the Declaration.

- 2. <u>Sales/Transfers of the Property.</u> In the event that Buyer sells or transfers title to the Property (directly or indirectly): (a) at any time within one (1) year-following the date of the Deed, and/or (b) at any time thereafter if such sale or transfer results from a Transfer Advertisement or Agreement made or entered into within one (1) year following the date of the Deed, then except only in the event of a Hardship Event released by Seller as provided in Paragraph 4 below, Buyer shall pay to Seller from the proceeds of such sale or transfer, an amount equal to one-hundred percent (100%) of the Gain regilized from such sale or transfer.
- 3. No Leasing of the Property. Notwithstanding anything to the contrary in the Declaration, for a period of one (1) year following the date of the Deed, except only in the event of a Hardship Event released by Seller as provided in paragraph 4 below, Buyer shall not lease and/or sublet the Property or any portion thereof. Any such lease and/or sublet shall be void and unenforceable. All other leases or sublets, including those resulting from such a Hardship Event, shall be subject to the terms and conditions of the Declaration.
- 4. <u>Lion Rights: Releases.</u> There is and shall be a lien against the Property to secure Buyer's obligations set forth in this <u>Exhibit "A"</u>, which lien may be foreclosed on by Seller if Buyer breaches any of its obligations hereunder. In the event of a proposed sale, transfer, lease or sublet of the Property due to a Hardship Event, Buyer must first provide to Seller evidence of such Hardship Event acceptable to Seller in Seller's sole and absolute discretion, and if acceptable to Seller, Seller shall deliver to Buyer a written acknowledgment of the Hardship Event and waiver of Seller's rights hereunder with respect only to such sale, transfer, lease or sublet. In addition, upon written request from Buyer to Seller and payment of the Gain due to Seller in connection with any sale or transfer of the Property as provided in this <u>Exhibit "A"</u>, then Seller shall provide to Buyer a written acknowledgment of such payment and release of Seller's lien rights with respect only to such sale or transfer provided that Buyer provides Seller with evidence satisfactory to Seller in Seller's sole and absolute discretion of the amount of the Gain due, including, without limitation closing or other settlement statements. Any release provided by Seller shall be specific only to the particular sale, transfer, lease or sublet described in the release and not to any subsequent sale, transfer, lease or sublet which shall remain subject to this <u>Exhibit "A"</u>.
- Binding and Running with Title to the Property. The covenants, restrictions, agreements and lien rights set forth in this <u>Exhibit "A"</u> shall burden and run with title to the Property.
- 6. <u>Remedies.</u> In addition to its right of foreclosure, Seller shall have all remedies at law and/or in equity for a breach by Buyer under this <u>Exhibit "A"</u>. In the event that Seller prevails in any action (legal or otherwise) to enforce its rights and/or Buyer's obligations, Seller shall be entitled to recover all of its costs incurred including, without limitation, reasonable attorneys' fees, through and including all appellate levels. By acceptance of the Deed to the Property, Buyer, for itself, and its successors and assigns waives any homestead or other exemption now or hereafter existing or enacted under either Florida or federal law as same may relate to Seller's rights hereunder.
- 7. <u>Subordination</u>. This <u>Exhibit "A"</u> shall be subordinate to the right of any holder of an institutional first mortgage on the Property and shall not apply to any sales or leases by an institutional first mortgagee who acquires title to the Property by foreclosure or deed in lieu of foreclosure.
- 8. <u>Miscellaneous</u>. This <u>Exhibit "A"</u> shall be construed in accordance with the laws of the State of Florida and shall be binding on Buyer and Buyer's heirs, successors and assigns. In that regard, all references to Buyer in this <u>Exhibit "A"</u> shall also mean and refer to each and every of Buyer's heirs, successors and/or assigns. Should any term or provision of this <u>Exhibit "A"</u> be ruled to be illegal or otherwise invalid by a court of competent jurisdiction, such term or provision shall be given its nearest legal meaning or be construed as deteed as such court determines, and the same will not invalidate the remaining terms and provisions of this <u>Exhibit "A"</u>, which terms, provisions and portions of this Contract will remain in full force and effect. This <u>Exhibit "A"</u> may not be amended or modified except by an instrument in writing executed by Seller.

8

Examiner: Ronnie M. Mancho Art Unit: 3664

METUKN TO NOVA TOTAL COMPANY 1401 UNIVERSITY OF BUILT 402 CORAL SPRINGS, FL 33071-8908 This instru**(884).755.8859** red by: John Hume, Esq. Hume & Johnson P.A. 1401 University Drive, Suite 402 Coral Springs, Florida 33071

CFN 20060567209 OR BK 20927 PG 0649 RECORDED 10/04/2006 12:56:16 Palm Beach County, Florida Sharen R. Bock, CLERK & COMPTROLLER Pg 0649; (1pg)

CORRECTION AND RATIFICATION AGREEMENT

AGREEMENT made this **76** day of **CAIO**, by JEAN BRUNER JEANGLAUDE AND GERTREDE ARTHUR JEANGLAUDE, husband and wife ("Borrowers"), whose post office address is 8671 Thornbrook Terrace Point, BOYNTON BEACH, FLORIDA 33437.

Recitals:

(§) A. Borrowers are the owners of the real property located at , 8671 Thornbrook Terrace Point Boyntón Beach, Florida 33437 more particularly described as follows: Lot 117, CANYON ISLES PLATIMO, according to the plat thereof, as recorded in Plat Book 105 at Page 40 of the Public Records of Palm Beach County, Florida

- B. Borrowers accisived title to the property by Warranty Deed dated September 5, 2006 and recorded September 8, 2006 in Official Records Book 20826 at Page 1476 of the Public Records of Palm Beach County, Florida.
- C. In conjunction with their purchase of the property, Borrowers encumbered the property with a mortgage in favor of GL FINANCIAL SERVICES, LLC., which mortgage secured a loan in the amount of \$550,000.00. The mortgage was dated August 3, 2006 and recorded August 8, 2006 in Official Records Book 20706 at Page 0327 of the Public Records of Palm Beach County, Florida.
 - D. RECORDED WITH INCORRECT LEGAL DESCRIPTION

THEREFORE, in consideration of the original mortgage loan and for other good and valuable considerations, the receipt of which is hereby acknowledged, Borrowers agree as follows:

- 1. Recitals. The above recitals are true and correct.
- 2. Correction. (INCORRECT LEGAL DESCRIPTION):
- Ratification. Except as otherwise modified herein, all of the original terms and provisions of the mortgage are hereby ratified and confirmed and incorporated herein by reference.

STATE OF FLORIDA

COUNTY OF BROWARD

The foregoing instrument was acknowledged before me this 26 day of September, 2006 by JEAN BRUNER JEANCLAUDE AND GERTRUDE ARTHUR JEANGLAUDE, who are personally known to me or produced drives () as identification.

identification.

My commission expires:

Maureen E. Roxberry
Commission #DD299658
Expires: Mar 11, 2008
Bonded Thru
Atlantic Bonding Co., Inc.

Book20927/Page649


Page 1 of 1

Jean Bruner Jeanslande Jean Bruner Jeanglaude

ີ້ຄ

20

Serial Number: 11/736,356 Examiner: Ronnie M. Mancho Art Unit: 3664



CFN 20060567210 OR BK 20927 PG 0650 RECORDED 10/04/2006 12:56:16 Palm Beach County, Florida Sheron R. Book, CLERK & COMPTROLLER Pg 0650; (1pg)

CORRECTION AND RATIFICATION AGREEMENT

AGREEMENT made this 76 day of 09 66 by JEAN BRUNER JEANGLAUDE AND GERTRUDE ARTHUR JEANGLAUDE, husband and wife ("Borrowers"), whose post office address is 8671 Thornbrook Terrace Point, BOYNTON BEACH, FLORIDA 33437.

Recitals:

A. Borrowers are the owners of the real property located at , 8671 Thornbrook Terrace Point Boynton Beach, Florida 33437 more particularly described as follows: Lot 117, CANYON ISLES PLAT MWO, according to the plat thereof, as recorded in Plat Book 105 at Page 40 of the Public Records of Palm Beach County, Florida

- B. Borrowers accounted title to the property by Warranty Deed dated September 5, 2006 and recorded September 8, 2006 in Official Records Book 20826 at Page 1476 of the Public Records of Palm Beach County, Florida.
- C. In conjunction with their purchase of the property, Borrowers encumbered the property with a mortgage fig tayor of GL FINANCIAL SERVICES, LLC., which mortgage secured a loan in the amount of \$141,120.00. The mortgage was dated August 3, 2006 and recorded August 8, 2006 in Official Records Book 20706 at Page 0344 of the Public Records of Palm Beach County, Florida.
 - D. RECORDED WITH INCORRECT LEGAL DESCRIPTION

THEREFORE, in consideration of the original mortgage loan and for other good and valuable considerations, the receipt of which is hereby acknowledged, Borrowers agree as follows:

- 1. Recitals. The above recitals are true and correct.
- 2. Correction. (INCORRECT LEGAL DESCRIPTION):
- 3. Ratification. Except as otherwise modified herein, all of the original terms and provisions of the mortgage are hereby ratified and confirmed and incorporated herein by reference.

Entrade Arthur

STATE OF FLORIDA

COUNTY OF BROWARD

The foregoing instrument was acknowledged before me this day of September, 2006 by JEAN BRUNER JEANGLAUDE AND GERTRUDE ARTHUR JEANGLAUDE, who are personally known to me or produced wire learning as identification.

My commission expires

Maureen E. Roxberry
Commission #DD299658
Expires: Mar I1, 2008
Bonded Thru
Atlantic Bonding Co., Inc.

Book20927/Page650

Page 1 of 1

Serial Number: 11/736,356

Filed: 04/17/2007 Examiner: Ronnie M. Mancho Art Unit: 3664



8

After Recording Return To:
COUNTRYWIDE HOME LOANS, INC. MS SV-79 DOCUMENT PROCESSING P.O.Box 10423 Van Nuys, CA 91410-0423 This document was prepared by:

RETURN TO.

CFN 20060462328 OR BK 20706 PG 0327 NOVA TITLE COMPANIES TO BE SOLVED BY

(954) 755-9889 Deed Doc 2, 2/3. 66
Intang 1, 300. 00
Sharon R. Bock, CLERK & COMPTROLLER
Pgs 0327 - 343; (17pgs)

GE FINANCIAL SERVICES, LLC.

YVERTE ZAPATA

210 N. UNIVERSITY DR STE 601 CORAL SPRINGS, FL 33071

00013884537607006 [Doc ID #]

MORTGAGE

MIN 1000157-0006863972-9

DEFINITIONS

Words used in multiple sections of this document are defined below and other words are defined in Sections 3, 11, 13, 18, 20 and 21. Certain rules regarding the usage of words used in this document are also provided in

(A) "Security Instrument" means this document, which is dated AUGUST 03, 2006 , together with all Riders to this document.

(B) "Borrower" is

JEAN B JEANGLAUDE, AND GERTRUDE ARTHUR-JEANGLAUDE, HUSBAND AND WIFE

Borrower is the mortgagor under this Security Instrument.

(C) "MERS" is Mortgage Electronic Registration Systems, Inc. MERS is a separate corporation that is acting solely as a nominee for Lender and Lender's successors and assigns. MERS is the mortgagee under this Security Instrument. MERS is organized and existing under the laws of Delaware, and has an address and telephone number of P.O. Box 2026, Flint, MI 48501-2026, tel. (888) 679-MERS. (D) "Lender" is

GL FINANCIAL SERVICES, LLC.

Lender is a BANK

organized and existing under the laws of FLORIDA

Lender's address is

210 N. UNIVERSITY DR STE 601, CORAL SPRINGS, FL 33071

(E) "Note" means the promissory note signed by Borrower and dated AUGUST 03, 2006 Note states that Borrower owes Lender

SIX HUNDRED FIFTY THOUSAND and 00/100

Dollars (U.S. \$ 650,000.00) plus interest. Borrower has promised to pay this debt in regular Periodic Payments and to pay the debt in full not later than SEPTEMBER 01, 2036 .

(F) "Property" means the property that is described below under the heading "Transfer of Rights in the Property.

FLORIDA-Single Family-Fannie Mae/Freddie Mac UNIFORM INSTRUMENT WITH MERS

Page 1 of 11 -6A(FL) (0005) CHL (08/05)(d) VMP Mortgage Solutions, Inc. (800)521-7291

Form 3010 1/01





Book20706/Page327

Page 1 of 17

Serial Number: 11/736,356 Filed: 04/17/2007

Serial Number: 11/736,356 Filed: 04/17/20 Examiner: Ronnie M. Mancho Art Unit: 3664

A				
		,		
E.			DOC ID #: 000138845	37607006
due under the Note, ar	nd all sums due under all Riders to this Se	this Security Instrumer ecurity Instrument that	i, any prepayment charges and	late charges
		ninium Rider	X Second Home Rider	
Adjustable Rat Balloon Rider VA Rider	X Planned	nmum Ricer I Unit Development Ric Iy Payment Rider		
상	2			
 (I) "Applicable Law ordinances and admin non-appealable judicia 	nistrative rules and o	olling applicable feder rders (that have the eff	eral, state and local statutes, fect of law) as well as all appl	regulations, icable final,
(J) "Community Ass	sociation Dues, Fees sed on Borrower or th		neans all dues, fees, assessmen ninium association, homeowner	
(K) "Electronic Func draft, or similar pape computer, or magneti- account. Such term transactions, transfers	ds Transfer means r instrument, which c tape so as to order includes, but is no initiated by telephon	is initiated through an e, instruct, or authorize at limited to, point-of e, wire transfers, and au	other than a transaction original electronic terminal, telephonic a financial institution to debit -sale transfers, automated tel tomated clearinghouse transfers	instrument, or credit an ler machine
(M) "Miscellaneous I any third party (other to, or destruction of,	Proceeds" means any than insurance proceed the Property; (ii) cor of condemnation; or	eds paid under the cover idempation or other tal	on 3. nent, award of damages, or proc rages described in Section 5) for king of all or any part of the P is of, or omissions as to, the	r: (i) damage roperty; (iii)
(N) "Mortgage Insur Loan.	ance" means insurar	nce protecting Lender a	gainst the nonpayment of, or de	fault on, the
(O) "Periodic Payme Note, plus (ii) any am (P) "RESPA" means implementing regulati any additional or sue Security Instrument, "federally related mo- under RESPA. (Q) "Successor in In-	ounts under Section 3 s the Real Estate Set on, Regulation X (24 cessor legislation or "RESPA" refers to a rigage loan" even if terest of Borrower"	of this Security Instructument Procedures Ac C.F.R. Part 3500), as a regulation that govern all requirements and re- the Loan does not que means any party that h	due for (i) principal and intercement. It (12 U.S.C. Section 2601 et they might be amended from tin is the same subject matter. As estrictions that are imposed in diffy as a "federally related mo as taken title to the Property, who this Security Instrument.	seq.) and its ne to time, or used in this regard to a rtgage loan"
TRANSFER OF RIGI	UTTO TAT THE DD ∩ DE	DTV		
This Security Instrum modifications of the Security Instrument a MERS (solely as nom of MERS, the followin	nent secures to Lende Note; and (ii) the pand the Note. For the nine for Lender and ng described property COUNTY	er; (i) the repayment of performance of Borrov is purpose, Borrower d Lender's successors an	the Loan, and all renewals, ex- ver's covenants and agreement oes hereby mortgage, grant and d assigns) and to the successors PALM BEACH	s under this d convey to
	ecording Jurisdiction]	TO AND MADE A PA	[Name of Recording Jurisdiction]	
SED BAHLDII "A"	Inclide fickle	TO DAY GOVE & EA	······································	
-6A(FL) (0005)	CHL (08/05)	Page 2 of 11	Fo	oran 3010 1/01

Parcel ID Number:

8671 THORNBROOK TERRACE POINT, Boynton Beach

[Street/City]

Florida 33437-4882 ("Property Address"):

TOGETHER WITH all the improvements now or hereafter erected on the property, and all easements, appurtenances, and fixtures now or hereafter a part of the property. All replacements and additions shall also be covered by this Security Instrument. All of the foregoing is referred to in this Security Instrument as the "Property." Borrower understands and agrees that MERS holds only legal title to the interests granted by Borrower in this Security Instrument, but, if necessary to comply with law or custom, MERS (as nominee for Lender and Lender's successors and assigns) has the right: to exercise any or all of those interests, including, but not limited to, the right: to foreclose and sell the Property; and to take any action required of Lender including, but not limited to, the right: to foreclose and sell the Property; and to take any action required of Lender including, but not limited to, the right:

BORROWER COVENANTS that Borrower is lawfully seised of the estate hereby conveyed and has the right to mortgage, grant and crinvey the Property and that the Property is unencumbered, except for encumbrances of record. Borrower warrants and will defend generally the title to the Property against all claims and demands, subject to any encumbrances of record.

THIS SECURITY INSTRUMENT combines uniform covenants for national use and non-uniform covenants with limited variations by jurisdiction to constitute a uniform security instrument covering real property.

UNIFORM COVENANTS. Borrower and Lender covenant and agree as follows:

1. Payment of Principal, Interest, Escrow Items, Prepayment Charges, and Late Charges. Borrower shall pay when due the principal of, and interest on, the debt evidenced by the Note and any prepayment charges and late charges due under the Note Borrower shall also pay funds for Escrow Items pursuant to Section 3. Payments due under the Note and this Security Instrument shall be made in U.S. currency. However, if any check or other instrument received by Lender as payment under the Note or this Security Instrument is returned to Lender unpaid, Lender may require that any or all subsequent payments due under the Note and this Security Instrument be made in one or more of the following forms, as selected by Lender; (a) cash; (b) money order; (c) certified check, bank check, treasurer's check or cashier's check, provided any such check is drawn upon an institution whose deposits are insured by a federal agency, instrumentality, or entity; or (d) Electronic Funds Transfer.

Payments are deemed received by Lender when received at the location designated in the Note or at such other location as may be designated by Lender in accordance with the notice provisions in Section 15. Lender may return any payment or partial payment if the payment or partial payments are insufficient to bring the Loan current, Lender may accept any payment or partial payment insufficient to bring the Loan current, without waiver of any rights hereunder or prejudice to its rights to refuse such payment or partial payments in the future, but Lender is not obligated to apply such payments at the time such payments are accepted. If each Periodic Payment is applied as of its scheduled due date, then Lender need not pay interest on unapplied funds. Lender may hold such unapplied funds until Borrower makes payment to bring the Loan current. If Borrower does not do so within a reasonable period of time, Lender shall either apply such funds or return tent to Borrower. If not applied earlier, such funds will be applied to the outstanding principal balance under the Note immediately prior to foreclosure. No offset or claim which Borrower might have now or in the future against Lender shall relieve Borrower from making payments due under the Note and this Security Instrument or performing the covenants and agreements secured by this Security Instrument.

2. Application of Payments or Proceeds. Except as otherwise described in this Section 2, all payments

2. Application of Payments or Proceeds. Except as otherwise described in this Section 2, all payments accepted and applied by Lender shall be applied in the following order of priority: (a) interest due under the Note; (b) principal due under the Note; (c) amounts due under Section 3. Such payments shall be applied to each Periodic Payment in the order in which it became due. Any remaining amounts shall be applied first to late charges, second to any other amounts due under this Security Instrument, and then to reduce the principal balance of the Note.

If Lender receives a payment from Borrower for a delinquent Periodic Payment which includes a sufficient amount to pay any late charge due, the payment may be applied to the delinquent payment and the late charge. If more than one Periodic Payment is outstanding, Lender may apply any payment received from Borrower to the repayment of the Periodic Payments if, and to the extent that, each payment can be paid in full. To the extent that any excess exists after the payment is applied to the full payment of one or more Periodic Payments, such excess may be applied to any late charges due. Voluntary prepayments shall be applied first to any prepayment charges and then as described in the Note.

-6A(FL) (0005) CHL (08/95) Page 3 of 11 Form 3010 1/01

DOC ID #: 00013884537607006

Any application of payments, insurance proceeds, or Miscellaneous Proceeds to principal due under the Note shall not extend or postpone the due date, or change the amount, of the Periodic Payments.

3. Finds for Escrow Items. Borrower shall pay to Lender on the day Periodic Payments are due under the Note, until the Note is paid in full, a sum (the "Funds") to provide for payment of amounts due for: (a) taxes and assessments and other items which can attain priority over this Security Instrument as a lien or encumbrance on the Property; (b) leasehold payments or ground rents on the Property, if any; (c) premiums for any and all insurance required by Lender under Section 5; and (d) Mortgage Insurance premiums, if any, or any sums payable by Borrower to Lender in lieu of the payment of Mortgage Insurance premiums in accordance with the provisions of Section 10. These items are called "Escrow Items." At origination or at any time during the term of the Loan, Lender may require that Community Association Dues, Fees, and Assessments, if any, be escrowed by Borrower, and such dues, fees and assessments shall be an Escrow Item Borrower shall promptly furnish to Lender all notices of amounts to be paid under this Section. Borrower shall pay Lender the Funds for Escrow Items unless Lender waives Borrower's obligation to pay the Funds for any or all Escrow Items. Lender may waive Borrower's obligation to pay to Lender Funds for any or all Escrow Items at any time. Any such waiver may only be in writing. In the event of such waiver, Borrower shall pay directly, when and where payable, the amounts due for any Escrow Items for which payment of Funds has been waived by Lender and, if Lender requires, shall furnish to Lender receipts evidencing such payment within such time period as Lender may require. Borrower's obligation to make such payments and to provide receipts shall for all purposes be deemed to be a covenant and agreement contained in this Security Instrument, as the phrase "covenant and agreement" is used in Section 9. If Borrower is obligated to pay Escrow Items directly, pursuant to a waiver, and Borrower fails to pay the amount due for an Escrow Item, Lender may exercise its rights under Section 9 and pay such amount and Borrower shall then be obligated under Section 9 to repay to Lender any such amount. Lender may revoke the waiver as to any or all Escro Items at any time by a notice given in accordance with Section 15 and, upon such revocation, Borrower shall pay to Lender all Funds, and in such amounts, that are then required under this Section 3

Lender may, at any time, collect and hold Punds in an amount (a) sufficient to permit Lender to apply the Funds at the time specified under RESPA, and (b) not to exceed the maximum amount a lender can requi under RESPA. Lender shall estimate the amount of Funds due on the basis of current data and reasonable estimates of expenditures of future Escrow Items or otherwise in accordance with Applicable Law.

The Funds shall be held in an institution whose deposits are insured by a federal agency, instrumentality, or entity (including Lender, if Lender is an institution whose deposits are so insured) or in any Federal Home Loan Bank, Lender shall apply the Funds to pay the Escrow Items no later than the time specified under RESPA. Lender shall not charge Borrower for holding and applying the Funds, annually analyzing the escrow account, or verifying the Escrow Items, unless Lender pays Borrower interest on the Funds and Applicable Law permits Lender to make such a charge. Unless an agreement is made in writing or Applicable Law requires interest to be paid on the Funds, Lender shall not be required to pay Borrower any interest or earnings on the Funds. Borrower and Lender can agree in writing, however, that interest shall be paid on the Funds. Lender shall give to Borrower, without charge, an annual accounting of the Funds as required by RESPA.

If there is a surplus of Funds held in escrow, as defined under RESPA, Lender shall account to Borrower for the excess funds in accordance with RESPA. If there is a shortage of Funds held in escrow, as defined under RESPA, Lender shall notify Borrower as required by RESPA, and Borrower shall pay to Lender the amount necessary to make up the shortage in accordance with RESPA, but in no more than 12 monthly payments. If there is a deficiency of Funds held in escrow, as defined under RESPA, Lender shall notify Borrower as required by RESPA, and Borrower shall pay to Lender the amount necessary to make up the deficiency in accordance with RESPA, but in no more than 12 monthly payments.

Upon payment in full of all sums secured by this Security Instrument, Lender shall promptly refund to

Borrower any Funds held by Lender.

4. Charges; Liens. Borrower shall pay all taxes, assessments, charges, fines, and impositions attributable to the Property which can attain priority over this Security Instrument, leasehold payments or ground rents on the Property, if any, and Community Association Dues, Fees, and Assessments, if any. To the extent that these items are Escrow Items, Borrower shall pay them in the manner provided in Section 3.

Borrower shall promptly discharge any lien which has priority over this Security Instrument unless Borrower: (a) agrees in writing to the payment of the obligation secured by the lien in a manner acceptable to Lender, but only so long as Borrower is performing such agreement; (b) contests the lien in good faith by, or defends against enforcement of the lien in, legal proceedings which in Lender's opinion operate to prevent the enforcement of the lien while those proceedings are pending, but only until such proceedings are concluded; or (c) secures from the holder of the lien an agreement satisfactory to Lender subordinating the lien to this Security Instrument. If Lender determines that any part of the Property is subject to a lien which can attain priority over this Security Instrument, Lender may give Borrower a notice identifying the lien. Within 10 days of the date on which that notice is given, Borrower shall satisfy the lien or take one or more of the actions set forth above in this Section 4

-6A(FL) (0005) CHL (08/05) Form 3010 1/01

Filed: 04/17/2007

DOC ID #: 00013884537607006

Lender may require Borrower to pay a one-time charge for a real estate tax verification and/or reporting

service used by Lender in connection with this Loan.

5. Expirerty Insurance, Borrower shall keep the improvements now existing or hereafter erected on the Property insurance, Borrower shall keep the improvements now existing or hereafter erected on the Property insured against loss by fire, hazards included within the term "extended coverage," and any other hazards including in the local floods, for which Lender requires insurance. This insurance shall be maintained in the amounts (including deductible levels) and for the periods that Lender requires. What Lender requires pursuant to the preceding sentences can change during the term of the Loan. The insurance carrier providing the insurance shall be chosen by Borrower subject to Lender's right to disapprove Borrower's choice, which right shall not be exercised unreasonably. Lender may require Borrower to pay, in connection with this Loan, either: (a) a one-time charge for flood zone determination and certification services and subsequent charges each time remappings or similar changes occur which reasonably might affect such determination or certification. Borrower shall also be responsible for the payment of any fees imposed by the Federal Emergency Management Agency in connection with the review of any flood zone determination resulting from an objection by Borrower.

If Borrower fails to maintain any of the coverages described above, Lender may obtain insurance coverage, at Lender's option and Borrower's expense. Lender is under no obligation to purchase any particular type or amount of coverage. Therefore, such coverage shall cover Lender, but might or might not protect Borrower, Borrower's equity in the Property, or the contents of the Property, against any risk, hazard or liability and might provide greater of Jesser coverage than was previously in effect. Borrower acknowledges that the cost of the insurance coverage, so obtained might significantly exceed the cost of insurance that Borrower could have obtained. Any amounts disbursed by Lender under this Section 5 shall become additional debt of Borrower secured by this Security Instrument. These amounts shall bear interest at the Note rate from the date of disbursement and shall be payable, with such interest, upon notice from Lender to Borrower requesting payment.

All insurance policies required by Lender and remeals of such policies shall be subject to Lender's right to disapprove such policies, shall include a standard mortgage clause, and shall name Lender as mortgages and/or as an additional loss payee. Lender shall have the right to hold the policies and renewal certificates. If Lender requires, Borrower shall promptly give to Lender all receipts of paid premiums and renewal notices. If Borrower obtains any form of insurance coverage, not otherwise required by Lender, for damage to, or destruction of, the Property, such policy shall include a standard mortgage clause and shall name Lender as mortgage and/or as an additional loss payee.

In the event of loss, Borrower shall give prompt notice to the insurance carrier and Lender. Lender may make proof of loss if not made promptly by Borrower. Unless Lender and Borrower otherwise agree in writing, any insurance proceeds, whether or not the underlying insurance was required by Lender, shall be applied to restoration or repair of the Property, if the restoration or repair is economically feasible and Lender's security is not lessened. During such repair and restoration period, Lender shall have the right to hold such insurance proceeds until Lender has had an opportunity to inspect such Property to ensure the work has been completed to Lender's satisfaction, provided that such inspection shall be undertaken promptly. Lender may disburse proceeds for the repairs and restoration in a single payment or in a series of progress payments as the work is completed. Unless an agreement is made in writing or Applicable Law requires interest to be paid on such insurance proceeds, Lender shall not be required to pay Borrower any interest or earnings on such proceeds. Fees for public adjusters, or other third parties, retained by Borrower any interest or earnings on the insurance proceeds and shall be the sole obligation of Borrower. If the restoration or repair is not economically feasible or Lender's security would be lessened, the insurance proceeds shall be applied to the sums secured by this Security Instrument, whether or not then due, with the excess, if any, paid to Borrower. Such insurance proceeds shall be applied in the order provided for in Section 2.

If Borrower abandons the Property, Lender may file, negotiate and settle any available insurance claim

If Borrower abandons the Property, Lender may file, negotiate and settle any available insurance claim and related matters. If Borrower does not respond within 30 days to a notice from Lender that the insurance carrier has offered to settle a claim, then Lender may negotiate and settle the claim. The 30-day period will begin when the notice is given. In either event, or if Lender acquires the Property under Section 22 or otherwise, Borrower bereby assigns to Lender (a) Borrower's rights to any insurance proceeds in an amount not to exceed the amounts unpaid under the Note or this Security Instrument, and (b) any other of Borrower's rights (other than the right to any refund of unearned premiums paid by Borrower) under all insurance policies covering the Property, insofar as such rights are applicable to the coverage of the Property. Lender may use the insurance proceeds either to repair or restore the Property or to pay amounts unpaid under the Note or this Security Instrument, whether or not then due.

Book20706/Page331

Page 5 of 17

DOC ID #: 00013884537607006

6. Occupancy. Borrower shall occupy, establish, and use the Property as Borrower's principal residence within 50 days after the execution of this Security Instrument and shall continue to occupy the Property as Borrower's principal residence for at least one year after the date of occupancy, unless Lender otherwise agrees in Writing, which consent shall not be unreasonably withheld, or unless extenuating circumstances exist which are beyond Borrower's control.

7. Preservation, Maintenance and Protection of the Property; Inspections. Borrower shall not destroy, damage or impair the Property, allow the Property to deteriorate or commit waste on the Property. Whether or not Borrower is residing in the Property, Borrower shall maintain the Property in order to prevent the Property from defenorating or decreasing in value due to its condition. Unless it is determined pursuant to Section 5 that repair or restoration is not economically feasible, Borrower shall promptly repair the Property if damaged to avoid further deterioration or damage. If insurance or condemnation proceeds are paid in connection with damage, go, or the taking of, the Property, Borrower shall be responsible for repairing or restoring the Property only if Lender has released proceeds for such purposes. Lender may disburse proceeds for the repairs and restoration in a single payment or in a series of progress payments as the work is completed. If the insurance or bondemnation proceeds are not sufficient to repair or restore the Property, Borrower is not refleved of Borrower's obligation for the completion of such repair or restoration.

Lender or its agent may make reasonable entries upon and inspections of the Property. If it has reasonable cause, Lender may inspect the interior of the improvements on the Property. Lender shall give Borrower notice at the time of or prior to spech an interior inspection specifying such reasonable cause.

8. Borrower's Loan Application. Borrower shall be in default if, during the Loan application process, Borrower or any persons or entities acting at the direction of Borrower or with Borrower's knowledge or consent gave materially false, misleading or inaccurate information or statements to Lender (or failed to provide Lender with material information) in connection with the Loan. Material representations include, but are not limited to, representations concerning Borrower's occupancy of the Property as Borrower's principal residence.

9. Protection of Lender's Interest in the Property and Rights Under this Security Instrument. If (a) Borrower fails to perform the covenants and agreements contained in this Security Instrument, (b) there is a legal proceeding that might significantly affect Lender's interest in the Property and/or rights under this Security Instrument (such as a proceeding in bankruptcy, probate, for condemnation or forfeiture, for enforcement of a lien which may attain priority over this Security Instrument or to enforce laws or regulations), or (c) Borrower has abandoned the Property, then Lender may do and pay for whatever is reasonable or appropriate to protect Lender's interest in the Property and rights under this Security Instrument, including protecting and/or assessing the value of the Property, and securing and/or repairing the Property. Lender's actions can include, but are not limited to: (a) paying any sums secured by a lien which has priority over this Security Instrument, (b) appearing in court; and (c) paying reasonable attorney's fees to protect its interest in the Property and/or rights under this Security Instrument, including its secured position in a bankruptcy proceeding. Securing the Property includes, but is not limited to, entering the Property to make repairs, change locks, replace or board up doors and windows, drain water from pipes, eliminate building or other code violations or dangerous conditions, and have utilities turned on or off. Although Lender may take action under this Section 9, Lender does not have to do so and is not under any duty or obligation to do so. It is agreed that Lender incurs no liability for not taking any or all actions authorized under this Section 9.

Any amounts disbursed by Lender under this Section 9 shall become additional debt of Borrower secured by this Security Instrument. These amounts shall bear interest at the Note rate from the date of disbursement and shall be payable, with such interest, upon notice from Lender to Borrower requesting payment.

If this Security Instrument is on a leasehold, Borrower shall comply with all the provisions of the lease. If Borrower acquires fee title to the Property, the leasehold and the fee title shall not merge unless Lender agrees to the negger in writing.


agrees to the merger in writing.

10. Mortgage Insurance. If Lender required Mortgage Insurance as a condition of making the Loan, Borrower shall pay the premiums required to maintain the Mortgage Insurance in effect. If, for any reason, the Mortgage Insurance coverage required by Lender ceases to be available from the mortgage insurer that previously provided such insurance and Borrower was required to make separately designated payments toward the premiums for Mortgage Insurance, Borrower shall pay the premiums required to obtain coverage substantially equivalent to the Mortgage Insurance previously in effect, at a cost substantially equivalent to the cost to Borrower of the Mortgage Insurance previously in effect, from an alternate mortgage insurer selected by Lender. If substantially equivalent Mortgage Insurance coverage is not available, Borrower shall continue to pay to Lender the amount of the separately designated payments that were due when the insurance coverage ceased to be in effect. Lender will accept, use and retain these payments as a non-refundable loss reserve in lieu of Mortgage Insurance. Such loss reserve shall be non-refundable, notwithstanding the fact that the Loan is ultimately paid in full, and Lender shall not be required to pay Borrower any interest or earnings on such loss reserve. Lender can no longer require loss reserve payments if Mortgage Insurance coverage (in the

-6A(FL) (0905) CHL (08/05) Page 6 of 11 Form 3010 1/

Book20706/Page332

Page 6 of 17



Sheet 123 of 241

amount and for the period that Lender requires) provided by an insurer selected by Lender again becomes available, is obtained, and Lender requires separately designated payments toward the premiums for Mortgage Insurance. In Lender required Mortgage Insurance as a condition of making the Loan and Borrower was required to make separately designated payments toward the premiums for Mortgage Insurance, Borrower shall pay the promiums required to maintain Mortgage Insurance in effect, or to provide a non-refundable loss reserve, until Lender's requirement for Mortgage Insurance ends in accordance with any written agreement between Borrower and Lender providing for such termination or until termination is required by Applicable Law. Nothing in this Section 10 affects Borrower's obligation to pay interest at the rate provided in the Note.

Mortgage Insurance reimburses Lender (or any entity that purchases the Note) for certain losses it may incur if Borrower does not repay the Loan as agreed. Borrower is not a party to the Mortgage Insurance.

Mortgage insurers evaluate their total risk on all such insurance in force from time to time, and may enter into agreements with older parties that share or modify their risk, or reduce losses. These agreements are on terms and conditions that are satisfactory to the mortgage insurer and the other party (or parties) to these agreements. These agreements into a require the mortgage insurer to make payments using any source of funds that the mortgage insurer may have available (which may include funds obtained from Mortgage Insurance premiums).

As a result of these agreements, Lender, any purchaser of the Note, another insurer, any reinsurer, any other entity, or any affiliate of any of the foregoing, may receive (directly or indirectly) amounts that derive from (or might be characterized as) a postion of Borrower's payments for Montgage Insurance, in exchange for sharing or modifying the mortgage insurers risk, or reducing losses. If such agreement provides that an affiliate of Lender takes a share of the insurer's risk in exchange for a share of the premiums paid to the insurer, the arrangement is often termed "captive reinsurance." Further:

(a) Any such agreements will not affect the amounts that Borrower has agreed to pay for Mortgage

(a) Any such agreements will not affect the amounts that Borrower has agreed to pay for Mortgage Insurance, or any other terms of the Loan Such agreements will not increase the amount Borrower will owe for Mortgage Insurance, and they will not entitle Borrower to any refund.

(b) Any such agreements will not affect the rights Borrower has - if any - with respect to the Mortgage Insurance under the Homeowners Protection Act of 1998 or any other law. These rights may include the right to receive certain disclosures, to request and obtain cancellation of the Mortgage Insurance, to have the Mortgage Insurance terminated automatically, and/or to receive a refund of any Mortgage Insurance premiums that were unearned at the time of such cancellation or termination.
11. Assignment of Miscellaneous Proceeds; Forfeiture, All Miscellaneous Proceeds are hereby

 Assignment of Miscellaneous Proceeds; Forfeiture, All Miscellaneous Proceeds are hereby assigned to and shall be paid to Lender.

If the Property is damaged, such Miscellaneous Proceeds shall be applied to restoration or repair of the Property, if the restoration or repair is coonomically feasible and Lender's security is not lessened. During such repair and restoration period, Lender shall have the right to hold such Miscellaneous Proceeds until Lender has had an opportunity to inspect such Property to ensure the work has been completed to Lender's satisfaction, provided that such inspection shall be undertaken promptly. Lender may pay for the repairs and restoration in a single disbursement or in a series of progress payments as the work is completed. Unless an agreement is made in writing or Applicable Law requires interest to be paid on such Miscellaneous Proceeds, Lender shall not be required to pay Borrower any interest or earnings on such Miscellaneous Proceeds. If the restoration or repair is not economically feasible or Lender's security would be lessened, the Miscellaneous Proceeds shall be applied to the sums secured by this Security Instrument, whether or not then due, with the excess, if any, read to Borrower. Such Miscellaneous Proceeds shall be applied to the sums secured by this Security Instrument, whether or not then due, viith the excess, if any, read to Borrower. Such Miscellaneous Proceeds shall be applied in the order provided for in Section 2.

paid to Borrower. Such Miscellaneous Proceeds shall be applied in the order provided for in Section 2. In the event of a total taking, destruction, or loss in value of the Property, the Miscellaneous Proceeds shall be applied to the sums secured by this Security Instrument, whether or not then due, with the excess, if any, paid to Borrower.

In the event of a partial taking, destruction, or loss in value of the Property in which the fair market value of the Property immediately before the partial taking, destruction, or loss in value is equal to greater than the amount of the sums secured by this Security Instrument immediately before the partial taking, destruction, or loss in value, unless Borrower and Lender otherwise agree in writing, the sums secured by this Security Instrument shall be reduced by the amount of the Miscellaneous Proceeds multiplied by the following fraction: (a) the total amount of the sums secured immediately before the partial taking, destruction, or loss in value divided by (b) the fair market value of the Property immediately before the partial taking, destruction, or loss in value. Any balance shall be paid to Borrower.

In the event of a partial taking, destruction, or loss in value of the Property in which the fair market value of the Property immediately before the partial taking, destruction, or loss in value is less than the amount of the sums secured immediately before the partial taking, destruction, or loss in value, unless Borrower and Lender otherwise agree in writing, the Miscellaneous Proceeds shall be applied to the sums secured by this Security Instrument whether or not the sums are then due.

-6A(FL) (0005) CHL (08/05) Page 7 of 11 Form 3010 1/01

Book20706/Page333

Page 7 of 17

DOC ID #: 00013884537607006

Property is abandoned by Borrower, or if, after notice by Lender to Borrower that the Opposing Party (as defined in the next sentence) offers to make an award to settle a claim for damages, Borrower fails to respond to Eender within 30 days after the date the notice is given, Lender is authorized to collect and apply the Miscellaneous Proceeds either to restoration or repair of the Property or to the sums secured by this Security Instrument, whether or not then due. "Opposing Party" means the third party that owes Borrower Miscellaneous Proceeds or the party against whom Borrower has a right of action in regard to Miscellaneous Proceeds.

Borrower shall be in default if any action or proceeding, whether civil or criminal, is begun that, in Lender's judgment, could result in forfeiture of the Property or other material impairment of Lender's interest in the Property or rights under this Security Instrument. Borrower can cure such a default and, if acceleration has occurred, reinstate as provided in Section 19, by causing the action or proceeding to be dismissed with a ruling that, in Lender's judgment, precludes forfeiture of the Property or other material impairment of Lender's interest in the Property-or cights under this Security Instrument. The proceeds of any award or claim for damages that are autributable to the impairment of Lender's interest in the Property are hereby assigned and shall be paid to Lender.

All Miscellaneous Proceeds that are not applied to restoration or repair of the Property shall be applied in the order provided for in Section 2:

12. Borrower Not Released: Forbearance By Lender Not a Waiver. Extension of the time for payment or modification of amonization of the sums secured by this Security Instrument granted by Lender to Borrower or any Successor in Interest of Borrower shall not be required to commence proceedings against any Successor in Interest of Borrower or to refuse to extend time for payment or otherwise modify amortization of the sums secured by this Security Instrument by reason of any demand made by the original Borrower or any Successors in Interest of Borrower. Any sorbearance by Lender in exercising any right or remedy including, without limitation, Lender's acceptance of payments from third persons, entities or Successors in Interest of Borrower or in amounts less than the amount then due, shall not be a waiver of or preclude the exercise of any right or remedy.

13. Joint and Several Liability; Co-signess; Successors and Assigns Bound. Borrower covenants and agrees that Borrower's obligations and liability shall be joint and several. However, any Borrower who co-signs this Security Instrument but does not execute the Note (a "co-signer"): (a) is co-signing this Security Instrument only to mortgage, grant and convey the co-signer's interest in the Property under the terms of this Security Instrument; (b) is not personally obligated to pay the sums secured by this Security Instrument; and (c) agrees that Lender and any other Borrower can agree to extend, modify, forbear or make any accommodations with regard to the terms of this Security Instrument or the Note without the co-signer's consent

Subject to the provisions of Section 18, any Successor in Interest of Borrower who assumes Borrower's obligations under this Security Instrument in writing, and is approved by Lender, shall obtain all of Borrower's rights and benefits under this Security Instrument. Borrower shall not be released from Borrower's obligations and liability under this Security Instrument unless Lender agrees to such release in writing. The covenants and agreements of this Security Instrument shall bind (except as provided in Section 20) and benefit the successors and assigns of Lender.

and assigns of Lender.

14. Loan Charges. Lender may charge Borrower fees for services performed in connection with Borrower's default, for the purpose of protecting Lender's interest in the Property and rights under this Security Instrument, including, but not limited to, attorneys' fees, property inspection and valuation fees. In regard to any other fees, the absence of express authority in this Security Instrument to charge a specific fee to Borrower shall not be construed as a prohibition on the charging of such fee. Lender may not charge fees that are expressly prohibited by this Security Instrument or by Apolicable Law.

are expressly prohibited by this Security Instrument or by Applicable Law.

If the Loan is subject to a law which sets maximum loan charges, and that law is finally interpreted so that the interest or other loan charges collected or to be collected in connection with the Loan exceed the permitted limits, then: (a) any such loan charge shall be reduced by the amount necessary to reduce the charge to the permitted limit; and (b) any sums already collected from Borrower which exceeded permitted limits will be refunded to Borrower. Lender may choose to make this refund by reducing the principal owed under the Note or by making a direct payment to Borrower. If a refund reduces principal, the reduction will be treated as a partial prepayment without any prepayment charge (whether or not a prepayment charge is provided for under the Note). Borrower's acceptance of any such refund made by direct payment to Borrower will constitute a waiver of any right of action Borrower might have arising out of such overcharge.

constitute a waiver of any right of action Borrower might have arising out of such overcharge.

15. Notices. All notices given by Borrower or Lender in connection with this Security Instrument must be in writing. Any notice to Borrower in connection with this Security Instrument shall be deemed to have been given to Borrower when mailed by first class mail or when actually delivered to Borrower's notice address if sent by other means, Notice to any one Borrower shall constitute notice to all Borrowers unless Applicable Law expressly requires otherwise. The notice address shall be the Property Address unless

8A(FL) (0005) CHL (08/05) Page 8 of 11 Form 3010 1/01

Book20706/Page334

Page 8 of 17

Serial Number: 11/736,356

DOC TD #+ 00013994537607006

Borrower has designated a substitute notice address by notice to Lender. Borrower shall promptly notify Lender of Borrower's change of address. If Lender specifies a procedure for reporting Borrower's change of address, then Borrower shall only report a change of address through that specified procedure. There may be only one designated notice address under this Security Instrument at any one time. Any notice to Lender shall be given by delivering it or by mailing it by first class mail to Lender's address stated herein unless Lender has designated another, address by notice to Borrower. Any notice in connection with this Security Instrument shall not be deemed to have been given to Lender until actually received by Lender. If any notice required by this Security Instrument is also required under Applicable Law, the Applicable Law requirement will satisfy the corresponding regimement under this Security Instrument.

16. Governing Law; Severability; Rules of Construction. This Security Instrument shall be governed by federal law and the law of the jurisdiction in which the Property is located. All rights and obligations contained in this Security Instrument are subject to any requirements and limitations of Applicable Law. Applicable Law might explicitly allow the parties to agree by contract or it might be silent, but such silence shall not be construed as a prohibition against agreement by contract. In the event that any provision or clause of this Security Instrument or the Note conflicts with Applicable Law, such conflict shall not affect other provisions of this Security Instrument or the Note which can be given effect without the conflicting provision.

As used in this Security Instrument: (a) words of the masculine gender shall mean and include corresponding neuter words or words of the feminine gender; (b) words in the singular shall mean and include the plural and vice versa; and (c) the word "may" gives sole discretion without any obligation to take any action.

17. Borrower's Copy. Borrower shall be given one copy of the Note and of this Security Instrument.

18. Transfer of the Property or a Beneficial Interest in Borrower. As used in this Section 18, Interest in the Property means any legal or beneficial interest in the Property, including, but not limited to, those beneficial interests transferred in a bond for deed, contract for deed, installment sales contract or escrow agreement, the intent of which is the transfer of stife by Borrower at a future date to a purchaser.

If all or any part of the Property or any Interest in the Property is sold or transferred (or if Borrower is not a natural person and a beneficial interest in Borrower is sold or transferred) without Lender's prior written consent, Lender may require immediate payment in full of all sums secured by this Security Instrument. However, this option shall not be exercised by Lender if such exercise is prohibited by Applicable Law.

If Lender exercises this option, Lender shall give Borrower notice of acceleration. The notice shall provide a period of not less than 30 days from the date the notice is given in accordance with Section 15 within which Borrower must pay all sums secured by this Security Instrument. If Borrower fails to pay these sums prior to the expiration of this period, Lender may invoke any remedies permitted by this Security Instrument without further notice or demand on Borrower.

19. Borrower's Right to Reinstate After Acceleration. If Borrower meets certain conditions, Borrower shall have the right to have enforcement of this Security Instrument discontinued at any time prior to the earliest of: (a) five days before sale of the Property pursuant to any power of sale contained in this Security Instrument; (b) such other period as Applicable Law might specify for the termination of Borrower's right to reinstate; or (e) entry of a judgment enforcing this Security Instrument. Those conditions are that Borrower: (a) pays Lender all sums which then would be due under this Security Instrument and the Note as if no acceleration had occurred; (b) cures any default of any other covenants or agreements; (c) pays all expenses incurred in enforcing this Security Instrument, including, but not limited to, reasonable attorneys' fees, property inspection and valuation fees, and other fees incurred for the purpose of protecting Lender's interest in the Property and rights under this Security Instrument; and (d) takes such action as Lender may reasonably require to assure that Lender's interest in the Property and rights under this Security Instrument, and Borrower's obligation to pay the sums secured by this Security Instrument, shall continue unchanged. Lender may require that Borrower pay such reinstatement sums and expenses in one or more of the following forms, as selected by Lender: (a) cash; (b) money order; (c) certified check, bank check, treasurer's check or cashier's check, provided any such check is drawn upon an institution whose deposits are insured by a federal agency. instrumentality or entity; or (d) Electronic Funds Transfer. Upon reinstatement by Borrower, this Security Instrument and obligations secured hereby shall remain fully effective as if no acceleration had occurred. However, this right to reinstate shall not apply in the case of acceleration under Section 18.

20. Sale of Note; Change of Loan Servicer; Notice of Grievance. The Note or a partial interest in the Note (together with this Security Instrument) can be sold one or more times without prior notice to Borrower. A sale might result in a change in the entity (known as the "Loan Servicer") that collects Periodic Payments due under the Note and this Security Instrument and performs other mortgage loan servicing obligations under the Note, this Security Instrument, and Applicable Law. There also might be one or more changes of the Loan Servicer unrelated to a sale of the Note. If there is a change of the Loan Servicer, Borrower will be given written notice of the change which will state the name and address of the new Loan Servicer, the address to

-6A(FL) (0005)

CHL (08/05)

Page 9 of 11

Form 3010 1/01

Serial Number: 11/736,356

Examiner: Ronnie M. Mancho Art Unit: 3664

DOC ID #: 00013884537607006

which payments should be made and any other information RESPA requires in connection with a notice of transfer of servicing. If the Note is sold and thereafter the Loan is serviced by a Loan Servicer other than the purchaser of the Note, the mortgage loan servicing obligations to Borrower will remain with the Loan Servicer or be transferred to a successor Loan Servicer and are not assumed by the Note purchaser unless otherwise provided by the Note purchaser.

Neither Borrower nor Lender may commence, join, or be joined to any judicial action (as either an individual litigan) or the member of a class) that arises from the other party s actions pursuant to this Security Instrument or that alleges that the other party has breached any provision of, or any duty owed by reason of, its Security Instrument, until such Borrower or Lender has notified the other party (with such notice given in compliance with the requirements of Section 15) of such alleged breach and afforded the other party hereto a reasonable period after the giving of such notice to take corrective action. If Applicable Law provides a time period which must elapse before certain action can be taken, that time period will be deemed to be reasonable for purposes of this paraginals. The notice of acceleration and opportunity to cure given to Borrower pursuant to Section 22 and the notice of acceleration given to Borrower pursuant to Section 18 shall be deemed to satisfy the notice and opportunity to take corrective action provisions of this Section 20.

21. Hazardous Substances. As used in this Section 21: (a) "Hazardous Substances" are those substances defined as toxic or hazardous substances, pollutants, or wastes by Environmental Law and the following substances: gasoline, kerosene, other llammable or toxic petroleum products, toxic pesticides and herbicides, volatile solvents, materials containing asbestos or formaldehyde, and radioactive materials; (b) "Environmental Law" means federal laws and laws of the jurisdiction where the Property is located that relate to health, safety or environmental projection; (c) "Environmental Cleamp" includes any response action, remedial action, or removal action, as defined in Environmental Law; and (d) an "Environmental Condition" means a condition that can cause, contribute to, or otherwise trigger an Environmental Cleanup.

Borrower shall not cause or permit the presence, use, disposal, storage, or release of any Hazardous Substances, or threaten to release any Hazardous Substances, on or in the Property. Borrower shall not do, nor allow anyone else to do, anything affecting the Property (a) that is in violation of any Environmental Law, (b) which creates an Environmental Condition, or (c) which, due to the presence, use, or release of a Hazardous Substance, creates a condition that adversely affects the value of the Property. The preceding two sentences shall not apply to the presence, use, or storage on the Property of small quantities of Hazardous Substances that are generally recognized to be appropriate to normal residential uses and to maintenance of the Property (including, but not limited to, hazardous substances in consumer products).

Borrower shall promptly give Lender written notice of (a) any investigation, claim, demand, lawsuit or other action by any governmental or regulatory agency or private party involving the Property and any Hazardous Substance or Environmental Law of which Borrower has actual knowledge, (b) any Environmental Condition, including but not limited to, any spilling, leaking, discharge, release or threat of release of any Hazardous Substance, and (c) any condition caused by the presence, use or release of a Hazardous Substance which adversely affects the value of the Property. If Borrower learns, or is notified by any governmental or regulatory authority, or any private party, that any removal or other remediation of any Hazardous Substance affecting the Property is necessary, Borrower shall promptly take all necessary remedial actions in accordance with Environmental Law. Nothing herein shall create any obligation on Lender for an Environmental Cleanup.

NON-UNIFORM COVENANTS, Borrower and Lender further covenant and agree as follows:

22. Acceleration; Remedies. Lender shall give notice to Borrower prior to acceleration following Borrower's breach of any covenant or agreement in this Security Instrument (but not prior to acceleration under Section 18 unless Applicable Law provides otherwise). The notice shall specify: (a) the default; (b) the action required to cure the default; (c) a date, not less than 30 days from the date the notice is given to Borrower, by which the default must be cured; and (d) that failure to cure the default on or before the date specified in the notice may result in acceleration of the sums secured by this Security Instrument, foreclosure by judicial proceeding and sale of the Property. The notice shall further inform Borrower of the right to reinstate after acceleration and the right to assert in the foreclosure proceeding the non-existence of a default or any other defense of Borrower to acceleration and foreclosure. If the default is not cured on or before the date specified in the notice, Lender at its option may require immediate payment in full of all sums secured by this Security Instrument without further demand and may foreclose this Security Instrument by judicial proceeding. Lender shall be entitled to collect all expenses incurred in pursuing the remedies provided in this Section 22, including, but not limited to, reasonable attorneys' fees and costs of title evidence.

23. Release. Upon payment of all sums secured by this Security Instrument, Lender shall release this Security Instrument. Borrower shall pay any recordation costs. Lender may charge Borrower a fee for releasing this Security Instrument, but only if the fee is paid to a third party for services rendered and the charging of the fee is permitted under Applicable Law.

-5A(FL) (0005) CHL (08/05) Page 10 of 11 Form 3010 1/01

Book20706/Page336

Page 10 of 17

Serial Number: 11/736,356

Examiner: Ronnie M. Mancho Art Unit: 3664

DOC ID #: 00013884537607006

24. Attorneys' Fees. As used in this Security Instrument and the Note, attorneys' fees shall include those awarded by an appellate court and any attorneys' fees incurred in a bankruptcy proceeding.

25. July Trial Waiver. The Borrower hereby waives any right to a trial by jury in any action, proceeding, claim, or counterclaim, whether in contract or tort, at law or in equity, arising out of or in any way related to this Security Instrument or the Note.

BY SIGNING BELOW, Borrower accepts and agrees to the terms and covenants contained in this Security Instrument and in any Rider executed by Borrower and recorded with it.

Signed, sealed and delivered in the presence of:

attaina	- Çı	Jean Brune Jeanblande	(Seal)
	V230	JEAN B. JEANGLAUDE	-Воггомет
c V		11 HEMMING DR STAFFORD, VA 22554	(Address)
$-M_{-}$	D ~ D	_ Gestrude thather Flangla Sertrude arthur-jeanglaude ((Scal)
	(Ç	11 HEMMING DR	
		STAFFORD, VA 22554	(Address)
			(Seal) -Borrower
			(Address)
			(Seal)
			-Borrower
			(Address)

しん TATE OF F	A,	The state of the s	County ss: FALL s
The foregoing i JEAN B JEA	nstrument was ackno NGLAUDE AND GE	wledged before me this <u>August</u> RTRUDE ARTHUR JEANGLAUDE	by
ho is personally kn	own to me or who ha	s produceddriver's licens	ses as identification.
		Co	111
		Notary Public 3/3/1	37
		4-1/0	,
			٠,
MP -64/FL) (0005)	CHI (08/05)	Page 11 of 11	Form 3010 1/01

Book20706/Page337

Page 11 of 17

GL FINANCIAL SERVICES, LLC.

08/03/2006

210 N. UNIVERSITY DR STE 601 CORAL SPRINGS, FL 33071 Phone: (954)825-4300 Brk Fax No.: (954)825-4320

00013884537607006

BORROWER: JEAN B. JEANGLAUDE PROPERTY ADDRESS: 8671 THORNBROOK TERRACE POINT Boynton Beach, FL 33437-4882

LEGAL DESCRIPTION EXHIBIT A

Lot 117, CANYON ISLES PLAT ONE, according to the plat thereof, as recorded in Plat Book 105 at Page of the Public Records of Palm Beach County, Florida

FHAVACONV Legai Description Exhibit A 2C404-XX (04/03)(d)





PLANNED UNIT DEVELOPMENT RIDER

After Recording Return To:
COUNTRYWIDE HOME LOANS, INC.
MS SV-79 DOCUMENT PROCESSING
P.O.BOX 10423

Van Nuys, CA 91410-0423

Prepared By: YVETTE ZAPATA GL FINANCIAL SERVICES LLC.

210 N. UNIVERSITY DR STE 601 CORAL SPRINGS, FL 33071

> 00013884537607006 [Doc ID #]

THIS PLANNED UNIT DEVELOPMENT RIDER is made this THIRD day of AUGUST, 2006 , and is incorporated into and shall be deemed to amend and supplement the, Mortgage, Deed of Trust, or Security Deed (the "Security Instrument") of the same date, given by the undersigned (the "Borrower") to secure Borrower's Note to GL FINANCIAL SERVICES, LLC.

(the "Lender") of the same date and covering the Property described in the Security Instrument and located at:

8671 THORNBROOK TERRACE POINT Boynton Beach, FL 33437-4882 [Property Address]

The Property includes, but is not limited to, a parcel of land improved with a dwelling, together with

MULTISTATE PUD RIDER - Single Family - Fannle Mae/Freddle Mac UNIFORM INSTRUMENT

-7R (0405) CHL (06/04)(d) Page 1 of 3

VMP Mortgage Solutions, Inc. (800)521-7291

Form 3150 1/01



Book20706/Page339

Page 13 of 17

Serial Number: 11/736,356

Examiner: Ronnie M. Mancho Art Unit: 3664

DOC ID #: 00013884537607006

other such parcels and certain common areas and facilities, as described in THE COVENANTS, CONDITIONS, AND RESTRICTIONS FILED OF RECORD

THAT AFFECT THE PROPERTY

ORB 19820, PG 216

(the "Declaration") The Property is a part of a planned unit development known as CANYON ISLES

[Name of Planned Unit Development]

(the "PUD"). The Property also includes Borrower's interest in the homeowners association or equivalent entity owning or managing the common areas and facilities of the PUD (the "Owners Association") and the uses benefits and proceeds of Borrower's interest.

PUD COVENANTS. It addition to the covenants and agreements made in the Security Instrument, Borrower and Lender further covenant and agree as follows:

A. PUD Obligations. Borrower's hall perform all of Borrower's obligations under the PUD's Constituent Documents. The "Constituent Documents" are the (i) Declaration; (ii) articles of incorporation, trust instrument or any equivalent document which creates the Owners Association; and (iii) any by-laws or other rules or regulations of the Owners Association. Borrower shall promptly pay, when due, all dues and assessments imposed pursuant to the Constituent Documents

B. Property Insurance. So long as the Owners Association maintains, with a generally accepted insurance carrier, a "master" or "blanket" policy insuring the Property which is satisfactory to Lender and which provides insurance coverage in the amounts (including deductible levels), for the periods, and against loss by fire, hazards included within the term "extended coverage," and any other hazards, including, but not limited to, earthquakes and floods, for which Lender requires insurance, then: (i) Lender waives the provision in Section 3 for the Periodic Payment to Lender of the yearly premium installments for property insurance on the Property; and (ii) Borrower's obligation under Section 5 to maintain property insurance coverage on the Property is deemed satisfied to the extent that the required coverage is provided by the Owners Association policy

What Lender requires as a condition of this waiver can change during the term of the loan.

Borrower shall give Lender prompt notice of any lapse in required property insurance coverage

provided by the master or blanket policy.

In the event of a distribution of property insurance proceeds in lieu of restoration or repair following a loss to the Property, or to common areas and facilities of the PUD, any proceeds payable to Borrower are hereby assigned and shall be paid to Lender. Lender shall apply the proceeds to the sums secured by the Security Instrument, whether or not then due, with the excess, if any, paid to

- C. Public Liability Insurance. Borrower shall take such actions as may be reasonable to insure that the Owners Association maintains a public liability insurance policy acceptable in form, amount, and extent of coverage to Lender.
- D. Condemnation. The proceeds of any award or claim for damages, direct or consequential, payable to Borrower in connection with any condemnation or other taking of all or any part of the Property or the common areas and facilities of the PUD, or for any conveyance in lieu of condemnation, are hereby assigned and shall be paid to Lender. Such proceeds shall be applied by Lender to the sums secured by the Security Instrument as provided in Section 11.
- E. Lender's Prior Consent. Borrower shall not, except after notice to Lender and with Lender's prior written consent, either partition or subdivide the Property or consent to: (i) the abandonment or termination of the PUD, except for abandonment or termination required by law in the case of substantial destruction by fire or other casualty or in the case of a taking by condemnation or eminent domain; (ii) any amendment to any provision of the "Constituent Documents" if the provision is for the

-7R (0405)

CHL (06/04)

Page 2 of 3

MODE CAT Form 3150 1/01

Sheet 131 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

DOC ID #: 00013884537607006

express benefit of Lender; (iii) termination of professional management and assumption of self-management of the Owners Association; or (iv) any action which would have the effect of rendering the public liability insurance coverage maintained by the Owners Association unacceptable to Lender.

to Lender.

F. Remedies. If Borrower does not pay PUD dues and assessments when due, then Lender may pay them. Any amounts disbursed by Lender under this paragraph F shall become additional debt of Borrower seoured by the Security Instrument. Unless Borrower and Lender agree to other terms of payment, these amounts shall bear interest from the date of disbursement at the Note rate and shall be payable, with interest, upon notice from Lender to Borrower requesting payment.

BY SIGNING BELOW Borrower accepts and agrees to the terms and provisions contained in this PUD Rider.

(Seal)	can Bruner Hawkande	De
- Borrower	JEAN B DEANGLAUDE	(
	11 HEMMING DR	<i>V</i>
	STAFFORD VA 22554	
(Seal)	nextrude Arthur-Jeanglande	la
- Borrower	GERTRUDE ARTHUR-JEANGLAUDE	1
	11 HEMMING PR	U
	STAFFORD, VA 22554	
(Seal)		
- Borrower		
(Seal)		
- Borrower		

-7R (0405) CHL (06/04)

Page 3 of 3

Form 3150 1/01

Sheet 132 of 241



SECOND HOME RIDER

After Recording Return To:
COUNTRYWIDE HOME LOANS, INC.
MS SV-79 DOCUMENT PROCESSING
P.O.Box 10423
Van Nuys, CA 91410 0423

Prepared By:
YVETTE ZAPATA
GL FINANCIAL SERVICES, IAC.

210 N. UNIVERSITY DR STE 601 CORAL SPRINGS, FL 33071

> 00013884537607006 [Doc ID #]

THIS SECOND HOME RIDER is made this THIRD day of AUGUST, 2006 , and is incorporated into and shall be deemed to amend and supplement the Mortgage, Deed of Trust, or Security Deed (the "Security Instrument") of the same date given by the undersigned (the "Borrower" whether there are one or more persons undersigned) to secure Borrower's Note to GL FINANCIAL SERVICES, LLC.

(the "Lender") of the same date and covering the Property described in the Security Instrument (the "Property"), which is located at:

8671 THORNBROOK TERRACE POINT Boynton Beach, FL 33437-4882 [Property Address]

MULTISTATE SECOND HOME RIDER - Single Family - Fannie Mae/Freddie Mac UNIFORM
INSTRUMENT Page 1 of 2 Initials:

GA

Form 3890-1/01

VMP Mortgage Solutions, Inc. (800)521-7291





Book20706/Page342

Page 16 of 17

DOC ID #: 00013884537607006
In addition to the covenants and agreements made in the Security Instrument, Borrower and Lender further covenant and agree that Sections 6 and 8 of the Security Instrument are deleted and are replaced by the

Normal Section 1. Some shall occupy, and shall only use, the Property as Borrower's second home. Borrower's hall keep the Property available for Borrower's exclusive use and enjoyment at all times, and shall not subject the Property to any timesharing or other shared ownership arrangement or to any rental pool of agreement that requires Borrower either to rent the Property or give a management firm or any other person any control over the occurancy or use of the Property.

or any other person any control over the occupancy or use of the Property.

8. Borrower's: Doan Application. Borrower shall be in default if, during the Loan application process, Borrower or any persons or entities acting at the direction of Borrower or with Borrower's knowledge or consent gave materially false, misleading, or inaccurate information or statement because (or failed to provide Lender with material information) in connection with the Loan. Material representations included but are not limited to, representations concerning Borrower's occupancy of the Property as Borrower's second home.

BY SIGNING BELOW Borrower accepts and agrees to the terms and provisions contained in this Second Home Rider.

(Seal)	Jean Brune Dean Hande
- Borrower	JEAN B. JEANSLAUDE
	11 HEMMING DR
	STAFFORD, VA 22554
(Seal)	Mestrude Arthur-Jeanglande
- Borrower	GERTRUDE ARTHUR-JEANGLAUDE
	11 HEMMING DR
	STAFFORD, VA 22554
(Seal)	
- Borrower	
(Seal)	
- Borrower	
- Dollower	

-365R (0405) CHL (06/04)

Page 2 of 2

Form 3890 1/01

Serial Number: 11/736,356

Filed: 04/17/2007 Examiner: Ronnie M. Mancho Art Unit: 3664

Inteng 282.24 Sharon R. Bock, CLERK & COMPTROLLER Pgs 0344 - 354; (11pgs)

CFN 20060462329 OR BK 20706 PG 0344

RECORDED 08/08/2006 15:46:06

Palm Beach County, Florida AMT 141,120.00 Deed Doc 494.20



ຂີ

22

After Recording Return To: COUNTRYWIDE HOME LOANS, INC. PRINCE HER MS SV-79 DOCUMENT PROCESSING THE SOMMANY
P.O.Box 10423 HOLUNIVERSITY OR SUITE 402
Van Nuys, CA 91410-0486NAL SPRINGS FL 33071-348 This document was prepared by: (954) 755-9889 TYETTE ZAPATA

GE FINANCIAL SERVICES, LLC.

210 N. UNIVERSITY DR STE 601 CORAL SPRINGS, FL 33071

00013884536807006

[Doc ID #]

MORTGAGE (Line of Credit)

[Space Above This Line For Recording Data]

MIN 1000157-0007101590-9

THIS MORTGAGE, dated AUGUST 03, 2006 , is between JEAN B JEANGLAUDE, AND GERTRUDE ARTHUR-JEANGLAUDE, HUSBAND AND WIFE

residing at

11 HEMMING DR the person or persons signing as "Mortgagor(s)" below and hereinafter referred to as "we," "our," or "us" and MORTGAGE ELECTRONIC REGISTRATION SYSTEMS, INC., ("MERS") a Delaware corporation with an address of P.O. Box 2026, Flint, M1.48561-2026, tel. (888) 679-MERS acting solely as nominee for

GL FINANCIAL SERVICES, LLC. ("Lender" or "you") and its successors and assigns. MERS is the "Mortgagee" under this Mortgage.

MORTGAGED PREMISES: In consideration of the loan hereinafter described, we hereby mortgage, grant and convey to MERS (solely as nominee for Lender and Lender's successors and assigns) and to the successors and assigns of MERS, the premises located at: 8671 THORNBROOK TERRACE POINT

Street BOYNTON BEACH

PALM BEACH County

Municipality (the "Premises"). 33437

 \mathbf{FL}

and further described as:

SEE EXHIBIT "A" ATTACHED HERETO AND MADE A PART HEREOF.

• MERS HELOC - FL MORTGAGE 2D993-FL (11/04)(d)

Page 1 of 5





Book20706/Page344

Page 1 of 11

Serial Number: 11/736,356 Examiner: Ronnie M. Mancho Art Unit: 3664

DOC ID #: 00013884536807006

The Premises includes all buildings and other improvements now or in the future on the Premises and all rights and interests which derive from our ownership, use or possession of the Premises and all appurtenances thereto.

WE UNDERSTAND and agree that MERS is a separate corporation acting solely as nominee for Lender and Lender's successors and assigns, and holds only legal title to the interests granted by us in this Mortgage's high, if necessary to comply with law or custom, MERS (as nominee for Lender and Lender's successors and assigns) has the right: to exercise any or all of those interests, including, but not limited to, the right to forcelose and sell the Property, and to take any action required of Lender including, but not limited to, releasing or canceling this Mortgage

LOAN: This Mortgage will secure Lender's loan to us in the principal amount of or so much thereof as may be advanced and readvanced from time to time to \$ 141,120.00 JEAN B. JEANGLAUDE GERTRUDE ARTHUR-JEANGLAUDE

the Borrower(s) under the Home Equity Credit Line Agreement And Disclosure Statement (the "Note") dated 08/03/2006 plus interest and costs, late charges and all other charges related to the loan, all of which sums are repayable according to the Note. This Mortgage will also secure the performance of all of the promises and agreements made by us and each Borrower and Co-Signer in the Note, all of our promises and agreements in this Mortgage, any extensions, renewals, amendments, supplements and other modifications of the Note, and any amounts advanced by you under the terms of the section of this Mortgage entitled "Our Authority To You." Loans under the Note may be made, repaid and remade from time to time in accordance with the terms of the Note and subject to the Credit Limit set forth in the Note.

OWNERSHIP: We are the sole owner(s) of the Premises. We have the legal right to mortgage the Premises

OUR IMPORTANT OBLIGATIONS:

- (a) TAXES: We will pay all real estate taxes, assessments, water charges and sewer rents relating to the Premises when they become due. We will not claim any credit on, or make deduction from, the loan under the Note because we pay these taxes and charges. We will provide Lender with proof of payment upon
- (b) MAINTENANCE: We will maintain the building(s) on the Premises in good condition. We will not make major changes in the building(s) except for normal repairs. We will not tear down any of the building(s) on the Premises without first getting Lender's consent. We will not use the Premises illegally. If this Mortgage is on a unit in a condominium or a planned unit development, we shall perform all of our obligations under the declaration or covenants creating or governing the condominium or planned unit development, the by-laws and regulations of the condominium or planned unit development and constituent
- (c) INSURANCE: We will keep the building(s) on the Premises insured at all time against loss, by fire, flood and any other hazards Lender may specify. We may choose the insurance company, but our choice is subject to Lender's reasonable approval. The policies must be for at least the amounts and the time periods that Lender specifies. We will deliver to Lender upon Lender's request the policies of other proof of the insurance. The policies must name Lender as "mortgagee" and "loss-payee" so that Lender will receive payment on all insurance claims, to the extent of this Mortgage, before we do. The insurance policies must also provide that Lender be given not less than 10 days prior written notice of any cancellation or reduction in coverage, for any reason. Upon request, we shall deliver the policies, certificates or other evidence of insurance to Lender. In the event of loss or damage to the Premises, we will immediately notify Lender in writing and file a proof of loss with the insurer. Lender may file a proof of loss on our behalf if we fail or refuse to do so. Lender may also sign our name to any check, draft or other order for the payment of insurance proceeds in the event of loss or damage to the Premises. If Lender receives payment of a claim, Lender will have the right to choose to use the money either to repair the Premises or to reduce the amount owing on the Note.

(d) CONDEMNATION: We assign to Lender the proceeds of any award or claim for damages, direct or consequential, in connection with any condemnation or other taking of the Premises, or part thereof, or for conveyance in lieu of condemnation, all of which shall be paid to Lender, subject to the terms of any Prior Mortgage.

MERS HELOC - FL MORTGAGE 20993-FL (11/04)

Page 2 of 5

1BTG-

Book20706/Page345

Page 2 of 11

Serial Number: 11/736,356 Filed: 04/17/20 Examiner: Ronnie M. Mancho Art Unit: 3664

(e) SECURITY INTEREST: We will join with you in signing and filing documents and, at our expense, in doing whatever you believe is necessary to perfect and continue the perfection of your lien and parties, whose claims or liens are discharged or paid with the proceeds of the Agreement secured hereby.

OUR AUTHORITY TO YOU: If we fail to perform our obligations under this Mortgage, Lender may, if fender chooses, perform our obligations and pay such costs and expenses. Lender will add the amounts Lender advances to the sums owing on the Note, on which Lender will charge interest at the interest rate set forth in the Note. If, for example, we fail to honor our promises to maintain insurance in effect, or to pay filing fees, taxes or the costs necessary to keep the Premises in good condition and repair or to perform any of our agreements with Lender, Lender may, if Lender chooses, advance any sums to satisfy any of our agreements with Lender or MERS and charge us interest on such advances at the interest rate set forth in the Note this Mortgage secures all such advances. Lender's payments on our behalf will not cure our failure to perform our promises in this Mortgage. Any replacement insurance that Lender obtains to cover loss or damages to the Premises may be limited to the amount owing on the Note plus the amount of any Prior Mortgages.

(g) PRIOR MORTSAGE: If the provisions of this paragraph are completed, this Mortgage is subject and subordinate to a prior stortgage dated 08/03/2006 and given by us to AWL

as mortgagee, in the original amount of \$ 650,000.00 (the "Prior Mortgage"). We shall not increase, amend or modify the Prior Mortgage without your prior written consent and shall upon receipt of any written notice from the holder of the Prior Mortgage promptly deliver a copy of such notice to you. We shall pay and perform all of our obligations under the Prior Mortgage as and when required under the Prior Mortgage.

- (h) HAZARDOUS SUBSTANCES we shall not cause or permit the presence, use, disposal, storage, or release of any Hazardous Substances on or in the Premises. We shall not do, nor allow anyone else to do, anything affecting the Premises that is in violation of any Brivinonmental Law. The preceding two sentences shall not apply to the presence, use, or storage on the Premises of small quantities of Hazardous Substances that are generally recognized to be appropriate to normal residential uses and to maintenance of the Premises. As used in this paragraph, "Hazardous Substances are those substances defined as toxic or hazardous substances by Environmental Law and the following substances: gasoline, kerosene, other flammable or toxic petroleum products, toxic pesticides and herbicides, volatile solvents, materials containing asbestos or formaldehyde, and radioactive materials. As used in this paragraph, "Environmental Law" means federal laws and laws of the jurisdiction where the Premises are located that relate to health, safety or environmental protection.
- (i) SALE OF PREMISES: We will not sell, transfer ownership of, mortgage or otherwise dispose of our interest in the Premises, in whole or in part, or permit any other lien or claim against the Premises without Lender's prior written consent.
 - (j) INSPECTION: We will permit Lender to inspect the Premises at any reasonable time.

NO LOSS OF RIGHTS: The Note and this Mortgage may be negotiated or assigned without releasing us or the Premises. Lender may ad or release any person or property obligated under the Note and this Mortgage with losing rights in the Premises.

DEFAULT: Except as may be prohibited by applicable law, and subject to any advance notice and cure period if required by applicable law, if any event or condition of default as described in the Note occurs, Lender may foreclose upon this Mortgage. This means that Lender may arrange for the Premises to be sold, as provided by law, in order to pay off what we owe on the Note and under this Mortgage. If the money Lender receive from the sale is not enough to pay off what we owe, we will still owe the difference which Lender may seek to collect from us in accordance with applicable law, In addition, Lender may, in accordance with applicable law, (i) enter on and take possession of the Premises; (ii) collect the rental payments, including over-due rental payments, directly from tenants; (iii) manage the Premises; and (iv) sign, cancel and change leases. We agree that the interest rate set forth in the Note will continue before and after a default, entry of a judgment and foreclosure. In addition, Lender shall be entitled to collect all reasonable fees and costs actually incurred by Lender in proceeding to foreclosure, including, but not limited to, reasonable attorneys fees and costs of documentary evidence, abstracts and title reports.

ASSIGNMENT OF RENTS; APPOINTMENT OF RECEIVER: As additional security, we assign to you the rents of the Premises. You or a receiver appointed by the courts shall be entitled to enter upon, take possession of and manage the Premises and collect the rents of the Premises including those past due.

● MERS HELOC - FL MORTGAGE 2D993-FL (11/04)

Page 3 of 5

Initials: _______

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 137 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

DOC ID #: 00013884536807006

WAIVERS: To the extent permitted by applicable law, we waive and release any error or defects in proceedings to enforce this Mortgage and hereby waive the benefit of any present or future laws providing for stay of execution, extension of time, exemption from attachment, levy and sale and homestead exemption.

BINDING EFFECT: Each of us shall be fully responsible for all of the promises and agreements in this Mortgage Until the Note has been paid in full and the obligation to make further advances under the Note has been terminated, the provisions of this Mortgage will be binding on us, our legal representatives, our heirs and all inture owners of the Premises. This Mortgage is for MRRS and Lender's benefit and for the benefit of anyone to whom it may be assigned. Upon payment in full of all amounts owing under the Note and this Mortgage and provided any obligation to make further advances under the Note has terminated, this Mortgage and your rights in the Premises shall end.

NOTICE: Except for any notice required under applicable law to be given in another manner, (a) any notice to us provided for in this Deed of Trust shall be given by delivering it or by mailing such notice by regular first class mail addressed to us at the last address appearing in your records or at such other address as we may designate by notice to you as provided herein, and (b) any notice to you shall be given by certified mail, return receipt requested, to your address at For MERS:

P.O. Box 2026, Flint, MI 48501-2026

For Lender:

210 N. UNIVERSITY DR STE 601, CORAL SPRINGS, FL 33071

or to such other address as you may designate by notice to us. Any notice provided for in this Mortgage shall be deemed to have been given to us or you when given in the manner designated herein.

RELEASE: Upon payment of all sums secured by this Mortgage and provided the obligation to make further advances under the Note has terminated you shall discharge this Mortgage without charge to us, except that we shall pay any fees for recording of a satisfaction of this Mortgage.

GENERAL: You can waive or delay enforcing any of your rights under this Mortgage without losing them. Any waiver by you of any provisions of this Mortgage will not be a waiver of that or any other provision on any other occasion.

 MERS HELOC - FL MORTGAGE 2D993-FL (11/04)

Page 4 of 5

Book20706/Page347

Page 4 of 11

Jed Margolin

Serial Number: 11/736,356

Filed: 04/17/2007

Sheet 138 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

DOC ID #: 00013884536807006
THUS MORTGAGE has been signed by each of us under seal on the date first above written.

E JEAN B. JEANGLAUDE 11 HEMMING DR STAFFORD, VA 22554

GERTRUDE ARTHUR-VEANGLAUDE

STAFFORD, VA 22554

(SEAL)

(SEAL)

(SEAL)

The foregoing instrument was acknowledged before me this August 3, 2006 JEAN B. JEANGLAUDE AND GERTRUDE ARTHUR JEANGLAUDE

who is personally known to me or who has produced as identification.

• MERS HELOC - FL MORTGAGE 2D993-FL (11/04)

Page 5 of 5

Filed: 04/17/2007

Sheet 139 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

Prepared by: YVETTE ZAPATA

GL FINANCIAL SERVICES, LLC.

08/03/2006

210 N. UNIVERSITY DR STE 601 CORAL SPRINGS, FL 33071 Phone: (954)825-4300 Brk Fax No.: (954)825-4320

00013884536807006

BORRÓWER: JEAN B. JEANGLAUDE PROPERTY ADDRESS: 8671 THORNBROOK TERRACE POINT BOYNTON BEACH, FL 33437

LEGAL DESCRIPTION EXHIBIT A

Lot 117, CANYON ISLES PLAT ONE, according to teh plat thereof, as recorded in Plat Book 105 at Page 1 of the Public Records of Palm Beach County, Florida

FHAVA/CONV Legal Description Exhibit A 2C404-XX (04/03)(d)





Filed: 04/17/2007 Sheet 140 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

PLANNED UNIT DEVELOPMENT RIDER

After Recording Return To:
COUNTRYWIDE SOME LOANS, INC.
MS SV-79 DOCUMENT PROCESSING
P.O.Box 10423
Van Nuys, CA 93410-0423

Prepared By: YVETTE ZAPATA GL FINANCIAL SERVICES LLC.

210 N. UNIVERSITY DR STE 601 CORAL SPRINGS, FL 33071

> 00013884536807006 [Doc ID #]

THIS PLANNED UNIT DEVELOPMENT RIDER is made this <code>THIRD</code> day of <code>AUGUST</code>, <code>2006</code> , and is incorporated into and shall be deemed to amend and supplement the, <code>Mortgage</code>, <code>Deed</code> of <code>Trust</code>, or <code>Security</code> <code>Deed</code> (the "Security Instrument") of the same date, given by the undersigned (the "Borrower") to secure Borrower's <code>Note</code> to <code>GL</code> <code>FINANCIAL</code> <code>SERVICES</code>, <code>LLC</code>.

(the "Lender") of the same date and covering the Property described in the Security Instrument and located at:

8671 THORNBROOK TERRACE POINT BOYNTON BEACH, FL 33437 [Property Address]

The Property includes, but is not limited to, a parcel of land improved with a dwelling, together with

MULTISTATE PUD RIDER - Single Family - Fannie Mae/Freddle Mac UNIFORM INSTRUMENT
-7R (0405) CHL (06/04)(d) Page 1 of 3 Initials: 1/20/06/07

VMP Mortgage Solutions, Inc. (800)521-7291 Form (140)/07





Book20706/Page350

Page 7 of 11

· • ,

DOC ID #: 00013884536807006

other such parcels and certain common areas and facilities, as described in THE COVENANTS, CONDITIONS, AND RESTRICTIONS FILED OF RECORD

THAT AFFECT THE PROPERTY

ORB 19820, PG 216

(the "Declaration") The Property is a part of a planned unit development known as CANYON ISLES

[Name of Planned Unit Development]

(the "PUD"). The Property also includes Borrower's interest in the homeowners association or equivalent entity owning or managing the common areas and facilities of the PUD (the "Owners Association") and the uses, benefits and proceeds of Borrower's interest.

Association") and the uses, benefits and proceeds of Borrower's interest.

PUD COVENANTS. In addition to the covenants and agreements made in the Security
Instrument, Borrower and Lender further covenant and agree as follows:

- A. PUD Obligations. Borrowe's shall perform all of Borrower's obligations under the PUD's Constituent Documents. The "Constituent Documents" are the (i) Declaration; (ii) articles of incorporation, trust instrument or any equivalent document which creates the Owners Association; and (iii) any by-laws or other rules or regulations of the Owners Association. Borrower shall promptly pay, when due, all dues and assessments imposed pursuant to the Constituent Documents.
- (iii) any by-laws or other intes or regulators of the Constituent Documents.

 B. Property Insurance. So long as the Owners Association maintains, with a generally accepted insurance carrier, a "master" or "blanket" policy insuring the Property which is satisfactory to Lender and which provides insurance coverage in the amounts (including deductible levels), for the periods, and against loss by fire, hazards included within the term "extended coverage," and any other hazards, including, but not limited to, earthquakes and floods, for which Lender requires insurance, then: (i) Lender waives the provision in Section 3 for the Periodic Payment to Lender of the yearly premium installments for property insurance on the Property; and (ii) Borrower's obligation under that the required coverage is provided by the Owners Association policy.

What Lender requires as a condition of this waiver can change during the term of the loan.

Borrower shall give Lender prompt notice of any lapse in required property insurance coverage provided by the master or blanket policy.

- In the event of a distribution of property insurance proceeds in lieu of restoration or repair following a loss to the Property, or to common areas and facilities of the PUD, any proceeds payable to Borrower are hereby assigned and shall be paid to Lender. Lender shall apply the proceeds to the sums secured by the Security Instrument, whether or not then due, with the excess, if any, paid to Borrower
- C. Public Liability Insurance. Borrower shall take such actions as may be reasonable to insure that the Owners Association maintains a public liability insurance policy acceptable in form, amount, and extent of coverage to Lender.
- D. Condemnation. The proceeds of any award or claim for damages, direct or consequential, payable to Borrower in connection with any condemnation or other taking of all or any part of the Property or the common areas and facilities of the PUD, or for any conveyance in lieu of condemnation, are hereby assigned and shall be paid to Lender. Such proceeds shall be applied by Lender to the sums secured by the Security Instrument as provided in Section 11.
- E. Lender's Prior Consent. Borrower shall not, except after notice to Lender and with Lender's prior written consent, either partition or subdivide the Property or consent to: (i) the abandonment or termination of the PUD, except for abandonment or termination required by law in the case of substantial destruction by fire or other casualty or in the case of a taking by condemnation or eminent domain; (ii) any amendment to any provision of the "Constituent Documents" if the provision is for the

-7R (0405)

CHL (06/04)

Page 2 of 3

Initials: Form 3150 1/0

POWE 3120 1/0.

Serial Number: 11/736,356
Examiner: Ronnie M. Mancho

Examiner: Ronnie M. Mancho Art Unit: 3664

, ...

DOC ID #: 00013884536807006

express benefit of Lender; (iii) termination of professional management and assumption of self-management of the Owners Association; or (iv) any action which would have the effect of rendering the public liability insurance coverage maintained by the Owners Association unacceptable to Lender.

to Lender.

F. Remedies. If Borrower does not pay PUD dues and assessments when due, then Lender may pay them. Any amounts disbursed by Lender under this paragraph F shall become additional debt of Borrower sebured by the Security Instrument. Unless Borrower and Lender agree to other terms of payment, these camounts shall bear interest from the date of disbursement at the Note rate and shall be payable, with interest, upon notice from Lender to Borrower requesting payment.

BY SIGNING BELOW Borrower accepts and agrees to the terms and provisions contained in this PUD Rider.

n paner Jeanslande	(Seal)
JEAN BAZEANGLAUDE	- Borrowei
11 HEMMING DR	
STAFFORD VA 22554	
Gertrude Arthur-Leanglande	(Seal)
GERTRUDE ARTHUR JEANGLAUDE	- Borrowei
~ 11 HEMMING (草根)	
STAFFORD, VA 22554	
	(Seal)
Ž.	- Borrowei
Name#=	
	(Seal)
	- Borrower

-7R (0405) CHL (06/04) Page 3 of 3 Form 3150 1/01

Serial Number: 11/736,356 File

Examiner: Ronnie M. Mancho Art Unit: 3664

SECOND HOME RIDER

After Recording Return To:
COUNTRYWIDE HOME LOANS, INC.
MS SV-79 DOCUMENT PROCESSING
P.O.Box 10423
Van Nuys, CA 91410-0423

Prepared By:
YVETTE ZAPATA
GL FINANCIAL SERVICES, LLC

210 N. UNIVERSITY DR STB 601 CORAL SPRINGS, FL 33071

> 00013884536807006 [Doc ID #]

THIS SECOND HOME RIDER is made this THIRD day of AUGUST, 2006, and is incorporated into and shall be deemed to amend and supplement the Mortgage. Deed of Trust, or Security Deed (the "Security Instrument") of the same date given by the undersigned (the "Borrower" whether there are one or more persons undersigned) to secure Borrower's Note to GL FINANCIAL SERVICES, LLC.

(the "Lender") of the same date and covering the Property described in the Security Instrument (the "Property"), which is located at:

8671 THORNBROOK TERRACE POINT BOYNTON BEACH, FL 33437 [Property Address]

MULTISTATE SECOND HOME RIDER - Single Family - Fannie Mae/Freddle Mac UNIFORM INSTRUMENT Page 1 of 2 Initials:

365R (0405) CHL (06/04)(d) Form 385

VMP Mortgage Solutions, Inc. (800)521-7291





Book20706/Page353

Page 10 of 11

Filed: 04/17/2007 Shee

Sheet 144 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

DOC ID #: 00013884536807006

In addition to the covenants and agreements made in the Security Instrument, Borrower and Lender further covenant, and agree that Sections 6 and 8 of the Security Instrument are deleted and are replaced by the

following:

6. Occupancy. Borrower shall occupy, and shall only use, the Property as Borrower's second home.

Borrower's shall keep the Property available for Borrower's exclusive use and enjoyment at all times, and shall not subject the Property to any timesharing or other shared ownership arrangement or to any rental pool or agreement that requires Borrower either to rent the Property or give a management firm or any other person any control over the occupancy or use of the Property.

8. Borrower's Loan Application. Borrower shall be in default if, during the Loan application

8. Borrower's Loan Application. Borrower shall be in default if, during the Loan application process, Borrower or any persons or entities acting at the direction of Borrower or with Borrower's knowledge or consent gave materially false, misleading, or inaccurate information or statements to Lender (or failed to provide Lender with material information) in connection with the Loan. Material representations include but are not limited to, representations concerning Borrower's occupancy of the Property as Borrower's second home.

BY SIGNING BELOW, Borrower accepts and agrees to the terms and provisions contained in this Second Home Rider.

(Sea	glan Guner geantflaude
- Borrowe	JEAN B. (JEANSLAUDE 11 HEMMING DR STAFFORD, VA 22594
(Seal	Gertrude Arthur-Jeanglande
- Borrowe	GERTRUDE ARTHUR-BEANGLAUDE 11 HEMMING DR STAFFORD, VA 22554
(Seal	
- Borrowe	
(Seal	
- Borrowe	

-365R (0405) CHL (06/04)

Page 2 of 2

Form 3890 1/01

Filed: 04/17/2007 Examiner: Ronnie M. Mancho Art Unit: 3664

Document Prepared By: Stephan L. Galiano ReconTrust Company, N.A. 1330 W. Southern Ave MS: TPSA-88 Tempe, AZ 85282-4545 (800) 540-2684

CFN 20070183108 OR BK 21628 PG 0225 RECORDED 04/16/2007 15:01:26 Palm Beach County, Florida Sharon R. Bock, CLERK & COMPTROLLER Pg 0225; (1pg)

When recorded return to: JEAN B JEANGLAUDE, GERTRUDE ARTHUR-JEANGLAUDE 11 Hemming Dr. Stafford, VA 22554

DOCID#0001388453762005N

SATISFACTION OF MORTGAGE

KNOW ALL MEN BY THESE PRESENTS: Mortgage Electronic regiserations a certain mortgage deed executed by JEAN B JEANGLAUDE. GERTRUDE ARTHUR-JEANGLAUDE to Mortgage Electronic Registration Systems, Inc. bearing date 08/03/2006, recorded on 08/08/2006 in Official Records Book OR 20706, Page'0327, Instrument # 20060482328 in the office of the Clerk of the Circuit Court of PALM BEACH County State of Flipride, securing a certain note in the principal sum 6550,000.00 Dollars, and certain promises and obligations set-forth in said mortgage deed, upon the property situated in said State and County hereby acknowledge full payment and satisfaction of said note and mortgage deed, and surrenders the same as canceled, and hereby directs the Clerk of the said Circuit Court to cancel the same of record.

IN WITNESS WHEREOF the said Corporation has caused these presents to be executed in its name, and its corporate seal to be herebut directs. The presents to be executed in its name, and its corporate seal to be day of April, 2007.

Mortgage Electronic Registration Systems, Inc.

Witness

Stacey Shirra Assistant Secretary

STATE OF ARIZONA COUNTY OF MARICOPA

On 04/04/2007, before me, Christine Jones, Notary Public, personally appeared Stacey Shirra personally known to me (or proved to me on the basis of satisfactory evidence) to be the person whose name is subscribed to the within instrument and acknowledged to me that he/she executed the same in his/her authorized capacity, and that by his/her signature on the instrument the person, or the entity upon behalf of which the person acted, executed the

Witness my hand and official seal.

Christine Jones, Notary Public Expires: 12/21/2009



Serial Number: 11/736,356

Examiner: Ronnie M. Mancho Art Unit: 3664

Document Prepared By: Steven U. Galiano ReconTrust Company, N.A. 1330 W. Southern Ave. MS: TPSA-88 Tempe, AZ 85282-4545 (800) 540-2684



CFN 20070185466 OR BK 21632 FG 1381 RECORDED 04/17/2007 14:52:07 Palm Beech County, Florida Sharon R. Bock, CLERK & COMPTROLLER Pg 1381; (1pg)

When recorded return to: JEAN B JEANGLAUDE, GERTRUDE ARTHUR-JEANGLAU 11 HEMMING DRIVE STAFFORD VA 22554

DOCID#0001388453682005N

SATISFACTION OF MORTGAGE

KNOW ALL MEN BYTHESE PRESENTS: Mortgage Electronic Registration Systems, Inc. the owner and holder of a certain mortgage deed-executed by JEAN B JEANGLAUDE, GERTRUDE ARTHUR-JEANGLAU

JEAN B JEANGLAUDE GERTRUDÉ ARTHUR-JEANGLAU
to Mortgage Electronic Registration Systems, Inc. bearing date 08/03/2006, recorded on 08/08/2006 in Official
Records Book 20706, Pagic 0344, Instrument # 20060462329 in the office of the Clerk of the Circuit Court of PALM
BEACH County State of Florida, securing a certain note in the principal sum of \$141,120.00 Dollars, and certain
promises and obligations set florid in said mortgage deed, upon the property situated in said State and County
hereby acknowledge full payment and satisfaction of said note and mortgage deed, and surrenders the same as
canceled, and hereby directs the Clerk of the said Circuit Court to cancel the same of record.

(CORPORATE
SEAL)

| N WITNESS WHEREOF the said Corporation has caused these
| presents to be executed in its name, and its corporate seal to be
| hereby acknowledge full payment and surrenders the same of record. |

hereunto amxeu, a day of April, 2007.

Mortgage Electronic Registration Systems, Inc.

Вохапле Вегтеа Assistant Secretary Signed and delivered in the presence of:

Monica Castro
Witner

Witness STATE OF ARIZONA COUNTY OF MARICOPA Peter Lopez Assistant Secretary

On 04/03/2007, before me, Mary H. Doyle, Notary Public, personally appeared Peter Lopez personally known to me (or proved to me on the basis of satisfactory evidence) to be the person whose name is subscribed to the within instrument and acknowledged to me that he/she executed the same in his/her authorized capity, and that by his/her signature on the instrument the person, or the entity upon behalf of which the person acted, executed the

instrument.

Witness my hand and official seal

Mary H. Doyle, Notary Public Expires: 08/18/2009

OFFICIAL SEAL
MARY H. DOYLE
NOTARY PUBLIC - ARIZONA
MARICOPA COUNTY
y Comm. Expires Aug. 18, 2008

Serial Number: 11/736,356

Filed: 04/17/2007 Examiner: Ronnie M. Mancho Art Unit: 3664



Recording Requested by & When Recorded Return To: US Recordings, Inc. PO Box 19989 Louisville, KY 40259

This document was prepared by HRATHER MCLAUGHLIN

QUINTRYWIDE HOME LOANS, INC.

2380 PERFORMANCE DR MSRGV

RICHARDSON TX 75082

CFN 20070188785 OR BK 21639 PG 1219 RECORDED 04/19/2007 08:35:21

Palm Beach County, Florida ANT 807,000.00 Deed Doc 2,824.50

Intang 1,614.00 Sharon R. Bock,CLERK & COMPTROLLER Pgs 1219 - 1236; (18pgs)

-{Space Above This Line For Recording Data}-

38382630

165070024 [Escrew/Closing #1 00016597093403007

[Doc ID #]

MORTGAGE

MIN 1000157 0007988670 7

T007-040958

DEFINITIONS

Words used in multiple sections of this document are defined below and other words are defined in Sections 3, 11, 13, 18, 20 and 21. Certain rules regarding the usage of words used in this document are also provided in

(A) "Security Instrument" means this document, which is dated MARCH 30, 2007 , together with all Riders to this document.

(B) "Borrower" is

JEAN BRUNER JEANGLAUDE, AND GERTRUDE ARTHUR-JEANGLAUDE, HUSBAND AND WIFE

Borrower is the mortgagor under this Security Instrument.

(C) "MERS" is Mortgage Electronic Registration Systems, Inc. MERS is a separate corporation that is acting solely as a nominee for Lender and Lender's successors and assigns. MERS is the mortgagee under this Security Instrument. MERS is organized and existing under the laws of Delaware, and has an address and telephone number of P.O. Box 2026, Flint, MI 48501-2026, tel. (888) 679-MERS. (D) "Lender" is

COUNTRYWIDE HOME LOAMS, INC.

Lender is a CORPORATION

organized and existing under the laws of NEW YORK

4500 Park Granada MSN# SVB-314, Calabasas, CA 91302-1613

(E) "Note" means the promissory note signed by Borrower and dated MARCH 30, 2007 . The Note states that Borrower owes Lender

EIGHT HUNDRED SEVEN THOUSAND and 00/100

Dollars (U.S. \$ 807,000.00) plus interest. Borrower has promised to pay this debt in regular Periodic Payments and to pay the debt in full not later than APRIL 01, 2037 (F) "Property" means the property that is described below under the heading "Transfer of Rights in the

FLORIDA-Single Family-Fannie Mee/Freddie Mac UNIFORM INSTRUMENT WITH MERS

Property.

Page 1 of 11 -8A(FL) (0005) CHL (08/05)(d) VMP Mortgage Solutions, Inc. (800)521-7291

Form 3010 1/01

pay and

Book21639/Page1219

Page 1 of 18

Jed Margolin

Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 148 of 241

Serial Number: 11/736,356 Filed: 04/17/20 Examiner: Ronnie M. Mancho Art Unit: 3664

4			
	•		
O , .			
(G) "Loan" means the debt ev due under the Note, and all sums (H) "Riders" means all Riders	due under this Security Instrume	interest, any prepayment of strument, plus interest. In that are executed by B	
Riders are to be executed by Bor	rower [check box as applica	able!:	
Adjustable Rate Rider Balloon Rider VA Rider	Condominium Rider Planned Unit Developm Biweekly Payment Ride		Rider
&			
(I) "Applicable (aw" means ordinances and administrative r non-appealable judiciar opinions	ules and orders (that have	the effect of law) as wel	l as all applicable final,
(J) "Community Association of charges that are imposed on Bor or similar organization.			
(K) "Electronic Funds Transh draft, or similar paper instrutie computer, or magnetic tape so account. Such term includes, transactions, transfers initiated b	nt, which is initiated throu is to order, instruct, or au but is not limited to, p	ngh an electronic terminal thorize a financial institut oint-of-sale transfers, au	, telephonic instrument, ion to debit or credit an tomated teller machine
(L) "Escrow Items" means thes (M) "Miscellaneous Proceeds"	e items that are described it	n Section 3.	
any third party (other than insura to, or destruction of, the Proper conveyance in lieu of condem	nce proceeds paid under th ty; (ii) condemnation or of	e coverages described in S ther taking of all or any p	ection 5) for: (i) damage art of the Property; (iii)
condition of the Property.	· -		
(N) "Mortgage Insurance" me Loan.			
(O) "Periodic Payment" mean Note, plus (ii) any amounts unde	r Section 3 of this Security	Instrument.	
(P) "RESPA" means the Real implementing regulation, Regula any additional or successor leg Security Instrument, "RESPA" "federally related mortgage loan	tion X (24 C.F.R. Part 350 slation or regulation that refers to all requirements	as they might be amend governs the same subject and restrictions that are	ded from time to time, or matter. As used in this imposed in regard to a
under RESPA. (Q) "Successor in Interest of B that party has assumed Borrower	orrower" means any party	that has taken title to the	Property, whether or not
TRANSFER OF RIGHTS IN TH			
This Security Instrument secure modifications of the Note; and Security Instrument and the No MERS (solely as nominee for L of MERS, the following describe	 (ii) the performance of te. For this purpose, Born ender and Lender's success 	Borrower's covenants and ower does hereby mortga- tors and assigns) and to the	I agreements under this ge, grant and convey to e successors and assigns
COUNTY [Type of Recording Juri	Of adjection[PALM BEA	
SEE EXHIBIT "A" ATTACE			
-6A(FL) (0005) CHL (08/8	5) Page 2 of 1	1	Form 3010 1/01
-			
		V	MY UPS
		10	, G

Book21639/Page1220

Page 2 of 18

Filed: 04/17/2007

6-42-45-32-03-00-1170 DOC ID #: 00016597093403007 Parcel ID Number: which currently has the address of 8671 THORNBROOK TERRACE PT, BOYNTON BEACH Florida 33437-4882 ("Property Address"): [Zip Code]

TOCETHER WITH all the improvements now or hereafter erected on the property, and all easements, appurtenances, and fixtures now or hereafter a part of the property. All replacements and additions shall also be covered by this Security Instrument. All of the foregoing is referred to in this Security Instrument as the "Property." Borrower understands and agrees that MERS holds only legal title to the interests granted by Borrower in this Security Instrument, but, if necessary to comply with law or custom, MERS (as nominee for Lender and Lender's successors and assigns) has the right: to exercise any or all of those interests, including, but not limited to, the right to forcelose and sell the Property; and to take any action required of Lender including, but not limited to, releasing and canceling this Security Instrument.

BORROWER COVENANTS that Borrower is lawfully seised of the estate hereby conveyed and has the right to mortgage, grant and convey the Property and that the Property is unencumbered, except for encumbrances of record, Bogrower warrants and will defend generally the title to the Property against all claims and demands, subject to any encumbrances of record.

THIS SECURITY INSTRUMENT combines uniform covenants for national use and non-uniform covenants with limited variations by jurisdiction to constitute a uniform security instrument covering real

UNIFORM COVENANTS. Borrower and Lender covenant and agree as follows:

1. Payment of Principal, Interest, Escrow Items, Prepayment Charges, and Late Charges. Borrower shall pay when due the principal of, and indexest on, the debt evidenced by the Note and any prepayment charges and late charges due under the Note. Borrower shall also pay funds for Escrow Items pursuant to Section 3. Payments due under the Note and this Security Instrument shall be made in U.S. currency. However, if any check or other instrument received by Lender as payment under the Note or this Security Instrument is returned to Lender unpaid, Lender may require that any or all subsequent payments due under the Note and this Security Instrument be made in one or more of the following forms, as selected by Lender: (a) cash; (b) money order; (c) certified check, bank check, treasurer's check or cashier's check, provided any such check is drawn upon an institution whose deposits are insured by a federal agency, instrumentality, or entity; or (d) Electronic Funds Transfer.

Payments are deemed received by Lender when received at the location designated in the Note or at such other location as may be designated by Lender in accordance with the notice provisions in Section 15. Lender may return any payment or partial payment if the payment or partial payments are insufficient to bring the Loan current. Lender may accept any payment or partial payment insufficient to bring the Loan current, without waiver of any rights hereunder or prejudice to its rights to refuse such payment or partial payments in the future, but Lender is not obligated to apply such payments at the time such payments are accepted. If each Periodic Payment is applied as of its scheduled due date, then Lender need not pay interest on unapplied funds. Lender may hold such unapplied funds until Borrower makes payment to bring the Loan curront. If Borrower does not do so within a reasonable period of time, Lender shall either apply such funds or return them to Borrower. If not applied earlier, such funds will be applied to the outstanding principal balance under the Note immediately prior to foreclosure. No offset or claim which Borrower might have now or in the future against Lender shall relieve Borrower from making payments due under the Note and this Security Instrument or performing the covenants and agreements secured by this Security Instrument.

2. Application of Payments or Proceeds. Except as otherwise described in this Section 2, all payments accepted and applied by Lender shall be applied in the following order of priority: (a) interest due under the Note: (b) principal due under the Note: (c) amounts due under Section 3. Such payments shall be applied to each Periodic Payment in the order in which it became due. Any remaining amounts shall be applied first to late charges, second to any other amounts due under this Security Instrument, and then to reduce the principal balance of the Note.

If Lender receives a payment from Borrower for a delinquent Periodic Payment which includes a sufficient amount to pay any late charge due, the payment may be applied to the delimquent payment and the late charge. If more than one Periodic Payment is outstanding, Lender may apply any payment received from Borrower to the repayment of the Periodic Payments if, and to the extent that, each payment can be paid in full. To the extent that any excess exists after the payment is applied to the full payment of one or more Periodic Payments, such excess may be applied to any late charges due. Voluntary prepayments shall be applied first to any prepayment charges and then as described in the Note.

-6A(FL) (0005) Form 3010 1/01 Page 3 of 11 CHL (88/05)

Book21639/Page1221

Page 3 of 18

DOC ID #: 00016597093403007

Any application of payments, insurance proceeds, or Miscellaneous Proceeds to principal due under the Notestial not extend or postpone the due tiate, or change the amount, of the Periodic Payments.

§ Funds for Escrow Items. Borrower shall pay to Lender on the day Periodic Payments are due under the Note, until the Note is paid in full, a sum (the "Funds") to provide for payment of amounts due for. (a) taxes and assessments and other items which can attain priority over this Security Instrument as a lieu or encumbrance on the Property; (b) leasehold payments or ground rents on the Property, if any; (c) premiums for any and all insurance required by Lender under Section 5; and (d) Mortgage Insurance premiums, if any, or any sums payable by Borrower to Lender in lieu of the payment of Mortgage Insurance premiums in accordance with the provisions of Section 10. These items are called "Eserow Items." At origination or at any time during the term of the Loan, Lender may require that Community Association Dues, Fees, and Assessments, if any be escrowed by Borrower, and such dues, fees and assessments shall be an Escrow Item. Borrower shall promptly jurnish to Lender all notices of amounts to be paid under this Section. Borrower shall pay Lender the Funds for Escrow Items unless Lender waives Borrower's obligation to pay the Funds for any or all Escrow Items. Lender may waive Borrower's obligation to pay to Lender Funds for any or all Escrow Items at any time. Any such waiver may only be in writing. In the event of such waiver, Borrower shall pay directly, when and where payable, the amounts due for any Escrow Items for which payment of Funds has been valved by Lender and it Lender requires, shall furnish to Lender receipts evidencing such payment within such time period as Lender may require. Borrower's obligation to make such payments and to provide receipts shall for all purposes be deemed to be a covenant and agreement contained in this Security Instrument, as the phrase "covenant and agreement" is used in Section 9. If Borrower is obligated to pay Bscrow Items directly, pursuant to a/waiver, and Borrower fails to pay the amount due for an Escrow Item, Lender may exercise its rights under Section 9 and pay such amount and Borrower shall then be obligated under Section 9 to repay to Lender any such amount. Lender may revoke the waiver as to any or all Escrow Items at any time by a notice given in accordance with Section 15 and, upon such revocation, Borrower shall

pay to Lender all Funds, and in such amounts, that are then required under this Section 3. Lender may, at any time, collect and Hold Funds in an amount (a) sufficient to permit Lender to apply the Funds at the time specified under RESPA, and (b) not to exceed the maximum amount a lender can require under RESPA. Lender shall estimate the amount of Funds due on the basis of current data and reasonable estimates of expenditures of future Escrow Items or otherwise in accordance with Applicable Law.

The Funds shall be held in an institution whose deposits are insured by a federal agency, instrumentality, or entity (including Lender, if Lender is an institution whose deposits are so insured) or in any Federal Home Loan Bank. Lender shall apply the Funds to pay the Escrow Items no later than the time specified under RESPA. Lender shall not charge Borrower for holding and applying the Funds, annually analyzing the escrow account, or verifying the Escrow Items, unless Lender pays Borrower interest on the Funds and Applicable Law permits Lender to make such a charge. Unless an agreement is made in writing or Applicable Law requires interest to be paid on the Funds, Lender shall not be required to pay Borrower any interest or earnings on the Funds. Borrower and Lender can agree in writing, however, that interest shall be paid on the Funds. Lender shall give to Borrower, without charge, an annual accounting of the Funds as required by RESPA.

If there is a surplus of Funds held in escrow, as defined under RESPA, Lender shall account to Borrower for the excess funds in accordance with RESPA. If there is a shortage of Funds held in escrow, as defined under RESPA, Lender shall notify Borrower as required by RESPA, and Borrower shall pay to Lender the amount necessary to make up the shortage in accordance with RESPA, but in no more than 12 monthly payments. If there is a deficiency of Funds held in escrow, as defined under RESPA, Lender shall notify Borrower as required by RESPA, and Borrower shall pay to Lender the amount necessary to make up the deficiency in accordance with RESPA, but in no more than 12 monthly payments.

Upon payment in full of all sums secured by this Security Instrument, Lender shall promptly refund to Borrower any Funds field by Lender.

4. Charges; Liens. Borrower shall pay all taxes, assessments, charges, fines, and impositions attributable to the Property which can attain priority over this Security Instrument, leasehold payments or ground rents on the Property, if any, and Community Association Ducs, Fees, and Assessments, if any. To the extent that these items are Escrow Items, Borrower shall pay them in the manner provided in Section 3.

items are Escrow Items, Borrower shall pay them in the manner provided in Section 3.

Borrower shall promptly discharge any lien which has priority over this Security Instrument unless Borrower: (a) agrees in writing to the payment of the obligation secured by the lien in a manner acceptable to Lender, but only so long as Borrower is performing such agreement; (b) contests the lien in a moner acceptable to Lender, but only so long as Borrower is performing such agreement; (b) contests the lien in good faith by, or defends against enforcement of the lien in, legal proceedings which in Lender's opinion operate to prevent the enforcement of the lien while those proceedings are pending, but only until such proceedings are concluded; or (c) secures from the holder of the lien an agreement satisfactory to Lender subordinating the lien to this Security Instrument. If Lender determines that any part of the Property is subject to a lien which can attain priority over this Security Instrument, Lender may give Borrower a notice identifying the lien. Within 10 days of the date on which that notice is given, Borrower shall satisfy the lien or take one or more of the actions set forth above in this Section 4.

-GA(FL) (0005) CHL (08/05) Page 4 of 11 Form 3010 1/01


AND GRO

Book21639/Page1222

Page 4 of 18

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 151 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664



Lender may require Borrower to pay a one-time charge for a real estate tax verification and/or reporting service used by Lender in connection with this Loan.

Property Insurance. Borrower shall keep the improvements now existing or hereafter erected on the Property insured against loss by fire, hazards included within the term "extended coverage," and any other hazards including, but not limited to, earthquakes and floods, for which Lender requires insurance. This insurance shall be maintained in the amounts (including deductible levels) and for the periods that Lender requires. What Lender requires pursuant to the preceding sentences can change during the term of the Loan. The insurance carrier providing the insurance shall be chosen by Borrower subject to Lender's right to disapprove Borgover's choice, which right shall not be exercised unreasonably. Lender may require Borrower to pay, in connection with this Loan, either. (a) a one-time charge for flood zone determination, certification and tracking services or (b) a one-time charge for flood zone determination and certification services and subsequent charges cach, time remappings or similar changes occur which reasonably might affect such determination or certification. Borrower shall also be responsible for the payment of any fees imposed by the Federal Emergency Management Agency in connection with the review of any flood zone determination resulting from an objection by Borrower.

If Borrower fails to maintain any of the coverages described above, Lender may obtain insurance coverage, at Lender's option and Borrower's expense. Lender is under no obligation to purchase any particular type or amount of coverage. Therefore, such coverage shall cover Lender, but might por might not protect Borrower, Borrower's equity in the Property, or the contents of the Property, against any risk, hazard or liability and might provide greater or lesser coverage than was previously in effect. Borrower acknowledges that the cost of the insurance coverage so obtained might significantly exceed the cost of insurance that Borrower could have obtained. Any amounts obtained by Lender under this Section 5 shall become additional debt of Borrower secured by this Security instrument. These amounts shall bear interest at the Note rate from the date of disbursement and shall be payable, with such interest, upon notice from Lender to Borrower remeasing nawment.

All insurance policies required by Lender and renewals of such policies shall be subject to Lender's right to disapprove such policies, shall include a standard mortgage clause, and shall name Lender as mortgagee and/or as an additional loss payee. Lender shall have the right to hold the policies and renewal certificates. If Lender requires, Borrower shall promptly give to Lender all receipts of paid premiums and renewal notices. If Borrower obtains any form of insurance coverage, not otherwise required by Lender, for damage to, or destruction of, the Property, such policy shall include a standard mortgage clause and shall name Lender as mortgagee and/or as an additional loss payee.

In the event of loss, Borrower shall give prompt notice to the insurance carrier and Lender. Lender may make proof of loss if not made promptly by Borrower. Unless Lender and Borrower otherwise agree in writing, any insurance proceeds, whether or not the underlying insurance was required by Lender, shall be applied to restoration or repair of the Property, if the restoration or repair is economically feasible and Lender's security is not lessened. During such repair and restoration period, Lender shall have the right to hold such insurance proceeds until Lender has had an opportunity to inspect such Property to ensure the work has been completed to Lender's satisfaction, provided that such inspection shall be undertaken promptly. Lender may disburse proceeds for the repairs and restoration in a single payment or in a series of progress payments as the work is completed. Unless an agreement is made in writing or Applicable Law requires interest to be paid on such insurance proceeds, Lender shall not be required to pay Borrower any interest or earnings on such proceeds. Fees for public adjusters, or other third parties, retained by Borrower and Inot be paid out of the insurance proceeds and shall be the sole obligation of Borrower. If the restoration or repair is not economically feasible or Lender's security would be lessened, the insurance proceeds shall be applied to the sums secured by this Security Instrument, whether or not then due, with the excess, if any, paid to Borrower. Such insurance proceeds shall be applied in the order provided for in Section 2.

If Borrower abandons the Property, Lender may file, negotiate and settle any available insurance claim and related matters. If Borrower does not respond within 30 days to a notice from Lender that the insurance carrier has offered to settle a claim, then Lender may negotiate and settle the claim. The 30-day period will begin when the notice is given. In either event, or if Lender acquires the Property under Section 22 or otherwise, Borrower hereby assigns to Lender (a) Borrower's rights to any insurance proceeds in an amount not to exceed the amounts unpaid under the Note or this Security Instrument, and (b) any other of Borrower's rights (other than the right to any refund of unearned premiums paid by Borrower) under all insurance policies covering the Property, insofar as such rights are applicable to the coverage of the Property. Lender may use the insurance proceeds either to repair or restore the Property or to pay amounts unpaid under the Note or this Security Instrument, whether or not then due.

6A(FL) (0005) CHL (08/05) Page 5 of 11 Form 3010 1/01

AN CAS

Book21639/Page1223

Page 5 of 18

DOC ID #: 00016597093403007

6. Occupancy. Borrower shall occupy, establish, and use the Property as Borrower's principal residence within 60 days after the execution of this Security Instrument and shall continue to occupy the Property as Borrower's principal residence for at least one year after the date of occupancy, unless Lender otherwise agrees in writing, which consent shall not be unreasonably withheld, or unless extenuating circumstances exist which are beyond Borrower's control.

7. Preservation, Maintenance and Protection of the Property; Inspections. Borrower shall not destroy, damage or impair the Property, allow the Property to deteriorate or commit waste on the Property. Whicher or not Borrower is residing in the Property. Borrower shall maintain the Property in order to prevent the Property from deteriorating or decreasing in value due to its condition. Unless it is determined pursuant to Section 5 that repair or restoration is not economically feasible, Borrower shall promptly repair the Property if damaged to avoid further deterioration or damage. If insurance or condemnation proceeds are paid in connection with damage, to, or the taking of, the Property, Borrower shall be responsible for repairing or restoring the Property only if Lender has released proceeds for such purposes. Lender may disburse proceeds for the repairs and restoration in a single payment or in a series of progress payments as the work is completed. If the insurance or condemnation proceeds are not sufficient to repair or restore the Property, Borrower's not relieved of Borrower's obligation for the completion of such repair or restoration.

Lender or its agent may make reasonable entries upon and inspections of the Property. If it has reasonable cause, Lender may inspect the interior of the improvements on the Property. Lender shall give Borrower notice at the time of or prior to such an interior inspection specifying such reasonable cause.

- 3. Borrower's Loan Application, Borrower shall be in default if, during the Loan application process, Borrower or any persons or entities acting at the direction of Borrower or with Borrower's knowledge or consent gave materially false, misleading or inaccurate information or statements to Lender (or failed to provide Lender with material information) in connection with the Loan. Material representations include, but are not limited to, representations concerning Borrower's occupancy of the Property as Borrower's principal residence.
- 9. Protection of Lender's Interest in the Property and Rights Under this Security Instrument. If (a) Borrower fails to perform the covenants and agreements contained in this Security Instrument, (b) there is a legal proceeding that might significantly affect Lender's interest in the Property and/or rights under this Security Instrument (Such as a proceeding in bankruptcy, probate, for condemnation or forfeiture, for enforcement of a lien which may attain priority over this Security Instrument or to enforce laws or regulations), or (c) Borrower has abandoned the Property, then Lender may do and pay for whatever is reasonable or appropriate to protect Lender's interest in the Property and rights under this Security Instrument, including protecting and/or assessing the value of the Property, and securing and/or repairing the Property. Lender's actions can include, but are not limited to: (a) paying any sums secured by a lien which has priority over this Security Instrument; (b) appearing in court; and (c) paying reasonable attorneys' fees to protect its interest in the Property and/or rights under this Security Instrument, including its secured position in a bankruptcy proceeding. Securing the Property includes, but is not limited to, entering the Property to make repairs, change locks, replace or board up doors and windows, drain water from pipes, climinate building or other code violations or dangerous conditions, and have utilities turned on or off. Although Lender may take action under this Section 9, Lender does not have to do so and is not under any duty or obligation to do so. It is accord that Instrument in the property in Section 9.

is agreed that Lender incurs no liability for not taking any or all actions authorized under this Section 9.

Any amounts disbursed by Lender under this Section 9 shall become additional debt of Borrower secured by this Security Instrument. These amounts shall bear interest at the Note rate from the date of disbursement and shall be payable, with such interest, upon notice from Lender to Borrower requesting payment.

If this Security Instrument is on a leasehold, Borrower shall comply with all the provisions of the lease.

If this Security Instrument is on a leasehold, Borrower shall comply with all the provisions of the lease. If Borrower acquires fee title to the Property, the leasehold and the fee title shall not merge unless Lender agrees to the merger in writing.

10. Mortgage Insurance. If Lender required Mortgage Insurance as a condition of making the Loan, Borrower shall pay the premiums required to maintain the Mortgage Insurance in effect. If, for any reason, the Mortgage Insurance coverage required by Lender ceases to be available from the mortgage insurer that previously provided such insurance and Borrower was required to make separately designated payments toward the premiums for Mortgage Insurance, Borrower shall pay the premiums required to obtain coverage substantially equivalent to the Mortgage Insurance previously in effect, at a cost substantially equivalent to the cost to Borrower of the Mortgage Insurance previously in effect, from an alternate mortgage insurer selected by Lender. If substantially equivalent Mortgage Insurance coverage is not available, Borrower shall continue to pay to Lender the amount of the separately designated payments that were due when the insurance coverage ceased to be in effect. Lender will accept, use and retain these payments as a non-refundable loss reserve ceased to Mortgage Insurance. Such loss reserve shall be non-refundable, notwithstanding the fact that the Loan is ultimately paid in full, and Lender shall not be required to pay Borrower any interest or earnings on such loss reserve. Lender can no longer require loss reserve payments if Mortgage Insurance coverage (in the

MA GAS

Book21639/Page1224

Page 6 of 18



amount and for the period that Lender requires) provided by an insurer selected by Lender again becomes available, is obtained, and Lender requires separately designated payments toward the premiums for Mortgage Insurance. If Lender required Mortgage Insurance as a condition of making the Loan and Borrower was required to make separately designated payments toward the premiums for Mortgage Insurance, Borrower shall pay the premiums required to maintain Mortgage Insurance in effect, or to provide a non-refundable loss reserve, until Lender's requirement for Mortgage Insurance ends in accordance with any written agreement between Borrower and Lender providing for such termination or until termination is required by Applicable Law. Nothing in this Section 10 affects Borrower's obligation to pay interest at the rate provided in the Note.

Mongage (narrance reimburses Lender (or any entity that purchases the Note) for certain losses it may incur if Borrower does not repay the Loan as agreed. Borrower is not a party to the Mongage Insurance.

Mortgage insurers evaluate their total risk on all such insurance in force from time to time, and may enter into agreements with other parties that share or modify their risk, or reduce losses. These agreements are on terms and conditions that are satisfactory to the mortgage insurer and the other party (or parties) to these agreements. These agreements may require the mortgage insurer to make payments using any source of funds that the mortgage insurer may have available (which may include funds obtained from Mortgage Insurance premiums).

As a result of these agreements, Lender, any purchaser of the Note, another insurer, any reinsurer, any other entity, or any affiliate of any of the foregoing, may receive (directly or indirectly) amounts that derive from (or might be characterized as a portion of Borrower's payments for Mortgage Insurance, in exchange for sharing or modifying the mortgage insurer's risk, or reducing losses. If such agreement provides that an affiliate of Lender takes a share of the insurer's risk in exchange for a share of the premiums paid to the insurer, the arrangement is often termed "captive reinsurance." Further:

(a) Any such agreements will not affect the amounts that Borrower has agreed to pay for Mortgage Insurance, or any other terms of the Joan, Such agreements will not increase the amount Borrower will owe for Mortgage Insurance, and they will not entitle Borrower to any refund.

(b) Any such agreements will not affect the rights Borrower has - if any - with respect to the

(b) Any such agreements will not affect the rights Borrower has - if any - with respect to the Mortgage Insurance under the Homeowners Protection Act of 1998 or any other law. These rights may include the right to receive certain disclosures, to request and obtain cancellation of the Mortgage Insurance, to have the Mortgage Insurance terminated automatically, and/or to receive a refund of any Mortgage Insurance premiums that were unearned at the time of such cancellation or termination.

 Assignment of Miscellaneous Proceeds; Forfeiture. All Miscellaneous Proceeds are hereby assigned to and shall be paid to Lender.

If the Property is damaged, such Miscellaneous Proceeds shall be applied to restoration or repair of the Property, if the restoration or repair is economically feasible and Lender's security is not lessened. During such repair and restoration period, Lender shall have the right to hold such Miscellaneous Proceeds until Lender has had an upportunity to inspect such Property to ensure the work has been completed to Lender's satisfaction, provided that such inspection shall be undertaken promptly. Lender may pay for the repairs and restoration in a single disbursement or in a series of progress payments as the work is completed. Unless an agreement is made in writing or Applicable Law requires interest to be paid on such Miscellaneous Proceeds, Lender shall not be required to pay Borrower any interest or earnings on such Miscellaneous Proceeds. If the restoration or repair is not economically feasible or Lender's security would be lessened, the Miscellaneous Proceeds shall be applied to the sums secured by this Security Instrument, whether or not then due, with the excess, if any, paid to Borrower. Such Miscellaneous Proceeds shall be applied to the order provided for in Section 2.

In the event of a total taking, destruction, or loss in value of the Property, the Miscellaneous Proceeds shall be applied to the sums secured by this Security Instrument, whether or not then due, with the excess, if any, paid to Borrower.

any, paid to Borrower.

In the event of a partial taking, destruction, or loss in value of the Property in which the fair market value of the Property immediately before the partial taking, destruction, or loss in value is equal to or greater than the amount of the sums secured by this Security Instrument immediately before the partial taking, destruction, or loss in value, unless Borrower and Lender otherwise agree in writing, the sums secured by this Security Instrument shall be reduced by the amount of the Miscellancous Proceeds multiplied by the following fraction:

(a) the total amount of the sums secured immediately before the partial taking, destruction, or loss in value divided by (b) the fair market value of the Property immediately before the partial taking, destruction, or loss in value. Any balance shall be paid to Borrower.

In the event of a partial taking, destruction, or loss in value of the Property in which the fair market value of the Property immediately before the partial taking, destruction, or loss in value is less than the amount of the sums secured immediately before the partial taking, destruction, or loss in value, unless Borrower and Lender otherwise agree in writing, the Miscellaneous Proceeds shall be applied to the sums secured by this Security Instrument whether or not the sums are then due.

-6A(FL) (0005) CHL (08/05) Page 7 of 11 Form 3010 1/01

yes and

Book21639/Page1225

Page 7 of 18

DOC ID #: 00016597093403007

If the Property is abandoned by Borrower, or if, after notice by Lender to Borrower that the Opposing Party fag defined in the next sentence) offers to make an award to settle a claim for damages, Borrower fails to respond to Lender within 30 days after the date the notice is given, Lender is authorized to collect and apply the Miscellaneous Proceeds either to restoration or repair of the Property or to the sums secured by this Security Instrument, whether or not then due. "Opposing Party" means the third party that owes Borrower Miscellaneous Proceeds or the party against whom Borrower has a right of action in regard to Miscellaneous Proceeds.

Borrower shall be in default if any action or proceeding, whether civil or criminal, is begun that, in Lender's judgment, could result in forfeiture of the Property or other material impairment of Lender's interest in the Property or rights under this Security Instrument. Borrower can cure such a default and, if acceleration in the Property or ingins that a mis security institution, borrower can core such a detail that, it has occurred, reinstate as provided in Section 19, by causing the action or proceeding to be dismissed with a ruling that, in Lender's judgment, precludes forfeiture of the Property or other material impairment of Lender's interest in the Property or rights under this Security Instrument. The proceeds of any award or claim for damages that are attributable to the impairment of Lender's interest in the Property are hereby assigned and shall be paid to Lender.

All Miscellaneous Proceeds that are not applied to restoration or repair of the Property shall be applied in the order provided for in Section 2.

12. Borrower Not Released: Forbearance By Lender Not a Waiver, Extension of the time for

payment or modification of anontization of the sums secured by this Security Instrument granted by Lender to Borrower or any Successor in Interest of Borrower shall not operate to release the liability of Borrower or any Successors in Interest of Borrower. Lender shall not be required to commence proceedings against any Successor in Interest of Borrower or to seruse to extend time for payment or otherwise modify amortization of the sums secured by this Security Instrument by reason of any demand made by the original Borrower or any Successors in Interest of Borrower. Any Jorbearance by Lender in exercising any right or remedy including, without limitation, Lender's acceptance of payments from third persons, entities or Successors in Interest of Borrower or in amounts less than the amount then due, shall not be a waiver of or preclude the exercise of any

13. Joint and Several Liability; Co-signers; Successors and Assigns Bound. Borrower covenants and agrees that Borrower's obligations and liability shall be joint and several. However, any Borrower who agrees that Borrower's obligations and mannly shall be joint and several. However, any Bourtows who co-signs this Security Instrument but does not execute the Note (a "co-signest"): (a) is co-signing this Security Instrument, (b) is not personally obligated to pay the sums secured by this Security Instrument; (c) agrees that Lender and any other Borrower can agree to extend, modify, forbear or make any accommodations with regard to the terms of this Security Instrument or the Note without the co-signer's

Subject to the provisions of Section 18, any Successor in Interest of Borrower who assumes Borrower's obligations under this Security Instrument in writing, and is approved by Lender, shall obtain all of Borrower's rights and benefits under this Security Instrument. Borrower shall not be released from Borrower's obligations and liability under this Security Instrument unless Lender agrees to such release in writing. The covenants and agreements of this Security Instrument shall bind (except as provided in Section 20) and benefit the successors and assigns of Lender.

14. Loan Charges. Lender may charge Borrower fees for services performed in connection with Borrower's default, for the purpose of protecting Lender's interest in the Property and rights under this Security Instrument, including, but not limited to, attorneys' fees, property inspection and valuation fees. In regard to any other fees, the absence of express authority in this Security Instrument to charge a specific fee to

Borrower shall not be construed as a prohibition on the charging of such fee. Lender may not charge fees that are expressly prohibited by this Security Instrument or by Applicable Law.

If the Loan is subject to a law which sets maximum loan charges, and that law is finally interpreted so that the interest or other loan charges collected or to be collected in connection with the Loan exceed the permitted limits, then: (a) any such loan charges shall be reduced by the amount necessary to reduce the charge to the permitted limit; and (b) any sums already collected from Borrower which exceeded permitted limit will be refunded to Borrower. Lender may choose to make this refund by reducing the principal owed under the Note or by making a direct payment to Borrower. If a refund reduces principal, the reduction will be treated as

Note or by making a direct payment to Borrower. If a retund reduces principal, the reduction will be a partial prepayment without any prepayment charge (whether or not a prepayment charge is provided for under the Note). Borrower's acceptance of any such refund made by direct payment to Borrower will constitute a waiver of any right of action Borrower might have arising out of such overcharge.

15. Notices. All notices given by Borrower or Lender in connection with this Security Instrument must be in writing. Any notice to Borrower in connection with this Security Instrument shall be deemed to have been given to Borrower when mailed by first class mail or when actually delivered to Borrower's notice address if sent by other means. Notice to any one Borrower shall constitute notice to all Borrowers unless Applicable Law expressly requires otherwise. The notice address shall be the Property Address unless

Page 8 of 11 Form 3010 1/01 -6A(FL) (0005) CHL (08/05)

Book21639/Page1226

Page 8 of 18

DOC ID #: 00016597093403007

Borrower has designated a substitute notice address by notice to Lender. Borrower shall promptly notify Leader of Borrower's change of address. If Lender specifies a procedure for reporting Borrower's change of address, then Borrower shall only report a change of address through that specified procedure. There may be only one designated notice address under this Security Instrument at any one time. Any notice to Lender shall be given by delivering it or by mailing it by first class mail to Lender's address stated herein unless Lender has designated another address by notice to Borrower. Any notice in connection with this Security Instrument shall not be designed to have been given to Lender until actually received by Lender. If any notice required by this Security Instrument is also required under Applicable Law, the Applicable Law requirement will satisfy the corresponding equirement under this Security Instrument.

16. Governing Law; Severability; Rules of Construction. This Security Instrument shall be governed by federal law and (fig law of the jurisdiction in which the Property is located. All rights and obligations contained in this Security Instrument are subject to any requirements and limitations of Applicable Law. Applicable Law might-explicitly or implicitly allow the parties to agree by contract or it might be sitent, but such silence shall not be construed as a prohibition against agreement by contract. In the event that any provision or clause of this Security Instrument or the Note conflicts with Applicable Law, such conflict shall not affect other provisions of this Security Instrument or the Note which can be given effect without the conflicting provision.

conflicting provision.

As used in this Security Instrument: (a) words of the masculine gender shall mean and include corresponding neuter words or words of the ferminine gender; (b) words in the singular shall mean and include the plural and vice versa; and (c) the word "may" gives sole discretion without any obligation to take any action.

17. Borrower's Copy. Borrower shall be given one copy of the Note and of this Security Instrument.

18. Transfer of the Property of Beneficial Interest in Borrower. As used in this Section 18, Interest in the Property' means any legal of beneficial interest in the Property, including, but not limited to, those beneficial interests transferred in a bond for deed, contract for deed, installment sales contract or escrow agreement, the intent of which is the transfer of the by Borrower at a future date to a purchaser.

If all or any part of the Property or any Interest in the Property is sold or transferred (or if Borrower is not a natural person and a beneficial interest in Borrower is sold or transferred) without Lender's prior written consent, Lender may require immediate payment in full of all sums secured by this Security Instrument. However, this option shall not be exercised by Lender if such exercise is prohibited by Applicable Law.

If Lender exercises this option, Lender shall give Borrower notice of acceleration. The notice shall

If Lender exercises this option, Lender shall give Borrower notice of acceleration. The notice shall provide a period of not less than 30 days from the date the notice is given in accordance with Section 15 within which Borrower must pay all sums secured by this Security Instrument. If Borrower fails to pay these sums prior to the expiration of this period, Lender may invoke any remedies permitted by this Security Instrument without further notice or demand on Borrower.

19. Borrower's Right to Reinstate After Acceleration. If Borrower meets certain conditions, Borrower shall have the right to have enforcement of this Security Instrument discontinued at any time prior to the earliest of: (a) five days before sale of the Property pursuant to any power of sale contained in this Security Instrument; (b) such other period as Applicable Law might specify for the termination of Borrower's right to reinstate; or (c) entry of a judgment enforcing this Security Instrument. Those conditions are that Borrower; (a) pays Lender all sums which then would be due under this Security Instrument and the Note as if no acceleration had occurred; (b) cures any default of any other covenants or agreements; (c) pays all expenses incurred in enforcing this Security Instrument, including, but not limited to, reasonable attorneys' fees, property inspection and valuation fees, and other fees incurred for the purpose of protecting Lender's interest in the Property and rights under this Security Instrument; and (d) takes such action as Lender may reasonably require to assure that Lender's interest in the Property and rights under this Security Instrument, and Borrower's obligation to pay the sums secured by this Security Instrument, shall continue unchanged. Lender may require that Borrower pay such reinstatement sums and expenses in one or more of the following forms, as selected by Lender; (a) cash; (b) money order; (c) certified check, bank check, treasurer's check or cashier's check, provided any such check is drawn upon an institution whose deposits are insured by a federal agency, instrumentality or entity; or (d) Electronic Funds Transfer. Upon reinstatement by Borrower, this Security Instrument and obligations secured hereby shall remain fully effective as if no acceleration had occurred.

However, this right to reinstate shall not apply in the case of acceleration under Section 18.

20. Sale of Note; Change of Loan Servicer; Notice of Grievance. The Note or a partial interest in the Note (together with this Security Instrument) can be sold one or more times without prior notice to Borrower. A sale might result in a change in the entity (known as the "Loan Servicer") that collects Periodic Payments due under the Note and this Security Instrument and performs other mongage loan servicing obligations under the Note, this Security Instrument, and Applicable Law. There also might be one or more changes of the Loan Servicer unrelated to a sale of the Note. If there is a change of the Loan Servicer, Borrower will be given written notice of the change which will state the name and address of the new Loan Servicer, the address to

-6A(FL) (0005)

CHL (08/05)

Page 9 of 11

Form 3010 1/01

fus con

Book21639/Page1227

Page 9 of 18

DOC ID #: 00016597093403007

which payments should be made and any other information RESPA requires in connection with a notice of transfer of servicing. If the Note is sold and thereafter the Loan is serviced by a Loan Servicer other than the purchaser of the Note, the mortgage Ioan servicing obligations to Borrower will remain with the Loan Servicer or be transferred to a successor Loan Servicer and are not assumed by the Note purchaser unless otherwise provided by the Note purchaser.

Neither Borrower nor Lender may commence, join, or be joined to any judicial action (as either an individual litigation the member of a class) that arises from the other party's actions pursuant to this Security Instrument of that alleges that the other party has breached any provision of, or any duty owed by reason of, this Security Instrument, until such Borrower or Lender has notified the other party (with such notice given in compliance with the requirements of Section 15) of such alleged breach and afforded the other party hereto a reasonable period after the giving of such notice to take corrective action. If Applicable Law provides a time period which must elassic before certain action can be taken, that time period will be deemed to be reasonable for purposes of this paragraph. The notice of acceleration and opportunity to cure given to Borrower pursuant to Section 22 and the hotice of acceleration given to Borrower pursuant to Section 18 shall be deemed to satisfy the notice and opportunity to take corrective action provisions of this Section 20.

21. Hazardous Substances. As used in this Section 21: (a) "Hazardous Substances" are those substances defined as toxic or hazardous substances, pollutants, or wastes by Environmental Law and the following substances: gasoline, kerosene only flammable or toxic petroleum products, toxic pesticides and herbicides, volatile solvents, materials containing asbestos or formaldehyde, and radioactive materials; (b) "Environmental Law" means federal laws and laws of the jurisdiction where the Property is located that relate to health, safety or environmental projection; (c) "Environmental Cleanup" includes any response action, remedial action, or removal action, as defined in Environmental Law; and (d) an "Environmental Condition" means a condition that can cause, contribute to, or otherwise trigger an Environmental Cleanup.

Borrower shall not cause or permit the presence, use, disposal, storage, or release of any Hazardous Substances, or threaten to release any Hazardous Substances, on or in the Property. Borrower shall not do, nor allow anyone else to do, anything affecting the Property (a) that is in violation of any Environmental Law, (b) which creates an Environmental Condition, or (c) which, due to the presence, use, or release of a Hazardous Substance, creates a condition that adversely affects the value of the Property. The preceding two sentences shall not apply to the presence, use, or storage on the Property of small quantities of Hazardous Substances that are generally recognized to be appropriate to normal residential uses and to maintenance of the Property (including, but not limited to, hazardous substances in consumer products).

Borrower shall promptly give Lender written notice of (a) any investigation, claim, demand, lawsuit or other action by any governmental or regulatory agency or private party involving the Property and any Hazardous Substance or Environmental Law of which Borrower has actual knowledge, (b) any Environmental Condition, including but not limited to, any spilling, leaking, discharge, release or threat of release of any Hazardous Substance, and (c) any condition caused by the presence, use or release of a Hazardous Substance which adversely affects the value of the Property. If Borrower learns, or is notified by any governmental or regulatory authority, or any private party, that any removal or other remediation of any Hazardous Substance affecting the Property is necessary, Borrower shall promptly take all necessary remedial actions in accordance with Environmental Law. Nothing heroin shall create any obligation on Lender for an Environmental Cleanup.

NON-UNIFORM COVENANTS. Borrower and Lender further covenant and agree as follows:

22. Acceleration; Remedies. Lender shall give notice to Borrower prior to acceleration following Borrower's breach of any covenant or agreement in this Security Instrument (but not prior to acceleration under Section 18 unless Applicable Law provides otherwise). The notice shall specify: (a) the default; (b) the action required to cure the default; (c) a date, not less than 30 days from the date the notice is given to Borrower, by which the default must be cured; and (d) that failure to cure the default on or before the date specified in the notice may result in acceleration of the sums secured by this Security Instrument, foreclosure by judicial proceeding and sale of the Property. The notice shall further inform Borrower of the right to reinstate after acceleration and the right to assert in the foreclosure proceeding the non-existence of a default or any other defense of Borrower to acceleration and foreclosure. If the default is not cured on or before the date specified in the notice, Lender at its option may require immediate payment in full of all sums secured by this Security Instrument without further demand and may foreclose this Security Instrument by judicial proceeding. Lender shall be entitled to collect all expenses incurred in pursuing the remedies provided in this Section 22, including, but not limited to, reasonable attorneys' fees and costs of title evidence.

23. Release. Upon payment of all sums secured by this Security Instrument, Lender shall release this Security Instrument. Borrower shall pay any recordation costs. Lender may charge Borrower a fee for releasing this Security Instrument, but only if the fee is paid to a third party for services rendered and the charging of the fee is permitted under Applicable Law.

-5A(FL) (0005) CHL (88/05) Page 10 of 11 Form 3010 1/01

My OD

Book21639/Page1228

Page 10 of 18

Serial Number: 11/736,356

DOC ID #: 00016597093403007 24. Attorneys' Fees. As used in this Security Instrument and the Note, attorneys' fees shall include those awardedby an appellate court and any attorneys fees incurred in a bankruptcy proceeding.

Trial Waiver. The Borrower hereby waives any right to a trial by jury in any action, proceeding, claim, or counterclaim, whether in contract or tort, at law or in equity, arising out of or in any way related to this Security Instrument or the Note. BY SIGNING BELOW, Borrower accepts and agrees to the terms and covenants contained in this Security Instrument and in any Rider executed by Borrower and recorded with it. Signed, sealed and delivered in the presence of: (Seal) (Address) (Seal) / 11 HEMMING DR STAFFORD, VA 22554 (Seal) -Berrower (Address) (Seal) (Address) STATE OF FLORIDA, The foregoing instrument was acknowledged before me this MANCh CAN B. JEANGLANCE & GERTRUGE A.S. who is personally known to me or who has produced Driver's Liceus? as identification. Emmanuel C. Booth

Page 11 of 11

Book21639/Page1229

SA(FL) (0005)

CHL (08/05)

Page 11 of 18

Form 3010 1/01



PLANNED UNIT DEVELOPMENT RIDER

After Recording Return To:
COUNTRY WIDE-HOME LOANS, INC.
MS SV-7 DOCUMENT PROCESSING
P.O.BOX 10183

Serial Number: 11/736,356

Van Nuys, CA 01410-0423

Prepared By:
HEATHER MCLAUGHLIN
COUNTRYWIDE HOME LOANS, INC.

2380 PERFORMANCE DR MSRGV C931

RICHARDSON TX 75082

> 165970934 [Escrow/Closing #]

00016597093403007 [Doc ID #]

THIS PLANNED UNIT DEVELOPMENT RIDER is made this THIRTIETH day of MARCH, 2007 , and is incorporated into and shall be deemed to amend and supplement the, Mortgage, Deed of Trust, or Security Deed (the "Security Instrument") of the same date, given by the undersigned (the "Borrower") to secure Borrower's Note to COUNTRYWIDE HOME LOANS, INC.

(the "Lender") of the same date and covering the Property described in the Security Instrument and located at:

8671 THORNBROOK TERRACE PT BOYNTON BEACH, FL 33437-4882 [Property Address]

The Property includes, but is not limited to, a parcel of land improved with a dwelling, together with

-7R (0405) CHL (06/04)(d)

MULTISTATE PUD RIDER - Single Family - Fannie Mae/Freddie Mac UNIFORM INSTRUMENT

TO -7R (0405) CHL (06/04)(d) Page 1 of 3 Initials (1477) Page 1 of 3 VMP Mortgage Solutions, Inc. (800)521-7291

Form 3150 1/01





Book21639/Page1230

Page 12 of 18

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 159 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

DOC ID #: 00016597093403007

other such parcels and certain common areas and facilities, as described in THE COVENANTS, CONDITIONS, AND RESTRICTIONS FILED OF RECORD THAT AFFECT THE PROPERTY



(the "Declaration"). The Property is a part of a planned unit development known as CANYON ISLES

[Name of Planned Unit Development]

(the "PUD"). The Property also includes Borrower's interest in the homeowners association or equivalent entity owning or managing the common areas and facilities of the PUD (the "Owners

Association") and the uses, benefits and proceeds of Borrower's Interest.

PUD COVENANTS. In addition to the covenants and agreements made in the Security Instrument, Borrower and Lenger further covenant and agree as follows:

A. PUD Obligations. Borrower shall perform all of Borrower's obligations under the PUD's Constituent Documents. The "Constituent Documents" are the (i) Declaration; (ii) articles of incorporation, trust instrument or any equivalent document which creates the Owners Association; and (iii) any by laws or other rules or regulations of the Owners Association. Borrower shall promptly pay, when due, all dues and assessments imposed pursuant to the Constituent Documents.

B. Property Insurance. So long as the Owners Association maintains, with a generally accepted insurance carrier, a "master" or "blanket" policy insuring the Property which is satisfactory to Lender and which provides insurance coverage in the amounts (including deductible levels), for the periods, and against loss by fire, hazards included within the term "extended coverage," and any other hazards, including, but not limited to, earthquakes and floods, for which Lender requires insurance, then: (i) Lender waives the provision in Section 3 for the Periodic Payment to Lender of the yearly premium installments for property insurance on the Property; and (ii) Borrower's obligation under Section 5 to maintain property insurance coverage on the Property is deemed satisfied to the extent that the required coverage is provided by the Owners Association policy.

What Lender requires as a condition of this waiver can change during the term of the loan. Borrower shall give Lender prompt notice of any lapse in required property insurance coverage

provided by the master or blanket policy.

In the event of a distribution of property insurance proceeds in lieu of restoration or repair following a loss to the Property, or to common areas and facilities of the PUD, any proceeds payable to Borrower are hereby assigned and shall be paid to Lender. Lender shall apply the proceeds to the sums secured by the Security Instrument, whether or not then due, with the excess, if any, paid to

- C. Public Liability Insurance. Borrower shall take such actions as may be reasonable to insure that the Owners Association maintains a public liability insurance policy acceptable in form, amount, and extent of coverage to Lender.
- D. Condemnation. The proceeds of any award or claim for damages, direct or consequential, payable to Borrower in connection with any condemnation or other taking of all or any part of the Property or the common areas and facilities of the PUD, or for any conveyance in lieu of condemnation, are hereby assigned and shall be paid to Lender. Such proceeds shall be applied by Lender to the sums secured by the Security Instrument as provided in Section 11.
- E. Lender's Prior Consent. Borrower shalf not, except after notice to Lender and with Lender's prior written consent, either partition or subdivide the Property or consent to: (i) the abandonment or termination of the PUD, except for abandonment or termination required by law in the case of substantial destruction by fire or other casualty or in the case of a taking by condemnation or eminent domain; (ii) any amendment to any provision of the "Constituent Documents" if the provision is for the

-7R (0405)

CHL (06/04)

Page 2 of 3

Book21639/Page1231

Page 13 of 18

Serial Number: 11/736,356

Filed: 04/17/2007

Sheet 160 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

DOC ID #: 00016597093403007

express, benefit of Lender; (iii) termination of professional management and assumption of self-management of the Owners Association; or (iv) any action which would have the effect of rendering the public liability insurance coverage maintained by the Owners Association unacceptable

F. Remedies. If Borrower does not pay PUD dues and assessments when due, then Lender may pay them. Any amounts disbursed by Lender under this paragraph F shall become additional debt of Borrower secured by the Security Instrument. Unless Borrower and Lender agree to other terms of payment, these amounts shall bear interest from the date of disbursement at the Note rate and shall be payable, with interest, upon notice from Lender to Borrower requesting payment.

BY SIGNING BELOW, Borrower accepts and agrees to the terms and provisions contained in this PUD Rider.

(Sea	gan founer grandlande
- Borrowe	JEAN BRUNER JEANGLAUDE
	11 HEMMING DR
	STAFFORD, VA 22554
(Sea	Gertrude Arthur-Jeanglande
- Borrowe	GERTRUDE ARTHUR-JEANGLAUDE
	11 HEMMING DR
	STAFFORD, VA 22554
(Sea	
- Borrowe	
(Seal	
- Borrowe	

-7R (0405)

CHL (06/04)

Page 3 of 3

Form 3150 1/01

Serial Number: 11/736,356 Filed: 04/17/2007

Examiner: Ronnie M. Mancho Art Unit: 3664

1-4 FAMILY RIDER (Assignment of Rents)

After Recording Return to: COUNTRY OF HOME LOAMS, INC. MS SV 9 DOCUMENT PROCESSING P.0 Box 10423 Van Nuys, CA 91410-0423

Prepared By: HEATHER MCLAUGHLIN COUNTRYWIDE HOME LOANS, INC.

2380 PERFORMANCE DR MSRGV C931 RICHARDSON

> 165970934 [Escrow/Closing #]

00016597093403007 [Doc ID #]

Sheet 161 of 241

THIS 1-4 FAMILY RIDER is made this THIRTIETH day of MARCH, 2007 and is incorporated into and shall be deemed to amend and supplement the Mortgage, Deed of Trust, or Security Deed (the "Security Instrument") of the same date given by the undersigned (the "Borrower") to secure Borrower's Note to COUNTRYWIDE HOME LOANS, INC.

(the "Lender") of the same date and covering the Property described in the Security Instrument and located at: 8671 THORNBROOK TERRACE PT BOYNTON BEACH, FL 33437-4882 [Property Address]

1-4 FAMILY COVENANTS. In addition to the covenants and agreements made in the Security Instrument, Borrower and Lender further covenant and agree as follows:

MULTISTATE 1-4 FAMILY RIDER - Fannie Mae/Freddie Mac UNIFORM INSTRUMENT -57R (0401).01 CHL (06/04)(d) Page 1 of 3 VMP Mortgage Solutions, Inc. (800)521-7291

Form 3170 1/01





Book21639/Page1233

Page 15 of 18

DOC ID #: 00016597093403007

A. ADDITIONAL PROPERTY SUBJECT TO THE SECURITY INSTRUMENT. In addition to the Property described in the Security Instrument, the following items now or hereafter attached to the Property to the extent they are fixtures are added to the Property description, and shall also constitute the Property covered by the Security Instrument: building materials, appliances and goods of every nature whatsoever now or hereafter to aled in, on, or used, or intended to be used in connection with the Property, including, but not limited to those for the purposes of supplying or distributing heating, cooling, electricity, gas, water, air and light, fire prevention and extinguishing apparatus, security and access control apparatus, plumbing, bath tubs, water heaters, water closets, sinks, ranges, stoves, refrigerators, dishwashers, disposals, washers, dryers, awnings, storm and doors, screens, blinds, shades, curtains and curtain rods, attached mirrors. cabinets, paneling and attached floor coverings, all of which, including replacements and additions thereto, shall be deemed to be and remain a part of the Property covered by the Security Instrument. All of the foregoing together with the Property described in the Security Instrument (or the leasehold estate if the Security Instrument is on a leasohold) are referred to in this 1-4 Family Rider and the Security Instrument as the "Property."

- B. USE OF PROPERTY; COMPLIANCE WITH LAW. Borrower shall not seek, agree to or make a change in the use of the Property or its zoning classification, unless Lender has agreed in writing to the change. Borrower shall comply with all laws, ordinances, regulations and requirements of any governmental body applicable to the Property.
- C. SUBORDINATE LIENS. Except as permitted by federal law, Borrower shall not allow any lien inferior to the Security Instrument to be perfected against the Property without Lender's prior written permission.
- D. RENT LOSS INSURANCE, Borrower shall maintain insurance against rent loss in addition to the other hazards for which insurance is required by Section 5
 - E. "BORROWER'S RIGHT TO REINSTATE" DELETED. Section 19 is deleted.
- F. BORROWER'S OCCUPANCY. Unless Lender and Borrower otherwise agree in writing, Section 6 concerning Borrower's occupancy of the Property is deleted.
- G. ASSIGNMENT OF LEASES. Upon Lender's request after default, Borrower shall assign to Lender all leases of the Property and all security deposits made in connection with leases of the Property. Upon the assignment, Lender shall have the right to modify, extend or terminate the existing leases and to execute new leases, in Lender's sole discretion. As used in this paragraph G, the word "lease" shall mean "sublease" if the Security Instrument is on a leasehold.
- H. ASSIGNMENT OF RENTS; APPOINTMENT OF RECEIVER; LENDER IN POSSESSION. Borrower absolutely and unconditionally assigns and transfers to Lender all the rents and revenues ("Rents") of the Property, regardless of to whom the Rents of the Property are payable. Borrower authorizes Lender or Lender's agents to collect the Rents, and agrees that each tenant of the Property shall pay the Rents to Lender or Lender's agents. However, Borrower shall receive the Rents until: (i) Lender has given Borrower notice of default pursuant to Section 22 of the Security Instrument, and (ii) Lender has given notice to the tenant(s) that the Rems are to be paid to Lender or Lender's agent. This assignment of Rents constitutes an absolute

assignment and not an assignment for additional security only.

If Lender gives notice of default to Borrower. (i) all Rents received by Borrower shall be held by Borrower as trustee for the benefit of Lender only, to be applied to the sums secured by the Security Instrument; (ii) Lender shall be entitled to collect and receive all of the Rents of the Property; (iii) Borrower agrees that each tenant of the Property shall pay all Rents due and unpaid to Lender or Lender's agents upon Lender's written demand to the tenant; (iv) unless applicable law provides otherwise, all Rents collected by Lender or Lender's agents shall be applied first to the costs of taking control of and managing the Property and collecting the Rents, including, but not limited to, attorneys' fees, receiver's fees, premiums on receiver's bonds, repair and

-57R (0401).01 CHL (06/04)

Page 2 of 3

Form 3170 1/01

Serial Number: 11/736,356

Filed: 04/17/2007

Sheet 163 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

DOC ID #: 00016597093403007

maintenance costs, insurance premiums, taxes, assessments and other charges on the Property, and then to the suras secured by the Security Instrument; (v) Lender, Lender's agents or any judicially appointed receiver shall be liable to account for only those Rents actually received; and (vi) Lender shall be entitled to have a receiver appointed to take possession of and manage the Property and collect the Rents and profits derived from the Property showing as to the inadequacy of the Property as security.

Property inflicut any showing as to the inadequacy of the Property as security.

If the Reits of the Property are not sufficient to cover the costs of taking control of and managing the Property and of collecting the Rents any funds expended by Lender for such purposes shall become indebtedness of Borrower to Lender secured by the Security Instrument pursuant to Section 9.

indebtedness of Borrower to Lender secured by the Security Instrument pursuant to Section 9.

Borrower represents and warrants that Borrower has not executed any prior assignment of the Rents and has not performed, and will not perform, any act that would prevent Lender from exercising its rights under this paragraph.

Lender, or Lenders agents or a judicially appointed receiver, shall not be required to enter upon, take control of or maintain the Property before or after giving notice of default to Borrower. However, Lender, or Lender's agents or a judicially appointed receiver, may do so at any time when a default occurs. Any application of Rents shall not cure or wave any default or invalidate any other right or remedy of Lender. This assignment of Rents of the Property shall terminate when all the sums secured by the Security Instrument are paid in full.

I. CROSS-DEFAULT PROVISION, Borrower's default or breach under any note or agreement in which Lender has an interest shall be a breach under the Security Instrument and Lender may invoke any of the remedies permitted by the Security Instrument.

BY SIGNING BELOW, Borrower accepts and agrees to the terms and provisions contained in this 14 Family Rider.

	Man Brune glandlande
(Seal	JEAN BRUNER JEANGLAUDE
- Borrowe	11 HEMMING DR
	STAFFORD, VA 22554
(Seal	Gestrude Ar Thier-Feanslande
- Borrowe	/GERTRUDE ARTHUR-JEANGLAUDE
	11 HEMMING DR
	STAFFORD, VA 22554
(Seal	
- Borrowe	
(Seal	
- Borrowe	

-57R (0401).01 CHL (06/04)

Page 3 of 3

Form 3170 1/01

EXHIBIT A

SITUATED IN PALM BEACH COUNTY, FLORIDA, THE FOLLOWING DESCRIBED PROPERTY:

CLOT 117, CANYON ISLES - PLAT TWO, ACCORDING TO THE PLAT THEREOF, AS RECORDED IN PLAT BOOK 105 AT PAGE 40, OF THE PUBLIC RECORDS OF PALM BEACH COUNTY, FLORIDA.

THORUSCOK TERRAC PLACE
ADDRESS: 8671 THORN BROOK; BOYNTON BEACH, FL 33437 MAP OR PARCEL ID NO.: 00-42-45-32-03-000-1170



U38332630-01NP18 LOAN# T007-040958 US Recordings

Jed Margolin

Serial Number: 11/736,356

Filed: 04/17/2007

Sheet 165 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

IN THE CIRCUIT COURT FOR PALM BEACH COUNTY, FLORIDA. CIVIL DIVISION

CASE NO.

THE BANK OF NEW YORK MELLON FKA THE BANK OF NEW YORK, AS TRUSTEE FOR THE CERTIFICATEHOLDERS, CWALT, INC., AETERNATIVE LOAN TRUST 2007-12T1 MORTGAGE PASS-THROUGH CERTIFICATES, SERIES 2007-12T1,

Maintiff,

JEAN BRUNER JEANGLAUDE; GERTRUDE ARTHUR JEANGLAUDE A/K/A GERTRUDE ARTHUR-JEANGLAUDE; CANYON ISLES HOMEOWNERS ASSOCIATION, INC.; UNKNOWN TENANT NO. 1; UNKNOWN TENANT NO. 2; and ALL UNKNOWN PARTIES CLAIMING INTERESTS BY, THROUGH, UNDER OR AGAINST A NAMED DEFENDANC TO THIS ACTION, OR HAVING OR CLAIMING TO HAVE ANY RIGHT, TITLE OR INTEREST IN THE PROPERTY HEREIN DESCRIBED,

50 2009 CA027 485 XXXX NE

Defendants.

NOTICE OF LIS PENDENS

NOTICE IS HERESY GIVEN that suit was instituted in the above styled Court on

2009, by the above styled Plaintiff against the above styled Defendants. The purpose of the suit is to foreclose a certain mortgag

upon the following property:

LOT 117, CANYON ISLES PLAT TWO, ACCORDING TO THE PLAT THEREOF, AS RECORDED IN PLAT BOOK 105 AT PAGE 40, OF THE PUBLIC RECORDS OF PALM BEACH GOODSTYLE FLORIDA.

All persons are therefore warned and advised of the pendency of this suit.

SMITH, HIATT & DIAZ, P.A. Attorneys for Plaintiff

BOX 11438

Fort Lauderdale, FL 33339-1438

phone: (954) 564**-007**

Robert A. Smith Florida Bar No. 116186 Patrice Tedescko Florida Bar No. 0628451 Gavin MacMillan

Florida Bar No. 0037641 Gabrielle Strauss

Florida Bar No. 0059563 Glenn Matt Lindsay

Florida Bar No. 0059200 Tat-Lin Angus

Florida Bar No. 0051909 Annemarie Bui Tedford

Florida Bar No. 0030143

1183-70318

CFN 20090283794, OR BK 23397 PG 1897, RECORDED 08/18/2009 18:51:01 Sharon R. Bock, CLERK & COMPTROLLER, Palm Beach County, NUM OF PAGES 1 Jed Margolin

Serial Number: 11/736,356

Filed: 04/17/2007

Sheet 166 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

IN THE CIRCUIT COURT FOR PALM BEACH COUNTY, FLORIDA.

CIVIL DIVISION

CASE NO.

THE DANK OF NEW YORK MELLON EVA THE PANK OF NEW

THE BANK OF NEW YORK MELLON FKA THE BANK OF NEW YORK, AS TRUSTEE FOR THE CERTIFICATEHOLDERS, CWALT, INC., AETERNATIVE LOAN TRUST 2007-12T1 MORTGAGE PASS-THROUGH CERTIFICATES, SERIES 2007-12T1,

Plaintiff,

JEAN BRUNER JEANGLAUDE; GERTRUDE ARTHUR JEANGLAUDE AK/A GERTRUDE ARTHUR-JEANGLAUDE; CANYON ISLES AK/A GERTRUDE ARTHUR-JEANGLAUDE; CANYON ISLES UNKNOWN ENANT NO. 1; UNKNOWN TENANT NO. 2; and ALL UNKNOWN PARTIES CLAIMING INTERESTS BY, THROUGH, UNDER OR AGAINST A NAMED DEFENDANT TO THIS ACTION, OR HAVING OR CLAIMING

TO HAVE ANY RIGHT, TITLE OR INTEREST IN THE PROPERTY HEREIN DESCRIBED.

50 2009 CA027 485 XXXX NO

AW

Defendants.

NOTICE OF LIS PENDENS

NOTICE IS HERESY GIVEN that suit was instituted in the above styled Court on

2009, by the above styled Plaintiff against the above styled Defendants. The purpose of the suit is to foreclose a certain mornage

upon the following property:

LOT 117, CANYON ISLES PLAT TWO, ACCORDING TO THE PLAT THEREOF, AS RECORDED IN PLAT BOOK 105 AT PAGE 40, OF THE PUBLIC RECORDS OF PALM BEACH GOODSTYLE FLORIDA.

All persons are therefore warned and advised of the pendency of this suit.

SMITH, HIATT & DIAZ, P.A. Attorneys for Plaintiff

PQ BOX 11438

Fort Lauderdale, FL 33339-1438

Telephone: (954) 564-007

Robert A. Smith
Florida Bar No. 116186
Patrice Tedescko
Florida Bar No. 0628451
Gavin MacMillan

Florida Bar No. 0037641 Gabrielle Strauss

Florida Bar No. 0059563 Glenn Matt Lindsay

Florida Bar No. 0059200 Tat-Lin Angus

Florida Bar No. 0051909 Annemarie Bui Tedford

Florida Bar No. 0030143

1183-70318

CFN 20090291557, OR BK 23407 PG 1969, RECORDED 08/25/2009 08:50:16 Sharon R. Bock, CLERK & COMPTROLLER, Palm Beach County, NUM OF PAGES 1 30

22

ريد.ه

- 2 · • • 5 \longrightarrow (-:

Sheet 167 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

CFN 20100076403 OR BK 23715 PG 1415 RECORDED 03/01/2010 08:30:07 Palm Beach County, Florida ANT 640,000.00 Doc Stamp 4,480.00 Sharon R. Bock, CLERK & COMPTROLLER Pgs 1415 - 1416; (2pgs)

This document was prepared by and Return to: MICHAEL A TRINKLER, ESQ. MICHAEL A TRINKLER, P.A. MICHABL A: THANDER, F.A. 5501 University Drive, Suite 101 Coral Springs) FL 33067 Phone: (954) 93-5700 Fax No. (954) 753-5767

(Reserved for Use by the Clerk)

WARRANTY DEED

THIS INDENTURE is made this 5 day of February, 2010, between, JEAN BRUNER JEANGLAUDE and GERTRUDE ARTHUR JEANGLAUDE, husband and wife, party of the first part, and ROMUALD ALTINE and GETOSE ALTINE, husband and wife, whose post office address is: 8671 Thornbrook Terrace Point, Boyaton Beach, FL 33437, party of the second part.

WITNESSETH:

That the party of the first part for and in consideration of the sum of TEN AND NO/100 (\$10.00) DOLLARS to them in hand paid by the party of the second part, the receipt whereof is hereby acknowledged, has granted, bargained and sold to the party of the second part, their heirs and assigns forever, the following described land, situate and being in the County of PALM BEACH and State of Florida, to-wit:

Lot 117, CANYON ISLES - PLATTWO, according to the plat thereof, as recorded in Plat Book 105 at Page 40, of the Public Records of Palm Beach County, Florida.

Folio No.: 00-42-45-32-03-000-1170

SUBJECT TO:

Taxes for the year 2010, and subsequent years; Conditions, restrictions, limitations and easements of record; without reimposing same;

Zoning restrictions, prohibitions and other requirements imposed by governmental authority.

And the party of the first part does hereby fully warrant the title to said land, and will defend the same against the lawful claims of all persons whomsoever.

Filed: 04/17/2007

Sheet 168 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

(Reserved for Use by the Clerk)

IN WITNESS WHEREOF, the party of the first part has hereunto set her hand and seal the day and year first above written.

Signed, Sealed and Delivered In the Presence of:

Print Name of 2nd Witness

Address: 11 Hemming Drive, Stafford, VA 22554

The execution of the foregoing instrument was acknowledged before me this 5 day of February, 2010 by, JEAN BRUNER JEANGLAUDE and GERTRUDE ARTHUR JEANGLAUDE, who are personally known to me or who have produced VR drivers License as identification, and who did not take an oath.

My Commission Expires: 6/30/10

OFFICIAL SEAL DRY PUBLIC COMMONWEALTH OF VIRGIN KAREN BARRONS

Book23715/Page1416

Page 2 of 2

Jed Margolin

Serial Number: 11/736,356

Filed: 04/17/2007

Sheet 169 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

IN THE CIRCUIT COURT FOR PALM BEACH COUNTY, FLORIDA. CIVIL DIVISION

CÁSE NO. 502009CA027485XXXXM8 (AW)

THE BANK OF NEW YORK MELLON FKA THE BANK OF NEW YORK, AS TRUSTEE FOR THE CERTIFICATEHOLDERS, CWALT, INC., ALTERNATIVE LOAN TRUST 2007-1211 MORTGAGE PASS-THROUGH CERTIFICATES, SERIES 2007-1211,

Plaintiff,

VS.

JEAN BRUNER JEANGLAUDE; GERTRUDE ARTHUR JEANGLAUDE A/K/A GERTRUDE ARTHUR-JEANGLAUDE; CANYON ISLES HOMEOWNERS ASSOCIATION, INC.; UNKNOWN TENANT NO. 1; UNKNOWN TENANT NO. 2; and ALL UNKNOWN PARTIES CLAIMING INTERESTS BY, THROUGH, UNDER OR AGAINST A NAMED DEFENDANT TO THIS ACTION, OR HAVING OR CLAIMING TO HAVE ANY RIGHT, TITLE OR INTEREST IN THE PROPERTY HEREIN DESCRIBED,

Defendants.

SUMMARY FINAL JUDGMENT OF FORECLOSURE

THIS ACTION came before the Court upon pleadings and proofs submitted herein, the motion of the Plaintiff, for the entry of a Summary Final Judgment, and on the evidence presented,

IT IS ADJUDGED THAT:

1. This Court has jurisdiction of the subject matter hereof and the parties hereto.

The equities of this action are with the Plaintiff, THE BANK OF NEW YORK MELLON FKA THE

BANK OF NEW YORK, AS TRUSTEE FOR THE CERTIFICATEHOLDERS,

1

CFN 20100052146, OR BK 23686 PG 1653,RECORDED 02/09/2010 16:24:43 Sharon R. Bock,CLERK & COMPTROLLER, Palm Beach County, NUM OF PAGES 7

200

CWALT, INC., ALTERNATIVE LOAN TRUST 2007-12T1 MORTGAGE PASS-THROUGH

CERTIFICATES, SERIES 2007-12T1, There is due to the Plaintiff, the sums of money as hereafter set

A.	Principal Balance	\$ 807,000.00
В.	6.375% interest at \$140.95 per diem from March 1, 2009 thru October 30, 2009	\$ 34,097.84
ွှင.	Interest from October 31, 2009 thru January 29, 2010	12,826.45
D ,	Advance for Taxes	\$ 17,066.99
É.	Pre-Acceleration Late Charges	\$ 643.08
F. 👸	Property Preservation Fees	\$ 45.00
G.	Title Search	\$ 325.00
H.	Filing Fee	\$ 1,963.50
I.	Service of Process	\$ 475.00
J.	Corporate Search	\$ 15.00
K.	Attorneys Fees	\$ 1,450.00
	TOTAL Q	\$ 875,907.86

- 2. Plaintiff is entitled to receive attorney's fees set forth above as compensation for 12 hours reasonably expended at a rate of \$150.00 per hour, as set forth in the filed affidavit. However, pursuant to the Plaintiff's fee agreement with Smith, Hiatt & Diaz, P.A., the Plaintiff will pay attorneys' fees in the amount of \$1450.00.
- The original promissory note having been presented and delivered to the Court,
 Count I of Plaintiff's Complaint is hereby deemed moot.
- 4. A lien is held by the Plaintiff for the total sum specified in paragraph 1, plus interest, superior in dignity to any right, title, interest, or claim of the Defendants upon the mortgaged property herein foreclosed situate, lying and being in Palm Beach County, Florida, to-wit:

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 171 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

LOT 117, CANYON ISLES – PLAT TWO, ACCORDING TO THE PLAT THEREOF, AS RECORDED IN PLAT BOOK 105 AT PAGE 40, OF THE PUBLIC RECORDS OF PALM BEACH COUNTY, FLORIDA.

- 5. If the total sum due to the Plaintiff, plus interest on the unpaid principal at the rate prescribed in the note and mortgage to date, and at the current statutory interest rate after the date through which interest is calculated in paragraph 1 above, and all costs of this proceeding incurred after the date of this Judgment are not forthwith paid, the Clerk of this Court shall sell that property at public sale at 10:00 a.m. on the 8 day of MARCH 2010, to the highest bidder or bidders for cash at the www.mypalmbeachclerk.clerkauction.com, after having first given notice as required by Section 45.031, Florida Statutes.
- 6. Plaintiff shall advance the cost of publishing the Notice of Sale and shall be reimbursed by the Clerk out of the proceeds of the sale if the Plaintiff is not the purchaser of the property, but such reimbursement will not be by the Clerk unless the Affidavit of Post Judgment Advances has been filed. The purchaser at the sale shall pay, in addition to the amount bid, the Clerk's fee, Clerk's registry fee and documentary stamps to be affixed to the Certificate of Title.
- The Plaintiff may assign the Judgment or the bid to a third party without further order of the Court.
- 8. If the Plaintiff or Plaintiff's assignee is the purchaser at the sale, the Clerk shall credit on the bid of the Plaintiff or Plaintiff's assignee the total sum herein found to be due the Plaintiff or such portion thereof as may be necessary to pay fully the bid of the Plaintiff or Plaintiff's assignee.
- 9. On filing the Certificate of Title, the Clerk shall distribute the proceeds of the sale to Plaintiff c/o Smith, Hiatt & Diaz, P.A., PO BOX 11438, Fort Lauderdale, FL 33339-1438, so far as they are sufficient, by paying:
 - All of Plaintiff's costs,

3

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 172 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

- B. Plaintiff's attorneys' fees,
- C. The total sum due to Plaintiff as set forth above, less the items paid, with interest at the current statutory interest rate from the date through which interest is calculated in paragraph 1 above to the date of the sale. If, subsequent to the date of the Plaintiff's Affidavit of Indebtedness and prior to the sale contemplated in paragraph 5 hereof, the Plaintiff has to advance money to protect its mortgage lien, including but not limited to post judgment advances for property taxes and insurance, property preservation costs, post judgment attorney's fees and costs and post judgment bankruptcy attorney fees and costs, the Plaintiff or its Attorneys shall certify by affidavit to the Clerk and the amount due to Plaintiff shall be increased by the amount of such advances upon further order of the Court.
- D. The remaining proceeds, if any, shall be retained by the Clerk pending further Order of the Court.
- 10. If the United States of America is a Defendant in this action, they shall have the right of redemption provided by 28 U.S.C. §2410(c) from the issuance of a Certificate of Title, but the right shall thereafter expire.
- Upon filing the Certificate of Sale, the Defendants and all persons claiming under or against them since the filing of the Notice of Lis Pendens shall be foreclosed of all estate or claim in the property, with the exception of any assessments that are superior pursuant to Florida Statutes, Section 718.116 (effective 4/1/1992) or Florida Statutes 720.3085 (effective 7/1/2008), both of which state they are not to be applied retroactively to alter a lien priority existing prior to the effective date of the statute. Upon issuance of the Certificate of Title, the purchaser at the sale shall be let into possession of the property located at 8671 THORNBROOK TERRACE PT, BOYNTON BEACH, FL 33437. Upon further order of the court, the Clerk of the Court is hereby specifically authorized to issue a Writ of Possession for the property which is the subject matter of this action, and the Sheriff is hereby authorized

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 173 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

to serve the Writ forthwith.

12. IF THIS PROPERTY IS SOLD AT PUBLIC AUCTION, THERE MAY BE ADDITIONAL MONEY FROM THE SALE AFTER PAYMENT OF PERSONS WHO ARE ENTITLED

TO BE PAID FROM THE SALE PROCEEDS PURSUANT TO THIS FINAL JUDGMENT.

13. IF YOU ARE A SUBORDINATE LIENHOLDER CLAIMING A RIGHT TO

FUNDS REMAINING AFTER THE SALE, YOU MUST FILE A CLAIM WITH THE CLERK NO

LATER THAN 60 DAYS AFTER THE SALE. IF YOU FAIL TO FILE A CLAIM, YOU WILL NOT

BE ENTITLED TO ANY REMAINING FUNDS.

14. FYOU ARE THE PROPERTY OWNER, YOU MAY CLAIM THESE FUNDS

YOURSELF. YOU ARE NOT REQUIRED TO HAVE A LAWYER OR ANY OTHER

REPRESENTATION AND YOU DO NOT HAVE TO ASSIGN YOUR RIGHTS TO ANYONE ELSE

IN ORDER FOR YOU TO CLARM ANY MONEY TO WHICH YOU ARE ENTITLED. PLEASE

CHECK WITH THE CLERK OF THE COURT, OF PALM BEACH COUNTY WITHIN TEN (10)

DAYS AFTER THE SALE TO SEE IF THERE IS ADDITIONAL MONEY FROM THE

FORECLOSURE SALE THAT THE CLERK HAS IN THE REGISTRY OF THE COURT.

15. IF YOU DECIDE TO SELL YOUR HOME OR HIRE SOMEONE TO HELP

YOU CLAIM THE ADDITIONAL MONEY, YOU SHOULD READ VERY CAREFULLY ALL

PAPERS YOU ARE REQUIRED TO SIGN, ASK SOMEONE ELSE, PREFERABLY AN ATTORNEY

WHO IS NOT RELATED TO THE PERSON OFFERING TO HELP YOU, TO MAKE SURE THAT

YOU UNDERSTAND WHAT YOU ARE SIGNING AND THAT YOU ARE NOT TRANSFERRING

YOUR PROPERTY OR THE EQUITY IN YOUR PROPERTY WITHOUT THE PROPER

INFORMATION. IF YOU CANNOT AFFORD TO PAY AN ATTORNEY, YOU MAY CONTACT

THE COUNTY LEGAL AID OFFICE OF FLORIDA RURAL LEGAL SERVICES, 1500 NW AVENUE

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 174 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

"L" UNIT B, BELLE GLADE, FL 33430, PHONE: (888) 993-0003 TO SEE IF YOU QUALIFY FINANCIALLY FOR THEIR SERVICES. IF THEY CANNOT ASSIST YOU, THEY MAY BE ABLE TO REFER YOU TO A LOCAL BAR REFERRAL AGENCY OR SUGGEST OTHER OPTIONS. IF YOU CHOOSE TO CONTACT PALM BEACH COUNTY AID SERVICES FOR ASSISTANCE, YOU SHOULD DO SO AS SOON AS POSSIBLE AFTER RECEIPT OF THIS NOTICE.

16. The Court retains jurisdiction of this action to enter further orders as are proper including, without limitation, deficiency judgments.

DONE AND ORDERED in Chambers at the Palm Beach County Courthouse, West Palm

Beach, Florida on

Circuit Judge

Copies furnished:

Gabrielle M Strauss, Esquire SMITH, HIATT & DIAZ, P.A. Attorneys for Plaintiff PO BOX 11438 Fort Lauderdale, FL 33339-1438 Telephone: (954) 564-0071

All parties on the attached service list 1183-70318

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 175 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

SERVICE LIST Case No. 502009CA027485XXMBAW

JEAN BRUNER JEANGLAUDE 11 Hemming Dr Stafford, VA 22554

GERTRUDE ARTHUR JEANGLAUDE A/K/A GERTRUDE ARTHUR-JEANGLAUDE 11 Hemming Dr Stafford, VA 22554

MICHAEL S. FELDMAN, ESQ Attorney For CANYON ISLES HOMEOWNERS ASSOCIATION, INC. 6111 BROKEN SOUND PKWY NW, STE 200 BOCA RATON, FL 33487

CFN 20100052146 BOOK 23686 PAGE 1659, 7 OF 7

Serial Number: 11/736,356

Filed: 04/17/2007

Sheet 176 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

RECORDED 03/01/2010 08:30:07 Palm Beach County, Florida ANT 640,000.00 Doc Stamp 4,480.00 Sharon R. Bock, CLERK & COMPTROLLER

Pgs 1415 - 1416; (2pgs)

(Reserved for Use by the Clerk)

CFN 20100076403 OR BK 23715 PG 1415

MICHAEL A TRINKLER, ESQ. MICHAEL A TRINKLER, P.A. MICHABL A: THANDER, F.A. 5501 University Drive, Suite 101 Coral Springs) FL 33067 Phone: (954) 93-5700 Fax No. (954) 753-5767

This document was prepared by and Return to:

30 - 2 · • •

 \longrightarrow (-: 22

ريد.ه

5

WARRANTY DEED

THIS INDENTURE is made this 5 day of February, 2010, between, JEAN BRUNER JEANGLAUDE and GERTRUDE ARTHUR JEANGLAUDE, husband and wife, party of the first part, and ROMUALD ALTINE and GETOSE ALTINE, husband and wife, whose post office address is: 8671 Thornbrook Terrace Point, Boyaton Beach, FL 33437, party of the second part.

WITNESSETH:

That the party of the first part for and in consideration of the sum of TEN AND NO/100 (\$10.00) DOLLARS to them in hand paid by the party of the second part, the receipt whereof is hereby acknowledged, has granted, bargained and sold to the party of the second part, their heirs and assigns forever, the following described land, situate and being in the County of PALM BEACH and State of Florida, to-wit:

Lot 117, CANYON ISLES - PLATTWO, according to the plat thereof, as recorded in Plat Book 105 at Page 40, of the Public Records of Palm Beach County, Florida.

Folio No.: 00-42-45-32-03-000-1170

SUBJECT TO:

Taxes for the year 2010, and subsequent years; Conditions, restrictions, limitations and easements of record; without reimposing same;

Zoning restrictions, prohibitions and other requirements imposed by governmental authority.

And the party of the first part does hereby fully warrant the title to said land, and will defend the same against the lawful claims of all persons whomsoever.

Serial Number: 11/736,356

Filed: 04/17/2007

Sheet 177 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

(Reserved for Use by the Clerk)

IN WITNESS WHEREOF, the party of the first part has hereunto set her hand and seal the day and year first above written.

Signed, Sealed and Delivered In the Presence of:

Print Name of 2nd Witness

Address: 11 Hemming Drive, Stafford, VA 22554

The execution of the foregoing instrument was acknowledged before me this 5 day of February, 2010 by, JEAN BRUNER JEANGLAUDE and GERTRUDE ARTHUR JEANGLAUDE, who are personally known to me or who have produced VR drivers License as identification, and who did not take an oath.

My Commission Expires: 6/30/10

OFFICIAL SEAL DRY PUBLIC COMMONWEALTH OF VIRGIN KAREN BARRONS

Book23715/Page1416

Page 2 of 2

Filed: 04/17/2007

Sheet 178 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

Document Prepared By: Document Prepared By: ReconTrust Company, N.A. 2575 W. Chandler Btvd, Mail Stop: AZ1-804-02-11 Chandler, AZ 85224 (800) 540-2684

CFN 20100187212 OR BK 23857 PG Ø153 RECORDED 05/20/2010 09:34:28 Palm Beach County, Florida Sharon R. Bock, CLERK & COMPTROLLER Pg 0153; (1pg)



When recorded return to:
JEAN BRENER JEANGLAUDE
11 Hemming Dr. Stafford VA 22554

DOC ID#0001659709342005N

SATISFACTION OF MORTGAGE

KNOW ALL MEN BYTHESE PRESENTS: Mortgage Electronic Registration Systems, Inc. the owner and holder of a

ATTEST

DeWayne Vardaman Assistant Secretary

Signed and delivered in the presence of:


Amy DeLaPaz Witness

STATE OF ARIZONA COUNTY OF MARICOPA

icela Lopez Vice President

Mortgage Electronic Registration Systems, Inc.

On S44O ____, before me, Edward Napier, Notary Public, personally appeared Icela Lopez personally known to me (or proved to me on the basis of satisfactory evidence) to be the person whose name is subscribed to the within instrument and acknowledged to me that he/she executed the same in his/her authorized capacity, and that by his/her signature on the instrument the person, or the entity upon behalf of which the person acted, executed the instrument. Witness my hand and official seal



Edulos Edward Napier, Notary Public Expires: 09/14/2013



Exhibit 5 - UCAV Distributed Mission Training Testbed:

Lessons Learned and Future Challenges

by Dr. Dutch Guckenberger and Matt Archer

The Interservice/Industry Training, Simulation & Education Conference

(I/ITSEC), Volume: 2000 (Conference Theme: Partnerships for Learning in

Examiner: Ronnie M. Mancho Art Unit: 3664

the New Millennium)

http://ntsa.metapress.com/link.asp?id=4mrrc0aupmjpf8e6

Filed: 04/17/2007

Sheet 179 of 241

Serial Number: 11/736,356

Jed Margolin

6

7

1 of 2

Examiner: Ronnie M. Mancho Art Unit: 3664

1

11/16/2010 11:39 AM



Log out genevahunter

Home Article Back To: Search Results

About
Search

Volumes The Interservice/Industry Training, Simulation & Education Conference (I/ITSEC)

Account Volume: 2000 (Conference Theme: Partnerships for Learning in the New Millengium)

Millennium)

Subscribe URL: Linking Options

Shopping Cart
UCAV Distributed Mission Training Testbed: Lessons Learned and Future
Challenges

Profile

Dr. Dutch Guckenberger A1 and Matt Archer A1

Services

Alerting

A1 SDS International Inc., Orlando, FL
A2 BMH Associates, Inc., Norfolk, VA

ActiveSearch

Support Contact Us

Downloads

Abstract:

The UCAV DMT Testbed research will focus on technologies for: defining effective training strategies for UAV/UCAV operators; assessing the delta in training required for multiple vehicles; advanced displays driven from human factors design; integration of Geneva Aerospace s Variable Autonomy Control System; and integrating several UAV and UCAV Flight Model into the Testbed. Potential applications include direct linkage of UCAV Testbeds as Participants in DMT. This paper chronicles the development of the UCAV DMT Testbed from the perspective of lessons learned and details features planned to support the initial research efforts planned for 2000.

Four successful UCAV DMT demonstrations and experiments are presented from a lessons learned perspective. Starting with the initial separately developed PC-Based UCAV simulations; evolving to the merging of the simulations and initial DMT research experiments including DMTO&I testbed, I/ITSEC99 and planned AFRL Mesa UCAV DMT Demonstrations. Key testbed components included the LiteFlite Flight Simulator, JSAF and SOAR applications, and the Variable Autonomy Control System (VACS). The unique and innovative portions of this paper detail the components integration for UCAV missions and operational concepts, along with the human factors engineering on the VACS human-system interface design and LiteFlite researcher toolkit interfaces. Illustrative examples, are also included with sufficient details to support other government, industry and academic organizations participation in future UCAV DMT experiments and demonstrations.

Participating organizations include but are not limited to AFRL Mesa, SDS International, Geneva Aerospace, Eglin 46th Test Wing PRIMES, NASA Dryden Flight Research Center/Tuskegee University, Computer Science Corporation. Future participants may include Navy Pax River (MFS and Distributed Simulation Groups), AFRL Wright-Patterson and Naval Aerospace Medical Research Lab. Additional discussion includes related UCAV DMT Research topics of:

- LiteFlite UCAV and Testbed Utilization of the Ordnance Server to ensure DMT Fair Fight
- Innovations associated with a new Distributed Ordnance Server to insure Temporal Correlation of the
- Target/Counter-Measure/Weapon Triad

Full Text Access

Full Text Available

The full text of this article is available. You may view the article as (a):

PDF

The size of this document is 2,135 kilobytes. Although it may be a lengthier download, this is the most authoritative online format.

Open Full Text

⊕ HTML

This offers the quickest access for ease of browsing. Please note that some scientific and mathematical characters may not render as precisely as in PDF versions.

Open Full Text

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 181 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

2 of 2 11/16/2010 11:39 AM

• An Innovative new concept of handing off UCAV Ownership from the Virtual LiteFlite Host Simulation to

1

the Constructive JSAF and SOAR Agents to automate tasks for the UCAV operators Results from three initial UCAV integration efforts are presented detailing DIS integration with existing DMT assets and HLA integration with planned DMT configurations I/ITSEC99, USAF Only DMTO&I Demonstration Jan2000, DMT UCAV Testbed development for AFRL/HEA and UAV 2000 Demonstration July 2000. An outline of planned research efforts that will utilize the DMT UCAV Testbed are presented along with Future Research Directions.

00 000

Remote Address: 68.190.187.74 • Server: MPWEB03
HTTP User Agent: Mozilla/5.0 (Windows; U; Windows NT 6.0; en-US; rv:1.9.2.3) Gecko/20100401
Firefox/3.6.3 (.NET CLR 3.5.30729)

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 182 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

UCAV Distributed Mission Training Testbed: Lessons Learned and Future Challenges

Dr. Dutch Guckenberger & Matt Archer SDS International Inc. Orlando, FL dutchg@sdslink.com & marcher@sdslink.com Michael R. Oakes BMH Associates, Inc. Norfolk, VA moakes@bmh.com

Abstract

The UCAV DMT Testbed research will focus on technologies for: defining effective training strategies for UAV/UCAV operators; assessing the delta in training required for multiple vehicles; advanced displays driven from human factors design; integration of Geneva Aerospace's Variable Autonomy Control System; and integrating several UAV and UCAV Flight Model into the Testbed. Potential applications include direct linkage of UCAV Testbeds as Participants in DMT. This paper chronicles the development of the UCAV DMT Testbed from the perspective of lessons learned and details features planned to support the initial research efforts planned for 2000.

Four successful UCAV DMT demonstrations and experiments are presented from a lessons learned perspective. Starting with the initial separately developed PC-Based UCAV simulations; evolving to the merging of the simulations and initial DMT research experiments including DMTO&I testbed, I/ITSEC99 and planned AFRL Mesa UCAV DMT Demonstrations. Key testbed components included the LiteFlite Flight Simulator, JSAF and SOAR applications, and the Variable Autonomy Control System (VACS). The unique and innovative portions of this paper detail the components integration for UCAV missions and operational concepts, along with the human factors engineering on the VACS human-system interface design and LiteFlite researcher toolkit interfaces. Illustrative examples, are also included with sufficient details to support other government, industry and academic organizations participation in future UCAV DMT experiments and demonstrations.

Participating organizations include but are not limited to AFRL Mesa, SDS International, Geneva Aerospace, Eglin 46th Test Wing PRIMES, NASA Dryden Flight Research Center/Tuskegee University, Computer Science Corporation. Future participants may include Navy Pax River (MFS and Distributed Simulation Groups), AFRL Wright-Patterson and Naval Aerospace Medical Research Lab. Additional discussion includes related UCAV DMT Research topics of:

- LiteFlite UCAV and Testbed Utilization of the Ordnance Server to ensure DMT Fair Fight
- Innovations associated with a new Distributed Ordnance Server to insure Temporal Correlation of the Target/Counter-Measure/Weapon Triad
- An Innovative new concept of handing off UCAV Ownership from the Virtual LiteFlite Host Simulation to the Constructive JSAF and SOAR Agents to automate tasks for the UCAV operators

Results from three initial UCAV integration efforts are presented detailing DIS integration with existing DMT assets and HLA integration with planned DMT configurations I/ITSEC99, USAF Only DMTO&I Demonstration Jan2000, DMT UCAV Testbed development for AFRL/HEA and UAV 2000 Demonstration July 2000. An outline of planned research efforts that will utilize the DMT UCAV Testbed are presented along with Future Research Directions.

About the Authors

Dr. Dutch Guckenberger is the Chief Scientist at SDS International, with 15 years of experience in the defense simulation and training systems. He has earned degrees in Computer Science, Physics, & Simulation and Training. Research interests include Distributed Mission Training, High Resolution PC-Based Visual Systems, Above Real-Time Training (ARTT), UAV and UCAV Research. He is a member of ACM, IEEE, Human Factors Society & a Link Foundation Fellow in Advanced Simulation & Training.

Michael Oakes is a Sr. Systems Engineer with BMH Associates, Inc. He was responsible for the evolution and deployment of high priority classified special access required programs. He is a retired USAF fighter pilot with over 20 years of experience in the Pacific, European, and Southwest Asia theaters of operations and is a USAF F-15 Fighter Weapons School Graduate. Mr. Oakes was the WISSARD Lab Test Director for the STOW-97 ACTD. He continues to provide modeling and military domain expertise for Air Synthetic Force development used in JSAF technologies.

1




Figure 11. LiteFlite UCAV Situational/ MFD Display replicate based upon the original interface developed by WPAFB Operator Vehicle Interface Lab.

It is important to note that the LiteFlite image above was developed based upon JPEG images from AFRL/HECP Operator Vehicle Interface (OVI) Group. The key to economically supporting the UCAV researchers is effective rapid prototyping. To this end SDS with their DISTI team partner were able to develop the Situational Display and the major portions of the Multifunction Display to functional prototype level including the DIS connectivity in less than 120 Hours. (See figure 11 above for the prototype UCAV Multifunction Display.)

Variable Autonomy Control System (VACS)

As a portion of the DMT UCAV Testbed development, the Geneva AeroSpace Variable Autonomy Control System (VACS) was added to LiteFlite. The VACS is designed to be effective for UAV and UCAV systems as usable to individuals whose training is focused on the requirements of a given mission or the usability of the payload, rather than on the aviation of the vehicle. As the dependence on UAVs for military operations grows and UAV technology is integrated into the emerging global command and control architecture, the cost and complexity of managing and controlling these assets can easily become substantial. The VACS solution to this UAV control problem lies in the appropriate functional allocation between the human and the machine. By merging modern stand-off missile flight control, advanced aircraft flight control, and state-of-the-art communications technologies, Geneva has developed a novel hierarchical flight control structure with varied levels of remote operator input to address the human-machine functional allocation problem.

The VACS has been successfully demonstrated enabling a diverse range of users to effectively operate UAVs. Furthermore, the VACS solution eliminates the requirement for UAVs to be controlled by highly

trained, rated pilots. In a continuing development and demonstration effort VACS is to be used Joint STARS MTE workstation and the Freewing Scorpion 100-50 UAV and conduct a flight test demonstration. This program will demonstrate the benefits of the variable autonomy flight control system design with simplified manual control modes, demonstrate the compatibility of such a system with the military's emerging C⁴I architecture, and demonstrate the synergism between Joint STARS and UAVs using the simplified UAV flight control technology.

Filed: 04/17/2007

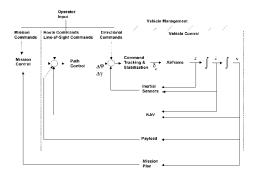


Figure 12. Variable Autonomy Control System (VACS)

JSAF, SOAR & SOAR Speak

Current distributive training technology has evolved towards larger Federations and greater entity resolution. DARPA's STOW has been the only demonstrated large-scale High Level Architecture (HLA) simulation using both large aggregates (for visualization) and entity resolution (for interaction arbitration). Since the October 1997 DoD Advanced Concept Technology Demonstration (ACTD) milestone, STOW has evolved to a viable technology demonstrating high resolution (platform level) simulation to support joint command and staff training, mission visualization capabilities and unit level training. STOW's ability for entity-level resolution has made it an excellent candidate for the USAF Distributed Mission Training (DMT) Program. The STOW Program has evolved into the Joint Semi Autonomous Forces (JSAF) and increased its applications to provide a robust simulation capable of supporting operational training, testing new concepts and doctrine as well as service and joint experimentation issues with direct linkages to realworld C⁴ISR systems in a seamless live, virtual or constructive environment. The current JSAF sponsor is the United States Joint Forces Command (USJFCOM).

Exhibit 6 - Documents from Geneva Aerospace Trademark Application,

Serial Number 78355947 for "Variable Autonomy Control System"

From USPTO Trademark Document Retrieval (TDR) Web Site

http://tmportal.uspto.gov/external/portal/tow

Examiner: Ronnie M. Mancho Art Unit: 3664

Filed: 04/17/2007

Sheet 184 of 241

Serial Number: 11/736,356

Jed Margolin

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 185 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

Trademark/Service Mark Application, Principal Register

Serial Number: 78355947 Filing Date: 01/22/2004

To the Commissioner for Trademarks:

MARK: (Standard Characters, see mark)

The mark consists of standard characters, without claim to any particular font, style, size, or color.

The literal element of the mark consists of VARIABLE AUTONOMY CONTROL SYSTEM.

The applicant, Geneva Aerospace, Inc., a corporation of Texas, residing at 4312 Sunbelt Dr., Addison, TX, USA, 75001, requests registration of the trademark/service mark identified above in the United States Patent and Trademark Office on the Principal Register established by the Act of July 5, 1946 (15 U.S.C. Section 1051 et seq.), as amended.

The applicant, or the applicant's related company or licensee, is using the mark in commerce, and lists below the dates of use by the applicant, or the applicant's related company, licensee, or predecessor in interest, of the mark on or in connection with the identified goods and/or services. 15 U.S.C. Section 1051(a), as amended.

International Class 009: computer software for autonomous aerial vehicle guidance and control systems

In International Class 009, the mark was first used at least as early as 09/01/1998, and first used in commerce at least as early as 09/01/1998, and is now in use in such commerce. The applicant is submitting or will submit one specimen for *each class* showing the mark as used in commerce on or in connection with any item in the class of listed goods and/or services, consisting of a(n) Portion of company website describing product.

Specimen - 1

The applicant hereby appoints Alexander M. Parker and R. Steven Jones of Jones & Davis, L.L.P., 15851 Dallas Parkway Suite 1220, Addison, TX, USA, 75001 to submit this application on behalf of the applicant. The attorney docket/reference number is Geneva/TM.

The USPTO is authorized to communicate with the applicant or its representative at the following email address: aparker@jonesdavis-law.com.

A fee payment in the amount of \$335 will be submitted with the application, representing payment for 1 class(es).

Declaration

The undersigned, being hereby warned that willful false statements and the like so made are punishable by

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 186 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1

fine or imprisonment, or both, under 18 U.S.C. Section 1001, and that such willful false statements, and the like, may jeopardize the validity of the application or any resulting registration, declares that he/she is properly authorized to execute this application on behalf of the applicant; he/she believes the applicant to be the owner of the trademark/service mark sought to be registered, or, if the application is being filed under 15 U.S.C. Section 1051(b), he/she believes applicant to be entitled to use such mark in commerce; to the best of his/her knowledge and belief no other person, firm, corporation, or association has the right to use the mark in commerce, either in the identical form thereof or in such near resemblance thereto as to be likely, when used on or in connection with the goods/services of such other person, to cause confusion, or to cause mistake, or to deceive; and that all statements made of his/her own knowledge are true; and that all statements made on information and belief are believed to be true.

Signature: /alexander_parker/ Date: 01/22/2004

Signatory's Name: Alexander M. Parker

Signatory's Position: Attorney

Mailing Address: Alexander M. Parker 15851 Dallas Parkway Suite 1220 Addison, TX 75001

RAM Sale Number: 513

RAM Accounting Date: 01/23/2004

Serial Number: 78355947

Internet Transmission Date: Thu Jan 22 18:04:09 EST 2004 TEAS Stamp: USPTO/BAS-6419013490-2004012218040973155

8-78355947-20044c21f938bb7a26d3b3c87a1dc

5be85-CC-513-20040122180300429827

Serial Number: 11/736,356 Filed: 04/17/20 Examiner: Ronnie M. Mancho Art Unit: 3664 Jed Margolin Filed: 04/17/2007 Sheet 187 of 241

VARIABLE AUTONOMY CONTROL SYSTEM

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 188 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

General Averaginates

General Averaginates

General Averaginates

interpretation

because the products programs press room about us contact us

Dakota Unmanned-Aerial Vehide

1

Variable Autonomy Control System (VACS)

Low-Cost UAV Avienics Kit

Hi-Fidelity 600F Engineering Simulation


400 MHz UAV Flight Tesmination System

Multi-UAV IP Datalink System

Products: Variable Autonomy Control System (VACS)™

Under Air Force Research Lab funding, Geneva has developed an innovative UAV control design that combines state-of-the-art missile technologies with fixed-wing aircraft control. Our design balances autonomous flight control with manual control to provide variable levels of directional independence and minimizes the personnel and training requirements for the operation of the UAV. The truly enabled UAV operator is not required to be a trained aviator, but still retains a wide range of control flexibility in order to successfully execute the mission objectives that call upon his/her specialized expertise.

Our solution is a hierarchical flight control structure with multiple levels of remote operator input combined with an off-board controller software package and intuitive human system interface. Research of the UAV control problem has indicated that the best solution lies in the appropriate functional allocation between the human and the machine, leading to the organization of the control problem between the two fundamental categories: flight governance and flight management.








Exhibit 7 - Documents from Geneva Aerospace Trademark Application,

Serial Number 78355939 for "VACS" From USPTO Trademark Document

Retrieval Web Sitehttp://tmportal.uspto.gov/external/portal/tow

Examiner: Ronnie M. Mancho Art Unit: 3664

Filed: 04/17/2007

Sheet 189 of 241

Serial Number: 11/736,356

Jed Margolin

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 190 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

Serial Number: 78355939 Filing Date: 01/22/2004

To the Commissioner for Trademarks:

MARK: (Standard Characters, see mark)

The mark consists of standard characters, without claim to any particular font, style, size, or color.

The literal element of the mark consists of VACS.

The applicant, Geneva Aerospace, Inc., a corporation of Texas, residing at 4312 Sunbelt Dr., Addison, TX, USA, 75001, requests registration of the trademark/service mark identified above in the United States Patent and Trademark Office on the Principal Register established by the Act of July 5, 1946 (15 U.S.C. Section 1051 et seq.), as amended.

The applicant, or the applicant's related company or licensee, is using the mark in commerce, and lists below the dates of use by the applicant, or the applicant's related company, licensee, or predecessor in interest, of the mark on or in connection with the identified goods and/or services. 15 U.S.C. Section 1051(a), as amended.

International Class 009: computer software for autonomous aerial vehicle guidance and control systems

In International Class 009, the mark was first used at least as early as 09/01/1998, and first used in commerce at least as early as 09/01/1998, and is now in use in such commerce. The applicant is submitting or will submit one specimen for *each class* showing the mark as used in commerce on or in connection with any item in the class of listed goods and/or services, consisting of a(n) Portion of company website describing product.

Specimen - 1

The applicant hereby appoints Alexander M. Parker and R. Steven Jones & Davis, L.L.P., 15851 Dallas Parkway Suite 1220, Addison, TX, USA, 75001 to submit this application on behalf of the applicant. The attorney docket/reference number is Geneva/TM.

The USPTO is authorized to communicate with the applicant or its representative at the following email address: aparker@jonesdavis-law.com.

A fee payment in the amount of \$335 will be submitted with the application, representing payment for 1 class(es).

Declaration

The undersigned, being hereby warned that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. Section 1001, and that such willful false statements, and the like, may jeopardize the validity of the application or any resulting registration, declares that he/she is properly authorized to execute this application on behalf of the applicant; he/she believes the applicant to

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 191 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

be the owner of the trademark/service mark sought to be registered, or, if the application is being filed under 15 U.S.C. Section 1051(b), he/she believes applicant to be entitled to use such mark in commerce; to the best of his/her knowledge and belief no other person, firm, corporation, or association has the right to use the mark in commerce, either in the identical form thereof or in such near resemblance thereto as to be likely, when used on or in connection with the goods/services of such other person, to cause confusion,

or to cause mistake, or to deceive; and that all statements made of his/her own knowledge are true; and

Signature: /alexander_parker/ Date: 01/22/2004 Signatory's Name: Alexander M. Parker

that all statements made on information and belief are believed to be true.

Signatory's Position: Attorney

Mailing Address: Alexander M. Parker 15851 Dallas Parkway Suite 1220 Addison, TX 75001

RAM Sale Number: 498

RAM Accounting Date: 01/23/2004

Serial Number: 78355939

Internet Transmission Date: Thu Jan 22 17:58:51 EST 2004 TEAS Stamp: USPTO/BAS-6419013490-2004012217585161254 8-78355939-200bbdc8f49b5e5748ffb87cf9e3f 98ff55-CC-498-20040122175614433791

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 192 of 241


Serial Number: 11/736,356 Filed: 04/17/20 Examiner: Ronnie M. Mancho Art Unit: 3664

VACS

Examiner: Ronnie M. Mancho

Filed: 04/17/2007 Art Unit: 3664 Sheet 193 of 241

1

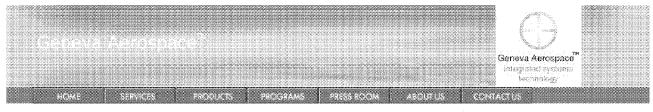

Dakota Unmanned Aerial Vehicle

Variable Autonomy Control System (VACS)

Low-Cost UAV Avionics Kit

Hi-Fidelity 600F Engineering Simulation


400 MHz UAV Flight Termination System


Multi-UAV IP Dotalink System


Products: Variable Autonomy Control System (VACS)^M

Under Air Force Research Lab funding, Geneva has developed an innovative UAV control design that combines state-of-the-art missile technologies with fixed-wing aircraft control. Our design balances autonomous flight control with manual control to provide variable levels of directional independence and minimizes the personnel and training requirements for the operation of the UAV. The truly enabled UAV operator is not required to be a trained aviator, but still retains a wide range of control flexibility in order to successfully execute the mission objectives that call upon his/her specialized expertise.

Our solution is a hierarchical flight control structure with multiple levels of remote operator input combined with an off-board controller software package and intuitive human system interface. Research of the UAV control problem has indicated that the best solution lies in the appropriate functional allocation between the human and the machine, leading to the organization of the control problem between the two fundamental categories: flight governance and flight management.







1	
2	Exhibit 8 - Development and Testing of a Variable Autonomy
3	Control System (VACS) for UAVs, by Dave Duggan of Geneva
4	Aerospace and Luis A. Piñeiro of AFRL contained in the
5	Proceedings AUVSI Symposium, 2002

Jed Margolin

Serial Number: 11/736,356 Filed: 04/17/20 Examiner: Ronnie M. Mancho Art Unit: 3664

Filed: 04/17/2007

Sheet 194 of 241

Development and Testing of a Variable Autonomy Control System (VACS) for UAVs

Dave Duggan
Vice President and Program Manager
Geneva Aerospace
4318 Sunbelt Dr.
Addison, TX 75001
(214) 420-2376 X105
dduggan@genaero.com

Luis A. Piñeiro
Air Force Program Manager
Air Force Research Laboratory
Integration and Demonstration Branch
AFRL/VAAI
2130 8th St. STE 1
WPAFB OH 45433-7542
(937) 255-2857
Luis.Pineiro@wpafb.af.mil

Abstract

As the role of UAVs expands throughout the DOD, increased consideration must be given to reduce cost and complexity of managing and controlling UAVs. First generation control schemes focus on either manual control (remote pilot-in-the-loop) or fully autonomous (preprogrammed) control. These schemes impose significant personnel and training requirements on one side, or increased logistics (mission planning and asset allocation) on the other. The objective of the Variable Autonomy Control SystemTM (VACS) program is to improve realtime control capability for UAVs by allowing autonomous route following capability (as it exists in current Air Force UAV systems) while providing for dynamic real-time control to deviate from pre-planned routes to accomplish a wide variety of tasks; and reduce human workload requirements significantly below that of existing UAV systems, thus allowing a single operator to effectively manage and control multiple UAVs as opposed to multiple operators per single UAV. The VACS architecture

provides for varying levels of control autonomy, from fully autonomous control to simplified manual flight control modes, and provides a flexible and simple user interface with a much smaller logistical footprint. Furthermore, the VACS design facilitates manned and unmanned systems interoperability as will be demonstrated in follow-on initiatives.

This paper describes the approach to the system's architecture and design, as well as the testing accomplished to date to validate its capabilities. The effectiveness of the system was evaluated recently in a series of flight demonstrations.

Background

Although first generation military UAVs have an impressive set of capabilities, real-time control capability may have been somewhat limited by the need to pre-program routes for totally automated platforms, or the need to have rated pilots assigned in non-flying tours of duty to deal with manually controlled assets. Rarely,

however, do real-world missions go exactly as planned. There are time-critical targets that pop up; traffic conflicts with manned aircraft; clouds that get in the way of EO/IR sensors; and, intelligent and devious adversaries who make target location and identification difficult. Realtime control is required to deviate from the planned route to find and identify new targets; to maneuver UAVs to avoid traffic; to fly under the weather; and to get better line-of-sight angles. Skilled pilots can maneuver aircraft, but then an additional operator is necessary to manage the sensors and the dynamic mission. Likewise, as the dependence on UAVs for military operations grows and UAV technology is integrated into the emerging global command and control architecture, the cost and complexity of managing and controlling these assets are expected to become substantial. Hence, an integrated flight control/flight management system that allows for, but minimizes, human

The VACS effort was established with the purpose of addressing the aforementioned concerns, thus simplifying UAV operation and control. As its name suggests, the architecture includes varying levels of control autonomy from fully autonomous control to simplified manual flight control modes. The simplified manual modes are designed to address Air Combat Command's stated need for "improved real-time control of UAVs". Along with the need for improved real-time control capabilities,

intervention is necessary for the Joint Services.

efforts exist within the Air Force to investigate the benefits of placing the UAV control onboard an aircraft. Doing this would allow a Joint STARS to capture imagery for positive ID of ground targets detected by radar. AWACS controllers could direct UAVs to jam enemy radar (when EA-6B Prowlers are unavailable) or direct UCAVs to attack radar sites. Rivet Joint controllers could maneuver UAVs to gather electronic intelligence. AC-130 gunship crews could maneuver a UAV below the clouds to identify targets and assess damage from a safe distance. These airborne platforms, however, have limited space on board for a crew dedicated to UAV control, and need a "de-skilled" UAV control system for their existing operators to use.

Filed: 04/17/2007

Art Unit: 3664

VACS Overview

The VACS architecture is designed to support an emerging generation of autonomous and semi-autonomous air vehicles. The design provides seamless transition between varying levels of control autonomy from fully autonomous control to simplified manual flight control modes. The VACS design evolved from high-performance aircraft and advanced standoff missile flight control technologies. Funding for the variable autonomy control concept was provided under the Small Business Innovative Research (SBIR) program Phase I, Phase II, and Phase III funding vehicles through the Air Force Research Laboratory (AFRL) Human Effectiveness and Air Vehicles Integration Directorates (Reference

1). The VACS is to improve real-time control of UAVs, providing autonomous route following capability (as exists in current Air Force UAV systems) while allowing for dynamic real-time control to:

- Deviate from the planned route
- Find and identify new targets
- Maneuver UAVs to avoid traffic
- Fly under the weather
- Avoid terrain collision and support low altitude terrain following
- Avoid airborne collisions with other manned and unmanned air vehicles
- Get better line-of-sight angles for target identification, bomb damage assessment, and other intelligence gathering missions

The VACS provides the real-time control capability that a flexible, operational UAV system requires to successfully execute a mission, including dynamic sensor control and real-time re-tasking, with human workload requirements significantly below that of existing UAV systems. Currently, the VACS capabilities include:

- Autonomous route navigation with autonomous on-station orbit and target search capabilities
- Real-time route editing
- Mixed/hybrid UAV control, such as execution of programmed, energy efficient

- climb to operator selected altitude mixed with autopilot assisted manual turn capability
- Tight integration of the UAV primary imaging sensor with the outer control loop for automatic sensor slave steering
- Simplified manual control allowing for realtime manual directional control capability (horizontal and vertical) with no operator training or aviation experience required
- Photo-realistic synthetic vision display (SVD) technology supporting synthetically enhanced situation awareness for the UAV operator


Additional capabilities currently being *implemented* are:

- Automatic takeoff and landing with no requirement for external aiding/guidance sensors
- Multi-ship control capability allowing a single operator the capability to simultaneously manage and control four or more UAVs at one time
- Digital terrain elevation database (DTED) based automatic ground collision avoidance
- Optical sensor based autonomous air collision avoidance

Each of these technologies is being implemented and flight-tested through multiple Air Force and Navy Autonomous Operations research and development programs that extend through the

summer of FY2003. The significant UAV capability advancements offered by the VACS design are the culmination of leveraging advanced capabilities developed through several Army, Navy, and Air Force programs.

VACS was designed to offer a core autonomous and semi-autonomous air vehicle flight control and multi-modal management software package that facilitates rapid, affordable advancements in UAV automation while maintaining seamless integration of the operator and the UAV(s) at all levels of control automation. Reviewing a structure for generalized intelligent control architecture provides a method of relating the VACS design to such a core software package. Figure 1 shows the mapping between a generalized intelligent controller hierarchy and the VACS architecture. The VACS design is modular and generic in nature. adaptation of VACS in its entirety or of one or several subcomponents thereof to TCS, VTUAV, TUAV, and other future military UAV systems will be technically trivial and can be done with rapid turn-around for low cost. Geneva is currently engaged in several VACS proprietary programs which adaptations are under way.



Filed: 04/17/2007

Figure 1 VACS Architecture


A key point to note in the above figure is that the core system architecture, core guidance, navigation, and control algorithms, and major sub-system interfaces are in place. New modules (i.e., new autonomous operations technologies) are added as funding permits. For example, the current AFRL 6.2 program is adding an automatic ground collision system (AutoGCAS, Reference 2). Additionally, an ONR funded Autonomous Operations program is adding an optical sensor-based autonomous "see and avoid" system. Capabilities such as these are modules that "plug" into the core architecture as facilitated by the modular "plugn-play" design of the VACS system.

The VACS architecture is comprised of airborne management and control functions as well as off-board control interfaces and intuitive human-system interfaces. The off-board control station is comprised of faster-than-real-time simulation capability supporting real-time operator situation awareness and decision aids, intuitive graphical user interfaces and situation displays, and

advanced photo-realistic synthetic vision displays.

The combination of high fidelity synthetic visualization tools (offered by Geneva's industry partner - SDS International), faster than real time simulation technology, and variable baseline autonomy control provides architecture that is capable of supporting a new level of real-time UAV control and situation awareness. The synthetically enhanced situation awareness system (SESAS) supports real-time management and control of multiple UAVs by a single operator. The synthetic visualization display includes threat data realistically displayed over mapped and photo-realistic 3D terrain. These visuals are driven (dynamically propagated) by a combination of simulated and real UAV data. The simulated data is generated by the ground control station and propagated at a much higher rate than real data is received from the air vehicle. When real data is received, it is used to correct the simulation solution, thus providing an accurate, continuous representation of the UAV flight state within its environment.

The realism afforded by the synthetic visuals significantly enhances the operator's situation awareness. The synthetic visuals offer multiple views (or frames of reference) and increased field-of-view (FOV) over that of on-board sensors. Figure 2 illustrates the concept.



Filed: 04/17/2007

Figure 2 Synthetically Enhanced Situation Awareness Concept

The Synthetically Enhanced Situation Awareness technology can be utilized to provide a wide FOV that augments live video and sensor feeds while circumventing payload and bandwidth limitations. Specifically, correlated, photo-realistic 3D terrain can be presented on multiple monitors or flat panel displays to provide a wide area FOV and aid controllers in orientation and situation awareness. Furthermore, this photo-realistic representation of the scene can be viewed from various frames of reference with the simple push of a button.

The synthetic vision based enhanced situation awareness concept was recently demonstrated in a flight test conducted over the Army's 10th Mountain Division Ft. Drum training range located in upstate New York. VIPs in attendance noted the realism of the synthetic visuals with respect to the live video feed transmitted from the UAV.

versatile design, and possesses the critical flexibility needed when adjustments to the airframe configuration become necessary during the course of the program.

Filed: 04/17/2007

Art Unit: 3664

Significant reductions in datalink bandwidth requirements can be achieved with the aid of the simulation. Background and high frequency update information is provided by the simulation, while low-frequency data specific to the UAV - data that changes in real time over long periods of time - is provided via downlinks. By filling in the high frequency gaps with simulated data, very low update rates over the datalink are made feasible in that the operator is provided with a continuous situation awareness that is comprised of mixed live and simulated data. SESAS addresses two key areas of needed technology improvements in the UAV community: datalink bandwidth By significantly reducing the survivability. transmission requirements of the air vehicle, UAV detection becomes more difficult, thus increasing system survivability.

The guidance executive manages path regulation and operator inputs and selects the appropriate guidance law to achieve the desired control requirement, supporting varying levels of control from fully autonomous waypoint / route following to fully manual directional control steering. All of the control capability requirements needed to support management and control of multiple UAVs by a single operator are comprehended in the existing VACS design and have been flight proven on Geneva's Dakota UAV testbed.

VACS Control Modes

The distinguishing aspect of the design is the with which control levels fluidity transitioned. Through algorithm research and human factors engineering trials, we derived a trajectory synthesis based control scheme. This control scheme uses trajectory predictive techniques that allow the operator to effortlessly interact with the control system at any control level from manual through autonomous. The marvel of the control scheme selected, which was derived primarily from advanced missile controls concepts, is its effectiveness in achieving the performance objectives with an uncomplicated, yet advanced, algorithm implementation.

The VACS is designed using a flight control architecture that is predominant in the missile industry. The autopilot software design utilizes state-of the-art flight control techniques, which allow the actuators to dynamically adjust the airframe stabilization properties "on the fly". The flight computer is programmed directly with the airframe physical properties, so that it can automatically adjust its settings with changes in airframe configuration, aerodynamic properties, or flight state. This provides for a simple and

The design is founded on rigorous, tractable mathematical formulations that allow interaction with the operator inputs and allow the operator to instantaneously remove himself from the loop without concern over corresponding vehicle reactions - the vehicle does what the pilot We avoid, however, heuristic expects. networks, artificial techniques (neural intelligence, fuzzy controllers), as they are not needed at this level of control. These techniques will be employed at the observer level for subsystem fault detection in future intelligent autonomy efforts. Consequently, the control system design is robust, predictable, and verifiable. From the UAV perspective, the vehicle that is sent out is the exact same vehicle that returns – a crucial design tenant that allows us to verify safe and predictable performance.

Although human factors played a key role in the design evolution, equally important were robustness, reliability, and affordability. The design features a tolerance to inertial sensor errors and large system latencies. A COTSdesign approach based utilizing micro electromechanical systems (MEMS) sensors and commercial grade components was a primary objective in our research. Consequently, the control system design had to provide precision control (e.g., precision path regulation and operator command responsiveness) in the presence of low quality inertial sensors (gyros, transducers) and accelerometers, pressure "sloppy" actuators. The trajectory synthesis

based control solution proved to be robust in the presence of all such sensor errors and subsystem latencies. Mathematically speaking, for example, large inertial measurement unit (IMU) biases wash out in the closed loop at all levels of control. We have demonstrated – in flight tests – precision, highly responsive control (relatively high bandwidth design) with the use of low-grade inertial sensors and low performance actuators.

Sheet 201 of 241

The VACS implementation currently provides the following set of control modes:

- R/C or Manual Control Mode
- Control-Stick-Steer Mode
- Programmed Maneuver Mode (See Table 1)
- Sensor-Slave Steering Mode
- Waypoint Guidance Mode (See Table 2)
- Park Mode
- Go To Mode (waypoint)
- Return-to-Base (RTB) Mode
- Launch Mode
- Fail-Safe Mode

Table 1: Programmed Maneuvers

Maneuver	Description
MAX CL	Climb at maximum climb
MAXCL	
	rate to input altitude
BEST CL	Climb at best climb (most
	efficient) climb rate to input
	altitude
STEEP	Descend at max descent
DEC	angle to input altitude
SHAL	Descend at approach descent
DEC	angle to input altitude
BEST RNG	Cruise at best range speed
BEST END	Cruise at best endurance
	speed
MAX	Cruise at maximum cruise
(SPD)	speed
MIN (SPD)	Cruise at minimum speed
RT	Turn right an amount equal
	to the input value
LT	Turn left an amount equal to
	the input value
ABS HDG	Turn to the exact heading
	input
DISABLE	Disable the programmed
D	maneuver

Table 2 Waypoint Properties

	J 1 1
Event Type	Waypoint, figure 8,
	racetrack, ellipse (circle is
	racetrack with equal length
	and width)
Waypoint	Geodetic latitude of
latitude	waypoint or orbit pattern
	center
Waypoint	Geodetic latitude of
longitude	waypoint or orbit pattern
	center
Waypoint	Ellipsoidal altitude of
Altitude	waypoint or orbit pattern
	center
Waypoint	Speed setting at waypoint
Speed	location
Orbit pattern	Length of desired orbit
length	pattern
Orbit pattern	Width of desired orbit
width	pattern
Orbit pattern	Rotation angle of orbit
orientation	pattern (relative to true
	North)
Number of	Desired number of orbit
orbit laps	laps
Time in	Desired time to maintain
orbit	orbit pattern (overrides
	orbit laps if greater than
	minimum threshold)
Orbit pattern	Offset vector of orbit
center offset	pattern center from known
	target location

Filed: 04/17/2007 Examiner: Ronnie M. Mancho Art Unit: 3664

Synthetic Vision Displays


Geneva's industry partner, SDS International, has emerged as a leader in high-fidelity PC based photo-realistic synthetic visualization technologies. ArchAngel Synthetic Vision Displays (SVD), one of SDS' SVD products provides revolutionary improvements to the efficiency and effectiveness of the war fighters by providing real-time displays of 2D and 3D images that include threats, friendlies, and command and control overlays. The visuals offer complete and current sensor/decision maker/shooter information, plus situation awareness for safety and navigation. ArchAngel utilizes synthetic vision plus simulation functionality assimilated from Distributed Mission Training (DMT), DIS and HLA Tools, and Constructive Simulations to support combat missions.

ArchAngel is aimed at providing innovative visualization technologies as an "Information Portal" based upon XML and Intelligent agents to provide "Pull" and "Push" to address a broad range of sensor-decision maker-shooter issues. ArchAngel's design focus is to provide relevant real-time portions of AWACS, JSTARS, Rivet-Joint and sensor data to the cockpit of the shooters including relaying of Satellite and UAV imagery.

Geneva Aerospace has an ongoing funded effort to adapt the ArchAngel technology to the VACS


UAV control station environment to include incoordinated time and sensor/decision maker/shooter information that is HLA distributed from the VACS ground control station to the synthetic visual displays. The displays include threat data realistically displayed over mapped and photo-realistic 3D terrain. Damage Assessment prediction visuals are supported with fire, smoke and even wind blown smoke. The key innovations include the ArchAngel project features of real-time multisource fusion and display via Super-MFD and SDS's Fast-Panel technology.

The following figure illustrates examples of the visualization technologies, including "pathway in the sky" visual overlays and visualization enhancements gained from overlaying / fusing synthetic terrain with ortho-rectified, georegistered imagery.



o Art Unit: 3664

Filed: 04/17/2007






Figure 3 Photo-Realistic Synthetic Visualization Illustrations

The Synthetic Visuals are driven by the UAV in a manner very similar to the original design intent of a high fidelity flight simulator commanding own ship eye-point, environment and other entities. The main difference being that instead of a high fidelity flight simulator, live UAV state information drives the own ship eye-point. Furthermore, the other entities (ground-based threats, other aircraft, etc.) can be real-world sensed entities as opposed to simulated entities.

The photo-realistic, geo-specific visuals that were originally developed for training and

mission rehearsal are now directly usable in operational UAV contexts. In the simplest terms the GPS and INS data that report UAV position are utilized as inputs to the Synthetic Visual Display's API, which couples the state data with FOV and orientation information from the cameras and sensors onboard the UAV. Replication of the simulated visuals provides "perfect weather", daylight visuals regardless of the night, weather, fog, clouds, or camera/sensor battle damage. The use of wider FOV, multiple screens, augmented symbology and network integrated data exchange support an entire new generation of situation awareness enhancements, tools and operator decision aids, especially in the context of UAVs with flexible ground control stations and network interconnectivity.

The Synthetic Vision Display (SVD) technical approach is based upon integrating advanced simulated visuals originally developed for training purposes, into UAV operational systems. Specifically, the successful integration of SDS's Simulated Visuals with the Geneva VACS Ground Control Station (GCS) during recent AFRL sponsored flight testing at the Army's 10th Mountain Division training range at Ft. Drum, NY is indicative of the potential advances that merging these technologies can have in the near-term. Further, simulated HUDs developed for other training simulations have direct utility in the Synthetic Visuals. A high level description of the technical approach encompasses SDS International's Acuity Visual

Products to provide the basic synthetic visuals and some of the simulated HUD features. Additional "Super-HUD" functions, features and symbologies are being leveraged from AFRL/SDS's UCAV DMT Testbed effort, the Space Maneuver Vehicle Prototype, ArchAngel Prototype and AFRL VR-HMD R&D efforts. SDS's considerable experience with DIS and HLA has also lead to innovations utilizing the Dead Reckoning Algorithm's (DRAs) to reduce the frequency of communication updates required in the UAV operational context.

Multi-UAV Control using VACS

Key technology areas that have been employed to support the VACS multi-vehicle control research, development, and flight-testing include communications, controls, vehicle management, human factors, and simulations. The VACS design implements spread-spectrum communications hardware architectures and supporting multi-layered communications software packages that enable multi-vehicle messaging. Furthermore, we have conducted extensive work in multi-vehicle simulation development - both in the area of pure simulation based, network centric multi-vehicle analysis with Geneva's industry partner SDS International as well as in the more pertinent area of real-time system multi-vehicle simulation, including Processor-in-the-Loop (PIL) and Hardware-in-the-Loop (HIL)

simulation. The fundamental difference between the two simulation approaches is that the former approach placed less emphasis on real-world implementation concerns and focused on higher-level concept development whereas the latter is designed entirely around real systems and considers all pertinent real-world implementation concerns. The simulations from the latter approach drive our real-time, flightworthy systems and, therefore, consider all of the limiting factors associated with the communications and flight control systems hardware and operating environments.

The multi-vehicle simulation studies have followed two approaches: 1) the Distributed Mission Training (DIS/HLA network protocols) approach for trade study analysis and 2) realtime, multi-system simulation using Geneva's developed internally multi-layered communications packages across RS232, 115.2 kpbs, using wireless RF (via spread-spectrum datalinks) connectivity between systems. For simulation studies in a non-laboratory environment, approach (2) uses the samelayered communications software package as in the lab environment, however the lowest level of the communications layer uses the Ethernet as opposed to the serial Input/Output device.

Finally, as discussed previously in this paper, we have designed and implemented a novel, variable autonomy vehicle management and control architecture that facilitate multi-vehicle

control with varying levels of functional allocation between the operator and the UAV network. Human factors engineering and live flight-testing have played key roles in the evolution of the VACS design. This gradient control implementation supports the full spectrum of autonomy from manual to supervised, to autonomous. The core architecture is highly flexible and offers a proven, core architecture to support the full evolution of the cooperative control solution.

Included in the VACS core are a set of mission health assessments generated based on much faster-than-real-time simulations that monitor vehicle performance utilizing UAV sensor inputs. Also included in the VACS core is an automated DTED based ground collision avoidance system. These capabilities play an important role, from the human factors perspective, in the multi-vehicle control problem as they offer automated system health monitoring and fault mitigation capabilities that significantly reduce operator workloads associated with managing a network of cooperative and non-cooperative UAVs.

As previously discussed, inherent in our efforts is the design and implementation of novel situation awareness technologies that facilitate effective management and control of multiple UAVs by a single operator. The VACS approach features mixed reality concepts using photo-realistic 3D synthetic vision displays

driven with both sensed and simulated vehicle state information.

Filed: 04/17/2007

Additionally, the work in variable autonomy controls has extended to the areas of automated collision avoidance technologies, where Geneva Aerospace has secured an ONR sponsored Autonomous Operations program to integrate VACS software with multi-vehicle sensing technologies to provide an optical sensor based automated air collision avoidance capability for UAVs. As evidenced by the research so far, the multi-vehicle cooperative behavior and control problem is dependent on both control system and situation awareness technologies.

VACS GCS Software

The VACS human-system interface (HSI) is a graphical user interface (GUI) that allows the operator to quickly alter the UAV course with little effort. The VACS HSI focuses on the UAV mission tasking rather than vehicle aviation; hence, the VACS interface places minimal significance on standard "cockpit" displays and focuses on situation displays. The operator interacts with VACS through the use of a mouse, a joystick (or game pad), and a keyboard. The software can easily be modified to take advantage of the touch-screen capabilities of the rugged notebook computer.

Push buttons in the main GUI provide access to dialogs that provide vehicle status information, sensor management and control functionality, information dissemination capability and through both data logging and network connectivity. A route editing dialog is accessed from the map display and provides the operator rapid, intuitive point-n-click system interaction for real-time mission planning and route editing capability, as well as map display editing features (zoom, center, change map background, etc). The route editing pop-up dialog provides the operator the capability to either type in known, precise waypoint coordinates or record graphically edited route event coordinates and parameters. The situation (map) display also contains a target editor with the capability to tie targets to UAV mission objectives and a corridor editor set no-fly zones and/or other mission planning boundary constraints.

Currently, the mission / route editing is performed manually by the operator, using the interface graphical user "point-n-click" functionality on the map or "fat-fingering" the The interface, however, was coordinates. designed generically so automated route plans can be accepted. VACS contains automatic route/mission analysis tools to alert the operator if a planned mission is not physically realizable due to vehicle performance constraints or terrain collision issues. Geneva Aerospace is planning efforts with various VACS customers to automate the entire in-flight route planning

process by integrating the Air Force's In-Flight Planning modules (3) with the VACS ground control station.

The VACS GCS also contains a Cautions, Alerts, and Warnings (CAWS) panel that alerts the operator to system malfunctions, low fuel, route errors, and various other off-nominal conditions. The CAWS display will alert the operator when a vehicle subsystem fault is detected.

Using the VACS GUI interface, the operator can maintain any level of control over the UAV, from fully manual to fully autonomous, with the simple click of a mouse.

A feature in the VACS GCS GUI is the incorporation of the Digital Terrain Elevation Database (DTED) with the map display and route planning tools. The VACS software includes a module that performs real-time interpolation on the DTED and provides terrain elevation at the vehicle's current geodetic location, along with a terrain elevation projection 5 km along the vehicle's current Additionally, the DTED routine heading. provides a real-time display of the operator's input device pointer location (such as the mouse cursor) over the map to provide rapid feedback of terrain elevation at selected geodetic locations. This DTED feature is used to aid in preflight and real time mission planning.

The DTED capability is currently being extended to the VACS airborne digital flight control system to provide a DTED-based automatic ground collision avoidance system (AutoGCAS) for both cruise missile and UAV applications. This AutoGCAS capability will be flight test demonstrated on the Dakota UAV testbed in late summer 2002.

The VACS design offers enormous flexibility to the UAV operator and reduces the operator workload to a level that facilitates the control of multiple UAVs by a single operator. The synergistic combination of the VACS design, the In-Flight Planning system, and the Synthetic Vision Display provide a comprehensive multimission, multi-vehicle automated UAV mission management and control system.

VACS TESTING

Testing of VACS has consisted of hundreds of thousands of all digital Monte Carlo simulation cycles, hundreds of hardware in-the-loop (HIL) simulations, over a dozen developmental test flights on two different UAV platforms, and one operational scenario demonstration flight at the Army's 10th Mountain Division training range at Ft. Drum, NY.

The live flight exercises have demonstrated that a single operator with no aviation skills can simultaneously manage and control the UAV and the UAV primary sensor. In these demonstrations, the operator was able to effectively transition control levels, update mission plans, monitor the UAV imagery, monitor the UAV systems status, and trouble shoot system malfunctions from the ground control station while the UAV demonstrated seamless mode transitions and at all times behaved as the operator expected and required. Furthermore, we demonstrated both in simulation and in flight exercises that the design eliminates common pilot induced faults such as pilot induced oscillation, stall, spin, over-g, or other pilot induced phenomena that over-drive the airframe and result in the loss of the vehicle.

Sheet 208 of 241

During the Phase II effort, Geneva Aerospace teamed with Northrop Grumman Corporation to integrate the Variable Autonomy Control System ground control station with the Joint STARS Moving Target Exploitation (MTE) workstation to demonstrate the effectiveness of the VACS human-system interface and VACS UAV control approach in a real-world, airborne battle management system. The VACS control station proved to offer an effective, intuitive human interface for the Joint STARS operator. This capability was successfully demonstrated in a scenario representative of that of Figure 4, with the Joint STARS participation being simulated by a ground operator utilizing a modified Joint STARS MTE workstation. The next round of demonstration flights is scheduled for the late summer 2002 tests, and will

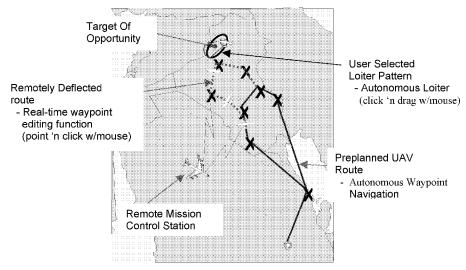


Figure 4 Wide Area Surveillance Sample Mission

showcase the multi-vehicle control, ground collision avoidance, and auto take-off and auto land capabilities.

Conclusions

The Variable Autonomy control System (VACS) is a comprehensive, flight proven air vehicle multi-modal management and control architecture designed to support the emerging generation of autonomous and semi-autonomous UAV systems. The synergistic combination of advanced, gradient control concepts, intuitive human-system interfaces, and photo-realistic synthetic offers vision displays comprehensive, off-the-shelf multi-UAV management and control package and provides a core flight control architecture that will enable

the rapid transition of autonomous UAV technologies to the war fighting community.

References

- Duggan, David S., "Demonstration of an Integrated Variable Autonomy UAV Flight Control System", Phase II SBIR Final Report, AFRL-HE-WP-TR-2001-0035, January 2001
- Swihart, Donald E., et al, "Joint Development of an Auto Ground Collision Avoidance System", 4th Saint Petersburg International Conference on Integrated Navigation Systems, May 1997
- Leavitt, Charles A., "Real-Time In-Flight Planning", May 1996, USAF Contracts F33615-92-C-3805 and F33615-94-C-1431

1	
2	Exhibit 9 - From Geneva Aerospace Provisional Application 60/480,192
3	Small Business Innovation Research (SBIR) Program Projects
4	Summary, Topic Number AF98-179

Jed Margolin

Serial Number: 11/736,356 Filed: 04/17/20 Examiner: Ronnie M. Mancho Art Unit: 3664

Filed: 04/17/2007

Sheet 210 of 241

Serial Number: 11/736,356

Examiner: Ronnie M. Mancho Art Unit: 3664

Filed: 04/17/2007

Sheet 211 of 241

APPENDIX B

U.S. DEPARTMENT OF DEFENSE SMALL BUSINESS INNOVATION RESEARCH (SBIR) PROGRAM PROJECT SUMMARY

TOPIC NUMBER:

AF98-179

PROPOSAL TITLE:

Examination of an Integrated Autopilot Design for Simplified UAV

Flight Control

FIRM NAME:

Geneva Aerospace, Inc.

PHASE I or II

Phase I

PROPOSAL:

Technical Abstract

In order to be truly versatile, Unmanned Aerial Vehicle (UAV) Systems must be usable to individuals who's training is more focused on the requirements of a given mission or on the usability of the payload, rather than on the aviation of the air vehicle. This suggests that flight control systems must respond to higher level, more intuitive remote commands such as "go left", "go right", "climb", or "dive".

Modern embedded guidance and control processing methods such as those used for autonomously guided cruise missiles or advanced military aircraft demonstrate that low-level stickand-rudder commands can be eliminated as a requirement on the remote operator. In addition to a more intuitive command-response autopilot, Geneva Aerospace has developed a design which allows the integration of intuitive "mission-level" remote commands into the guidance system, significantly reducing the work-load on the operator as it pertains to the aviation of the UAV.

The guidance system is evaluated on the Freewing Tilt-Body airframe, which provides unique inherent camera stabilization and "Extremely" Short Take-off and Landing properties. The integrated guidance design and systems engineering approach proposed provides a modular core structure that can easily be upgraded and can grow with increasing technology.

Anticipated Benefits/Potential Commercial Applications of the Research or Development.

A well integrated mixed-reality guidance system could Make UAV's useful for border patrol, speed control, hazardous area investigation, atmospheric sampling, or even motion picture filming by persons who could operate with minimal aviation expertise or manual skill.

Keywords:

Unmanned Arial Vehicle Guidance/Autopilot Virtual Reality Telepresence

Mixed Reality Autonomous **GPS Aided Navigation Ground Station**

Nothing on this page is classified or proprietary information/data Proposal page No. 2

1.0 Identification and Significance of Opportunity

The nature of this research opportunity is best appreciated by first posing a set of toplevel requirements for an "Ideal UAV System":

The system must be easy to use with minimal training. As recognized in the solicitation, an effective UAV system will respond to more intuitive command motions. This will allow the operator to focus on the payload and mission operations rather than on aircraft piloting. Commercialized products such as video games and CAD utilities provide an excellent model for human interfaces which have already been evaluated and tested on the open market. In fact, the ideal simplified UAV autopilot should be compatible with COTS hardware such as standard joysticks, track-balls, lap-top computers, and Virtual Reality Head Mounted Displays and Glove Input Devices.

The system must be able to operate autonomously as well as respond to high-level remote commands. Autonomous mission capability with the ability to remotely interrupt the mission is essential to minimize the work load of the operator when flying multiple-UAV's from a single ground control station. The ideal guidance concept will nominally operate with enough autonomy even when responding to remote commands that one person will be able to operate several UAV's from the same station.

The system must be adaptable to on-going command-and-control software development efforts. For military applications, the system will be required to operate within the advanced Command, Control, Communications, Computers, and Intelligence (C4I) infrastructure and interface with associated Common Ground Control Stations such as the Joint STARS Common Ground Station. As a commercial application, this could be a lap-top version of a somewhat less complicated, but similar ground control package. The guidance software must have the capability not only to respond to the command interface, but must also be capable of expanding modularly as new capabilities are desired without significant changes in the interface.

Advances in Virtual Reality simulation graphics display technology makes the concept of a Virtual Reality interface to real-time systems feasible. Already used by surgeons in the Medical community, the use of Virtual Reality, such as Telepresence or Mixed Reality systems, in UAVs is not far away. For this reason, we include an evaluation of a Line-of-Sight Slave mode capability in which the operator's point of reference is the image scene transmitted from the UAV's on-board camera (we will refer to this as the "tactical situation display"). In this mode the operator does not provide direct directional commands to the UAV. Instead, the operator focuses his attention on the tactical situation display, commanding the look angle of the UAV's on-board sensor to survey the battlefield (or other topographical region for non-military applications) while the UAV autonomously commands a flight profile which is slaved to the operator's sensor line-of-sight commands. As discussed below, our integrated guidance solution adapts easily to this mode.

The system must be easy to land. Even with directional-response controls, the operator must be capable of commanding the flare and touch-down phase of landing. To

eliminate this operator requirement, the simplified autopilot must be compatible with existing COTS automatic landing systems such as the Sierra Nevada Corporation's UAV Common Automatic Recovery System (UCARS), and hence must be able to land autonomously under nominal conditions. The system must also be able to respond to changes in the terminal approach when the operator detects an obstruction or desires a change in the landing conditions. In addition to its other benefits, the ESTOL capability of the Freewing Tilt-Body airframe design simplifies and reduces the risk of vehicle recovery over that of conventional fixed-wing UAVs

The system will be highly modular, and manufactured from Commercial, Off-the-Shelf (COTS) components. To compete as a marketable product, the system must be affordable, maintainable, and easy to upgrade. For the system to be flexible enough to do so, the guidance software must be designed to work under varying configurations with changing levels of uncertainty. For this reason, a robust, integrated control system design approach will be evaluated.

The above requirements point toward on-going Freewing Tilt-Body UAV development efforts by Freewing Aerial Robitics Corporation and Geneva Aerospace. The proposed SBIR study effort presents an opportunity to evaluate this system against the above desired capabilities, leading to a rapid development and marketing of the "Ideal UAV".

The Geneva guidance concept is founded in the understanding that a UAV can be controlled more like a missile than an airplane because human comfort is not a constraint. We can use a more flexible multivariable controller structure and can allow the airframe to perform conventionally unacceptable maneuvers such as negative accelerations, skidding turns, and high body-rate stabilization. Our controller structure integrates the guidance and autopilot sub-functions (outer loop path commands and inner loop stabilization). As we will show later in this proposal, the simplified autopilot concept is a straightforward augmentation of our integrated guidance design approach.

We have chosen the surveillance mission as a platform for evaluation because of its apparent commercial application potential. A well integrated mixed-reality guidance system could Make UAV's useful for border patrol, speed control, hazardous area investigation, atmospheric sampling, or even motion picture filming by persons who could operate with minimal aviation expertise or manual skill.

2.0 Feasibility of Technical Approach

The proposed technical design approach to the simplified autopilot and integrated surveillance system is made feasible by both the maturity and unique aerodynamic features of the host UAV platform, the Freewing Scorpion Model 100-50, and the maturity of the Geneva all-digital Six-Degree-of-Freedom (6DOF) simulation and integrated guidance design solution. A key feature of the Freewing design concept is its inherent ability to automatically neutralize the effects of turbulence on the fuselage, providing a host sensor platform which requires a significantly less expensive gimbal stabilization system than conventional fixed-wing air vehicles.

Geneva Aerospace has independently developed an integrated guidance design solution using modern robust control systems design techniques. This multivariable integrated guidance design solution provides a low-risk systematic design approach for the simplified autopilot application. The integrated guidance design solution uses system model uncertainties in the vehicle controller design, providing a robust controller design over the model uncertainty region.

2.1 Simplified Autopilot Feasibility

The simplified autopilot provides a UAV control mechanism which allows the remote pilot to provide intuitive directional commands rather than conventional stick and rudder commands. These so-called intuitive commands can be paralleled to outer loop guidance commands in conventional missile flight control systems. Typically the outer guidance loop in these systems provides fairly low frequency acceleration and bank angle commands to a three-axis (pitch, yaw, and roll) autopilot. It is this autopilot which is responsible for generating the commands to the actuators and performing the higher frequency body rate stabilization, thereby resolving the body accelerations and bank angle to the desired commands in a stable manner and tracking the desired trajectory. Such control systems have been in existence for decades and have been proven both in the test environment as well as on the battle-field. In recent years, the advancement of embedded controller technology (e.g., embedded microprocessors) has driven the industry standard to the use of digital autopilots. High performance microprocessors such as Intel's Pentium processors or Texas Instruments' C40 chips can be procured at relatively low cost, making the use of a fairly high performance digital autopilots in UAV systems cost effective and, therefore, feasible.

Geneva has combined the technology associated with high performance missile and aircraft fly-by-wire autopilots with the application of a remote piloted UAV to develop an integrated design solution which satisfies the need for a simplified UAV autopilot system. Utilizing a robust multivariable control system design approach, we have developed a *single* control structure for a UAV autopilot which is robust and modular in nature, allowing multiple levels of remote pilot control as well as fully autonomous flight. We believe that the proven digital autopilot technology in modern weapon systems and high performance aircraft combined with readily available commercial off-the-shelf (COTS) microprocessors and integrated GPS inertial navigation kits makes our concept the right solution for the next generation UAV autopilot.

2.2 Freewing UAV Description

The Freewing Scorpion Model 100-50 has been privately developed by Freewing and represents the culmination of nearly fourteen years of design evolution. The fairly recent formulation of diverse military UAV mission needs has created the venue for which this technology is most attractive. The first UAV variant of the Freewing design flew in 1992, manned variants having flown as early as 1983. The Scorpion evolved through 40% and 50% scale models developed by Freewing with Burt Rutan in 1992 and 1993, respectively. The design featured the freely hinged wing and vectored thrust gained simply by independently rotating the forward fuselage upward relative to the tail boom assembly. The Scorpion 100, also developed with Rutan, first flew in 1994. The Scorpion 100 capabilities include

conventional vehicle-like dash and cruise performance, an extremely short takeoff/landing capability, and turbulence mitigation characteristics. Additionally the vehicle is inherently stable and relatively insensitive to large center-of-gravity changes, making it an appealing platform for a variety of COTS sensors.

The Freewing Scorpion 100-50 provides extremely short takeoff and landing (ESTOL) performance in a simple, modular vehicle that provides a stable sensor platform while retaining all the advantages of a conventional fixed wing aircraft. The freewing tilt-body is a new kind of aircraft, distinct from fixed wings and rotary wings. It is a combination of two tested technologies, the improved free-wing and the tilt-body, which combine to provide an extremely short takeoff and landing aircraft that is stable throughout its flight envelope, while requiring only a few moving parts.

In the Freewing aircraft, the wing is placed on bearings so that it is completely free to rotate in pitch, de-coupling the wing in pitch from the fuselage. Trim surfaces on the trailing edge of the wing are used to control the wing angle of attack and to provide roll control. The resulting "flying wing" has a fraction of the effective pitching moment of inertia compared to an otherwise identical fixed wing vehicle. This allows the wing to rapidly and automatically adjust the angle of attack (as would a weathervane) in response to gusts and other changes in the relative wind. Traditional fixed wing aircraft must overcome the moment of inertia of the entire aircraft to accomplish the same change. But the rapid pitch response of the Freewing allows it to effectively maintain a constant angle of attack with respect to instantaneous wind direction for a given trim surface setting. In addition, the absence of a root moment means that only very small variations in the magnitude/direction of aerodynamic forces are transmitted to the fuselage. The result is a smoother, more stable flight and better sensor resolution since air turbulence is largely neutralized before being transmitted to the fuselage. NASA studies show that accelerations due to gusts are reduced by as much as an order of magnitude in a Freewing aircraft compared to a similar fixed wing aircraft. Conservative estimates developed for the Scorpion by Texas A&M show a 50% reduction in gust loading over the low frequency end of the wind spectrum.

With the Freewing Tilt-body vehicle, the de-coupling between fuselage and wing is taken a step further. Here, fuselage trim surfaces generate body pitching moments independent of the wings, effectively de-coupling the thrust vector from the aircraft velocity vector. The fuselage itself is a lifting body, so the result is a left/right wing pair joined by a rotating spar passing through the lifting body. Both the left/right wing pair and the central lifting body are free to rotate about the span-wise shaft.

The Scorpion tilt-body aircraft has all the attributes of the Freewing Tilt-Body class. The Scorpion 100-50 was designed by Burt Rutan and Scaled Composites, in collaboration with Freewing Aerial Robotics, to meet the original Joint Tactical UAV requirements. The Scorpion was designed to make maximum use of commercial off-the-shelf (COTS) equipment to reduce costs and ensure availability of spares. The following figure shows a side view of the Scorpion in both a take-off/land and cruise configuration. This figure also shows a planform view of the vehicle.

Filed: 04/17/2007

Sheet 216 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

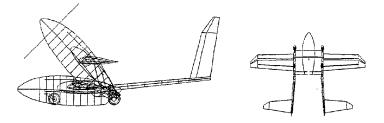


Figure 1: Freewing Side-View and Planform

The following table provides the main physical characteristics of the Scorpion 100-50.

Table 1: Scorpion 100-50 Air Vehicle Physical Properties

Table 1: Scorpion 100-50 Air v	enicie i nysical i ropercies				
Total length	11.8 ft				
Span	16.1 ft				
Wing area (total)	37.3 sq ft				
Freewing area	61% sq ft				
Stub wing area	39% sq ft				
Total height (cruise mode)	4.1 ft				
Total height (tilt body mode)	6.75 ft				
Maximum take-off weight	444 lbs				
Empty weight	322 lbs				
Maximum payload weight	50 lbs				
Maximum fuel load	72 lbs				
Power	52 hp				
Max RPM	7000 (3000 output shaft)				
BSCF	.5257 lbs/hp-hr				
Propeller	60" fixed pitch				
Direction of rotation	CW (facing propeller)				
Static thrust	270 lbs				

2.2.1 Freewing UAV Capability

The following figures show the Scorpion Model 100-50 climb rate, flight envelope, range efficiency, and loiter efficiency. The predicted rate of climb as a function of airspeed and altitude is given in Figure 2, indicating a service ceiling of about 13 kft and a best climb speed of 60 to 70 knots. The resulting times to climb at full power are 5.0, 11.9 and 17.3 minutes to

Serial Number: 11/736,356

Sheet 217 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

5K, 10K and 12K feet, respectively. The maximum level flight envelope and service ceiling are shown on Figure 3. Since the vehicle's wing does not stall, the minimum speed will be determined by control limitations and maximum thrust. The indicated limitation at low speed is based on present flight test experience.





Figure 2: Rate-of-Climb

Figure 3: Flight Envelope

The range factor for this engine at sea-level is about 7 nm/lb at 65 knots. endurance factor is predicted to be 6.8 min/lb. Data for this engine at altitude will not be available until the completion of the flight test program. We have therefore used the sea-level fuel consumption figures for range and endurance calculations for all altitudes.



52 HP Engine; at TOGW

Figure 4: Endurance Factor

Figure5: Range Factor

With a maximum fuel load of 72 lbs and an endurance factor of approximately 6.8 min/lb, it is evident that the Scorpion vehicle is capable of providing several hours of time on station. The Scorpion loiter efficiency combined with its inherent insensitivity to turbulence makes this vehicle an attractive platform for the development and test of the simplified UAV autopilot concept.

Filed: 04/17/2007

Sheet 218 of 241 Examiner: Ronnie M. Mancho Art Unit: 3664

3.0 Phase I Technical Approach

We view the research opportunity for this effort to be two-fold. The Geneva integrated guidance design approach merges the seeker, GPS/Navigator, guidance/autopilot, and remote command sub-functions in a structure that will greatly reduce workload and training requirements for the operator. In addition to the functionality of this design, we will assess a systems engineering design approach which will result in a lower-cost, more produceable, and more maintainable UAV. We therefore additionally propose to gather data which will show a cost benefit to our improved integrated systems engineering process.

3.1 Control System Architecture

Our controller design approach introduces several high-level operational modes, with varied levels of automation:

Energy-Optimization: Autonomous flight with only a single observation point and time-on-station requirement. The guidance determines speed, altitudes and flight paths to minimize energy expenditure.

Pre-Planned Waypoint: The vehicle flies the pre-programmed waypoints, either specifying speed and altitude, or allowing the UAV to autonomously determine them from the energy management system.

Real-Time Waypoint Editing: Can be entered at any time during a mission by specifying a waypoint that the UAV can physically reach from its current location, or by changing the location of an existing waypoint.

Directional Response Autopilot: Entered automatically by moving the joystick. The joystick commands immediately override the existing commands and relate to changes in flight path.

<u>Line-of-Sight Slave</u>: The vehicle heading is commanded to align with the camera lineof-sight commands until the vehicle comes within a specified radius, in which case it is commanded to circle the designated point.

These operational modes suggest an hierarchical control structure with varied levels of remote pilot command insertion. For example, when flying in the "stick and rudder" mode, the pilot commands would be inserted at the lowest control level immediately prior to actuation. Conversely when flying the directional-response autopilot, the commands will be inserted as vertical or horizontal flight path turning rates. LOS Slave commands would be inserted at the guidance command level. Figure 6 shows the proposed control loop organization structure:

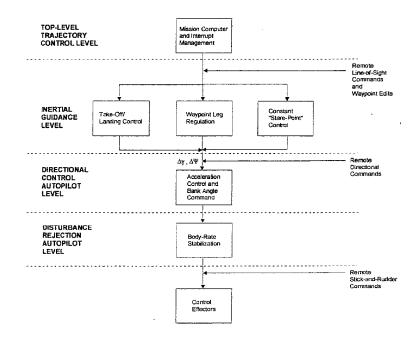


Figure 6 Airframe Control Structure Organization

Perturbations in flight path and ground track angles ($\Delta\gamma$ and $\Delta\Psi$) provide the command signals used for outer loop guidance because they can be mapped directly to "go up/go down" and "go left/go right" intuitive commands and because they lend themselves well to the inertial control laws which are used for the autonomous guidance modes. Figure 6 shows several parallel processing paths at the guidance level. Processing for the outer-loop control is determined by the top-level trajectory control, which is driven primarily by the remote pilot's mode selection and by inertial trajectory requirements. This controller structure leads to a more modular software architecture, which will be useful for future capabilities or use on other UAV systems.

By mapping joystick motion into $\Delta\gamma$ and $\Delta\Psi$, we can achieve the added benefit that letting go of the joystick (referred to here as "stick-free") will result in constant velocity, straight-and-level flight. This will be valuable to the operator when he/she needs to change to another task such as camera slewing or waypoint editing without having to switch to a completely autonomous autopilot mode.

The primary modes for use, and therefore the focus of the evaluation efforts will be on the directional-response autopilot, the LOS slave mode guidance, and the waypoint editing capability. The following discussion defines the operational concept for each of these modes.

<u>Directional-Response Autopilot</u>. The purpose of directional command response is to enable an untrained operator to maneuver the vehicle in a stable manner as he or she affects

the trajectory from ground-station information without having to compensate the faster loop dynamics of rate stabilization, aerodynamic coupling, or speed control. This can be achieved by associating changes in flight-path with the joystick motion, and by injecting these commands into a multi-variable digital autopilot which autonomously controls engine throttle, thrust vector setting, and body rate stabilization. Figure 7 shows the proposed multi-variable control loop structure, augmented with the higher-level functions.

When operating in directional response mode, the joystick commands are converted to flight-path angle change commands through a scheduled gain. This gain must be scheduled versus thrust setting and body tilit angle to maintain equivalent command-per-joystick deflection slope.

The operator will have command of speed control via a simplified, constant setting on his/her display. The directional commands and velocity setting comprise the command vector entering the autopilot. It should be pointed out that the other operational modes also provide the same command signals after some level of processing.

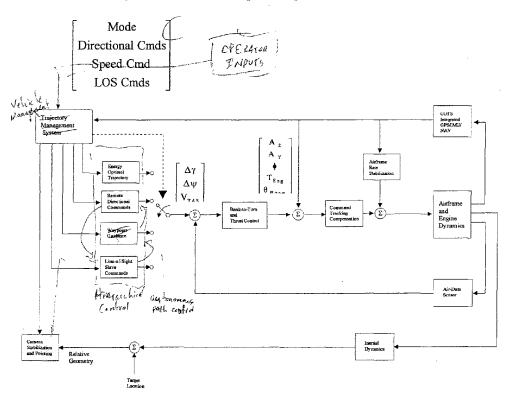


Figure 7 Multivariable Control Loop Structure

The Tilt-Body provides a unique thrust-vectoring capability which is optimally utilized in the thrust vector controller. Figure 8 shows that there are several trim points for most operating conditions across the locus of boom angles and elevator deflections. The data depicted in this figure represent the sum of the aerodynamic force coefficients and installed thrust coefficients at a 50% throttle setting.

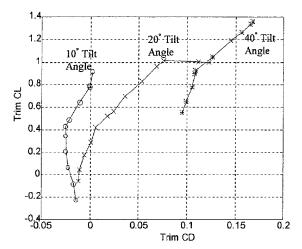


Figure 8: Trimmed Lift vs Drag

The above figure shows both the benefits and penalties associated with the thrust vector. For example, note that when the body tilt is increased from 10 to 40 deg, the total maximum lift capability at 50% power increases by 50%. Also note, however, the severe drag penalty associated with the high boom angle configuration. Consequently, these trim solutions are scheduled as functions of energy management constraints, maneuverability requirements, and desired speed. The curves are synthesized into an integrated multi-variable boom angle and throttle control, which are driven by the operator's speed and mode settings as command inputs. The low speeds available from the Tilt-Body will be a benefit for surveillance purposes, but can result in aerodynamic stall on the tail surfaces. This is particularly a concern when flying at higher boom angles, where the vehicle must fly at slow speeds in order to maintain speed trim. For this reason, the stall limits are multi-dimensional in nature and include a predictive stall-avoidance algorithm.

Because the operator may be inexperienced or otherwise occupied, the system includes control deflection and command limits at several levels to prevent non-linear aerodynamics such as stall and cross-channel coupling, over-expenditure of any mixed control surface in a single axis, structural over-loading, or actuator slew rate limiting.

LOS-Slave Control.

The directional-response autopilot, combined with the stabilized seeker platform allows a single minimally trained operator to easily conduct a UAV surveillance mission. A further level of user simplification is achieved by combining seeker designation command logic with the outer

loop guidance. This mixing provides Line-of-Sight Slave mode capability in which the operator's point of reference is the image scene transmitted from the UAV's on-board camera. In this mode the operator does not provide direct directional commands to the UAV. Instead, the operator focuses his attention on the tactical situation display, commanding the look angle of the UAV's on-board sensor to survey the battlefield (or other topographical region for non-military applications) while the UAV autonomously commands a flight profile which is slaved to the operator's sensor line-of-sight commands. This integration of the camera platform with the guidance provides the following benefits:

- 1. Time-on-station loiter control which can be easily selected and designated.
- Further reduction of workload on the operator, who can now focus primarily on the surveillance aspects the mission.
- 3. An easily adaptable relative Navigation method.

Figure 9 shows an example of how LOS-slave control would be used with the ground station display. The Navigation display would be a top-view with a schematic of the aircraft for easier conceptualization. This symbology would be added to the set of flight state information normally found on the display. The outer circle around the aircraft is a projection of the entire seeker field-of-view onto the ground. The smaller pie-shaped queue is a ground projection of the current seeker borsight position. These would be calculated by the ground station software from the positional information and seeker angle sent across the data-link.

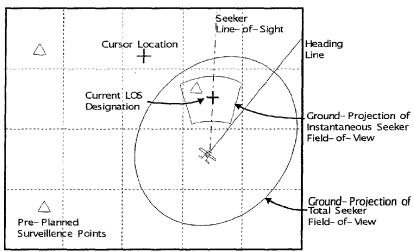


Figure 9 Augmentation to Tactical Situation Display

The remote pilot can opt to either keep the cursor active as the continual steering point, or he/she can designate a "surveillance-point" by clicking on a desired ground location. In the latter case, the staring point would be captured so the cursor could be moved to a new constant location.

If the pilot chooses a surveillance location outside the total FOV, then the outer loop guidance will follow a command-to-LOS mode guide law until the UAV flight path points toward the target. Once the desired staring-point comes within a minimum range threshold, the guidance automatically trips into a loiter pattern (either constant-radius or elliptical) to maintain track on the desired location. This guidance structure allows the operator to park the vehicle at a station with a single key-click while he/she conducts other activities. Figure 10 shows a diagram of the surveillance-point approach scenario.

If a constant location is selected within the minimum turning radius, then the guidance must fly over the surveillance-point and plan an out-and-back pattern to avoid a singularity in the loiter guide-law. This can be easily achieved by inserting waypoint legs autonomously.

If the operator chooses, he/she can select a standoff range (or accept the default range) for surveillance over a hostile target. The seeker line-of-sight commands will also comprehend the offset location to track on the desired location. This is achieved by inserting the offset range vector in the positional component of the loiter guide-law.

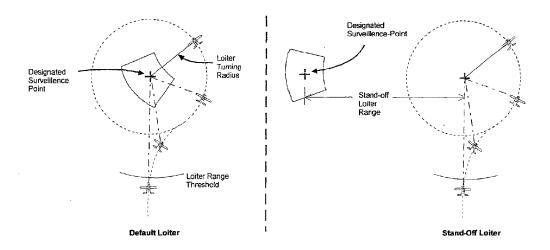


Figure 10 Surveillance-Point Approach Trajectory

Filed: 04/17/2007

The following simplified equations are used to show the basic structure of the LOS Slave mode guidance:

$$\begin{split} & \text{If } (R_{\text{Target}} > \text{Loiter_Threshhold} \,) \, \text{then} \\ & \dot{\psi}_{\text{Cmd}} = K_{\dot{\psi}} \, (\, \lambda_{\text{Horiz}} - \psi_{\text{Heading}}) \\ & \dot{\gamma}_{\text{Cmd}} = K_{H} \, (H_{\text{CMD}} - H) + K_{\dot{H}} \, \dot{H} + \frac{g}{V} \\ & \text{else} \\ & \dot{\psi}_{\text{Cmd}} = K_{\dot{\psi}} \Delta \psi + K_{\rho} \Big(\rho_{\text{Turn}} - \Big\| \bar{R}_{\text{Target}} + \bar{R}_{\text{S ton d-Otf}} \Big\| \Big) \\ & \dot{\gamma}_{\text{Cmd}} = K_{H} \, (H_{\text{CMD}} - H) + K_{\dot{H}} \, \dot{H} + \frac{g}{V} \\ & \text{endif} \\ & \text{where} \\ & R_{\text{Target}} \approx \text{Horizontal Range} - \text{to} - \text{Target} \\ & \dot{\psi}_{\text{Cmd}} = \text{Horizontal Turning Rate Command} \\ & \Delta \psi = \text{Heading Error Relative to Loiter Path} \\ & \lambda_{\text{Horiz}} = \text{Horizontal Line} - \text{of} - \text{Sight to Target} \\ & \dot{\gamma}_{\text{Cmd}} = \text{Vertical Turning Rate Command} \\ \end{split}$$

 $\psi_{\text{Heading}} = \text{Heading Angle}$

 ρ_{Tura} = Loiter Turning Radius

H = Altitude

g = Gravity Acceleration Magnitude

V = Vehicle Inertial Velocity Magnitude

The above equations show two active horizontal guidance terms when flying the constant turning radius circle. The first term is the damping term which drives the vehicle to align its ground track with the desired circular loiter pattern and is the dominating term. The second term is a positional term to help maintain the constant arc.

Waypoint Mode with Real-Time Waypoint Editing

The waypoint guidance system is organized as a linked list of waypoints augmented with smooth turn and leg propagation logic at each station. This provides the capability to easily edit the waypoint list from the graphical display both during pre-flight mission planning and while the UAV is in the air.

The operator will now have the ability to insert waypoints visually with a track-ball or mouse. If the operator discovers an unknown hazard in the pre-planned flight-path, then he can either "drag-and-drop" the existing waypoints or he can delete and insert new waypoints as necessary.

By grabbing the joystick, the operator automatically overrides the waypoint mode and enters directional response mode. Waypoint mode can be re-entered by commanding the vehicle back to alignment with the current waypoint leg.

Autonomous and Directional Response Landing

The usability of typical UAV systems is strongly dependent upon how much skill and instrumentation is required at landing. Completely autonomous landings with conventional fixed-wing UAV's are only possible with very accurate terminal altitude instrumentation such as a millimeter-wave capture and recovery systems, differential GPS Navigation, or RADAR altimeters.

Most systems rely upon remote piloting at the terminal phase. Landing would present a challenge to the simplification of the remote pilot commands because of the complexity and timing of the terminal flare maneuver. However, the Tilt-Body design provides a solution to both autonomous and simplified-remote command landings. When the vehicle flies at high body tilt angle, a large component of lift is afforded at very low airspeeds. This makes it possible to fly the vehicle at steady-state terminal sink rates which will not harm the structure of the vehicle at impact. With this feature, the pilot needs only to command a landing point, and the vehicle guidance responds by setting up its own terminal leg geometrically. A weight-on-wheels sensor is added to shut off the motor at impact and to command negative lift on the Freewing.

The operator can correct the terminal flight-path if he visually detects an obstruction, or he can land the vehicle purely with the directional response autopilot. In this case, the internal command limits prevent him from slamming the vehicle into the ground with too much vertical velocity.

3.2 Typical Mission Profile

The utility of the modes discussed above are demonstrated with a example of how they might be used for a surveillance scenario. The sequence of events correspond to the diagram in figure 11:

- After take-off, the operator points the camera or seeker with the joystick as the UAV flies autonomously along either per-planned or real-time inserted wayopints.
- (2) Operator-controlled maneuver to avoid reported hazard along flight path. The mode is invoked automatically by grabbing the joystick.
- (3) By letting go of the joystick (and not yet designating to re-capture waypoint plan), the UAV flies straight-and-level while the operator scans the seeker
- (4) Operator designates a stand-off surveillance of one of the original mission objective points.
- (5) The operator edits the original waypoints to command a return-to-base, flying by the second mission objective point.
- (6) Operator evokes continuous LOS Slave control to examine third target.
- (7) Operator commands a loiter prior to approach in order to coordinate with other mission objectives or vehicles
- (8) Applies the terminal waypoint to establish the run-in heading.

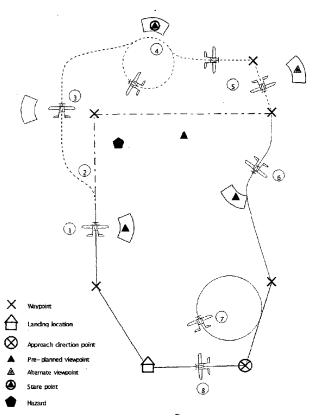


Figure 11: Sample Mission Profile

3.3 Systems Engineering Approach

The systems engineering process is modified to develop systems with COTS components by enabling us to evaluate the contributions of each subsystem to the top level requirements as well as the subsystem component interactions in the presence of a synthesized controller.

Rather than beginning with subsystem requirements from systems engineering trade studies, our process begins with cost and performance data from existing production-ready components. We will design modularity into the system by recognizing those de-facto interface standards which exist with the most cost-effective components. The guidance and autopilot compensation is then developed in parallel with the trade studies identifying the subsystems to be used. This allows us to trade-off certain characteristics of subsystems for equivalent top-level performance. For example, the degraded performance of a lower-cost IMU may be acceptable if slightly better actuators are available.

The cost/performance trades will be evaluated by observing their effects on the highest reasonable level of performance requirements. Several candidate systems will then be projected,

and their performance plotted versus cost. The most cost-effective system will then be identified, and the associated performance characteristics become the system specifications. If the resulting performance is less than what would be considered marketable, then the next higher performing candidate system will be chosen. Subsystem allocations will then be completed by recognizing the specifications of those already-procured components. This design approach has several benefits:

- The development cycle-time and associated cost is greatly reduced by avoiding procurement on the subsystem level.
- The design is modular by definition, thereby facilitating future subcomponent upgrades or system capability expansion.
- 3. The development cycle results in a low-cost, production-ready system design.
- 4. In this case, the system design can more effectively take advantage of the Freewing Tilt-Body's unique flying qualities.

3.4 Research Plan

We have introduced a guidance design concept and systems engineering approach that we believe can fulfill the list of requirements posed for a usable and versatile UAV system. Throughout phase II and into development, the final ground station and interface may take one of several possible forms. We feel our UAV guidance/autopilot structure will be compatible with existing C4I Common Ground Control Stations and will facilitate the advance of the UAV surveillance community into the realm of Virtual Reality, linking the senses of the operator with the sensors from the remote platform. We intend to show this by performing a simulation-based integration of the above guidance laws and relevant modeling parameters.

We will then perform a series of simulation trade studies and cost analyses to demonstrate the effectiveness of our integrated guidance design with the Freewing airframe. When complete, our results will either position us to begin phase II efforts or they will point toward other development tasks that should be pursued. The following work breakdown structure is proposed:

1.0 Industry survey of COTS performance parameters.

We will attempt to collect enough COTS subsystem cost and performance data to simulate at least 3 candidate integrated system designs. We will also collect the data necessary to model the subsystems.

2.0 Update 6DOF simulation to include subsystem models and interface.

In addition to subcomponent models, a set of prototype controller hardware must be integrated with the simulation. This will include a standard COTS joystick and mouse with appropriate driver software. This will not include a prototype of the ground controller interface.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 228 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

3.0 Integrate the directional-response controller into simulation.

This integration effort will include the core multivariable controller structure with the body tilt angle and thrust vector regulator as well as bank-to-turn autopilot.

4.0 Integrate Line-of-Sight Slave mode controller into simulation

5.0 Integrate waypoint-guidance mode controller into simulation

6.0 Assess performance and usability of the high-level controller functions

A simulation-based study will seek to answer the following questions:

- Is this controller intuitive and usable by an untrained pilot?
- It the controller robust and stable under all operating conditions?
- Can the operator over-drive the UAV, or does the software effectively limit his/her commands?
- Can the controller be implemented with existing data-link interfaces?
- 7.0 <u>Perform a cost-performance build-up on the candidate systems and assess optimal cost vs.</u> performance system
- 8.0 Investigate interfaces and expandability of current ground control stations and mission planning modules.

The last effort will be important to establish the basis for phase II planning. We will seek opportunities to acquire government-furnished ground station equipment which would represent the perceived direction of technology.

4.0 Related Work

Geneva Aerospace is currently under contract with Freewing Aerial Robotics, Inc. to assess the performance capability and to develop an operational autopilot for the Freewing Tilt-Body series of UAV's. In order to execute this contract, Geneva is also currently developing a Six Degree-of-Freedom simulation which accurately models the Freewing's unique kinematic and aerodynamic properties. These and the other significant development efforts are identified discussed:

University of Maryland, MATRA BAe and Texas A&M Wind Tunnel Tests

Freewing and its partners have logged over 560 hours of wind tunnel testing for use in the development of a Freewing Tilt-Body aerodynamics model. Researchers at the University of Maryland, Texas A&M University, and most recently, Geneva Aerospace have teamed to analyze the Freewing wind tunnel data and develop a realistic Freewing Tilt-Body vehicle aerodynamics model. Geneva Aerospace has integrated this aerodynamics model into a 6DOF simulation for use in the development of an automatic flight control system for the Freewing UAV. Geneva has also used this aerodynamics model to conduct a comprehensive vehicle performance assessment.

Boeing Instrumented Flight Test Series

Freewing has recently teamed with Boeing to conduct a comprehensive instrumented flight test program using the Scorpion Model 100-50. This flight test program is the first in a planned series of test programs to collect real flight test data which will be used to validate the Freewing aerodynamics model as well as the propeller, engine, and actuator models used in Geneva's 6DOF simulation. This flight test program along with the follow-on aerodynamics and simulation model updates will be completed prior to the AF98 Phase I SBIR contract award, providing both technical merit for entrance into a Phase I study effort as well as risk reduction for advancement to a Phase II flight test demonstration program.

Geneva Six Degree-of-Freedom Simulation

Geneva is currently developing a generic off-the-shelf six degree-of-freedom simulation to support this and several other design and analysis efforts. The long-term goal of this effort is to provide a validated and accredited core simulation package for missile, UAV, and aircraft development efforts. The simulation is highly modular and written in the C++ object-oriented language.

The Freewing dynamics model and aerodynamic database has been integrated into the generic 6DOF, which is currently being used for on-going performance evaluation and design trades.

Freewing Tilt-Body Development Program

Most recently Freewing has been in active development of a variant of its Scorpion Tilt-Body in collaboration with Europe's Matra BAe Dynamics. This variant, known as the "Marvel," is to be employed by the French Navy for use aboard its frigates and other surface combatants. This ambitious program is scheduled to demonstrate the suitability of the Scorpion platform in the late 1998 time-frame. The program gained a further boost amid indications that the French Army may consider a 60% scale version for its UAV reconnaissance needs.

Geneva's Integrated Guidance Systems Design Methodology

The desire for more use of COTS components in modern military applications calls for a modified systems engineering design approach. We feel that this can be done more effectively by focusing on the highest level requirements, and by designing the embedded controller to optimize the interactions between the subsystems. Geneva has developed a methodology which uses the framework of modern robust control theory to synthesize a controller, allowing us to assess the effects of degrading subsystem uncertainties on top-level performance. From there, a comprehensive Cost vs. Performance curve can be developed, whereby cost can truly be treated as an independent design variable. It is the merging of systems engineering, COTS subsystem procurement, and multivariable robust control theory that makes this approach so unique.

5.0 Relationship with Phase II Work

As the development of the Freewing aerial vehicle progresses, the guidance, navigation, and ground station systems must develop in parallel. Although an innovative guidance system architecture has been developed from projected mission profiles, several questions regarding the

usability of our design must be answered prior to entering full-scale system development. The results of the phase I research will provide the critical information needed to enter into the full-scale development of the integrated system.

With this information, Freewing and Geneva will propose a phase II integration and test plan with the goal of developing a complete low-cost UAV capable of interfacing with current and future ground stations, payloads, and seekers.

6.0 Company Information

Geneva Aerospace is a progressive engineering firm specializing in integrated flight control systems technology. Formed in 1995 and formally founded in early 1997 by several Members of the Group Technical Staff of Raytheon-TI Systems, Geneva's flight control systems team has a proven track record on various military weapon systems programs such as the U.S. military's Joint Standoff Weapon (JSOW), High-Speed Anti-Radiation Missile (HARM), and the Extended Range Guided Munitions (ERGM) weapon. Geneva's staff specializes in design and implementation of inertially guided autonomous glider weapons and maintains leading-edge expertise in robust real-time control system design techniques.

Freewing Aerial Robotics Corporation is one of a new breed of high-tech companies launched in university-based business incubators, in a special kind of public/private partnership, with its R&D partially funded by competitive government technology grants. Consulting and shareholding agreements with other engineers, such as Burt Rutan and John Roncz, expand Company capabilities. A number of Texas A&M University faculty members and graduate students also work extensively with Freewing. Freewing has been selected by European aerospace giant Matra BAe Dynamics as partner and vehicle subcontractor in a UAV proposal to the French government.

7.0 Key Personnel

David Allen Felio - Principal Investigator

Dave Felio has developed autonomously-guided weapon systems as an autopilot and guidance specialist at Texas Instruments Missile Systems Division for the past 11 years. He has had extensive experience developing anti-radiation homing missiles, GPS inertially guided glider weapons, and cannon-launched smart munitions. He is currently a Member of the Group Technical Staff at Raytheon-TI Systems, and has served as the lead G&C systems designer for the Joint Stand-Off Weapon System, RTIS's Interdiction Weapons Division, and several proprietary development programs. Mr. Felio holds a Masters of Mechanical Engineering with an emphasis in control theory from the University of Texas at Arlington, and a Bachelor's Degree in Electrical Engineering from Texas Tech University.

David Shane Duggan

Dave Duggan has developed missile systems as an autopilot and guidance specialist at Texas Instruments Missile Systems Division for the past 8 years. He has had extensive experience developing anti-radiation homing missiles, GPS inertially guided glider weapons, and precision guided imaging missiles. He is currently a member of the Group Technical Staff at Raytheon-TI Systems, and has served as the lead G&C systems designer of the Unitary variant of the Joint Stand-Off Weapon system for the past 3 years. He currently holds the lead G&C systems functional position over RTIS's Interdiction Weapons Division. Mr. Duggan holds a Bachelor's Degree in Aerospace Engineering from the University of Texas, Arlington.

8.0 Facilities

Geneva Aerospace maintains state-of-the art computing platforms and engineering software to support analysis, simulation, and control system design work for Freewing. All hardware integration necessary for the studies will be conducted on-site at the Freewing facility in College Station.

Freewing's research and development laboratory is housed in a 20,000 ft2 complex of four buildings in College Station, Texas. Freewing conducts its flight tests at an airport on the Riverside campus of Texas A&M University, which participates in flight testing as a subcontractor to Freewing.

Freewing has formed a business arrangement with L&L Tooling & Manufacturing, Inc. of Itasca, Texas, to acquire pre-production models of its Scorpion Tilt-Body and to gain production tooling. L&L is a premier maker of composites tooling, whose customer list includes Rockwell, Gulfstream and Bell Helicopter. Freewing's production line for the Scorpion Model 100-50, a 50-pound payload Freewing Tilt-Body UAV, is scheduled to open in 1997 in Texas. Several Scorpions have been produced from the soft production tooling. The final tooling will be capable of producing up to one aircraft per day.

Bibliography

Porter, R.F., Hall, D.W., Brown J.H., Gregorek, G.M., "Analytical study of the Free-Wing Free-Trimmer Concept", NASA CR-2946, February 1978.

Chen, W. & Barlow, J.B., "Stability, Control and Gust Response Characteristics of an Ultralight freewing Aircraft", AIAA-92-4342, Atmospheric Flight mechanics Meeting, Hilton Head, SC, August 10-12, 1992.

Chen, W. & Barlow, J.B., "An Ultralight Freewing Aircraft Design Study', AIAA-92-4194, AIAA Aircraft Design System Meeting, Hilton Head, SC, August 24-26, 1992.

Chen, W., "Stability, Control and Gust Sensitivity of a Low Wing Loading Freewing Airplane", M.S. Thesis, 1992.

Barlow, J.B. & Chen, W., "Aerodynamic Characteristics and Control Aspects of a Freewing Tilt-Body Airplane", presented at the Twelfth Briston International Conference on RPVs, 9-11 September 1996, Bristol, UK.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007

Examiner: Ronnie M. Mancho Art Unit: 3664

APPENDIX C

Sheet 232 of 241

U.S. DEPARTMENT OF DEFENSE SMALL BUSINESS INNOVATION RESEARCH (SBIR) PROGRAM

PROJECT SUMMARY

Name of Offerer: Geneva Aerospace, Inc.
 Home office address: PO Box 613018

Dallas, TX 75261-3018

3. Location where work will be performed: 2215 St. Andrew

Highland Village, TX 75067

4. Title of proposed effort: "Examination of a Generalized Guidance and Autopilot Design for UAV

Flight Control Simplification"

5. Topic Number And Title: AF98-179. "Simplified Manual Flight Control"

\$ 93,177 6. Total dollar amount of Proposed Effort 7. Direct material costs COTS Controller Sim. Hardware \$10,000 \$10,000 8. Direct labor (specify) Principal Investigator 700 Hours @ \$ 38.00 \$ 26,600 \$ 15,750 Assistant Investigator 500 Hours @ \$ 31.50 b. Total \$ 38,550 \$ 42,350 9. Labor overhead 51% of Direct Labor Costs \$ 21,675 \$ 21,675 10. Travel (if direct charge) a. Transportation to acquire typical system parameters: Rental Car 50 2,000 Airline Tickets

b. Per diem or subsistence

Hotel \$ 200 Meals \$ 100

c. Estimated total travel \$ 2,350 \$ 2,350

11. Other direct costs none

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 233 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

 12. Total Costs
 \$ 76,375

 13. General and Administrative (15%)
 \$ 11,456

 14. Fee (7%)
 \$ 5,346

15. Total Firm Fixed-Price Cost \$ 93,177

16. Type of contract proposed: Firm-fixed-price.

17

a) Has any executive agency of the United States Government performed any review of your accounts or records in connection with any other government prime contract or subcontract within the past twelve months? No.

b) Will you require the use of any government property in the performance of this proposal? No.

c) Do you require government contract financing to perform this proposed contract? Yes. If yes, then specify type as advanced payments or progress payments. Progress Payments

David A. Felio	Date	
President		

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 234 of 241 Examiner: Ronnie M. Mancho Art Unit: 3664

Exhibit 10 - Geneva Phase I Contract information for AF98-179
from Air Force SBIR Web site at

http://www.afsbirsttr.com/TechMall/Default.aspx?kwa=AF98-179

Filed: 04/17/2007 Sheet 235 of 241


Serial Number: 11/736,356

Examiner: Ronnie M. Mancho Art Unit: 3664

http://www.afsbirsttr.com/award/AwardDetails...

2 of 3

11/26/2010 12:04 PM

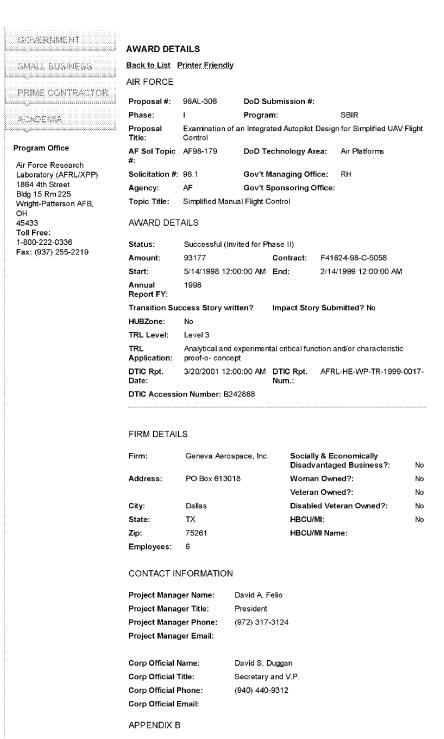

In order to be truly versatile, Unmanned Aerial Vehicle (UAV) Systems must be usable to individuals who's training is more focused on the requirements of a given mission or on the usability of the payload, rather than on the aviation of the air vehicle. This

Abstract:

TOPIC/AWARD DATA

SEARCH TOPICS

SEARCH AWARDS

LOGIN

Please select the area you work within in relation to the SBIR & STTR programs from the menu on the left.

PUBLICATIONS

SBIR/STTR Advantage Innovation Stories
Transition Stories

	Jed Margolin	Serial Number: 11/736,356 Examiner: Ronnie M. Mancho	Filed: 04/17/2007 Art Unit: 3664	Sheet 236 of 2
2		Exhibit 11 - IDS From Duggan P	rovisional Application	on
3		No. 60/480,1	92	

Sheet 236 of 241

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 237 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

first Named

Inventor : Dave Duggan et al.

Appln. No.: 60/480,192

Filed : June 20, 2003

For : METHOD AND APPARATE

: METHOD AND APPARATUS FOR AUTONOMOUS AND SEMI-AUTONOMOUS

COMMAND AND CONTROL OF UNMANNED AIR VEHICLE

Docket No.: G46.12-0001

Group Art Unit: ---

1FW

Examiner: ---

DAY OF Var

INFORMATION DISCLOSURE STATEMENT

Commissioner for Patents P.O. Box 1450 Alexandria, VA 22313-1450

I HEREBY CERTIFY THAT THIS PAPER IS BEING SENT BY U.S. MAIL, FIRST CLASS, TO THE COMMISSIONER FOR PATENTS, P.O. BOX 1450, ALEXANDRIA, VA 22313-1450, THIS

PATENT ATTORNEY

Sir:

\a

The patents or publications listed on the enclosed PTO Form-1449 are submitted pursuant to 37 C.F.R. § 1.97. Copies of the patents or publications cited are enclosed.

TIME OF FILING

The information disclosure statement is being filed:

- with the application or within three months of the filing date of the application or date of entry into the national stage of an international application or before the mailing date of a first Office action on the merits, whichever event occurs last. In accordance with 37 C.F.R. § 1.97(b), no statement or fee is required.
- after the time period specified in paragraph 1 above, but before the mailing date of a final action under 37 C.F.R. § 1.113 or notice of allowance under 37 C.F.R. § 1.311. Therefore, in accordance with 37 C.F.R. § 1.97(c), submitted herewith is:

(check either A or B below)

A. ___ a statement as specified in 37 C.F.R. § 1.97(e).

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 238 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

-2-

B. ___ the fee set forth in 37 C.F.R. § 1.17(p) for submission of an information disclosure statement under 37 C.F.R. § 1.97(c).

- 3. ___ after the mailing date of either a final action under 37 C.F.R. § 1.113 or a notice of allowance under 37 C.F.R. § 1.311, whichever occurs first, but before payment of the issue fee. Therefore, Applicant petitions for consideration and submits herewith:
 - A. a statement as specified in 37 C.F.R. § 1.97(e);
 - B. the petition fee set forth in 37 C.F.R. § 1.17(p).

STATEMENT

(only used if No. 2(A) or No. 3 above is checked) The person(s) signing below certify

(check appropriate paragraph)

that each item of information contained in this Information Disclosure Statement was first cited in any communication from a foreign patent office in a counterpart foreign application not more than three months prior to the filing of this statement. 37 C.F.R. § 1.97(e)(1).

OR

that no item of information contained in this Information Disclosure Statement was cited in a communication from a foreign patent office in a counterpart foreign application or, to the knowledge of the person signing the certification after making reasonable inquiry, was known to any individual designated in 37 C.F.R. § 1.56(c) more than three months prior to the filing of this statement. 37 C.F.R. § 1.97(e) (2).

METHOD OF PAYMENT

X	_ No f	ee	is	requi	ced.				
	Attached	is	а	check	in	the	amount	of	\$

Serial Number: 11/736,356 Jed Margolin Filed: 04/17/2007

Examiner: Ronnie M. Mancho Art Unit: 3664

-3-

The Director is authorized to charge any fee deficiency required by this paper or credit any overpayment to Deposit Account No. 23-1123. A duplicate copy of this communication is enclosed.

Respectfully submitted,

WESTMAN, CHAMPLIN & KELLY, P.A.

Christopher L. Holt, Reg. No. 45,844 Suite 1600 - International Centre

900 Second Avenue South

Minneapolis, Minnesota 55402-3319 Phone: (612) 334-3222 Fax: (612) 334-3312

CLH/rkp

>

Sheet 239 of 241

Jed Margolin

Serial Number: 11/736,356

Filed: 04/17/2007

Sheet 240 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

AUG 0 3 2004 gr

Sheet 1 of 2

FORM PTO-1449	Atty. Docket No.: G46.12-0001	Appl. No.: 10/871,612
LIST OF PATENTS AND PUBLICATIONS APPLICANT'S INFORMATION DISCLOSURE STATEMENT		
	Dave Duggan et al.	
	Filing Date	Group Art:
	June 18, 2004	

U.S. PATENT DOCUMENTS

Examiner Initial	Document No.	Date	Name	Class	Sub Class	Filing Date If Appropriate
AA	5,214,584	05/1993	Dingee et al.	364	423	
AB	5,123,610	06/1992	Oaks	244	3.12	
AC	4,611,771	09/1986	Gibbons et al.	244	3.12	
AD	4,725,956	02/1988	Jenkins	364	434	
AE	5,522,567	06/1996	Kinstler	244	3.15	
AF	5,904,724	05/1999	Margolin	701	120	
AG	4,848,755	09/1989	McNulty et al.	364	434	
АН	4,642,774	02/1987	Centala et al.	364	434	
AI	5,951,609	09/1999	Hanson et al.	701	13	
AJ	5,951,607	09/1999	Senn et al.	701	1	
AK	5,944,762	08/1999	Bessacini et al.	701	27	

FOREIGN PATENT DOCUMENTS

	Document No.	Date	Country	Class	Sub Class	Translation Yes No
AL						
 AM						
AN						

OTHER ART (Including Author, Title, Date, Pertinent Pages, Etc.)

	AO	
	AP	
	AQ	
EXAMINE	ER:	DATE CONSIDERED:

EXAMINER: Initial if citation considered, whether or not citation is in conformance with MPEP 609; draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

Jed Margolin

Serial Number: 11/736,356

Filed: 04/17/2007

Sheet 241 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664



Sheet 2 of 2

FORM PTO-1449	MOEMATROS	Atty. Docket No.: G46.12-0001	Appl. No.: 10/871,612
APPI	TENTS AND PUBLICATIONS FOR ICANT'S INFORMATION SCLOSURE STATEMENT	First Named Invent	or:
		Dave Duggan et al.	
•		Filing Date	Group Art:
		June 18, 2004	

U.S. PATENT DOCUMENTS

Examiner Initial	Document No.	Date	Name	Class	Sub Class	Filing Date If Appropriate
AR	5,822,515	10/1998	Baylocq	395	185.09	
AS	5,782,429	07/1998	Mead	244	3.11	
AT	5,691,531	11/1997	Harris et al.	244	3.14	
AU	5,048,771	09/1991	Siering	244	3.15	
AV	5,042,743	08/1991	Edwin R. Carney	244	3.11	
AW	5,240,207	08/1993	Eiband et al.	244	190	
AX	5,938,148	08/1999	Orenstein	244	3.15	,
AY	5,552,983	09/1996	Thornberg et al.	364	424.01	
AZ	5,181,673	01/1993	Hubricht et al.	244	3.12	
ВА	5,605,307	02/1997	Batchman et al.	244	3.11	
ВВ						

FOREIGN PATENT DOCUMENTS

	Document No.	Date	Country	Class	Sub Class	Translation Yes No
вс						
BD						
BE						

OTHER ART (Including Author, Title, Date, Pertinent Pages, Etc.)

BF	
BG	
ВН	
EXAMINER:	DATE CONSIDERED:

EXAMINER: Initial if citation considered, whether or not citation is in conformance with MPEP 609; draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

Exhibit 6

Exhibit 6

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address: COMMISSIONER FOR PATENTS P.O. Box 1450 Alexandria, Virginia 22313-1450 www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
11/736,356	04/17/2007	Jed Margolin		3649
23497 JED MARGOL	7590 02/15/201 IN	1	EXAM	IINER
1981 EMPIRE I RENO, NV 895	ROAD		MANCHO,	RONNIE M
NEINO, INV 695	0Z1-743U		ART UNIT	PAPER NUMBER
			3664	
			MAIL DATE	DELIVERY MODE
			02/15/2011	PAPER

Please find below and/or attached an Office communication concerning this application or proceeding.

The time period for reply, if any, is set in the attached communication.

	Application No.	Applicant(s)
	11/736,356	MARGOLIN, JED
Office Action Summary	Examiner	Art Unit
	RONNIE MANCHO	3664
The MAILING DATE of this communication app Period for Reply	pears on the cover sheet with the o	correspondence address
A SHORTENED STATUTORY PERIOD FOR REPL' WHICHEVER IS LONGER, FROM THE MAILING D. - Extensions of time may be available under the provisions of 37 CFR 1.1 after SIX (6) MONTHS from the mailing date of this communication. - If NO period for reply is specified above, the maximum statutory period or Failure to reply within the set or extended period for reply will, by statute Any reply received by the Office later than three months after the mailing earned patent term adjustment. See 37 CFR 1.704(b).	ATE OF THIS COMMUNICATION 36(a). In no event, however, may a reply be tir will apply and will expire SIX (6) MONTHS from a, cause the application to become ABANDONE	N. mely filed I the mailing date of this communication. ED (35 U.S.C. § 133).
Status		
 Responsive to communication(s) filed on 11/2. This action is FINAL. 2b) This Since this application is in condition for alloware closed in accordance with the practice under Exercise. 	s action is non-final. nce except for formal matters, pro	
Disposition of Claims		
4) ☑ Claim(s) 1-14 is/are pending in the application 4a) Of the above claim(s) is/are withdra 5) ☐ Claim(s) is/are allowed. 6) ☑ Claim(s) 1-14 is/are rejected. 7) ☐ Claim(s) is/are objected to. 8) ☐ Claim(s) are subject to restriction and/or	wn from consideration.	
Application Papers		
9) The specification is objected to by the Examine 10) The drawing(s) filed on is/are: a) acc Applicant may not request that any objection to the Replacement drawing sheet(s) including the correct 11) The oath or declaration is objected to by the Example 11.	epted or b) objected to by the drawing(s) be held in abeyance. Se tion is required if the drawing(s) is ob	e 37 CFR 1.85(a). ejected to. See 37 CFR 1.121(d).
Priority under 35 U.S.C. § 119		
12) Acknowledgment is made of a claim for foreign a) All b) Some * c) None of: 1. Certified copies of the priority document 2. Certified copies of the priority document 3. Copies of the certified copies of the priority document application from the International Bureau * See the attached detailed Office action for a list	s have been received. Is have been received in Applicat In rity documents have been receive In (PCT Rule 17.2(a)).	ion No ed in this National Stage
Attachment(s) 1) Notice of References Cited (PTO-892)	4) 🔲 Interview Summary	v (PTO-413)
2) Notice of Treferences Cried (TO-032) Notice of Draftsperson's Patent Drawing Review (PTO-948) Information Disclosure Statement(s) (PTO/SB/08) Paper No(s)/Mail Date	Paper No(s)/Mail D 5) Notice of Informal F 6) Other:	ate

Application/Control Number: 11/736,356

Art Unit: 3664

Page 2

DETAILED ACTION

Claim Rejections - 35 USC § 103

- 1. The following is a quotation of 35 U.S.C. 103(a) which forms the basis for all obviousness rejections set forth in this Office action:
 - (a) A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subject matter sought to be patented and the prior art are such that the subject matter as a whole would have been obvious at the time the invention was made to a person having ordinary skill in the art to which said subject matter pertains. Patentability shall not be negatived by the manner in which the invention was made.
- 2. Claims 1-14 are rejected under 35 U.S.C. 103(a) as being unpatentable over Margolin (5904724) in view of Duggan et al (US 2005004723).

Regarding claim 1, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) discloses a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

- (a) a ground station 400 (fig. 1&4) equipped with a synthetic vision system (figs. 1&3; col. 5, lines 50-60; col. 4, lines 1 to col. 5, lines 67);
- (b) an unmanned aerial vehicle 300 (figs. 1&3) capable of supporting said synthetic vision system (305, 306, 307, 311 on aircraft; col. 5, lines 50-60; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67);
- (c) a remote pilot 102 operating said ground station 400 (figs. 1&4; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67);
- (d) a communications link between said unmanned aerial vehicle 300 and said ground station 400;

Application/Control Number: 11/736,356

Art Unit: 3664

e) a system onboard said unmanned aerial vehicle 300 for detecting the presence and position of nearby aircraft (305, 306, 307, 311 on aircraft) and communicating this information to said remote pilot 102 (col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67);

whereas said remote pilot uses said synthetic vision system (305, 306, 307, 311 on aircraft; col. 5, lines 50-60) to control said unmanned aerial vehicle 300 during at least selected phases of the flight of said unmanned aerial vehicle (selected phases implies some or all phases during flight).

Margolin did not disclose that the vehicle is flown using an autonomous control system (e.g. autopilot). However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0329).

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggan abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne having ordinary skill in the art.

Page 3

Art Unit: 3664

Regarding claim 2, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the system of claim 1 whereby said selected phases of the flight of said unmanned aerial vehicle comprise:

- (a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;
- (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

Regarding claim 3, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the system of claim 1 further comprising a system onboard said unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and bearing of said unmanned aerial vehicle.

Regarding claim 4, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the system of claim 1 further comprising a system onboard said unmanned aerial vehicle for providing a communications channel for Air Traffic Control and the pilots of other aircraft to communicate directly with said remote pilot.

Regarding claim 5, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

- (a) a ground station equipped with a synthetic vision system;
- (b) an unmanned aerial vehicle capable of supporting said synthetic vision system;
- (c) a remote pilot operating said ground station;
- (d) a communications link between said unmanned aerial vehicle and said ground station;

Application/Control Number: 11/736,356

Art Unit: 3664

e) a system onboard said unmanned aerial vehicle for detecting the presence and position

of nearby aircraft and communicating this information to said remote pilot;

whereas said remote pilot uses said synthetic vision system to control said unmanned aerial vehicle during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system, and

whereas the selected phases of the flight of said unmanned aerial vehicle comprise:

(a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;

(b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

Margolin did not disclose that the vehicle is flown using an autonomous control system. However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0329).

Page 5

Art Unit: 3664

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggan abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne having ordinary skill in the art.

Regarding claim 6, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the system of claim 5 further comprising a system onboard said unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and bearing of said unmanned aerial vehicle.

Regarding claim 7, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the system of claim 5 further comprising a system onboard said unmanned aerial vehicle for providing a communications channel for Air Traffic Control and the pilots of other aircraft to communicate directly with said remote pilot.

Regarding claim 8, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose a method for safely flying an unmanned aerial vehicle as part of a unmanned aerial system equipped with a synthetic vision system in civilian airspace comprising the steps of:

(a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle an autonomous control system is used to fly said unmanned aerial vehicle;

Application/Control Number: 11/736,356

Art Unit: 3664

Page 7

(b) providing a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot.

Margolin did not disclose that the vehicle is flown using an autonomous control system. However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0329).

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggan abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne having ordinary skill in the art.

Regarding claim 9, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the method of claim 8 whereby said selected phases of the flight of said unmanned aerial vehicle comprise:

- (a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;
- (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

Application/Control Number: 11/736,356

Art Unit: 3664

Page 8

Regarding claim 10, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the method of claim 8 further comprising the step of providing a system onboard said unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and bearing of said unmanned aerial vehicle.

Regarding claim 11, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the method of claim 8 further comprising the step of providing a system onboard said unmanned aerial vehicle for providing a communications channel for Air Traffic Control and the pilots of other aircraft to communicate directly with said remote pilot.

Regarding claim 12, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose a method for safely flying an unmanned aerial vehicle as part of a unmanned aerial system equipped with a synthetic vision system in civilian airspace comprising the steps of:

- (a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle an autonomous control system is used to fly said unmanned aerial vehicle;
- (b) providing a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot;

whereas said selected phases of the flight of said unmanned aerial vehicle comprise:

Art Unit: 3664

(a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;

(b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

Margolin did not disclose that the vehicle is flown using an autonomous control system. However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0329).

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggna abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne having ordinary skill in the art.

Regarding claim 13, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the method of claim 12 further comprising the step of providing a system onboard said unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and bearing of said unmanned aerial vehicle.

Art Unit: 3664

Regarding claim 14, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the method of claim 12 further comprising the step of providing a system onboard said unmanned aerial vehicle for providing a communications channel for Air Traffic Control and the pilots of other aircraft to communicate directly with said remote pilot.

Response to Arguments

3. Applicant's arguments filed 11/29/10 have been fully considered but they are not persuasive.

Applicant's specification is ONLY 16 pages long. However, applicant has provided an affidavit and remarks that are over 200 pages. The affidavits are referring to paying rents and mortgages, etc. The examiner does not understand how paying rents and mortgages are related to the present invention drawn to flying an un-manned aerial vehicle.

Applicant further argues that Margolin belongs to the inventor. It is noted that the prior art is a statutory bar since it was published more that 8 years before filing of the present application.

Applicant further argues that the prior art do not disclose flying an unmanned aerial vehicle (i.e. an aircraft) in civilian airspace. The examiner does not acquiesce to applicant's remarks. The prior art clearly shows flying an unmanned aerial vehicle (i.e. an aircraft) in civilian airspace since the air space in which the vehicle is flown is not restricted. As further noted applicant fails to provide a particular meaning attached to "civilian airspace".

Art Unit: 3664

Applicant further argues that both prior art do not disclose "a synthetic vision system". The examiner disagrees. It appears that applicant is insisting that the prior art must recite the exact same terms as disclosed in the claims. Applicant first of all does not present an argument which first provide the meaning of the claimed "synthetic vision system". As disclosed in applicant's specification the claimed, "a synthetic vision system" is referring to 3-D vision. The prior art disclose 3-D presentation of image to a pilot (here a remote pilot) thus the prior art anticipates the claimed, "a synthetic vision system".

Applicant further argues about the abstract cited in the prior. The purpose of the argument is not understood since applicant is arguing that the popular interpretation of 608.01 (b) is that the purpose of the abstract is to provide search terms. It is unclear whether "popular" refers to the manner abstracts are interpreted in Florida, Washington, or somewhere else.

Abstracts are not excluded during the examination process.

Some of applicant's remarks are that the prior art does not recite the phrase, "safely flying an unmanned aerial vehicle in civilian airspace comprising: ...". Applicant thus insists that the rejection is conclusory and is not supported. The examiner disagrees and notes that any particular level of safety is not described or disclosed in the specification nor is there any meaning provided for "civilian airspace" or "safety". It is believed that the aircraft flown in the prior art is flown safely and further that the aircraft is flown in all airspaces since a particular airspace was not prohibited.

Applicant continues that the examiner fails to address all of the recitations of the rejected claims. The examiner disagrees and notes that the prior art anticipates all limitations in the

Art Unit: 3664

claims. There is not rule in MPEP that insist that the prior must recite the terms in the claims exactly as they are disclosed in the claims.

4. Claims 1-14 are rejected under 35 U.S.C. 103(a) as being unpatentable over Margolin (5904724) in view of Duggan et al (US 2005004723).

Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) discloses a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

- (a) a ground station 400 (fig. 1&4) equipped with a synthetic vision system (figs. 1&3; col. 5, lines 50-60; col. 4, lines 1 to col. 5, lines 67);
- (b) an unmanned aerial vehicle 300 (figs. 1&3) capable of supporting said synthetic vision system (305, 306, 307, 311 on aircraft; col. 5, lines 50-60; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67);
- (c) a remote pilot 102 operating said ground station 400 (figs. 1&4; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67);
- (d) a communications link between said unmanned aerial vehicle 300 and said ground station 400;
- e) a system onboard said unmanned aerial vehicle 300 for detecting the presence and position of nearby aircraft (305, 306, 307, 311 on aircraft) and communicating this information to said remote pilot 102 (col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67);

whereas said remote pilot uses said synthetic vision system (305, 306, 307, 311 on aircraft) to control said unmanned aerial vehicle 300 during at least selected phases of the flight of said unmanned aerial vehicle.

Art Unit: 3664

Margolin did not disclose that the vehicle is flown using an autonomous control system (e.g. an autopilot). However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0329).

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggan abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne having ordinary skill in the art.

It is believed that the rejection is proper and thus shall stand. Applicant may file an RCE, Appeal to the Board, or abandon the case.

Conclusion

5. **THIS ACTION IS MADE FINAL.** Applicant is reminded of the extension of time policy as set forth in 37 CFR 1.136(a).

A shortened statutory period for reply to this final action is set to expire THREE

MONTHS from the mailing date of this action. In the event a first reply is filed within TWO

MONTHS of the mailing date of this final action and the advisory action is not mailed until after

Art Unit: 3664

the end of the THREE-MONTH shortened statutory period, then the shortened statutory period will expire on the date the advisory action is mailed, and any extension fee pursuant to 37 CFR 1.136(a) will be calculated from the mailing date of the advisory action. In no event, however, will the statutory period for reply expire later than SIX MONTHS from the mailing date of this final action.

Communication

6. Any inquiry concerning this communication or earlier communications from the examiner should be directed to RONNIE MANCHO whose telephone number is (571)272-6984. The examiner can normally be reached on Mon-Thurs: 9-5.

If attempts to reach the examiner by telephone are unsuccessful, the examiner's supervisor, Tran Khoi can be reached on 571-272-6919. The fax phone number for the organization where this application or proceeding is assigned is 571-273-8300.

Information regarding the status of an application may be obtained from the Patent Application Information Retrieval (PAIR) system. Status information for published applications may be obtained from either Private PAIR or Public PAIR. Status information for unpublished applications is available through Private PAIR only. For more information about the PAIR system, see http://pair-direct.uspto.gov. Should you have questions on access to the Private PAIR system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-free). If you would like assistance from a USPTO Customer Service Representative or access to the automated information system, call 800-786-9199 (IN USA OR CANADA) or 571-272-1000.

Art Unit: 3664

/Ronnie Mancho/ Primary Examiner, Art Unit 3664

/Ronnie Mancho/ Primary Examiner, Art Unit 3664

Exhibit 7

Exhibit 7

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of Jed Margolin

Serial No.: 11/736,356 Examiner: Ronnie M. Mancho

Filed: 4/17/2007 Art Unit: 3664

For: System and Method For Safely Flying Unmanned Aerial Vehicles in Civilian Airspace

 Filed:
 4/17/2007

 First Office Action:
 9/1/2010

 Response:
 11/29/2010

 Second Office Action:
 2/15/2011

The following is to comply with 37 CFR § 1.133 **Interviews** and MPEP Section 713.04 **Substance of Interview Must Be Made of Record**.

I called the Examiner on or about March 2, 2011. I identified myself and the patent application and asked the Examiner to withdraw making the Second Office Action Final.

He asked for my reason.

I said I wanted the opportunity to respond to the additional grounds for rejection he had made in the Second Office Action (which he had made Final).

He said that the First Office Action had been sent to me and I had had the opportunity to respond, and he believed I did.

I repeated that he had made additional grounds for rejection in the Second Office Action and I wanted the opportunity to respond.

He looked up the case and cited the 103 basis for rejection: Margolin (5,904,724) and Duggan (Published Application US 2005004723).

I told him that I am that Margolin.

I also told him that he had done a cut-and-paste of the rejection in the First Office Action but had added a few things.

He wanted to know where.

I pointed out First Office Action (page 3, third paragraph):

Margolin did not disclose that the vehicle is flown using an autonomous control system. However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

In the Second Office Action it became (page 3, third paragraph):

Margolin did not disclose that the vehicle is flown using an autonomous control system (e.g. autopilot). However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

I said that he had equated autonomous control system with an autopilot, but they are not the same.

He believed the rejection was still the same and offered a long explanation that did not make much sense. I did hear him say that he believed I did not understand the term "autopilot."

We moved on to his statement in the Second Office Action about civilian airspace (page 10, last line), where he said:

Applicant further argues that the prior art do not disclose flying an unmanned aerial vehicle (i.e. an aircraft) in civilian airspace. The examiner does not acquiesce to applicant's remarks. The prior art clearly shows flying an unmanned aerial vehicle (i.e. an aircraft) in civilian airspace since the air space in which the vehicle is flown is not restricted. As further noted applicant fails to provide a particular meaning attached to "civilian airspace".

I told him that "civilian airspace" was term commonly used in the aerospace community and that FAA and the military use it. I referred him to my reference **Sensing Requirements for Unmanned Air Vehicles** which contains the passage:

Engineers from the Air Vehicles Directorate transferred unmanned air vehicle (UAV) sensing system requirements for airspace operations to civilian UAV users and developers. These requirements represent design goals on which to base future sensing subsystem designs, filling an omission in UAV technology planning. Directorate engineers are continuing to develop the technologies that will enable future UAVs to coexist with manned aircraft in both military and civilian airspace. Incorporating these

requirements will ensure that engineers design future UAVs to detect possible conflicts, such as midair collisions or runway incursions, and take action to avoid them.

He said that I had used the term but did not define it.

I said that, although I was entitled to be my own lexicographer, I was not required to be one, and I had the right to use the common meaning of terms.

He said that I still had to provide the meaning of the term, and I hadn't.

I said he could have made that rejection in the First Office Action, when I would have had the opportunity to respond to it. Instead, by introducing it in the Second Office Action he had denied me the opportunity to respond.

We moved on to his use of my own patent against me. I reminded him that I had protested his use of my own patent against me in my Response to the First Office Action.

Applicant argued that Margolin belongs to the inventor. It is noted that the prior art is a statutory bar since it was published more that 8 years before filing of the present application.

I asked him where the 8 years comes from because I had not found it in MPEP or the U.S. Code. He said 8 years was longer than 1 year and referred me to 102(b).

Then he asked if I was a patent attorney. Since I am not, I said no. Then he suggested I get a patent attorney.

To get back to the issue at hand I read 102(b) to him and told him that it does not apply because the present invention is not the same as the one described in '724. It is a new application for '724.

At that point the Examiner was confused as to whether I was Margolin or Duggan.

{The problem is not, as he implied, that I don't know anything about patent law. The problem is that I cannot read his mind or sometimes, understand his English.}

We moved on. I explained why I had discussed the Duggan application in such detail, starting with the fact that it had issued as a patent (U.S. Patent 7,343,232 **Vehicle control system including related methods and components**) on March 11, 2008, before the First Office

Action. I also explained why I had introduced the extensive exhibit concerning the financial

problems experienced by the Duggan Examiner. I explained that when I stated in my Response

to the First Office Action that "Perhaps the Duggan Examiner was preoccupied with financial

problems" I was being diplomatic. In fact, the evidence shows that the Duggan Examiner was

either incompetent or may have committed misconduct. I explained to the Examiner that my

reason for bringing up the subject was to show that the USPTO Office discriminates against pro

se inventors. Aerospace Companies with expensive Law Firms are given a free pass, while pro

se inventors get kicked in the head. I was not asking for a free pass, only to be treated fairly.

The telephone interview between the Examiner and myself that is described above was cordial

but the Examiner refused to withdraw making the Second Office Action Final. Indeed, the

Examiner displayed the USPTO's bias against pro se inventors.

Respectfully submitted,

/Jed Margolin/

Date: April 10, 2010

Jed Margolin

Jed Margolin 1981 Empire Rd.

Reno, NV 89521-7430

(775) 847-7845

4

Evidence Appendix - 455

Exhibit 8

Exhibit 8

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of Jed Margolin

Serial No.: 11/736,356 Examiner: Ronnie M. Mancho

Filed: 4/17/2007 Art Unit: 3664

For: System and Method For Safely Flying Unmanned Aerial Vehicles in Civilian Airspace

 Filed:
 4/17/2007

 First Office Action:
 9/1/2010

 Response:
 11/29/2010

 Second Office Action:
 2/15/2011

The following is to comply with 37 CFR § 1.133 **Interviews** and MPEP Section 713.04 **Substance of Interview Must Be Made of Record**.

I called SPE Tran Khoi on or about March 22, 2011. Mr. Khoi is the SPE for the Examiner in this application. I identified myself and the patent application and explained to SPE Khoi that his Examiner had expanded his grounds for rejection in the Second Office Action, which constructively added new grounds for rejection, and had made the rejection final. I asked SPE Khoi to ask the Examiner to withdraw making the Second Office Action Final so I could respond to the new rejection and introduce new evidence.

SPE Khoi asked if I had amended the claims. I said no.

He asked if I was an attorney. I said no, I am a pro se applicant but I have done this before.

Then he asked for the Application Number and I gave it to him.

After he looked it up he asked where the Examiner had given new grounds for rejection.

I started with where the Examiner had equated an Autopilot with an Autonomous Control System.

Then I pointed out where the Examiner had introduce the issue of Civilian Airspace, and that he could have done that in the First Office Action but hadn't.

I brought up the issue of the Duggan Examiner and that her actions in the Duggan patent constitute either incompetence or possible misconduct. I explained that the reason I had brought up this issue was to show that the USPTO discriminates against *pro se* inventors. Aerospace companies with expensive Law Firms are given a free pass, while *pro se* inventors get kicked in the head. I was not asking for a free pass, only fair treatment.

I brought up the issue of the Examiner citing my own patent (5,904,724) against me, and that it was not proper under 102(b) because the present invention is not taught by '724, it is a new application of '724.

We discussed the issue of Civilian Airspace again.

Then I brought up the issue of the Examiner's statement about safety. In the Second Office Action he had made the statement (page 11, third paragraph):

Applicant thus insists that the rejection is conclusory and is not supported. The examiner disagrees and notes that any particular level of safety is not described or disclosed in the specification nor is there any meaning provided for "civilian airspace" or "safety". It is believed that the aircraft flown in the prior art is flown safely and further that the aircraft is flown in all airspaces since a particular airspace was not prohibited.

I explained that the Examiner's belief is absolutely wrong and that safely flying UAVs is a major problem. I went into some detail.

SPE Khoi distinguished the section in the Second Office Action "Response to Arguments" with the Formal Rejection in "Claim Rejections" and stated that "Response to Arguments" was not subject to Rule 706.07(a).

I said that the Examiner's Response to Arguments will be used against me at BPAI and I deserve the right to respond to it and introduce new evidence.

SPE Khoi suggested I file a Petition. I told him that filing a Petition does not toll deadlines and that I have heard of the USPTO simply waiting for the deadline to pass and then saying the Petition is moot.

After that the conversation deteriorated and will not be summarized here.

Then we talked about the current state of UAV technology and what my invention actually is.

SPE Khoi said he would look at my case and get back to me.

A few days later, on or about March 24, 2001, SPE Khoi left me message saying that the Examiner's Final Office Action was correct and proper.

The telephone interview between SPE Khoi and myself that is described above was mostly cordial but SPE Khoi decided that the Examiner's Final Office Action was correct and proper. And then he advised me to "Have a Nice Day."

Respectfully submitted,

/Jed Margolin/ Date: April 10, 2010

Jed Margolin

Jed Margolin 1981 Empire Rd. Reno, NV 89521-7430 (775) 847-7845

Exhibit 9

Exhibit 9

Unc	<u>ler the Paperwork Reduction Act of 1995.</u>	no perso	ns are required to res	spond to a collection of informati	on unless it contains a valid OMB control number.
s	Substitute for form 1449A/PTO		Col	mplete if Known	
				Application Number	
I	NFORMATION DISC	CLOS	SURE	Filing Date	
9	STATEMENT BY APPLICANT			First Named Inventor	Jed Margolin
Ì				Art Unit	
	(Use as many sheets as nec	essary)		Examiner Name	
Sheet	1	of	3	Attorney Docket Number	

•	, and the second		U. S. PATENT D	OCUMENTS	
Examiner Initials*	Cite No. ¹	Document Number Number-Kind Code ^{2 (# known)}	Publication Date MM-DD-YYYY	Name of Patentee or Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear
		^{US-} 5,153,836	10-06-1992	Fraughton, et al.	
		^{US-} 5,187,485	02-16-1993	Tsui, et al.	
		^{US-} 5,904,724	05-18-1999	Margolin	
		^{US-} Publication Number 20060174221	08-03-2006	Kinsella, et al.	Paragraphs 0018, 0019, and 0042
		US-			
		US-			
*******		US-			
		US-			
		US-	AND THE RESERVE AND A STREET OF THE STREET, AND A STREET AND A STREET, A	ANTHERMONIA PROPERTIES OF PROPER ANTHER PROPERTIES AND ANTHER PROPERTIES OF THE ANT	
		US-			
		US-			
•••••		US-			
		US-			

FOREIGN PATENT DOCUMENTS									
Examiner Initials*	Cite No.1	Foreign Patent Document	Publication Date MM-DD-YYYY	Name of Patentee or Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages	T ⁶			
		Country Code ³ Number ⁴ Kind Code ⁵ (<i>if known</i>)			or Relevant Figures Appear				
***************************************			• • • • • • • • • • • • • • • • • • • •	•••••••••••••••••••••••••••••••••••••••	***************************************				

	**********			***************************************	•••••••••••••••••••••••••••••••••••••••				

Examiner	/Ronnie Mancho/ (08/28/2010)	Date	
Signature	Trialitie trialities (out and to)	Considered	

EXAMINER: Initial if reference considered, whether or not citation is in conformance with MPEP 609. Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant. 1 Applicant's unique citation designation number (optional). 2 See Kinds Codes of USPTO Patent Documents at www.uspto.gov or MPEP 901.04. 3 Enter Office that issued the document, by the two-letter code (WIPO Standard ST.3). 4 For Japanese patent documents, the indication of the year of the reign of the Emperor must precede the serial number of the patent document. 5 Kind of document by the appropriate symbols as indicated on the document under WIPO Standard ST.16 if possible. 6 Applicant is to place a check mark here if English language

This collection of information is required by 37 CFR 1.97 and 1.98. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 2 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Substitute for	form 1449B/PTO			Complete if Known		
	RMATION DI			Application Number Filing Date First Named Inventor	Jed Margolin	
1	(Use as many sheets as	necessary)	Art Unit Examiner Name		
Sheet	2	of	3	Attorney Docket Number		

		NON PATENT LITERATURE DOCUMENTS				
Examiner Cite No.		Include name of the author (in CAPITAL LETTERS), title of the article (when appropriate), title of the item (book, magazine, journal, serial, symposium, catalog, etc.), date, page(s), volume-issue number(s), publisher, city and/or country where published.				
		Sensing Requirements for Unmanned Air Vehicles, AFRL's Air Vehicles Directorate, Control Sciences Division, Systems Development Branch, Wright-Patterson AFB OH, June 2004, www.afrlhorizons.com/Briefs/Jun04/VA0306.html				
		Presentation: Developing Sense & Avoid Requirements for Meeting an Equivalent Level of Safety given by RUSS WOLFE, Technology IPT Lead, Access 5 Project at UVS Tech 2006. (January 18, 2006)				
		Presentation: Integration into the National Airspace System (NAS) given by JOHN TIMMERMAN of the FAA's Air Traffic Organization (July 12, 2005)				
		Zone Ready for Drone , April 7, 2006 on the web site for the FAA's Air Traffic Organization Employees, www.ato.faa.gov/DesktopDefault.aspx?tabindex=4&tabid=17&itemid=937∣=103				
		Virtual Cockpit WIndow for a Windowless Aerospacecraft NASA Tech Brief, January 2003 page 40. www.nasatech.com/Briefs/Jan03/MSC23096.html				
		Press Release from Rapid Imaging Software, Inc. www.landform.com/pages/PressReleases.htm "On December 13th, 2001, Astronaut Ken Ham successfully flew the X-38 from a remote cockpit "				

Examiner Signature	/Ronnie Mancho/ (08/30/2010)	Date Considered	
-----------------------	------------------------------	--------------------	--

^{*}EXAMINER: Initial if reference considered, whether or not citation is in conformance with MPEP 609. Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

¹ Applicant's unique citation designation number (optional). 2 Applicant is to place a check mark here if English language Translation is attached. This collection of information is required by 37 CFR 1.97 and 1.98. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 2 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Substitute for	form 1449B/PTO			Complete if Known		
	RMATION DI			Application Number Filing Date First Named Inventor	Jed Margolin	
	(Use as many sheets as	necessary)	Art Unit Examiner Name	-	
Sheet	3	of	3	Attorney Docket Number		

	NON PATENT LITERATURE DOCUMENTS						
Examiner Initials*							
		Article: Flying UAVs in Civil Airspace By Using Synthetic Vision JED MARGOLIN, www.jmargolin.com/todo/uavs.htm					
		NTSB Incident Report on crash of Predator on April 25, 2006, northwest of Nogales, NM. NTSB Identification CHI06MA121					
		Lockheed's Polecat UCAV Demonstrator Crashes Aviation Week & Space Technology, AMY BUTLER, 03/19/2007, page 44					
•••		The F-22 Continues to Encounter Aviation Week & Space Technology, 02/26/2007, page 18					
		Gulf of Mexico Helo Ops Ready for ADS-B Aviation Week & Space Technology, FRANCES FIORINO, 02/26/2007, page 56					
		Embedded Experts: Fix code bugs or cost lives, RICK MERIT, EE Times, 04/10/2006 www.eetimes.com/showArticle.jhtml?articleID-184429901					
		Entries from the Software Failure Hall of Shame, Part 1, TOM RHINELANDER, July 06, 2006, www.g2zero.com/2006/07/notable_entries_from_the_softw_1.html					
		Hardware-in-the-Loop Simulation, MARTIN GOMEZ, Embedded Systems Design, 11/30/01, www.embedded.com/shoArticle.jhtml?articleID=15201692					
		Supreme Court Decision, Boyle v. United Technologies Corp., 487 U.S. 500 (1988)					
		Basic Concepts of real-time operating systems, DAVID KALINSKY (Nov. 18, 2003) http://linuxdevices.com/articles/AT4627965573.html					

Examiner	/Ronnie Mancho/ (08/30/2010)	Date	
Signature		Considered	

^{*}EXAMINER: Initial if reference considered, whether or not citation is in conformance with MPEP 609. Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

¹ Applicant's unique citation designation number (optional). 2 Applicant is to place a check mark here if English language Translation is attached. This collection of information is required by 37 CFR 1.97 and 1.98. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 2 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

Exhibit 10

Exhibit 10

Sensing Requirements for Unmanned Air Vehicles

Engineers develop requirements and metrics to ensure integration of future autonomous unmanned aircraft into manned airspace.

AFRL's Air Vehicles Directorate, Control Sciences Division, Systems Development Branch, Wright-Patterson AFB OH

Engineers from the Air Vehicles Directorate transferred unmanned air vehicle (UAV) sensing system requirements for airspace operations to civilian UAV users and developers. These requirements represent design goals on which to base future sensing subsystem designs, filling an omission in UAV technology planning. Directorate engineers are continuing to develop the technologies that will enable future UAVs to coexist with manned aircraft in both military and civilian airspace. Incorporating these requirements will ensure that engineers design future UAVs to detect possible conflicts, such as midair collisions or runway incursions, and take action to avoid them.

Present UAVs cannot detect manned aircraft and conflict situations and, therefore, they cannot share airspace with manned aircraft. To overcome this obstacle, UAVs need to sense the presence of other aircraft in their operating environment (see figure on next page). In other words, UAVs need to at least replicate a human pilot's ability to see and avoid problems before they will be accepted into the national air space (NAS). Since some aircraft do not have air traffic transponders, UAVs must use onboard sensors to detect aircraft and coordinate that information with available transponder information. With this level of capability, UAVs and operators will have the situational awareness of the airspace around the vehicle to ensure safety at the same level as manned aircraft.

With this goal in mind, directorate engineers worked with Northrop Grumman Corporation (NGC) engineers to establish, iterate, and finalize sensing system performance requirements for the broad range of future Air Force missions. During this collaborative process, directorate engineers noted that many mission elements were similar to civilian airspace operations tasks, and that the requirements they were developing were directly applicable to civilian UAV technology. They also found no report that defined and expressed these requirements for nonmilitary use. To help fill this void, directorate engineers coordinated their research results with the American Institute for Aeronautics and Astronautics UAV airspace operations' focal point, North Atlantic Treaty Organization's Standards Committees, the National Aeronautics and Space Administration, and industry organizations working the same topics from the civilian side. Incorporation of the directorate's technology into civilian requirements' definitions and standards will directly impact airspace operations' sensing systems for current and future UAVs.

The coordinated effort of directorate and NGC engineers that resulted in the sensing system requirements represents the first stage of work on the Autonomous Flight Control Sensing Technology (AFCST) program. This program's long-term goal is to develop the upfront portion of the UAV virtual pilot capability. During this first phase, NGC engineers analyzed midair and near-midair collision data, along with runway incursion data, to generate lessons learned. Then, the NGC engineers combined the lessons learned from aircraft mishap data with sensing performance specifications and good engineering judgment to establish conventions for operating aircraft in the NAS. Next, they examined

airspace tasks for operation in NAS and grouped them into deconfliction, collision avoidance, autonomous landing, and ground operations. The UAV functional requirements resulting from this effort are shown in the table.

As shown in the table, the threshold values represent the nearterm requirements (year 2007), while objective values are far-term requirements (year 2013). Engineers consider the forward vision threshold values equivalent to or slightly better than human performance. Federal Aviation Administration data indicates the dominant cause for midair collision is when an aircraft is overtaken by a faster aircraft because a pilot's position in the cockpit limits rear visibility. In the UAV, rear visibility is not restricted because designers can locate sensors anywhere on the aircraft. Objective values contain UAV rear vision capability to improve safety in this scenario.

Directorate and NGC engineers are currently working on the second phase of AFCST— the preliminary design of the sensor hardware architecture. The AFCST design strategy for all UAV situational awareness functions is to minimize hardware and software quantity and maximize use of multifunction sensors and common image processing software components. Most of the design efforts are completed satisfactorily. NGC engineers are continuing detailed sensor reliability analyses, capturing the individual and combined effects of sensor field-of-view coverage, sensor failure rates, and exposure rates.

During the final stage of the AFCST program, engineers will run simulations emphasizing landing and collision avoidance-tasks with demanding sensing and processing requirements. The engineers will develop landing and see-and-avoid strategies of operation as well as a detailed software architecture design. The simulations should determine if the preferred electrooptic/ infrared and radar sensors meet the specifications identified in the first phase of the AFCST program and the number of false alarms and false negatives that will be encountered. The engineers will also compare various image-processing solutions to determine the most reliable. The ideal system design will be free of nuisance faults caused by system error and will include software designed to minimize such faults. Reliability analysis studies will eventually combine software reliabilities with hardware reliabilities to meet the overall UAV system reliability.

In the near future, directorate and NGC engineers plan to publish the results of the detailed sensor reliability analysis. Program managers are also planning a follow-on hardware-in-the-loop simulation effort to address and demonstrate the integrated system design. In this realistic simulation, engineers will study concepts such as the integration of AFCST sensors with instrument flight rules avionics for see-and-avoid maneuvers, landing, and automated traffic collision avoidance. Real-time simulation will stress the detailed sensor architecture design, allowing the engineers to assess its adequacy and determine its readiness for technology transition to flight test. These efforts will ensure the safe incorporation of UAVs into the NAS.

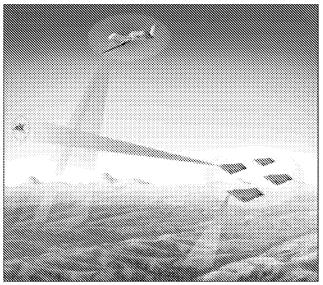


Figure. UAV senses presence of other aircraft

unctional Requirements	Threshold Values	Objective Values
Field of View	Azimuth: 60° Elevation: 30°	4 π steradians
Field of Regard	Azimuth: +/-100` Elevation: +30', -90`	4 π steradians
Ranging	0.5 ft CEP*@ 100 ft 700 ft CEP*@ 6 nm	0.25 ft CEP*@ 100 ft 770 ft CEP*@ 13,2 nm
lmaging	Varies from 30 ft to 3 nm	Varies from 30 tt to 13.2 nm
Data Rate	30 Hz	60 Hz
Weather Capability	Visual Meteorological Capability	Visual and Instrument Meteorological Capability
Criticality	Safety Critical	Safety Critical
Emission Constraints	Various Federal Aviation Administration Limitations	Various Federal Avlation Administration Limitations


Table. Near- and far-term UAV sensing requirement

Mr. Tom Molnar and Mr. Bruce Clough, of the Air Force Research Laborator y's Air Vehicles Directorate, and Mr. Won-Zon Chen, of Northrop Grumman Corporation, wrote this article. For more information contact TECH CONNECT at (800) 203-6451 or place a request at http://www.afrl.af.mil/techconn/index.htm. Reference document VA-03-06


DISTRIBUTION A
PUBLIC RELEASE
HOME | ABOUT AFRL | CONTACT US | DISCLAIMER
The information within this website is hosted by ABP International

Exhibit 11

Exhibit 11

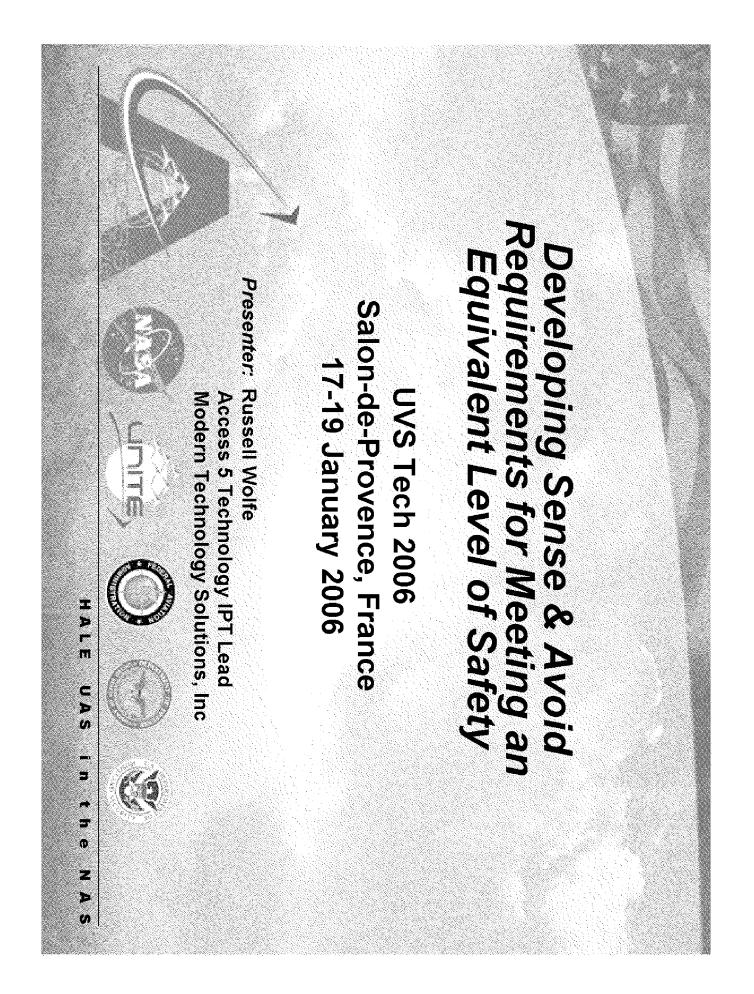






UAS Collision Avoidance Initiatives

NASA Dryden Flight Research Center




- Sensor Requirements
- Sensor Concept Development
- Flight Test Demonstrations
- Cooperative


EO/IR

Radar

ACCESS 5: 2004 - present

Requirements Development












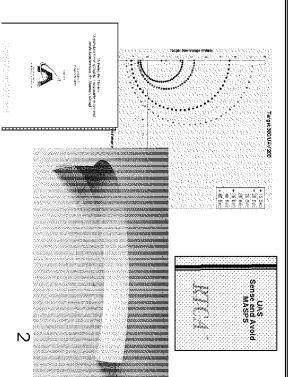


Simulation Tools

Standards Development

Flight Test Demonstrations

Safety Analysis

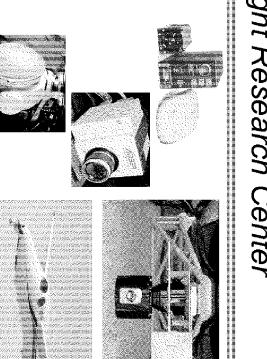




Collision Avoidance Work Package **ACCESS 5**

Work Package Objectives:

- Define Equivalent Level of Safety (ELOS) for Sense and Avoid.
- Develop collision avoidance (CA)
 requirements for Unmanned
 Aircraft Systems (UAS); validated
 through analysis, simulation, and
 flight demonstration.
- Provide inputs to the FAA and RTCA Special Committee 203 "Unmanned Aircraft Systems"

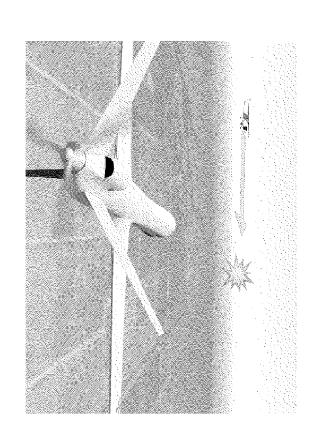

Team Members:

- NASA Dryden & Langley
- Northrop Grumman
- Lockheed Martin (Ft. Worth)
- MITRE

- Modern Technology Solutions
- Aurora Flight Sciences
- Federal Aviation Administration



ACCESS 5 Collision Avoidance Work Package 5 Major Task Areas


CA Task 1:

Define ELOS for See & Avoid




<u>CA Task 3:</u> Perform CA Safety Analysis

<u>CA Task 2:</u> **Develop CA Requirements**



<u>CA Task 5:</u> **Perform CA Flight Test**


CA Task 4: Develop CA Simulation Tool





Collision Avoidance Work Package


Task Relationships

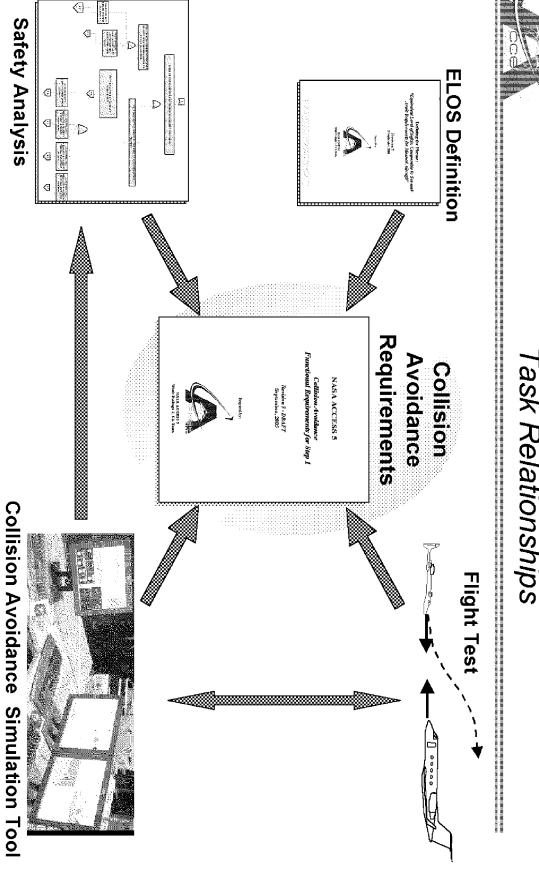




Task 1: ELOS Definition Document

- of safety, as it pertains to see and avoid Objective: To present a recommended approach for defining an equivalent level
- Deliverable Content:
- Current regulatory / operational environment
- 14 CFR 91.113(b), Right of Way Rules
- 14 CFR 91.111, Operating near other aircraft
- Basis for having to meet an Equivalent Level of Safety
- 14 CFR 21.21(b), Certification Procedures
 FAA Order 8110.4C, Equivalent Level of Safety Findings
- Potential Approaches & Methodologies for defining ELOS
- 1) Statistical Approach
- 2) Performance / Rule Based Approach
- Recommended Definition and Measures of Performance for Sense and Avoid ELOS

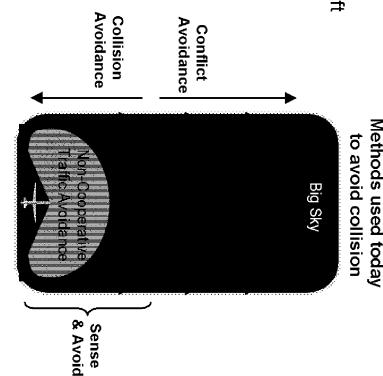


Status: Delivered to FAA on 23 Nov 2004




Task 1: ELOS Definition Document Definition and Measures of Performance

avoid collisions." conflicting traffic and the ability to take the appropriate action necessary to capability to provide situational awareness with adequate time to detect Definition: "Equivalent level of safety to manned aircraft see-and-avoid" is the

Measures of Performance

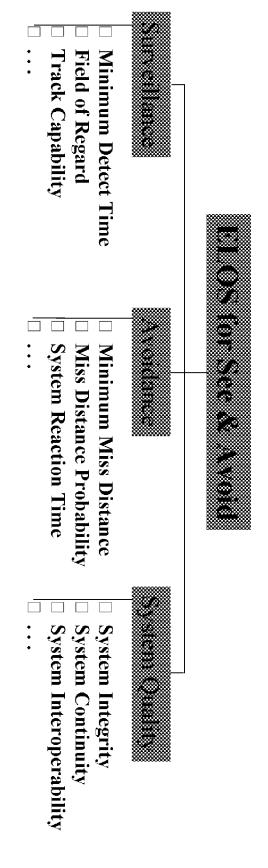



Task 2: Develop Collision Avoidance Reqmts


- pertormance requirements for HALE UAS. Objective: To develop the collision avoidance operational, functional, and
- Deliverable Content:
- Notional CA Subsystem Description
- Subsystem Architecture
- Interfaces
- Operational Requirements
- Functional Analysis
- List of Collision Avoidance Functions
- Functional Flow Block Diagram
- **Functional Requirements**
- Design Guidelines


Performance Requirements

- Performance Trade-offs
- Verification Method (Analysis, Inspection, Simulation/Modeling, Demo, Test)
- Status: Intend to release Revision 6.0 in February 2006 (All previous revisions have included FAA input and review)



Task 2: Develop Collision Avoidance Reqmts Collision Avoidance Functions

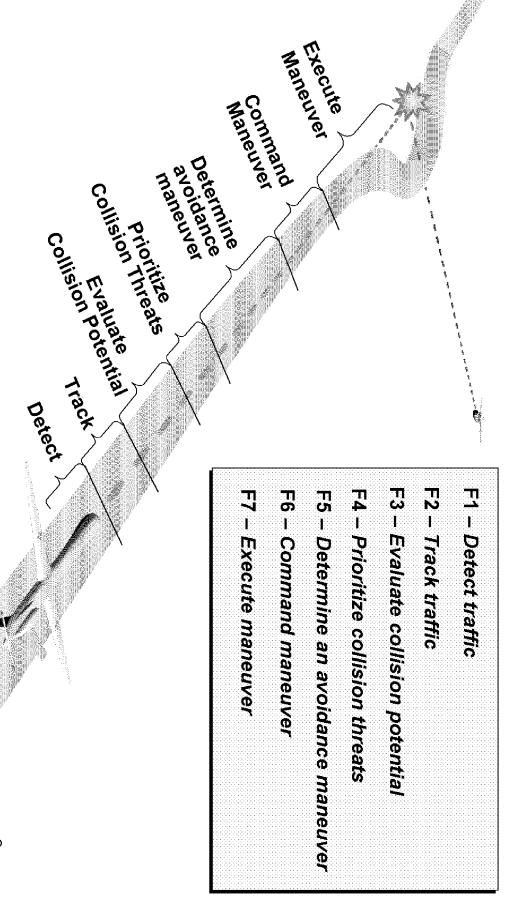

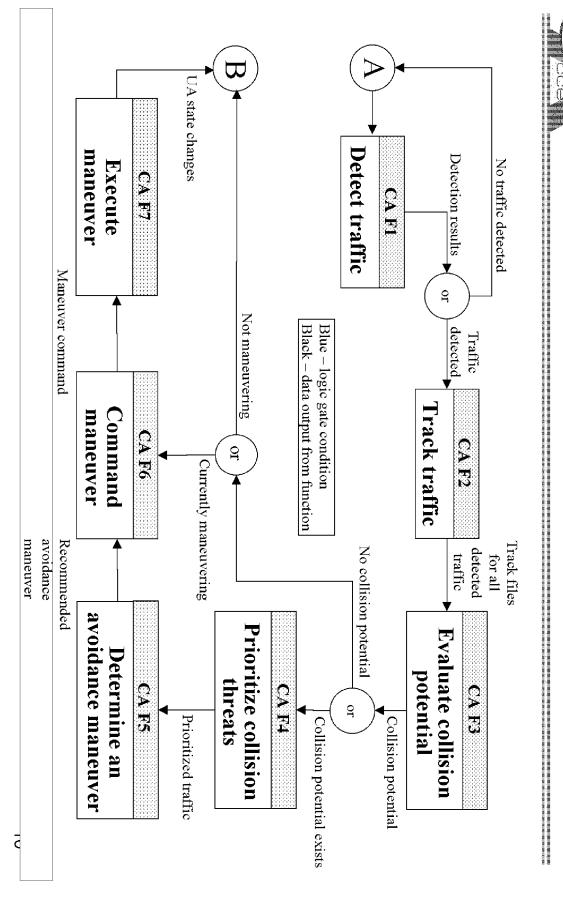

Task 2: Develop Collision Avoidance Regmts Functional Flow Block Diagram



Task 2: Develop Collision Avoidance Reqmts

Function 1: Detect Traffic Requirements (Example)

- Detect Traffic - The UAS shall detect traffic within its surveillance volume.
- F1.1: Minimum Detect Time The CAS shall detect traffic with sufficient time remaining for successful performance of all required collision avoidance functions
- F1.2: Detection Range The CAS shall detect cooperative traffic at a range of at least xx nautical miles. (see Table F1.2)
- I azimuth FOR of at least +/-110° referenced from the flight path of the UA. F1.3: Azimuth Field of Regard - The CAS shall detect cooperative traffic within an
- elevation FOR of at least +/-15° referenced from the flight path of the UA. F1.4: Elevation Field of Regard - The CAS shall detect cooperative traffic within an
- I volume at a rate that supports the track probability guideline (see F2.3). F1.5: Detection Probability - The CAS shall detect cooperative traffic in the surveillance
- F1.6: Detection Rate The average CAS detection rate shall be equal to or greater than xx hertz. (see Table F1.6)
- F1.7: Detection Accuracy The CAS shall detect cooperative traffic with an accuracy of TBD ft for range determinations, and TBD ft for altitude determinations
- I all detected traffic F1.8: False Detection/Nuisance - False detections shall account for less than TBD% of



Task 3: Perform Safety Analysis

- avoidance for UAS Objective: To develop a method for evaluating the safety of collision
- and logic risk ratios Establish equivalent level of safety to manned aircraft using event/fault trees P(collision UAS)

Risk Ratio = $\frac{\Gamma(\text{collision } \cup \text{As})}{\Pr(\text{collision } \text{manned } \text{AC})} \le 1$

Accomplishments:


- Developed visual acquisition model based on Lincoln Lab's SEE1 model
- Developed surveillance error models for GPS/ADS-B
- for the primary event tree probabilities Performed multiple assessments using results from the CA simulation tool
- Supported requirements development in the areas of Surveillance Maneuver times, etc. Effectiveness, Detection Accuracies, Detection times, Reaction times,
- Status: Currently finalizing final report and lessons learned



Task 3: Perform Safety Analysis

Generic Event/Fault Tree for Collision Probability Estimation


- provide a consistent basis for comparison: Generic Event/Fault Tree established to
- 1. Manned aircraft using see & avoid
- 3. UAS with Sense & Avoid

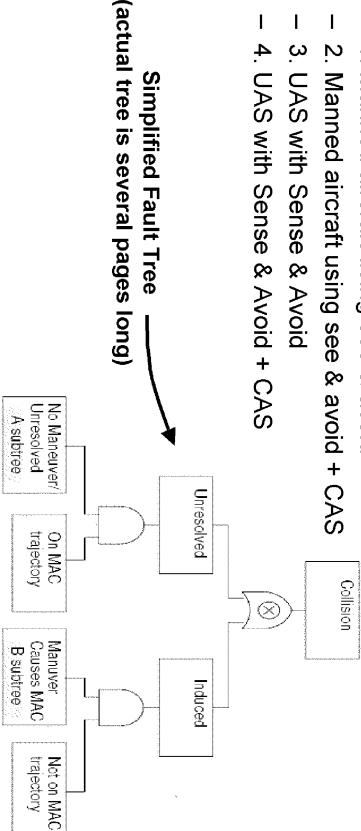





Task 4: Develop CA Simulation Tool


- via Simulation as well as support the CA Flight Test activities Objective: To assess the validity of the proposed CA Functional Requirements
- Allows characterization of:
- Ownship Vehicle Dynamics
- **CA Equipment and Software**
- **Encounter Scenarios**
- Accomplishments:
- **Duplicated Tech Demo Scenarios**
- Flight Test Risk Reduction
- Improve Probability of Obtaining Useful Data
- Validated Against the System Integration Lab (SIL)
- Flight Test Risk Reduction
- CCA Component Models
- Sensitivity Analyses performed
- Status: Currently analyzing flight test data and validating the CA simulation tool.

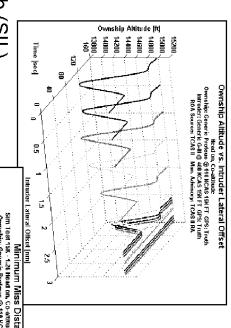

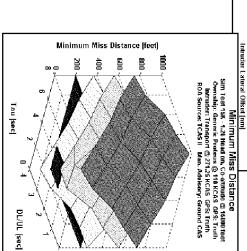



<u>1</u>






Task 4: Develop CA Simulation Tool






- MATLAB™/Simulink® Simulation Environment
- Multi-Vehicle Simulation (4 Aircraft Max)
- Generic Aircraft Models Represent Any Fixed Wing Aircratt
- Each Aircraft = 1 Parameter File
- Scripts Trim & Initialize Aircraft to Any Encounter Geometry
- Modular Components
- Blocks Can be Copied and/or Swapped Out for Software Upgrades (e.g. CA Sensors, Maneuver Advisory)
- Capable of Batch Runs for Parametric Variation Studies
- Uses Microsoft Excel Input Dataset
- Multiple Plot Outputs Available
- PC Portable (< 37 MB)
- Can Run in Both Fast Sim-Time & Soft Real-Time



Task 5: Perform CA Flight Test

Objective: To collect cooperative collision avoidance data to validate the CA simulation tool

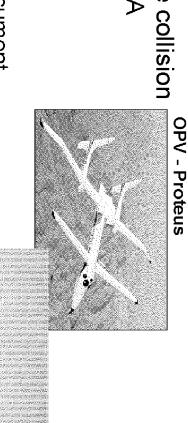

Accomplishments:

- Developed Interface Control Document
- Developed System Integration Lab (SIL)
- Developed CA algorithms
- Developed CA software and human interface tool


Intruder – Gulfstream III

- Procured CA sensors and integrated them onto Proteus platform
- Developed CA scenarios and test cards
- Post-processed flight data and prepared for data analysis effort
- Status: Successfully completed over 50 collision scenarios during the last two weeks of September 2005





Test Scenarios

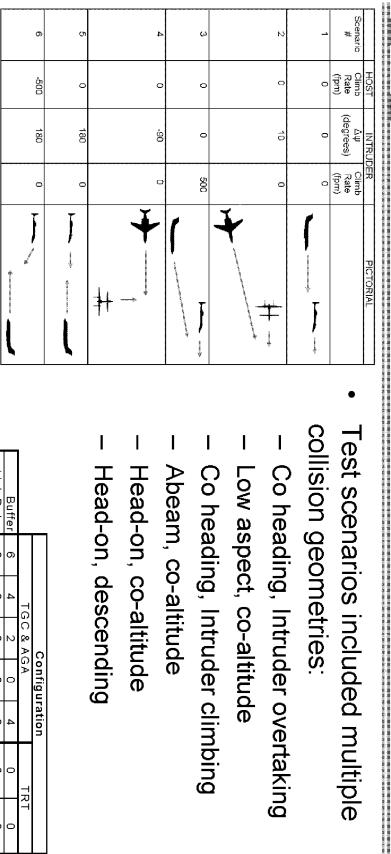

- Test scenarios included multiple collision geometries:
- Co heading, Intruder overtaking
- Low aspect, co-altitude
- Co heading, Intruder climbing
- Abeam, co-altitude
- Head-on, co-altitude
- Head-on, descending

			C	Configuration	ration		
		TG	TGC & AGA	3A		LAI	Ţ
Buffer	6	4	2	0	4	0	0
Link Delay	0	0	0	0	2	0	2
ertaking				1		2	
				1		2	
				1		2	
	1	1	_	2	1	1	1
	1	1	1	2	1	1	1
	1	1	1	2	1	1	_

Abeam, Co-Alt Head-On, Co-Alt Head-On, Descending

Co-Heading, Intruder Climbing

Low Aspect, Co-Alt

Co-Heading, Co-Alt, Intruder Ove

Scenario



Next Steps

- Analysis and Flight Test Activities Document the results and lessons learned from the Safety
- Complete validating the CA Simulation tool
- Derive practical values/ranges for the TBDs in the performance requirements
- Utilize the validated CA Simulation tool
- Utilize the safety analysis results
- Begin Non-cooperative Collision Avoidance Activities
- Derive unique Non-cooperative performance requirements
- Conduct Non-cooperative Simulation Runs and Flight Demos Perform Trade Studies and Concept Assessments
- Support RTCA SC-203 on developing the Sense & Avoid Minimum Aviation System Performance Standards (MASPS)

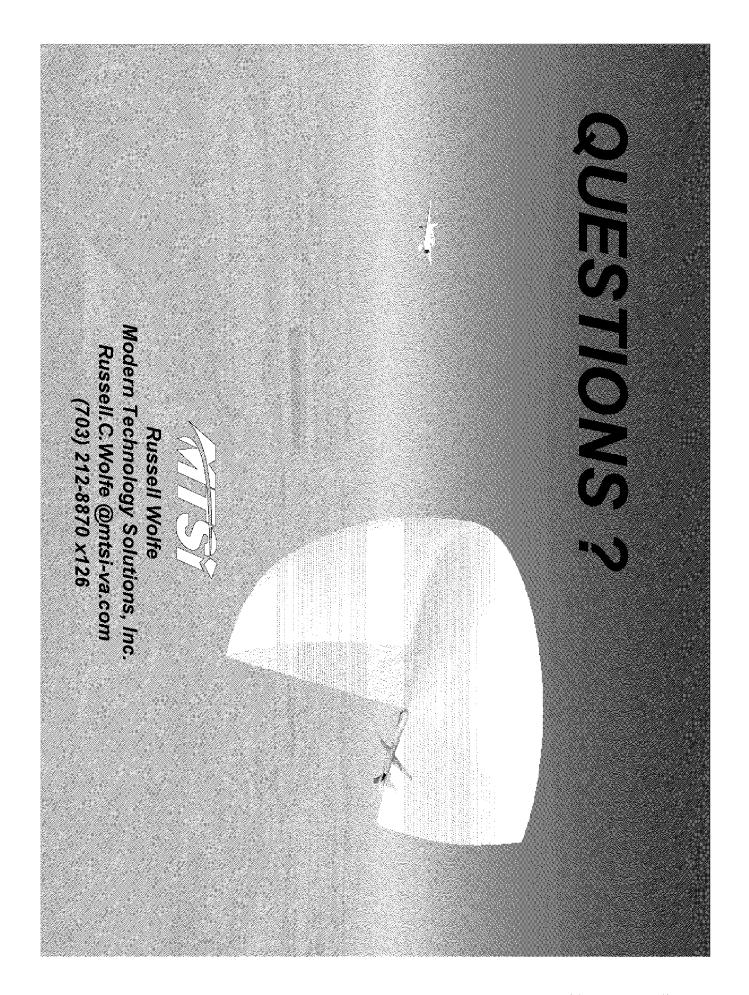


Exhibit 12

Exhibit 12

World News & Analysis

Lockheed's Polecat UCAV Demonstrator Crashes

Aviation Week & Space Technology 03/19/2007, page 44
Amy Butler
Washington


Polecat UAV has been labeled a total loss after December crash

Printed headline: Roadkill

Lockheed Martin's Polecat unmanned aerial vehicle demonstrator has crashed months after accomplishing only three flight tests.

The incident takes the steam out of the company's strategy to fund its own project to keep pace with--and potentially surpass--work at Northrop Grumman and Boeing on government-funded *UAV* programs. Northrop Grumman and Boeing have been beneficiaries of the Pentagon's multibillion-dollar on-again off-again program to develop a combat UAV for the Navy and Air Force. And, both companies have flying demonstrators of varying maturity as a result of this support.

Lockheed Martin has no major government funding for its UAV efforts. But, company officials said that with Polecat they hoped to surpass the knowledge base of the nascent UAVs at rival companies and secure a foothold in the next-wave of Pentagon purchasing in this area-particularly for the Air Force's future bomber.

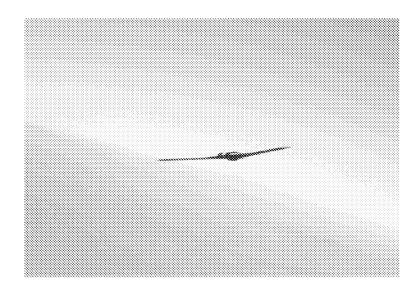

Lockheed Martin officials took months to acknowledge the crash of its Polecat UAV development aircraft. Credit: LOCKHEED MARTIN

THE POLECAT CRASH occurred Dec. 18, 2006, at the Air Force's Nevada Test and Training Range. Lockheed Martin officials say they could not discuss the crash any earlier due to a thenongoing Air Force-led investigation that was only recently completed. The company notes that it had no formal customers for Polecat, but was restricted by government rules from discussing the incident since it occurred on a federal test range.

The 90-ft. wingspan demonstrator, which cost them more than \$30 million to develop, was declared a total loss as a result of the crash. The company is attributing the incident to an "irreversible unintentional failure in the flight termination ground equipment," though it was unable to say whether human error or a technical malfunction was a cause. The aircraft was, however, "in full control and performing well" when its automatic "fail-safe flight termination mode" activated, according to a Lockheed Martin statement. A company official says a failsafe, which prevented operators from recovering control of the UAV, initiated "in seconds," rendering them powerless as the aircraft dove to the ground.

"The fail-safe mode is designed to irreversibly terminate flight to ensure that systems do not deviate from the range into civilian airspace," according to a company statement. "There was an irreversible unintentional failure in the flight termination ground equipment at the Nevada Test and Training Range. We believe the test range has corrected the potential for a similar circumstance to occur again." Company officials say the Polecat validated rapid prototyping methods and that aerodynamic performance was "better than expected." They add, the flight termination software "performed exactly as expected."

The incident is an embarrassment for Lockheed Martin, which has been criticized for ignoring the UAV business and focusing too much on its booming manned fighter work on the F-22 and F-35. The company's efforts to conduct *UAV* testing fizzled after the termination of its DarkStar UAV program; one of its prototypes crashed in April 1996.

Yet, the company is not alone when it comes to embarrassing UAV incidents. Early in the development of the Global Hawk, a Northrop Grumman UAV, operators at one test range inadvertently engaged a self-destruct code that was picked up by a prototype UAV flying at a different range. The aircraft's extraordinarily high altitude gave it line-of-sight to both range sites. So, the *UAV* wound up in a self-destruct spiral and was declared a total loss.

For Lockheed Martin, Polecat's unveiling was the high point of the aeronautics sector's news briefings during last year's Farnborough air show in the U.K. (AW&ST July 24, 2006, p. 64). Frank Cappuccio, executive vice president for Lockheed Martin Skunk Works, showed a video clip during that briefing to reporters of the early Polecat flights. He touted the air vehicle as a demonstrator for new technologies in the areas of composites, fabrication and twisting strut designs to morph the UAV's wings in flight.

Polecat was the first public attempt by a company to demonstrate the effectiveness of a tailless Horton-wing design at altitudes in excess of 60,000 ft. The design, similar to the B-2's, is inherently stealthy because it lacks a tail. Skunk Works had wanted to experiment with it in high altitudes where the air is thin. Yet, with only three flights under its belt, the aircraft never climbed above 15,000 ft. to prove itself at high altitudes as planned.

Contrail suppression is also a problem the company hoped to tackle via its work on Polecat. Despite its high altitude, the U-2 has been plagued by contrails during its decades of operation. And, effective visible contrail suppression will augment the stealth qualities afforded through design and coatings. Polecat was not coated with stealthy materials, but the tailless design and angled engine inlets provided stealthy qualities to the demonstrator.

Frank Mauro, director of Lockheed Martin's unmanned systems at Skunk Works, said last year that work on Polecat would feed into the company's evolving designs for the Air Force long-range strike aircraft concept as well as needs beyond Northrop Grumman's Global Hawk for a future high-altitude UAV for intelligence collection. "Many lessons learned on this project will be applicable to future efforts, including Long Range Strike," according to the company statement.

The aircraft was designed to hoist 1,000 lb. of payload. It was powered by two FJ44-3E Williams International engines. Work began on Polecat in 2003 and it was ready for flight 18 months later.

Exhibit 13

Exhibit 13



UNITED STATES PATENT AND TRADEMARK OFFICE

BEFORE THE BOARD OF PATENT APPEALS AND INTERFERENCES

Ex parte MAURICE GIVENS

Appeal 2009-003414 Application 11/265,973 Technology Center 2800

Decided: August 6, 2009

Before JOHN C. MARTIN, CARLA M. KRIVAK, and THOMAS S. HAHN, *Administrative Patent Judges*.

KRIVAK, Administrative Patent Judge.

DECISION ON APPEAL

Appellant appeals under 35 U.S.C. § 134(a) from a final rejection of claims 1-15. We have jurisdiction under 35 U.S.C. § 6(b).

We reverse.

STATEMENT OF CASE

Appellant's claimed invention is a method and apparatus for reducing noise associated with acoustic sensor outputs (Spec. ¶[0001]). Appellant's invention uses a sub-band spectral subtraction mechanism to process a noise cancellation mechanism output signal, producing a reduced noise acoustic data signal (Spec. ¶[0007]).

Independent claim 1, reproduced below, is representative of the subject matter on appeal.

1. A method for sensor output signal noise reduction comprising the steps of:

introducing at least one sensor output signal into an LMS-based adaptive noise canceller, producing a noise canceller output signal; and

introducing said noise canceller output signal into a sub-band spectral subtractive routine external to said LMS-based adaptive noise canceller, producing a reduced noise signal.

REFERENCE

Lin US 2007/0090980 A1

Apr. 26, 2007 (filed Oct. 21, 2005)

The Examiner rejected claims 1-15 under 35 U.S.C. § 102(e) based upon the teachings of Lin.

The only contention is whether Lin teaches a sub-band spectral subtractive routine external to an LMS-based adaptive filter (App. Br. 7-9; Reply Br. 16-17; Ans. 11-12).

The Examiner finds that Lin teaches an LMS adaptive noise canceller 1412 that includes a sub-band spectral subtraction routine 1410 (Ans. 13). The Examiner further finds that Appellant has not provided a specific definition of "sub-band spectral subtractive routine" and thus, giving the term its broadest reasonable interpretation, the term can include any adaptive filter (Ans. 12). We cannot agree.

Appellant's Specification explains that "sub-band spectral subtraction algorithms are . . . known to those skilled in the art" in paragraph [0023], sets forth the sub-band spectral subtractive mechanism in paragraph [0032], and also sets forth the function that implements the sub-band spectral noisereduction algorithm (Appendix-Spec: 21-22). Although Appellant's Specification does not specifically define the term "sub-band spectral subtractive routine," this is a specific claim term for a specific type of filtering (Spec. ¶[0032]). Any interpretation that fails to give weight to "sub-band," "spectral," "subtractive," and "routine" deprives the words in this claim term of their normal meaning. Thus, the "sub-band spectral subtractive routine" does not include just any adaptive filter, but rather refers to a specific filtering routine. Further, the output from Lin's LMS based adaption circuit is fed to a summer 1124, 1224 (Lin Fig. 14), not a sub-band spectral subtractive routine. A summer is an additive circuit and not a subtractive circuit. Also, Lin does not describe the summer as operating on a sub-band. Thus, because Lin does not disclose each and every element of Appellant's invention, Lin does not anticipate claims 1-15. RCA Corp. v. Appl. Dig. Data Sys., Inc., 730 F.2d 1440, 1444 (Fed. Cir. 1984).

Application 11/265,973

CONCLUSION

The Examiner erred in rejecting claims 1-15 under 35 U.S.C. § 102(e).

DECISION

The Examiner's decision rejecting claims 1-15 is reversed.

REVERSED

ke

MARK E. FEJER GAS TECHNOLOGY INSTITUTE 1700 SOUTH MOUNT PROSPECT ROAD DES PLAINES IL 60018

Exhibit 14

Exhibit 14



Speech – "Safety Must Come First"

"Safety Must Come First"
J. Randolph Babbitt, Scottsdale, AZ
November 18, 2009

AIA: Unmanned Aircraft Systems

Remarks as prepared for delivery

Good afternoon, and thank you, John [Langford, Chairman & President, Aurora Flight Sciences]. It's an exciting time in aviation and to be involved with introducing new technology into the National Airspace System. It's also a good time to be thinking and talking about personal and professional responsibility — something I have unfortunately had to do too much of lately. But we all — every professional in aviation — have a shared responsibility to make this system as absolutely as safe as it can be, and never to just a level where we would ever say, "We could do more, but this is safe enough".

So if we are direct with ourselves here, as of today, unmanned aircraft systems are not ready for seamless or routine use yet in civilian airspace. The idea of pilots flying remotely has been around for a long time. And it is, I truly believe, the way of the future. But where we are, on numerous fronts, they're not ready for open access to the NAS and we can't give you the thumbs up.

And you know that I'm not telling you anything that your technical folks aren't already telling you. While the UAS is undoubtedly the way of the future, my concern must be on today, and right now, the era of the unmanned aircraft system in civilian airspace is just not here yet. Much as we'd all wish the case were different, the level of technical maturity isn't where it needs to be for full operation in the NAS.

UAS is not plug-and-play. The technology has shown amazing potential and it's provided an astonishing value in use for what they're intended. As someone who's pulling for our troops overseas, I'm glad that unmanned aircraft systems are part of our military arsenal. When they gave the *Hunter* and the *Predator* their names, they weren't kidding.

But the issue here stateside is safety and it is Rule number one for everyone in the NAS. And being able to see-and-avoid is a fundamental part of that rule.

The definition of see and avoid for UAS is "the capability of an unmanned aircraft system to remain well clear from and avoid collisions with other airborne traffic and vice-versa." With the UAS, you're talking about a blend of technology that in terms of complexity is head and shoulders above anything we're doing now. That complexity is what makes it difficult to meld the UAS safely into a mature system like the NAS.

I think it's fair to compare the advent of the UAS with the introduction of the jet engine. We're talking about an exponential leap in capability, and that leap needs a contemporaneous jump in technology and procedures to do so safely.

We are considering the vast potential of UAS as we develop and implement NextGen, but it's an unacceptable risk to simply add today's level of UAS technology to today's NAS, and, I'd venture to say, that both you and the American public would agree.

We know the headlines following the helicopter accident over the Hudson on August 8th. That was followed by two Congressional hearings and calls to immediately shut down all traffic over the Hudson or sharply curtail these operations.

Now can you even imagine if one of those aircraft had been an unmanned system? With the headline: "Unmanned Robot plane crash kills 9." How do you think the Congress would react to that headline — after they confirmed my replacement?

Evidence Appendix - 498

That kind of scenario notwithstanding, I think unmanned aircraft systems are here to stay. In FY-09, there were about 20,000 flights in civilian airspace for a total of over 2,500 hours. And the number of operations that have been granted has more than tripled since 2007. But in order for us to get to the place where the UAS can become a viable, accepted part of the national airspace system, we have to make sure that sense-and-avoid is more than a given — it must be a guarantee.

Without a pilot who can look and scan to the left and the right — just the way you and I do when we're backing out of a parking space — there's a perceived level of risk that the American public isn't ready for.

As a safety regulator who is obligated to consider the total picture, I can tell you that proven performance must be the order of the day when it comes to UAS. We can't let our desire to focus on the enormous potential blind our safety concerns.

With that said, change is a joint effort. You drive change. The FAA ensures safety. And I do believe more community support is needed, and not just by DoD. Technology takes time. Development and maturity takes time — raising children should have proved that to you. But seriously, we know that from every aspect of our life experience that when you rush into something, your troubles have usually just begun. Consider, for example, that most of what you're doing now with unmanned aircraft takes places in the daylight. The challenge of night flying is not insignificant.

When you're dealing with the FAA, remember that all of the components need to be addressed. While air traffic will help you get from point A to point B, it's the aviation safety organization that sets the standards to be at point A. Our Airports group regulates point A and point B and other groups within the FAA setting standards for performance and maintenance of the machines and facilities. And I haven't yet mentioned the Human Factors considerations.

To assist and be ready for UAS reaching maturity, we have special program offices in our aviation safety and air traffic organization, military and other government organizational liaisons for UAS. We are doing what we can to help get you to market. My senior executives in Aviation Safety and Air Traffic, including Hank Krakowski, our COO, are meeting with the Government Executives that operate UAS in Dallas as we speak.

As far as UAS technology itself goes, most UAS have a single point of failure for hydraulics, electrical, flight control and satellite link. That's a concern.

When there's a single point of failure for something that runs into trouble every thousand hours, that's a problem. We have to address these risks. When you're talking about bringing something new into the airspace mix — something that could range from the size of a 737 to something as small as your fist, there's little doubt that there's a lot of homework that needs to get done first. That's part of earning the privilege to operate in the NAS. We're all going to going to have to act like we are from Missouri — "Show me".

For our part, we're working on an NPRM for small UAS. It will define standards for routine commercial operations to meet the needs of a large portion of the UAS community. And while limited, it represents a significant step forward in enabling this community. I think this experience will promote a better understanding of the challenges that you and I face. We're also working on revising a memorandum of agreement with DoD that addresses specific critical access needs.

The UAS Executive Committee — the ExCom — has been established to develop solutions to allow incremental access of UAS into the NAS. The ExCom is a multi-agency, Federal executive-level committee including FAA, DoD, DHS and NASA.

No organization can solve this challenge alone. But by combining the strengths, expertise and capabilities of the member organizations, we'll take on the task of UAS access much faster and will do it more efficiently. The ExCom has a tremendous amount of operational experience and have the lessons learned to implement policy and procedures. Additionally we're making sure we meet the requirements of the National Defense Authority Act.

We also have a special Committee with RTCA, SC-203, to develop standards. This is the primary method for you to support and promote the future of the UAS. These standards will serve as a basis for regulations.

And I also must mention that we're working with DoD and NASA on research as part of NextGen. This will not Evidence Appendix - 499

only help us get to sense and avoid, but find interim solutions until we do.

Given that unmanned aircraft are becoming the method of choice to conduct mapping, fire detection, scientific missions, weather mapping, volcanic sampling, search and rescues, disaster response and security surveillance, the need for standardized regulations has never been more paramount.

And in closing, that is where we are. We need to develop standards for the future. But we must make sure that we're all moving in the same direction before it happens. Those safety standards must be the same for everyone, even if no one's in the cockpit.

###

Exhibit 15

Exhibit 15



This copy is for your personal, noncommercial use only. You can order presentation-ready copies for distribution to your colleagues, clients or customers <u>here</u> or use the "Reprints" tool that appears above any article. <u>Order a reprint of this article now.</u>

Printed on page A1

PRESSED INTO SERVICE

Pentagon Accident Reports Suggest Military's Drone Aircraft Plagued With Problems

By David Zucchino Los Angeles Times Published: Tuesday, July 6, 2010 at 10:48 p.m.

KANDAHAR, Afghanistan | The U.S. military often portrays its drone aircraft as high-tech marvels that can be operated seamlessly from thousands of miles away. But Pentagon accident reports reveal that the pilotless aircraft suffer from frequent system failures, computer glitches and human error.



Rick Loomis | Los Angeles Times
A pilot in a remote site at Kandahar Air
Field uses a camera pod to remotely
steer a Reaper aircraft back into base
after a mission. Thirty-eight Predator
and Reaper drones have crashed during
combat missions in Afghanistan and
Iraq, and nine more during training on
bases in the U.S., with each crash
costing between \$3.7 million and \$5
million.

Design and system problems were never fully addressed in the haste to push the fragile planes into combat over Afghanistan shortly after the Sept. 11, 2001, attacks more than eight years ago. Air Force investigators continue to cite pilot mistakes, coordination snafus, software failures, outdated technology and inadequate flight manuals.

Thirty-eight Predator and Reaper drones have crashed during combat missions in Afghanistan and Iraq, and nine more during training on bases in the U.S. - with each crash costing between \$3.7 million and \$5 million. Altogether, the Air Force says there have been 79 drone accidents costing at least \$1 million each.

Accident rates are dropping, but the raw numbers of

mishaps are increasing as use of the aircraft skyrockets, according to Air Force safety experts.

But no lives are lost, and for some experts, that's the most important point: For them, drones are the vanguard of a new type of remote warfare that minimizes the risk to U.S. personnel. The number of crashes, however, illustrates how quickly the unmanned aircraft have become an essential part of U.S. combat operations. At least 38 drones are in flight over Afghanistan and Iraq at any given time.

Flight hours over Afghanistan and Iraq more than tripled between 2006 and 2009. However, ground commanders in Afghanistan say only about a third of their requests for drone missions are met because of shortages of aircraft and pilots. The loss of aircraft to crashes and other accidents can hamper combat operations - and risk the lives of troops who depend on them for reconnaissance and air cover.

The Air Force acknowledges that armed drones were not ready when first deployed as the U.S. military geared up for the campaign to oust the Taliban and al-Qaida from Afghanistan. Most weapons systems are tested and refined for years. Unarmed drones had been in use since the mid-1990s, but the first armed version went to war just nine months after it was retrofitted.

It was pushed into use after a Predator successfully launched Hellfire antitank missiles at the Naval Air Weapons testing range at China Lake in January 2001.

"It was never designed to go to war when it did," said Lt. Col. Travis Burdine, a manager for the Air Force Unmanned Aircraft Systems Task Force. "We didn't have the luxury of ironing out some of the problems."

Technicians bought off-the-shelf equipment at Radio Shack and Best Buy to build a system to allow ground forces to see the drones' video feeds. At least one drone crashed because it had no fuel gauge, and the aircraft ran out of fuel. In another crash, investigators cited a design flaw: The "kill engine" switch was located next to the switch to lower the landing gear, and a ground-based pilot confused the two.

Even now, the planes are not designed for the amount of use they're getting, their defenders say. The 27-foot Predators and 36-foot Reapers operate under conditions that put enormous stress on the light drones - and the humans who operate them.

"These airplanes are flying 20,000 hours a month, OK?" said retired Rear Adm. Thomas J. Cassidy Jr., president of the aircraft systems group at General Atomics Aeronautical Systems in San Diego, which makes Predators and Reapers.

"That's a lot of flying," Cassidy said. "Some get shot down. Some run into bad weather. Some, people do stupid things with them. Sometimes they just run them out of gas."

The drones flew 185,000 hours over Afghanistan and Iraq in 2009, more than triple the number of hours flown in 2006. The Air Force expects that number to grow to 300,000 hours this year.

"The Air Force needs as many as they can get," said Col. Jeff Kappenman, director of the Center of Excellence for UAS Research, Education and Training at the University of North Dakota. "There has been exponential growth in need and demand."

Air Force officials say design and training improvements have lowered the Predator's accident rate. They say lessons learned from that plane's problems have solved some issues for the larger and more potent Reaper, in use in combat since 2007. Accident rates per 100,000 hours dropped to 7.5 for the Predator and 16.4 for the Reaper last year, according to the Air Force. The Predator rate is comparable to that of the F-16 fighter at the same stage, Air Force officers say, and just less than the 8.2 rate for small, single-engine private airplanes flown in the U.S.

The crash figures do not include drones flown over Pakistan by the CIA, which does not acknowledge the covert program. But independent experts said Predators flown over Pakistan probably experience problems similar to those flown by the Air Force in Afghanistan and Iraq.

Four Air Force Predators have crashed this year, three of them in Afghanistan - on Jan. 15 in southern Afghanistan, one on takeoff Feb. 9 in eastern Afghanistan, and a third March 14 in the southern part of the country. All were total losses, the Air Force said. Another Predator crashed in California during a training exercise April 20.

In the 12 months ended Sept. 30, the Air Force reported 16 Predator and Reaper accidents. Four involved crashes during a 15-day period in September. On Sept. 13, a pilot inside a ground station in Nevada lost video and data links to a Reaper over Afghanistan. As it was about to exit Afghan airspace and crash, an F-15 pilot was ordered to shoot it down and ground troops recovered the wreckage to keep top-secret technology out of insurgents' hands.

In another case, a drone crashed into a Sunni political headquarters in Mosul, Iraq. No injuries were reported.

In some cases, a cause is never determined and no wreckage is recovered. On May 13, 2009, a crew in Nevada lost contact with a Predator, and it was listed as "presumed crashed" somewhere in Afghanistan, according to an Air Force report.Retired Gen. Wesley K. Clark, asked whether high drone mishap rates concerned him, replied: "Not really. They're expendable." Others disagree.

"We can't treat these things like disposable diapers and just throw them out," retired Air Force Gen. Hal Hornburg, former chief of the Air Force Air Combat Command, warned officers at a conference on drones.

Kyle Snyder, who tracks military drones for the Association for Unmanned Vehicle Systems International, a nonprofit research group, said he had never heard anyone in the Air Force call drones expendable.

This story appeared in print on page A1

Copyright © 2011 TheLedger.com — All rights reserved. Restricted use only.

X. Related Proceedings Appendix

There are no related proceedings so the Related Proceedings Appendix is blank (except for this statement.)

Electronic Patent Application Fee Transmittal					
Application Number:	11736356				
Filing Date:	17-Apr-2007				
Title of Invention:	System and Method For Safely Flying Unmanned Aerial Vehicles in Civilian Airspace				
First Named Inventor/Applicant Name:	Jed Margolin				
Filer:	Jed Margolin				
Attorney Docket Number:	torney Docket Number:				
Filed as Small Entity					
Utility under 35 USC 111(a) Filing Fees					
Description		Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Basic Filing:					
Pages:					
Claims:					
Miscellaneous-Filing:					
Petition:					
Patent-Appeals-and-Interference:					
Filing a brief in support of an appeal		2402	1	270	270
Post-Allowance-and-Post-Issuance:					
Extension-of-Time:					

Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Miscellaneous:				
	Tot	al in USD	(\$)	270

Electronic Acknowledgement Receipt				
EFS ID:	10316572			
Application Number:	11736356			
International Application Number:				
Confirmation Number:	3649			
Title of Invention:	System and Method For Safely Flying Unmanned Aerial Vehicles in Civilian Airspace			
First Named Inventor/Applicant Name:	Jed Margolin			
Customer Number:	23497			
Filer:	Jed Margolin			
Filer Authorized By:				
Attorney Docket Number:				
Receipt Date:	16-JUN-2011			
Filing Date:	17-APR-2007			
Time Stamp:	10:37:44			
Application Type:	Utility under 35 USC 111(a)			
Payment information:				

Submitted with Payment	yes
Payment Type	Credit Card
Payment was successfully received in RAM	\$270
RAM confirmation Number	9770
Deposit Account	
Authorized User	

File Listing:

Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
----------------------	-----------	-------------------------------------	---------------------	---------------------

		Total Files Size (in bytes):	238	820801	
Information:					
Warnings:					
_	rec voltaneet (esco)	· ·	d10677067bac03efa16901691f46c37b5af4 01c0		
2	Fee Worksheet (SB06)	fee-info.pdf	29450	no	2
Information:					
Warnings:					
'	Appearament	Jiii_ipvz_asiiici.pai	c2a66850b80a197c100ecc99f7e0ace92c8a 6251		300
1	Appeal Brief Filed	jm_rpv2_abrief.pdf	23791351	no	506

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

		Docket Number (Opt	tional)			
NOTICE OF APPEAL FROM THE EXAMINER TO						
THE BOARD OF PATENT APPEALS AND INTERFERI	ENCES					
I hereby certify that this correspondence is being facsimile transmitted In re Application of						
to the USPTO or deposited with the United States Postal Service with	Jed Margolin					
sufficient postage as first class mail in an envelope addressed to						
"Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-	Application N 11/736,356		Filed 04/17/2007			
¹⁴⁵⁰ " [³⁷ CFR ^{1.8} (a)] Filed by EFS, 04/17/2011			ifely Flying Unmanned			
Signature /Jed Margolin/	For Aerial	Vehicles in Civilian	n Airspace			
Signature	Art Unit	Exa	miner			
Typed or printed Jed Margolin	3664	Ro	onnie M. Mancho			
name	0001	1100	onine w. wanene			
Applicant hereby appeals to the Board of Patent Appeals and Interference	se from the last o	lecision of the evamin	or			
Applicant hereby appears to the board of Faterit Appears and interierence	es iroin the last t					
TI 6 6 (II: N.II: 6A II: 407 0ED 44 004) VAN		•	540.00			
The fee for this Notice of Appeal is (37 CFR 41.20(b)(1))		\$.				
Applicant claims small entity status. See 37 CFR 1.27. Therefore, the half and the regulting for its	ne fee shown ab	ove is reduced	270.00			
by half, and the resulting fee is:		Φ.				
A check in the amount of the fee is enclosed.						
Payment by credit card. Form PTO-2038 is attached.						
The Director has already been authorized to charge fees in this app	lication to a Dep	osit Account.				
The Director is hereby authorized to charge any fees which may be	required, or cree	dit any overpayment				
to Deposit Account No						
A petition for an extension of time under 37 CFR 1.136(a) (PTO/SB/22) is enclosed.						
WARNING: Information on this form may become public. Credit card information should not						
be included on this form. Provide credit card information and a	uthorization or	n PTO-2038.				
I am the						
	/Jed N	/largolin/				
✓ applicant/inventor.			nature			
assignee of record of the entire interest.	lad N	Jargolin	matare			
See 37 CFR 3.71. Statement under 37 CFR 3.73(b) is enclosed.						
(Form PTO/SB/96)		Typea or p	printed name			
attorney or agent of record.	775-8	47-7845				
Registration number			ne number			
		Тејерно	ne number			
attorney or agent acting under 37 CFR 1.34.	4/17/2	2011				
Registration number if acting under 37 CFR 1.34 Date						
NOTE: Signatures of all the inventors or assignees of record of the entire interest or their representative(s) are required.						
Custing multiple forms if more than one signature is required, see below	Submit multiple forms if more than one signature is required, see below*.					
*Total of 1 forms are submitted						

This collection of information is required by 37 CFR 41.31. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11, 1.14 and 41.6. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

Electronic Patent Application Fee Transmittal					
Application Number:		736356			
Filing Date:	17-Apr-2007				
Title of Invention:	System and Method For Safely Flying Unmanned Aerial Vehicles in Civilian Airspace				
First Named Inventor/Applicant Name:	Jed Margolin				
Filer:	Jed Margolin				
Attorney Docket Number:	Attorney Docket Number:				
Filed as Small Entity					
Utility under 35 USC 111(a) Filing Fees					
Description		Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Basic Filing:					
Pages:					
Claims:					
Miscellaneous-Filing:					
Petition:					
Patent-Appeals-and-Interference:					
Notice of appeal		2401	1	270	270
Post-Allowance-and-Post-Issuance:					
Extension-of-Time:					

Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Miscellaneous:				
	Tot	al in USD	(\$)	270

Electronic Acknowledgement Receipt				
EFS ID:	9895467			
Application Number:	11736356			
International Application Number:				
Confirmation Number:	3649			
Title of Invention:	System and Method For Safely Flying Unmanned Aerial Vehicles in Civilian Airspace			
First Named Inventor/Applicant Name:	Jed Margolin			
Customer Number:	23497			
Filer:	Jed Margolin			
Filer Authorized By:				
Attorney Docket Number:				
Receipt Date:	17-APR-2011			
Filing Date:	17-APR-2007			
Time Stamp:	05:28:38			
Application Type:	Utility under 35 USC 111(a)			
Payment information:				

Submitted with Payment	yes
Payment Type	Credit Card
Payment was successfully received in RAM	\$270
RAM confirmation Number	6577
Deposit Account	
Authorized User	

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
--------------------	----------------------	-----------	-------------------------------------	---------------------	---------------------

1	Notice of Appeal Filed	jm_rpv2_noa.pdf	58119	no	1
ı			0d43848c109ac4bf78e3242d7b82e5f04b6 49dc6		
Warnings:					
Information:					
2	Fee Worksheet (PTO-875)	fee-info.pdf	29351	no	2
_	Tec Worksheet (170 075)		e41b50e0892c2daad0de514dfa7f05fa3b70 7f23		
Warnings:					
Information:					
		Total Files Size (in bytes):	8	37470	

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of Jed Margolin

Serial No.: 11/736,356 Examiner: Ronnie M. Mancho

Filed: 4/17/2007 Art Unit: 3664

For: System and Method For Safely Flying Unmanned Aerial Vehicles in Civilian Airspace

 Filed:
 4/17/2007

 First Office Action:
 9/1/2010

 Response:
 11/29/2010

 Second Office Action:
 2/15/2011

The following is to comply with 37 CFR § 1.133 **Interviews** and MPEP Section 713.04 **Substance of Interview Must Be Made of Record**.

I called the Examiner on or about March 2, 2011. I identified myself and the patent application and asked the Examiner to withdraw making the Second Office Action Final.

He asked for my reason.

I said I wanted the opportunity to respond to the additional grounds for rejection he had made in the Second Office Action (which he had made Final).

He said that the First Office Action had been sent to me and I had had the opportunity to respond, and he believed I did.

I repeated that he had made additional grounds for rejection in the Second Office Action and I wanted the opportunity to respond.

He looked up the case and cited the 103 basis for rejection: Margolin (5,904,724) and Duggan (Published Application US 2005004723).

I told him that I am that Margolin.

I also told him that he had done a cut-and-paste of the rejection in the First Office Action but had added a few things.

He wanted to know where.

I pointed out First Office Action (page 3, third paragraph):

Margolin did not disclose that the vehicle is flown using an autonomous control system. However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

In the Second Office Action it became (page 3, third paragraph):

Margolin did not disclose that the vehicle is flown using an autonomous control system (e.g. autopilot). However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

I said that he had equated autonomous control system with an autopilot, but they are not the same.

He believed the rejection was still the same and offered a long explanation that did not make much sense. I did hear him say that he believed I did not understand the term "autopilot."

We moved on to his statement in the Second Office Action about civilian airspace (page 10, last line), where he said:

Applicant further argues that the prior art do not disclose flying an unmanned aerial vehicle (i.e. an aircraft) in civilian airspace. The examiner does not acquiesce to applicant's remarks. The prior art clearly shows flying an unmanned aerial vehicle (i.e. an aircraft) in civilian airspace since the air space in which the vehicle is flown is not restricted. As further noted applicant fails to provide a particular meaning attached to "civilian airspace".

I told him that "civilian airspace" was term commonly used in the aerospace community and that FAA and the military use it. I referred him to my reference **Sensing Requirements for Unmanned Air Vehicles** which contains the passage:

Engineers from the Air Vehicles Directorate transferred unmanned air vehicle (UAV) sensing system requirements for airspace operations to civilian UAV users and developers. These requirements represent design goals on which to base future sensing subsystem designs, filling an omission in UAV technology planning. <u>Directorate engineers are continuing to develop the technologies that will enable future UAVs to coexist with manned aircraft in both military and civilian airspace.</u> Incorporating these

requirements will ensure that engineers design future UAVs to detect possible conflicts, such as midair collisions or runway incursions, and take action to avoid them.

He said that I had used the term but did not define it.

I said that, although I was entitled to be my own lexicographer, I was not required to be one, and I had the right to use the common meaning of terms.

He said that I still had to provide the meaning of the term, and I hadn't.

I said he could have made that rejection in the First Office Action, when I would have had the opportunity to respond to it. Instead, by introducing it in the Second Office Action he had denied me the opportunity to respond.

We moved on to his use of my own patent against me. I reminded him that I had protested his use of my own patent against me in my Response to the First Office Action.

Applicant argued that Margolin belongs to the inventor. It is noted that the prior art is a statutory bar since it was published more that 8 years before filing of the present application.

I asked him where the 8 years comes from because I had not found it in MPEP or the U.S. Code. He said 8 years was longer than 1 year and referred me to 102(b).

Then he asked if I was a patent attorney. Since I am not, I said no. Then he suggested I get a patent attorney.

To get back to the issue at hand I read 102(b) to him and told him that it does not apply because the present invention is not the same as the one described in '724. It is a new application for '724.

At that point the Examiner was confused as to whether I was Margolin or Duggan.

{The problem is not, as he implied, that I don't know anything about patent law. The problem is that I cannot read his mind or sometimes, understand his English.}

We moved on. I explained why I had discussed the Duggan application in such detail, starting with the fact that it had issued as a patent (U.S. Patent 7,343,232 **Vehicle control system including related methods and components**) on March 11, 2008, before the First Office

Action. I also explained why I had introduced the extensive exhibit concerning the financial

problems experienced by the Duggan Examiner. I explained that when I stated in my Response

to the First Office Action that "Perhaps the Duggan Examiner was preoccupied with financial

problems" I was being diplomatic. In fact, the evidence shows that the Duggan Examiner was

either incompetent or may have committed misconduct. I explained to the Examiner that my

reason for bringing up the subject was to show that the USPTO Office discriminates against pro

se inventors. Aerospace Companies with expensive Law Firms are given a free pass, while pro

se inventors get kicked in the head. I was not asking for a free pass, only to be treated fairly.

The telephone interview between the Examiner and myself that is described above was cordial

but the Examiner refused to withdraw making the Second Office Action Final. Indeed, the

Examiner displayed the USPTO's bias against pro se inventors.

Respectfully submitted,

/Jed Margolin/

Date: April 10, 2010

Jed Margolin

Jed Margolin 1981 Empire Rd.

Reno, NV 89521-7430

(775) 847-7845

4

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of Jed Margolin

Serial No.: 11/736,356 Examiner: Ronnie M. Mancho

Filed: 4/17/2007 Art Unit: 3664

For: System and Method For Safely Flying Unmanned Aerial Vehicles in Civilian Airspace

 Filed:
 4/17/2007

 First Office Action:
 9/1/2010

 Response:
 11/29/2010

 Second Office Action:
 2/15/2011

The following is to comply with 37 CFR § 1.133 **Interviews** and MPEP Section 713.04 **Substance of Interview Must Be Made of Record**.

I called SPE Tran Khoi on or about March 22, 2011. Mr. Khoi is the SPE for the Examiner in this application. I identified myself and the patent application and explained to SPE Khoi that his Examiner had expanded his grounds for rejection in the Second Office Action, which constructively added new grounds for rejection, and had made the rejection final. I asked SPE Khoi to ask the Examiner to withdraw making the Second Office Action Final so I could respond to the new rejection and introduce new evidence.

SPE Khoi asked if I had amended the claims. I said no.

He asked if I was an attorney. I said no, I am a pro se applicant but I have done this before.

Then he asked for the Application Number and I gave it to him.

After he looked it up he asked where the Examiner had given new grounds for rejection.

I started with where the Examiner had equated an Autopilot with an Autonomous Control System.

Then I pointed out where the Examiner had introduce the issue of Civilian Airspace, and that he could have done that in the First Office Action but hadn't.

I brought up the issue of the Duggan Examiner and that her actions in the Duggan patent constitute either incompetence or possible misconduct. I explained that the reason I had brought up this issue was to show that the USPTO discriminates against *pro se* inventors. Aerospace companies with expensive Law Firms are given a free pass, while *pro se* inventors get kicked in the head. I was not asking for a free pass, only fair treatment.

I brought up the issue of the Examiner citing my own patent (5,904,724) against me, and that it was not proper under 102(b) because the present invention is not taught by '724, it is a new application of '724.

We discussed the issue of Civilian Airspace again.

Then I brought up the issue of the Examiner's statement about safety. In the Second Office Action he had made the statement (page 11, third paragraph):

Applicant thus insists that the rejection is conclusory and is not supported. The examiner disagrees and notes that any particular level of safety is not described or disclosed in the specification nor is there any meaning provided for "civilian airspace" or "safety". It is believed that the aircraft flown in the prior art is flown safely and further that the aircraft is flown in all airspaces since a particular airspace was not prohibited.

I explained that the Examiner's belief is absolutely wrong and that safely flying UAVs is a major problem. I went into some detail.

SPE Khoi distinguished the section in the Second Office Action "Response to Arguments" with the Formal Rejection in "Claim Rejections" and stated that "Response to Arguments" was not subject to Rule 706.07(a).

I said that the Examiner's Response to Arguments will be used against me at BPAI and I deserve the right to respond to it and introduce new evidence.

SPE Khoi suggested I file a Petition. I told him that filing a Petition does not toll deadlines and that I have heard of the USPTO simply waiting for the deadline to pass and then saying the Petition is moot.

After that the conversation deteriorated and will not be summarized here.

Then we talked about the current state of UAV technology and what my invention actually is.

SPE Khoi said he would look at my case and get back to me.

A few days later, on or about March 24, 2001, SPE Khoi left me message saying that the Examiner's Final Office Action was correct and proper.

The telephone interview between SPE Khoi and myself that is described above was mostly cordial but SPE Khoi decided that the Examiner's Final Office Action was correct and proper. And then he advised me to "Have a Nice Day."

Respectfully submitted,

/Jed Margolin/ Date: April 10, 2010

Jed Margolin

Jed Margolin 1981 Empire Rd. Reno, NV 89521-7430 (775) 847-7845

3

Electronic Acknowledgement Receipt				
EFS ID:	9846815			
Application Number:	11736356			
International Application Number:				
Confirmation Number:	3649			
Title of Invention:	System and Method For Safely Flying Unmanned Aerial Vehicles in Civilian Airspace			
First Named Inventor/Applicant Name:	Jed Margolin			
Customer Number:	23497			
Filer:	Jed Margolin			
Filer Authorized By:				
Attorney Docket Number:				
Receipt Date:	10-APR-2011			
Filing Date:	17-APR-2007			
Time Stamp:	14:54:34			
Application Type:	Utility under 35 USC 111(a)			

Payment information:

Submitted with Payment	no
------------------------	----

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Applicant summary of interview with	jm interview mancho.pdf	32564	no	4
'	examiner	J. T. L. M. C. M.	cacf2fccd41093080d35eadbfd7565b2f062 a72a		

Warnings:

Information:

2	Applicant summary of interview with examiner	jm_interview_khoi.pdf	24899	no	3	
			94ba5a70b8b92ba05201b358473a350b65 dc8223			
Warnings:						
Information:						
Total Files Size (in bytes)			5	7463		

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address: COMMISSIONER FOR PATENTS P.O. Box 1450 Alexandria, Virginia 22313-1450 www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
11/736,356	04/17/2007	Jed Margolin		3649
23497 JED MARGOL	7590 02/15/201 IN	1	EXAM	IINER
1981 EMPIRE	ROAD	MANCHO, RONNIE M		
RENO, NV 89521-7430			ART UNIT	PAPER NUMBER
			3664	
			MAIL DATE	DELIVERY MODE
			02/15/2011	PAPER

Please find below and/or attached an Office communication concerning this application or proceeding.

The time period for reply, if any, is set in the attached communication.

	Application No.	Applicant(s)		
Office Astion Commensus	11/736,356	MARGOLIN, JED		
Office Action Summary	Examiner	Art Unit		
	RONNIE MANCHO	3664		
The MAILING DATE of this communication app Period for Reply	pears on the cover sheet with the c	orrespondence address		
A SHORTENED STATUTORY PERIOD FOR REPLY WHICHEVER IS LONGER, FROM THE MAILING DOWN THE MAILING DOWN THE STATE OF THE MAILING DOWN THE STATE OF THE METERS OF	ATE OF THIS COMMUNICATION 36(a). In no event, however, may a reply be tim will apply and will expire SIX (6) MONTHS from a cause the application to become ABANDONE	Lely filed the mailing date of this communication. (35 U.S.C. § 133).		
Status				
1) ■ Responsive to communication(s) filed on 11/2s 2a) ■ This action is FINAL . 2b) ■ This 3) ■ Since this application is in condition for allowar closed in accordance with the practice under E	action is non-final. nce except for formal matters, pro			
Disposition of Claims				
4) ☐ Claim(s) 1-14 is/are pending in the application. 4a) Of the above claim(s) is/are withdray 5) ☐ Claim(s) is/are allowed. 6) ☐ Claim(s) 1-14 is/are rejected. 7) ☐ Claim(s) is/are objected to. 8) ☐ Claim(s) are subject to restriction and/o	vn from consideration.			
Application Papers				
9) The specification is objected to by the Examine 10) The drawing(s) filed on is/are: a) accomplicant may not request that any objection to the Replacement drawing sheet(s) including the correct 11) The oath or declaration is objected to by the Examine	epted or b) objected to by the Eddrawing(s) be held in abeyance. See ion is required if the drawing(s) is obj	e37 CFR 1.85(a). ected to. See 37 CFR 1.121(d).		
Priority under 35 U.S.C. § 119				
 12) Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f). a) All b) Some * c) None of: 1. Certified copies of the priority documents have been received. 2. Certified copies of the priority documents have been received in Application No 3. Copies of the certified copies of the priority documents have been received in this National Stage application from the International Bureau (PCT Rule 17.2(a)). * See the attached detailed Office action for a list of the certified copies not received. 				
Attachment(s) 1) D Notice of References Cited (PTO-892)	4) ☐ Interview Summary	(PTO-413)		
Notice of References Cited (PTO-992) Notice of Draftsperson's Patent Drawing Review (PTO-948) Information Disclosure Statement(s) (PTO/SB/08) Paper No(s)/Mail Date	Paper No(s)/Mail Da 5) Notice of Informal P 6) Other:	ite		

Application/Control Number: 11/736,356 Page 2

Art Unit: 3664

DETAILED ACTION

Claim Rejections - 35 USC § 103

- 1. The following is a quotation of 35 U.S.C. 103(a) which forms the basis for all obviousness rejections set forth in this Office action:
 - (a) A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subject matter sought to be patented and the prior art are such that the subject matter as a whole would have been obvious at the time the invention was made to a person having ordinary skill in the art to which said subject matter pertains. Patentability shall not be negatived by the manner in which the invention was made.
- 2. Claims 1-14 are rejected under 35 U.S.C. 103(a) as being unpatentable over Margolin (5904724) in view of Duggan et al (US 2005004723).

Regarding claim 1, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) discloses a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

- (a) a ground station 400 (fig. 1&4) equipped with a synthetic vision system (figs. 1&3; col. 5, lines 50-60; col. 4, lines 1 to col. 5, lines 67);
- (b) an unmanned aerial vehicle 300 (figs. 1&3) capable of supporting said synthetic vision system (305, 306, 307, 311 on aircraft; col. 5, lines 50-60; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67);
- (c) a remote pilot 102 operating said ground station 400 (figs. 1&4; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67);
- (d) a communications link between said unmanned aerial vehicle 300 and said ground station 400;

e) a system onboard said unmanned aerial vehicle 300 for detecting the presence and position of nearby aircraft (305, 306, 307, 311 on aircraft) and communicating this information to said remote pilot 102 (col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67);

whereas said remote pilot uses said synthetic vision system (305, 306, 307, 311 on aircraft; col. 5, lines 50-60) to control said unmanned aerial vehicle 300 during at least selected phases of the flight of said unmanned aerial vehicle (selected phases implies some or all phases during flight).

Margolin did not disclose that the vehicle is flown using an autonomous control system (e.g. autopilot). However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0329).

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggan abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne having ordinary skill in the art.

Regarding claim 2, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the system of claim 1 whereby said selected phases of the flight of said unmanned aerial vehicle comprise:

- (a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;
- (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

Regarding claim 3, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the system of claim 1 further comprising a system onboard said unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and bearing of said unmanned aerial vehicle.

Regarding claim 4, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the system of claim 1 further comprising a system onboard said unmanned aerial vehicle for providing a communications channel for Air Traffic Control and the pilots of other aircraft to communicate directly with said remote pilot.

Regarding claim 5, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

- (a) a ground station equipped with a synthetic vision system;
- (b) an unmanned aerial vehicle capable of supporting said synthetic vision system;
- (c) a remote pilot operating said ground station;
- (d) a communications link between said unmanned aerial vehicle and said ground station;

e) a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot;

whereas said remote pilot uses said synthetic vision system to control said unmanned aerial vehicle during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system, and

whereas the selected phases of the flight of said unmanned aerial vehicle comprise:

- (a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;
- (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

Margolin did not disclose that the vehicle is flown using an autonomous control system. However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0329).

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggan abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne having ordinary skill in the art.

Regarding claim 6, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the system of claim 5 further comprising a system onboard said unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and bearing of said unmanned aerial vehicle.

Regarding claim 7, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the system of claim 5 further comprising a system onboard said unmanned aerial vehicle for providing a communications channel for Air Traffic Control and the pilots of other aircraft to communicate directly with said remote pilot.

Regarding claim 8, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose a method for safely flying an unmanned aerial vehicle as part of a unmanned aerial system equipped with a synthetic vision system in civilian airspace comprising the steps of:

(a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle an autonomous control system is used to fly said unmanned aerial vehicle;

(b) providing a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot.

Margolin did not disclose that the vehicle is flown using an autonomous control system. However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0329).

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggan abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne having ordinary skill in the art.

Regarding claim 9, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the method of claim 8 whereby said selected phases of the flight of said unmanned aerial vehicle comprise:

- (a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;
- (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

Application/Control Number: 11/736,356

Art Unit: 3664

Regarding claim 10, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the method of claim 8 further comprising the step of providing a system onboard said unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and bearing of said unmanned aerial vehicle.

Page 8

Regarding claim 11, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the method of claim 8 further comprising the step of providing a system onboard said unmanned aerial vehicle for providing a communications channel for Air Traffic Control and the pilots of other aircraft to communicate directly with said remote pilot.

Regarding claim 12, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose a method for safely flying an unmanned aerial vehicle as part of a unmanned aerial system equipped with a synthetic vision system in civilian airspace comprising the steps of:

- (a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle an autonomous control system is used to fly said unmanned aerial vehicle;
- (b) providing a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot;

whereas said selected phases of the flight of said unmanned aerial vehicle comprise:

- (a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;
- (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

Margolin did not disclose that the vehicle is flown using an autonomous control system. However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0329).

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggna abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne having ordinary skill in the art.

Regarding claim 13, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the method of claim 12 further comprising the step of providing a system onboard said unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and bearing of said unmanned aerial vehicle.

Application/Control Number: 11/736,356 Page 10

Art Unit: 3664

Regarding claim 14, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the method of claim 12 further comprising the step of providing a system onboard said unmanned aerial vehicle for providing a communications channel for Air Traffic Control and the pilots of other aircraft to communicate directly with said remote pilot.

Response to Arguments

3. Applicant's arguments filed 11/29/10 have been fully considered but they are not persuasive.

Applicant's specification is ONLY 16 pages long. However, applicant has provided an affidavit and remarks that are over 200 pages. The affidavits are referring to paying rents and mortgages, etc. The examiner does not understand how paying rents and mortgages are related to the present invention drawn to flying an un-manned aerial vehicle.

Applicant further argues that Margolin belongs to the inventor. It is noted that the prior art is a statutory bar since it was published more that 8 years before filing of the present application.

Applicant further argues that the prior art do not disclose flying an unmanned aerial vehicle (i.e. an aircraft) in civilian airspace. The examiner does not acquiesce to applicant's remarks. The prior art clearly shows flying an unmanned aerial vehicle (i.e. an aircraft) in civilian airspace since the air space in which the vehicle is flown is not restricted. As further noted applicant fails to provide a particular meaning attached to "civilian airspace".

Applicant further argues that both prior art do not disclose "a synthetic vision system". The examiner disagrees. It appears that applicant is insisting that the prior art must recite the exact same terms as disclosed in the claims. Applicant first of all does not present an argument which first provide the meaning of the claimed "synthetic vision system". As disclosed in applicant's specification the claimed, "a synthetic vision system" is referring to 3-D vision. The prior art disclose 3-D presentation of image to a pilot (here a remote pilot) thus the prior art anticipates the claimed, "a synthetic vision system".

Applicant further argues about the abstract cited in the prior. The purpose of the argument is not understood since applicant is arguing that the popular interpretation of 608.01 (b) is that the purpose of the abstract is to provide search terms. It is unclear whether "popular" refers to the manner abstracts are interpreted in Florida, Washington, or somewhere else.

Abstracts are not excluded during the examination process.

Some of applicant's remarks are that the prior art does not recite the phrase, "safely flying an unmanned aerial vehicle in civilian airspace comprising: ...". Applicant thus insists that the rejection is conclusory and is not supported. The examiner disagrees and notes that any particular level of safety is not described or disclosed in the specification nor is there any meaning provided for "civilian airspace" or "safety". It is believed that the aircraft flown in the prior art is flown safely and further that the aircraft is flown in all airspaces since a particular airspace was not prohibited.

Applicant continues that the examiner fails to address all of the recitations of the rejected claims. The examiner disagrees and notes that the prior art anticipates all limitations in the

Application/Control Number: 11/736,356 Page 12

Art Unit: 3664

claims. There is not rule in MPEP that insist that the prior must recite the terms in the claims exactly as they are disclosed in the claims.

4. Claims 1-14 are rejected under 35 U.S.C. 103(a) as being unpatentable over Margolin (5904724) in view of Duggan et al (US 2005004723).

Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) discloses a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

- (a) a ground station 400 (fig. 1&4) equipped with a synthetic vision system (figs. 1&3; col. 5, lines 50-60; col. 4, lines 1 to col. 5, lines 67);
- (b) an unmanned aerial vehicle 300 (figs. 1&3) capable of supporting said synthetic vision system (305, 306, 307, 311 on aircraft; col. 5, lines 50-60; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67);
- (c) a remote pilot 102 operating said ground station 400 (figs. 1&4; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67);
- (d) a communications link between said unmanned aerial vehicle 300 and said ground station 400;
- e) a system onboard said unmanned aerial vehicle 300 for detecting the presence and position of nearby aircraft (305, 306, 307, 311 on aircraft) and communicating this information to said remote pilot 102 (col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67);

whereas said remote pilot uses said synthetic vision system (305, 306, 307, 311 on aircraft) to control said unmanned aerial vehicle 300 during at least selected phases of the flight of said unmanned aerial vehicle.

Margolin did not disclose that the vehicle is flown using an autonomous control system (e.g. an autopilot). However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0329).

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggan abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne having ordinary skill in the art.

It is believed that the rejection is proper and thus shall stand. Applicant may file an RCE, Appeal to the Board, or abandon the case.

Conclusion

5. **THIS ACTION IS MADE FINAL.** Applicant is reminded of the extension of time policy as set forth in 37 CFR 1.136(a).

A shortened statutory period for reply to this final action is set to expire THREE

MONTHS from the mailing date of this action. In the event a first reply is filed within TWO

MONTHS of the mailing date of this final action and the advisory action is not mailed until after

the end of the THREE-MONTH shortened statutory period, then the shortened statutory period will expire on the date the advisory action is mailed, and any extension fee pursuant to 37 CFR 1.136(a) will be calculated from the mailing date of the advisory action. In no event, however, will the statutory period for reply expire later than SIX MONTHS from the mailing date of this final action.

Communication

6. Any inquiry concerning this communication or earlier communications from the examiner should be directed to RONNIE MANCHO whose telephone number is (571)272-6984. The examiner can normally be reached on Mon-Thurs: 9-5.

If attempts to reach the examiner by telephone are unsuccessful, the examiner's supervisor, Tran Khoi can be reached on 571-272-6919. The fax phone number for the organization where this application or proceeding is assigned is 571-273-8300.

Information regarding the status of an application may be obtained from the Patent Application Information Retrieval (PAIR) system. Status information for published applications may be obtained from either Private PAIR or Public PAIR. Status information for unpublished applications is available through Private PAIR only. For more information about the PAIR system, see http://pair-direct.uspto.gov. Should you have questions on access to the Private PAIR system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-free). If you would like assistance from a USPTO Customer Service Representative or access to the automated information system, call 800-786-9199 (IN USA OR CANADA) or 571-272-1000.

Application/Control Number: 11/736,356

Art Unit: 3664

/Ronnie Mancho/ Primary Examiner, Art Unit 3664

Page 15

/Ronnie Mancho/ Primary Examiner, Art Unit 3664 Index of Claims

App	licatio	n/Contro	l No.
-----	---------	----------	-------

11/736,356

Examiner

MARGOLIN, JED

Applicant(s)/Patent under Reexamination

Art Unit

3664

RONNIE MANCHO

Rejected **Allowed**

ı	(Through numeral) Cancelled
÷	Restricted

N	Non-Elected
ı	Interference

Α	Appeal
0	Objected

							ı					
Cla	Date											
Cla	\vdash				Jak	-	_		\vdash			
Final	Original	2/12/11										
										H		
	2	V								\Box		
	3	1								П		
	4	1										
	1 2 3 4 5	4										
	6	1								Щ		
	7 8	V				_		_		\dashv		
	9	N				_		_		\dashv		
	10	N N								\vdash		
	11	1								H		
	12	Ť		\vdash		\vdash	Н	\vdash		Н		
	13	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \								Н		
	14	1								П		
	10 11 12 13 14 15 16 17 18											
	16											
	17											
	18									Щ		
	19									Щ		
	20									Н		
	21	\vdash				_				\dashv		
	23	\vdash		\vdash		_		_		H		
	24	H								H		
	20 21 22 23 24 25 26											
	26											
	27 28											
	28									Щ		
	29 30									Щ		
	30											
	31									\dashv		
	32 33	H	-		-		H			Н		
	34	H				\vdash	H	\vdash		H		
	35									H		
	35 36											
	37 38											
	38									Ш		
	39									Щ		
	40	H	_		_				_	Н		
	41 42	\vdash	_		_		H			Н		
	42	H								Н		
	44	\vdash		\vdash		\vdash				\dashv		
	45	H								Н		
	46	Г								Н		
	47									П		
	48											
	49	$oxedsymbol{oxed}$		$oxedsymbol{oxed}$		$oxedsymbol{oxedsymbol{oxed}}$				Ш		
	50	ı	1	i		İ		l	1			

Cla	Date										
Final	Original										
	51										
	52										
	53										
	54	Н		H							
	55	\vdash		\vdash						_	
-	56	\vdash		\vdash				\vdash		_	
	57	H		\vdash						_	
	58	\vdash		\vdash				_		_	
	59	\vdash		\vdash						_	
	60										
	61										
	62	\vdash		\vdash				\vdash		_	
-	63	\vdash	-	\vdash		\vdash		\vdash			
-	64	\vdash		\vdash	H	<u> </u>	-	-	-		
-	65	\vdash	\vdash	\vdash	\vdash	 	-	\vdash	-	_	
-	66	\vdash	\vdash	\vdash	H	\vdash		\vdash	-	-	
	67										
	68	\vdash		\vdash						_	
	69	\vdash		\vdash				_		_	
	70	\vdash		\vdash							
	71	\vdash		\vdash						_	
	72	\vdash		\vdash				_		_	
	73	\vdash		\vdash				\vdash			
	74	H		H							
	75										
	76	H		H							
	77										
	78										
	79	Н									
	80	H		Н							
	81										
	82	Н		Н				\vdash			
	83	Н		Н				\vdash			
	84	\vdash	\vdash	Н				\vdash			
	85	\vdash	\vdash	\vdash		\vdash		\vdash			
	86	\vdash	\vdash	\vdash	Н	\vdash		\vdash			
	87	Н		Н	Н			\vdash			
	88										
	89	Г		Г	П						
	90	Г		Г							
	91										
	92										
	93										
	94										
	95	Г		Г							
	96	Г		Г							
	97										
	98										
	99										
	100	Г	Г	Г				Г			

Cla	im	Date			Date Claim Date										Claim Date								\neg										
7							\dashv									1					Т	\neg	-										
<u> </u>	Original	2/12/11									Final	Original											Final	Original									
	1	V								\exists		51		\exists		\exists					\exists	ŀ		101		#							
	2	7										52												102									
	3	1										53		╗		\Box		╗		╗		Ī		103								╗	
	4	1										54		J	J	J		╛				Ī		104								╗	
	5	4										55												105									
	6	4										56												106									
	7	1										57				\Box				┚				107		\Box							
	8	1										58												108									
	9	4								_		59		\perp		[$oldsymbol{ol}}}}}}}}}}}}}}}}}}}}}$						109									
_]	10	1					Ш		Щ	_		60		\perp		\Box		_[110]		_]	
	11	V				\perp	Ш		Ш	_		61		\perp	\perp	\perp		\perp	\perp	\Box	[Į		111	\perp	\perp							
	12	4	_		<u> </u>	\vdash	Ш		Ш	_		62	\sqcup	\perp	\perp	\perp	_	ightharpoonup	\perp	_		Į		112	\perp	\perp	_						
	13	1		_	<u> </u>	<u> </u>	Ш		Щ	_		63	\sqcup	\perp	_	_	_	\downarrow	_	_	_	ļ		113	_	\perp				_			
	14	V		_	<u> </u>	_	Ш			_		64		4	_	_	_	\dashv	_	_	_	ļ		114	_	\perp	_	_		_	_	_	
_	15									_		65		\dashv		4		4		_		ļ		115		_		_		_		_	
_	16		<u> </u>	_	<u> </u>	┞	Ш	_	Ш	4		66	\sqcup	4	_	4	_	\downarrow	_	_	[ļ		116	_	\perp		_		_	_	_	
	17									_		67		_		4		_		_		Ļ		117		_		_				_	
_	18	\vdash	<u> </u>	_	<u> </u>	\vdash	Ш	_	\sqcup	_		68	\sqcup	4	\perp	\dashv	_	\dashv	\perp	4	_	ļ		118	\dashv	\dashv	4	_		_	_	_	
4	19				<u> </u>	_	Ш		\sqcup	_		69		4	_	\perp	_	4	_	4	_	ļ		119	_	\perp	_	_				4	_
4	20	\vdash	_	_	<u> </u>	├	Ш		\sqcup	_		70	\sqcup	4	\perp	\perp	_	4	_	4	_	ļ		120	\perp	\perp	_	_		_	_	4	
_	21				<u> </u>	_	Ш		\vdash	_		71		\dashv	\perp	\dashv	_	\dashv	_	4	_	ļ		121	\rightarrow	\perp	_	_		_	_	_	
_	22	\vdash	<u> </u>	_	<u> </u>	<u> </u>	Ш		\sqcup	_		72	\sqcup	4	_	\dashv	_	4	_	4		ļ		122	_	\perp	_	_		_		4	
	23			_	<u> </u>	_	Н		\sqcup	4	$\vdash \vdash$	73	\perp	\perp	_	\perp	_	\dashv	_	_	_	ļ		123	_	_		_			_	_	_
_	24	<u> </u>	<u> </u>	_	<u> </u>	\vdash	Н	_	\vdash	4	\vdash	74	\dashv	\dashv	\dashv	+	\dashv	\dashv	\dashv	4	4	ļ		124	\dashv	+	4			\dashv	_	_	_
_	25			-	1	-	Н		\vdash		\vdash	75	\vdash	+		+		\dashv	_	_	\dashv	ļ		125		+	_	_		-	_	_	_
	26	H		_	<u> </u>	<u> </u>	Н	_	\vdash	_	\vdash	76		\dashv		+		\dashv		_	\dashv	ļ		126	-	_				\dashv		_	_
\dashv	27	\vdash	_	\vdash	-	\vdash	Н	<u> </u>	\vdash	\dashv	$\vdash\vdash\vdash$	77	\dashv	+	\dashv	+	\dashv	\dashv	\dashv	-	\dashv	ŀ		127	\dashv	+	4	-		\dashv	_	\dashv	_
\dashv	28			\vdash	-	\vdash	Н	_	\vdash	\dashv		78	\dashv	+	\dashv	+	\dashv	\dashv	\dashv	\dashv	\dashv	}		128	+	+	\dashv	\dashv	\dashv	\dashv	+	\dashv	\dashv
\dashv	29	\vdash	\vdash	\vdash	-	\vdash	Н	<u> </u>	\vdash	\dashv	\vdash	79	\dashv	+	\dashv	+	\dashv	\dashv	\dashv	4	\dashv	ŀ		129	\dashv	+	\dashv	\dashv		\dashv	+	\dashv	-
-	30 31	H	-	\vdash	 	\vdash	Н		\vdash	\dashv	\vdash	80 81	\vdash	+	-	+	-	\dashv	\dashv	\dashv	\dashv	ŀ		130 131	-	+	-	\dashv		-	-	\dashv	-
\dashv	32	H		\vdash	\vdash	\vdash	Н	-	\vdash	\dashv	\vdash	82	+	+	+	+	\dashv	\dashv	\dashv	\dashv	\dashv	ŀ		132	\dashv	+	+	\dashv		\dashv	-	\dashv	-
\dashv	33			\vdash	-	\vdash	Н		\vdash	\dashv	$\vdash\vdash\vdash$	83	+	\dashv	\dashv	+	\dashv	\dashv	\dashv	\dashv	\dashv	ŀ		133	+	+	\dashv	\dashv		\dashv	+	\dashv	\dashv
\dashv	34	H	-	\vdash	 	\vdash	Н	-	\vdash	\dashv	$\vdash \vdash \vdash$	84	\dashv	+	+	+	\dashv	\dashv	\dashv	\dashv	\dashv	ŀ		134	+	+	\dashv	\dashv		\dashv	-	\dashv	-
\dashv	35	\vdash		\vdash	\vdash	\vdash	Н	\vdash	\vdash	\dashv	\vdash	85	\vdash	+	\dashv	+	\dashv	\dashv	\dashv	\dashv	\dashv	ŀ		135	+	+	\dashv	\dashv	-	\dashv	+	\dashv	\dashv
\dashv	36	H		\vdash	\vdash	\vdash	Н	\vdash	\vdash	\dashv	\vdash	86	\dashv	+	\dashv	+	\dashv	\dashv	\dashv	\dashv	\dashv	ŀ		136	\dashv	+	\dashv	\dashv		\dashv	-	\dashv	-
\dashv	37	H			\vdash	\vdash	H		\vdash	\dashv	\vdash	87	\dashv	+		+	\dashv	\dashv	\dashv	\dashv	\dashv	ŀ		137	-	+	+		_	\dashv		\dashv	\dashv
\dashv	38	H	\vdash	\vdash	\vdash	\vdash	Н	\vdash	\vdash	\dashv	\vdash	88	\dashv	+	\dashv	+	\dashv	\dashv	\dashv	\dashv	\dashv	ŀ		138	\dashv	+	\dashv	\dashv	_	\dashv	_	\dashv	-
\dashv	39			\vdash	\vdash	\vdash	Н		\vdash	\dashv	\vdash	89	+	\dashv	\dashv	+	\dashv	\dashv	\dashv	\dashv	\dashv	ŀ		139	\dashv	+	+	\dashv	\dashv	\dashv	\dashv	\dashv	\dashv
\dashv	40	H	\vdash	\vdash	1	\vdash	Н		\forall	\dashv	\vdash	90	\dashv	+	\dashv	+	\dashv	\dashv	\dashv	\dashv	\dashv	ŀ		140	\dashv	+	\dashv	\dashv	_	\dashv	+	\dashv	\dashv
\dashv	41			\vdash		\vdash	Н		\vdash	\dashv	\vdash	91	+	\dashv	\dashv	+	\dashv	\dashv	\dashv	\dashv	\dashv	ŀ		141	+	+		\dashv	_	\dashv		\dashv	\dashv
\dashv	42			\vdash	\vdash	\vdash	Н		\vdash	\dashv	\vdash	92	+	\dashv	\dashv	\dashv	\dashv	\dashv	\dashv	\dashv	\dashv	ŀ		142	\dashv	+	+	\dashv	_		\dashv	\dashv	\dashv
\dashv	43						Н			-		93		\dashv		+		\dashv	_	_		ŀ		143		\dashv	1	_				\dashv	
\dashv	44	H			t	\vdash	H		\vdash	\dashv	\vdash	94	\dashv	\dashv	-	\dashv	\dashv	\dashv	\dashv	\dashv	\dashv	ŀ		144	+	\dashv	+	\dashv		\dashv	-	\dashv	
\dashv	45	Н			\vdash	\vdash	Н		\vdash	\dashv	\vdash	95	\dashv	+	\dashv	+	\dashv	\dashv	\dashv	\dashv	\dashv	ŀ		145	\dashv	+	+	\dashv	_	\dashv	+	\dashv	-
\dashv	46	Н		\vdash	\vdash	\vdash	Н		\vdash	\dashv	\vdash	96	\dashv	+	\dashv	+	\dashv	\dashv	\dashv	\dashv	\dashv	ŀ		146	\dashv	+	+	\dashv	_	\dashv	+	\dashv	\dashv
\dashv	47	Н		\vdash	\vdash	\vdash	Н		\vdash	\dashv	\vdash	97	\vdash	+	+	\dashv	+	\dashv	\dashv	\dashv	\dashv	ŀ		147	+	+	+	\dashv		\dashv	-	\dashv	\dashv
\dashv	48	Н	\vdash	\vdash	\vdash	\vdash	Н		\dashv	\dashv	$\vdash \vdash \vdash$	98	\vdash	+	\dashv	\dashv	+	\dashv	\dashv	\dashv	\dashv	ŀ		148	\dashv	+	1	\dashv		\dashv	+	\dashv	-
\dashv	49	H			t	\vdash	H		\vdash	\dashv	\vdash	99	\dashv	\dashv	+	\dashv	\dashv	\dashv	\dashv	\dashv	\dashv	ł		149	+	\dashv	+	\dashv	_	\dashv	_	\dashv	
\dashv	50	Н			t		Н		\vdash	\dashv	\vdash	100	+	+	-	+	-	\dashv	\dashv	\dashv	\dashv	ŀ		150	-	\dashv	1	\dashv				\dashv	
	50		I		<u> </u>		ш	_			ш	100			L		L	_1				L		150	L			I			!		

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 1 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 2 3 4 5 IN THE UNITED STATES PATENT AND TRADEMARK OFFICE 6 7 8 In re Application of Jed Margolin 9 Serial No.: 11/736,356 Examiner: Ronnie M. Mancho Filed: 04/17/2007 Art Unit: 3664 10 11 For: SYSTEM AND METHOD FOR SAFELY FLYING UNMANNED AERIAL VEHICLES 12 IN CIVILIAN AIRSPACE 13 14 15 Mail Stop Amendment Commissioner for Patents 16 17 P.O. Box 1450 Alexandria, VA 22313-1450 18 19 20 **RESPONSE** 21 Dear Sir: 22 23 24 In response to the Office Action mailed September 1, 2010, please consider the following 25 remarks. 26 27 **Section 1. General Summary** 28 Claims 1 - 14 were rejected solely under 35 U.S.C. §103(a) as being obvious by combining U.S. 29 Patent 5,904,724 ("Margolin '724") and published Patent Application US 2005004723 ("Duggan"). 30 Applicant will show that the Examiner has failed his burden of establishing a prima facie case of obviousness. 31 32 a. The Examiner has failed to distinctly point out where all of the claim elements and 33 limitations of Applicant's claims are present in the two cited references.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 2 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 <u>b.</u> The Examiner has mischaracterized the two cited references as teaching all of the claim elements and limitations of Applicant's claims, when they do not.

<u>c.</u> The present Applicant is the named inventor on one of the Examiner's cited references

4 (U.S. Patent 5,904,724).

5

3

Section 2 - Detailed Response

7 8

6

Part A - Examiner's Detailed Action Paragraph 2

9 10

2. Claims 1-14 are rejected under 35 U.S.C. 103(a) as being unpatentable over Margolin (5904724) in view of Duggan et al (US 2005004723).

12

11

Regarding claim 1, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) discloses a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

- (a) a ground station 400 (fig. 1 & 4) equipped with a synthetic vision system (figs. 1 & 3; col. 4, lines 1 to col. 5, lines 67);
- (b) an unmanned aerial vehicle 300 (figs. 1 &3) capable of supporting said synthetic vision system (305, 306, 307, 311 on aircraft; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67);
- (c) a remote pilot 102 operating said ground station 400 (figs. 1&4; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67);
- (d) a communications link between said unmanned aerial vehicle 300 and said ground station 400;
- (e) a system onboard said unmanned aerial vehicle 300 for detecting the presence and position of nearby aircraft (305, 306, 307, 311 on aircraft) and communicating this information to said remote pilot 102 (col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67);

whereas said remote pilot uses said synthetic vision system (305, 306, 307, 311 on aircraft) to control said unmanned aerial vehicle 300 during at least selected phases of the flight of said unmanned aerial vehicle.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 3 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

- 1 Applicant Responds.
- 2 MPEP § 2142 states under the heading ESTABLISHING A PRIMA FACIE CASE OF
- **3 OBVIOUSNESS**

a. **> The key to supporting any rejection under 35 U.S.C. 103 is the clear articulation of the reason(s) why the claimed invention would have been obvious. The Supreme Court in KSR International Co. v. Teleflex Inc., 550 U.S. ____, ____, 82 USPQ2d 1385, 1396 (2007) noted that the analysis supporting a rejection under 35 U.S.C. 103 should be made explicit. The Federal Circuit has stated that "rejections on obviousness cannot be sustained with mere conclusory statements; instead, there must be some articulated reasoning with some rational underpinning to support the legal conclusion of obviousness." In re Kahn, 441 F.3d 977, 988, 78 USPQ2d 1329, 1336 (Fed. Cir. 2006). See also KSR, 550 U.S. at ____, 82 USPQ2d at 1396 (quoting Federal Circuit statement with approval). <

5 {Emphasis added}

4

9

14

15

- The Examiner has cited lengthy passages in the above rejection and made conclusory statements as to their contents.
- 10 **Examiner:**
- Regarding claim 1, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5,
- lines 1-67) discloses a system for safely flying an unmanned aerial vehicle in civilian airspace
- comprising:
 - Applicant:
- In Margolin '724: Column 3, lines 8-67; Column 4, lines 1-67; and Column 5, lines 1-67 form a
- 17 continuous passage from Column 3, line 8 to Column 5, line 67. This passage of approximately
- 18 1619 words forms the core of the Margolin '724 DETAILED DESCRIPTION. The remainder of the
- 19 Margolin '724 DETAILED DESCRIPTION teaches additional topics such as **Flight Control** (with
- 20 headings Flight Control, Direct Control Non-Remotely Piloted Vehicles, Computer Mediated Non-
- 21 Remotely Piloted Vehicles, Second Order Flight Control Mode, First Order Flight Control Mode

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 4 of 241

- Column 9, line 18}, the use of a Head-Mounted Display {See Column 9, lines 19 - 32}, the use of

Examiner: Ronnie M. Mancho Art Unit: 3664

1 {See Column 6, line 19 - Column 8, line 3}, the features of a Control Panel (See Column 8, line 64

- 2 the invention for training (See Column 0 lines 22, 62) and The Detahage (See Column 0 line 6)
- 3 the invention for training {See Column 9, lines 33 63}, and **The Database** {See Column 9, line 64
- 4 Column 10, line 50.}

5

2

- 6 The Examiner cites Figures 1 7 in Margolin '724. These constitute all the figures in Margolin
- 7 '724.

8

9

- The Examiner also cites the Abstract in Margolin '724. According to **608.01(b)** Abstract of the
- 10 **Disclosure** [R-7]:
- 11 37 CFR 1.72 Title and abstract.

12 *****

- 13 (b) A brief abstract of the technical disclosure in the specification must commence on a
- separate sheet, preferably following the claims, under the heading "Abstract" or "Abstract of
- the Disclosure." The sheet or sheets presenting the abstract may not include other parts of the
- application or other material. The abstract in an application filed under 35 U.S.C. 111 may not
- exceed 150 words in length. The purpose of the abstract is to enable the United States Patent
- and Trademark Office and the public generally to determine quickly from a cursory inspection
- 19 the nature and gist of the technical disclosure.<

20

21 {Emphasis added}

22

- 23 The popular interpretation of 608.01(b) is that the purpose of the Abstract is to provide search
- terms. In any event, the Abstract in Margolin '724 does not say anything about civilian airspace.

25

- The Examiner has made a conclusory statement by repeating the title of Applicant's invention
- 27 (leaving out the words "and method") and citing the core of the DETAILED DESCRIPTION in
- 28 Margolin '724.

- 30 In the remaining sections of the Examiner's rejection of Applicant's Claim 1 he asserts that he has
- found all of the elements and limitations of Applicant's invention.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 5 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 It is not surprising that some of the elements of Applicant's invention are present in Margolin '724 2 since Margolin '724 is probably the pioneering patent for the use of what is now called *synthetic* 3 vision in remotely piloted aircraft (now commonly called Unmanned Aerial Vehicles) and 4 Applicant's present invention uses synthetic vision as an element. 5 6 However, there are limitations in Applicant's current invention that are not present in Margolin 7 ¹724. 8 9 **Examiner:** 10 11 whereas said remote pilot uses said synthetic vision system (305, 306, 307, 311 on aircraft) to 12 control said unmanned aerial vehicle 300 during at least selected phases of the flight of said 13 unmanned aerial vehicle. 14 15 {From Applicant's Claim 1} 16 17 References 305, 306, 307, 311, and 300 come from Margolin '724 Figure 3 which shows the 18 structural elements in Margolin '724 Remote Aircraft Unit 300. There is nothing in these structural 19 elements which show that synthetic vision is used "during at least selected phases of the flight of 20 said unmanned aerial vehicle." 21 22 The Examiner has not shown that this limitation is taught in Margolin '724. He has only made a 23 conclusory statement. 24 25 Although KSR may have loosened the required reasoning that may be employed for combining prior 26 art references in an obviousness rejection, the Examiner must still provide a factual basis for each of 27 the claimed features of a rejected claim. MPEP 2143.03 entitled "All Claim Limitations must be 28 Considered" states: "all words in a claim must be considered in judging the patentability of that 29 claim against the prior art." In re Wilson, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970)." 30 If an examiner fails to address all of the recitations of a rejected claim, a prima facie case of 31 obviousness has not been established because such a deficiency fails to satisfy the evidentiary

requirements articulated by the Supreme Court in KSR (e.g. "the key to supporting any rejection

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 6 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 under 35 U.S.C. 103 is the clear articulation of the reason(s) why the claimed invention would have

- 2 been obvious" and that "a rejection under 35 U.S.C. 103 should be made explicit.")
- 3 The BPAI in a recent decision (Ex parte Wehling et al.) stated (with emphases added):
- 4 "the dispositive issue in this case is whether the Examiner has explicitly articulated a prima
- 5 facie case of obviousness which addresses all of the limitations of the claimed invention." The
- 6 BPAI was guided by the following legal principles:
- 7 "When determining whether a claim is obvious, an Examiner must make 'a searching comparison of
- 8 the claimed invention including all its limitations with the teachings of the prior art.' In re
- 9 Ochiai, 71 F.3d 1565, 1572 (Fed. Cir. 1995) (emphasis added). Thus, 'obviousness requires a
- suggestion of all limitations in a claim.' CFMT, Inc. v. Yieldup Int'l. Corp., 349 F.3d 1333, 1342
- 11 (Fed. Cir. 2003) (citing *In re Royka*, 490 F.2d 981, 985 (CCPA 1974)). Furthermore, in *KSR Int'l*
- 12 Co. v. Teleflex Inc., 550 U.S. 398, 418 (2007) (citing In re Kahn, 441 F.3d 977, 988 (Fed. Cir.
- 13 2006), the Supreme Court noted that '[t]o facilitate review, this [obviousness] analysis should
- be made explicit." (Ex parte Wehling et al., Appeal No. 2009-8111 (BPAI))
- 15 The BPAI in Ex Parte Wehling et al. held that "absent a fact-based analysis which explicitly
- 16 compares all the limitations of the claimed invention with the combined teachings of Gioffre and
- 17 Rockliffe, we are constrained to reverse the rejection of claims 1, 21, 29, and 31 and the claims
- dependent thereon under § 103 over the combined teachings of Gioffre and Rockliffe."
- Note that Ex Parte Wehling et al. (Appeal 2009-008111, Application 10/743,118) was decided May
- 20 17, 2010. According to the BPAI online database the decision was issued 10/19/2010 which is after
- 21 the mail date of the Examiner's rejection (9/1/2010).

2223

Examiner's Detailed Action Paragraph 2 (Continued)

2425

The Examiner continues

26

30

27 Margolin did not disclose that the vehicle is flown using an autonomous control system.

28 However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian

29 airspace comprising:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 7 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0329).

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggna abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne[sic] having ordinary skill in the art.

(Applicant assumes Examiner meant to say, "The different embodiments in both prior arts are combinable as it would be obvious to one having ordinary skill in the art.)

The Examiner has mischaracterized Duggan.

Examiner	<u>Duggan</u>
Margolin did not disclose that the	[0352] In one aspect of the present invention, an operator
vehicle is flown using an	station (also referred to as the ground control station or GCS)
autonomous control system.	is designed to accommodate command and control of multiple
However, Duggan teach of a	vehicles or a single vehicle by a single operator. In accordance
system for safely flying an	with one embodiment, the ground control station is platform
unmanned aerial vehicle in civilian	independent and implements an application program interface
airspace comprising:	that provides windowing and communications interfaces (e.g.,
a ground station controlling an	the platform is implemented in Open Source wxWindows
unmanned aerial vehicle (sec.	API). The underlying operating system is illustratively
0352,	masked and enables a developer to code in a high level
	environment.
00353),	[0353] In one embodiment, the ground control station
	incorporates several specialized user interface concepts

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 8 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

designed to effectively support a single operator tasked to control multiple vehicles. The GCS also illustratively supports manual control and sensor steering modes. In the manual control mode, the operator can assume control authority of the vehicles individually from the ground control station at any time in flight. In the sensor steering mode, a vehicle will autonomously fly in the direction the operator is manually pointing the on-board imaging sensor (e.g., operator views video output from a digital camera on a TV interface, computer screen display, etc.). A custom data link is illustratively, utilized to support a two-way transfer of data between the ground control station and the UAV's. These design concepts together provide a flexible, multiple vehicle control system. The details of the concepts are discussed below.

wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, [0318] If the pilot chooses a surveillance location outside the total FOV, then the outer loop guidance will illustratively follow a command-to-LOS mode guide law until the UAV flight path points toward the target. Once the desired staring-point comes within a minimum range threshold, the guidance automatically trips into a loiter pattern (either constant-radius or elliptical) to maintain a station with a single key-click while he/she conducts other activities. FIGS. 22A & 22B together demonstrate the surveillance-point approach scenario.

0322,

[0322] In accordance with one aspect of the present invention, sensor-slave mode commands are generated by an autonomous line-of-sight driven function, in which the command objectives are generated by the necessities of the function rather than by an operator. For example, a function

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 9 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

designed to command a raster-scan of a particular surveillance area, or a function designed to scan a long a roadway could be used to generate sensor slave commands. Another example is a function designed to generate line-of-sight commands for UAV-to-UAV rendezvous formation flying.

0353)

[0353] In one embodiment, the ground control station incorporates several specialized user interface concepts designed to effectively support a single operator tasked to control multiple vehicles. The GCS also illustratively supports manual control and sensor steering modes. In the manual control mode, the operator can assume control authority of the vehicles individually from the ground control station at any time in flight. In the sensor steering mode, a vehicle will autonomously fly in the direction the operator is manually pointing the on-board imaging sensor (e.g., operator views video output from a digital camera on a TV interface, computer screen display, etc.). A custom data link is illustratively, utilized to support a two-way transfer of data between the ground control station and the UAV's. These design concepts together provide a flexible, multiple vehicle control system. The details of the concepts are discussed below.

when a synthetic vision (sec. 0356,

[0356] a synthetic vision display

0365.

[0365] The two video monitors are illustratively used to display real-time data linked camera imagery from two air vehicles having cameras (of course, fewer, more or none of the vehicles might have cameras and the number of monitor displays can be altered accordingly). In accordance with one

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 10 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

embodiment, camera imagery is recorded on videotapes during a mission. In accordance with one embodiment, the two repeater displays are used to provide redundant views of the GUI and synthetic vision display. The laptop illustratively serves as a GUI backup in the event that the main GUI fails.

0388,

[0388] In one aspect of the present invention, synthetic vision display technical approach of the present invention is based upon integrating advanced simulated visuals, originally developed for training purposes, into UAV operational systems. In accordance with one embodiment, the simulated visuals are integrated with data derived from the ground control station during flight to enable real-time synthetic visuals.

0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system

[0390] In one aspect of the present invention, through GUI display 2622, an operator can maintain a variable level of control over a UAV, from fully manual to fully autonomous, with simple user-friendly inputs. For example, if an operator decides to divert a UAV to a new route, the operator has a plurality of options to select from. The following are examples of some of the options that an operator has. Those skilled in the art should recognize that this is not an exhaustive list. In one embodiment, the operator could graphically edit the existing route on mission situation display 2629 by adding a waypoint or orbit pattern in the vicinity of a desired target region. Prior to accepting the edited route, the control system evaluates the revised route against the vehicle performance capability as well as terrain obstructions. If the route is within acceptable bounds, the control system registers the modified route and maneuvers the vehicle accordingly. In another

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 11 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

embodiment, the operator could select a park mode on selections pane 2630. After selected, the control system queues the operator to click the location of and graphical size (via a mouse) the desired orbit pattern in which the vehicle will fly while "parked" over a desired target. In another embodiment, the operator can select a manual control mode on selections pane 2630. By selecting RDC (remote directional command), for example, the control system controls the UAV into a constant altitude, heading and speed flight until the operator instructs a maneuver. While in RDC mode, the operator can either pseudo-manually direct the UAV using the control stick (e.g. joystick) or the operator can program a fixed heading, altitude and speed using the control options provided in selections pane 2630.

(autopilot, sec 0346 to 0350,

[0346] In accordance with one embodiment, an exemplary translation layer implementation will now be provided. After the guidance algorithms execute, the outputs are translated to the native vehicle autopilot commands. The equations below provide example kinematic translations from the guidance acceleration commands to native vehicle autopilot commands. These equations demonstrate the principal that vehicle motion is activated through acceleration. The methods that various vehicles employ to generate acceleration are numerous (bank angle autopilot, acceleration autopilot, heading control autopilot, altitude control autopilot, etc). Since the control algorithms described herein generate acceleration commands that can be kinematically translated into any of these native autopilot commands, the guidance algorithms truly provide a generalized library of control laws that can control any vehicle through that vehicle's native atomic functions. Ubiquitous

Examiner: Ronnie M. Mancho Art Unit: 3664

acceleration control techniques enable VACS to synthesize control commands for any vehicle, including air, ground, or sea-based. 35 a v = vertical plane acceleration command a h = horizontal plane acceleration command = tan - 1 (a h a v) = bank angle command a T = a v 2 + a h 2 = total body acceleration command . = a h V = turn rate command i = i - 1 + . t = heading command . = (a v - g) V = flight path rate command i = i - 1 + . t = flight path angle command h . = V sin () = climb rate command h i = h i = 1 + h . t = altitude command Eq . 57

Sheet 12 of 241

[0347] Additional functionality that can be enabled in a translation layer is means for discouraging or preventing an operator (e.g., the human or non-human operator interfacing the VACS architecture) from overdriving, stalling, or spinning the vehicle frame. This being said, limiting algorithms can also be employed in the guidance or autopilot functions.

[0348] X. Autopilot

[0349] As has been addressed, the present invention is not limited to, and does not require, a particular autopilot system. The control system and architecture embodiments of the present invention can be adapted to accommodate virtually any autopilot system.

[0350] For the purpose of providing an example, an illustrative suitable autopilot software system will now be described. The illustrative autopilot system incorporates a three-axis design (pitch and yaw with an attitude control loop in the roll axis) for vehicle stabilization and guidance

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 13 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

command tracking. The autopilot software design incorporates flight control techniques, which allow vehicle control algorithms to dynamically adjust airframe stabilization parameters in real-time during flight. The flight computer is programmed directly with the airframe physical properties, so that it can automatically adjust its settings with changes in airframe configuration, aerodynamic properties, and/or flight state. This provides for a simple and versatile design, and possesses the critical flexibility needed when adjustments to the airframe configuration become necessary. The three-loop design includes angular rate feedback for stability augmentation, attitude feedback for closed-loop stiffness, and acceleration feedback for command tracking. In addition, an integral controller in the forward loop illustratively provides enhanced command tracking, low frequency disturbance rejection and an automatic trim capability.

0390-0329).

{The Examiner may have meant 0390-0392. Otherwise the range is not credible}

[0390] In one aspect of the present invention, through GUI display 2622, an operator can maintain a variable level of control over a UAV, from fully manual to fully autonomous, with simple user-friendly inputs. For example, if an operator decides to divert a UAV to a new route, the operator has a plurality of options to select from. The following are examples of some of the options that an operator has. Those skilled in the art should recognize that this is not an exhaustive list. In one embodiment, the operator could graphically edit the existing route on mission situation display 2629 by adding a waypoint or orbit pattern in the vicinity of a desired target region. Prior to accepting the edited route, the control system

Examiner: Ronnie M. Mancho Art Unit: 3664

evaluates the revised route against the vehicle performance capability as well as terrain obstructions. If the route is within acceptable bounds, the control system registers the modified route and maneuvers the vehicle accordingly. In another embodiment, the operator could select a park mode on selections pane 2630. After selected, the control system queues the operator to click the location of and graphical size (via a mouse) the desired orbit pattern in which the vehicle will fly while "parked" over a desired target. In another embodiment, the operator can select a manual control mode on selections pane 2630. By selecting RDC (remote directional command), for example, the control system controls the UAV into a constant altitude, heading and speed flight until the operator instructs a maneuver. While in RDC mode, the operator can either pseudo-manually direct the UAV using the control stick (e.g. joystick) or the operator can program a fixed heading, altitude and speed using the control options provided in selections pane 2630.

[0391] The described Intelligent displays with smart variables represent an effective approach to actively displaying information for different types of vehicles. However, a problem can arise when a new vehicle is integrated into the ground control station with a completely foreign command and control interface. Under these circumstances, the ground control station is not concerned about displaying data, but is tasked to provide a command and control interface for the operator to perform the required operations. This conundrum is the motivation for another embodiment of the present invention, namely, the integration of vehicle specific panels in the ground control station.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 15 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

[0392] In one embodiment, a generic vehicle class (GVC) is illustratively a software component that provides a rapid development environment API to add new vehicle classes and types to the ground control station. The GVC also illustratively serves as a software construct that allows the inclusion of multiple vehicles within the ground control station framework. One of the variables in the application is a vector of pointers to a generic vehicle class. This list is constructed by allocating new specific vehicles and returning a type case to the base generic vehicle class. When a new vehicle is integrated into the ground control station, the generic vehicle class provides all of the virtual functions to integrate with system control components (e.g., to integrate with a map display, a communications package, PCIG imagery and/or appropriate display windows). An important object in the application framework is illustratively a pointer to the current vehicle generic class. When the user switches vehicles, this pointer is updated and all displays grab the appropriate smart variables from the pointer to the new base class. This is the mechanism by which windows immediately update to the current vehicle information whenever the user switches vehicles. The default windows use the pointer to the current vehicle to grab information. In this manner, if the user switches to a new vehicle with a different set of datalink variables, that fact is immediately apparent on the display windows.

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention

Filed: 04/17/2007 Sheet 16 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggna abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne [sic] having ordinary skill in the art.

Abstract

Serial Number: 11/736,356

Embodiments are disclosed for a vehicle control system and related sub-components that together provide an operator with a plurality of specific modes of operation, wherein various modes of operation incorporate different levels of autonomous control. Through a control user interface, an operator can move between certain modes of control even after vehicle deployment. Specialized autopilot system components and methods are employed to ensure smooth transitions between control modes. Empowered by the multi-modal control system, an operator can even manage multiple vehicles simultaneously.

[0014] Embodiments of the present invention pertain to a hierarchical control system, user interface system, and control architecture that together incorporate a broad range of user-selectable control modes representing variable levels of autonomy and vehicle control functionality. A unified autopilot is provided to process available modes and mode transitions. An intelligence synthesizer is illustratively provided to assist in resolving functional conflicts and transitioning between control modes, although certain resolutions and transitions can be incorporated directly into the functional sub-components associated with the different control modes. In accordance with one embodiment, all modes and transitions are funneled through an acceleration-based autopilot system. Accordingly, control commands and transitions are generally reduced to an acceleration vector to

Serial Number: 11/736,356 Filed: 04/17/2007

Examiner: Ronnie M. Mancho Art Unit: 3664

be processed by a centralized autopilot system.

Sheet 17 of 241

[0085] As will be discussed in greater detail below, the control system and architecture embodiments of the present invention essentially enable any autopilot design to support control of a vehicle in numerous control modes that are executed with switches between modes during flight. All control modes are supported even in the presence of sensor errors, such as accelerometer and gyro biases. This robustness is at least partially attributable to the fact that the closed-loop system, in all control modes, is essentially slaved to an inertial path and, hence, the sensor biases wash out in the closed loop, assuming the biases are not so grossly large that they induce stability problems in the autopilot system. Furthermore, winds are generally not an issue in the overall control scheme in that the flight control system will regulate to the inertial path, adjusting for winds automatically in the closed loop. Given the precision afforded by inertial navigation aided by GPS technology, inertial path regulation offers a highly effective and robust UAV control approach. Generally speaking, the autopilot system functions such that winds, medium Dryden turbulence levels, sensor errors, airframe aerodynamic and mass model parameter uncertainties, servo non-linearity (slew rate limits, etc.), and various other atmospheric and noise disturbances will non have a critically negative impact on flight path regulation.

[0086] Component 408 receives commands generated by component 404 and filtered by autopilot component 406. The commands received by component 408 are executed to actually manipulate the vehicle's control surfaces. Autopilot component 406 then continues to monitor vehicle stabilization

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 18 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

	and/or command tracking, making additional commands to
	component 408 as necessary.
1	
2	At the beginning of this subsection, the Examiner asserts, "Margolin did not disclose that the
3	vehicle is flown using an autonomous control system. However, Duggan teach of a system for
4	safely flying an unmanned aerial vehicle in civilian airspace comprising:"
5	
6	The Examiner's statement, "However, Duggan teach of a system for safely flying an unmanned
7	aerial vehicle in civilian airspace comprising:" is conclusory and is not supported by the
8	Examiner's citations to Duggan.
9	
10	In addition, none of the Duggan citations teach that either synthetic vision or Duggan's Variable
11	Autonomy System is used "during at least selected phases of the flight of said unmanned aerial
12	vehicle" which is a limitation in Applicant's Claim 1.
13	
14	Duggan fails to teach the limitation that his Variable Autonomy System is used during selected
15	phases of a UAV's flight and Margolin '724 fails to teach the limitation that synthetic vision is used
16	during selected phases of a UAV's flight. Therefore, the combination of Duggan and Margolin '724
17	does not read on Applicant's Claim 1.
18	
19	As cited above by Applicant, MPEP 2143.03 "All Claim Limitations must be Considered" states:
20	"all words in a claim must be considered in judging the patentability of that claim against the prior
21	art." In re Wilson, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970)."
22	
23	The Examiner has failed his duty under MPEP 2143.03 (and in view of Wehling) to present a prima
24	facie case of obviousness for rejecting Applicant's Claim 1.
25	
26	Examiner's Regarding Claim 2, a claim dependent on Claim 1. Applicant has shown that Claim 1
27	is nonobvious. Therefore, under 2143.03 All Claim Limitations Must Be Considered, Claim 2 is
28	non-obvious.
29	2143.03 All Claim Limitations Must Be **>Considered< [R-6]

Jed Margolin Serial Number: 11/736,356 Sheet 19 of 241 Filed: 04/17/2007

Examiner: Ronnie M. Mancho Art Unit: 3664

1	** "All words in a claim must be considered in judging the patentability of that claim against
2	the prior art." In re Wilson, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970). If an
3	independent claim is nonobvious under 35 U.S.C. 103, then any claim depending therefrom is
4	nonobvious. In re Fine, 837 F.2d 1071, 5 USPQ2d 1596 (Fed. Cir. 1988).
5	

7

9

10

11

12

6 **Examiner's Regarding Claim 3**, a claim dependent on Claim 1. Applicant has shown that Claim 1

is nonobvious. Therefore, under 2143.03 All Claim Limitations Must Be Considered, Claim 3 is

non-obvious. 8

2143.03 All Claim Limitations Must Be **>Considered< [R-6]

** "All words in a claim must be considered in judging the patentability of that claim against the prior art." In re Wilson, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970). If an independent claim is nonobvious under <u>35 U.S.C. 103</u>, then any claim depending therefrom is nonobvious. In re Fine, 837 F.2d 1071, 5 USPQ2d 1596 (Fed. Cir. 1988).

13 14

15

16

17

18

19

20

21

Examiner's Regarding Claim 4, a claim dependent on Claim 1. Applicant has shown that Claim 1 is nonobvious. Therefore, under 2143.03 All Claim Limitations Must Be Considered, Claim 4 is non-obvious.

2143.03 All Claim Limitations Must Be **>Considered< [R-6]

** "All words in a claim must be considered in judging the patentability of that claim against the prior art." In re Wilson, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970). If an independent claim is nonobvious under 35 U.S.C. 103, then any claim depending therefrom is nonobvious. In re Fine, 837 F.2d 1071, 5 USPQ2d 1596 (Fed. Cir. 1988).

22 23

24

Examiner:

Regarding claim 5, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

- (a) a ground station equipped with a synthetic vision system;
- (b) an unmanned aerial vehicle capable of supporting said synthetic vision system;
- (c) a remote pilot operating said ground station;

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 20 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

(d) a communications link between said unmanned aerial vehicle and said ground station;

e) a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot;

whereas said remote pilot uses said synthetic vision system to control said unmanned aerial vehicle during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system, and

whereas the selected phases of the flight of said unmanned aerial vehicle comprise:

- (a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;
- (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

2 Applicant:

1

- 3 In Margolin '724: Column 3, lines 8-67; Column 4, lines 1-67; and Column 5, lines 1-67 form a
- 4 continuous passage from Column 3, line 8 to Column 5, line 67. This passage of approximately
- 5 1619 words forms the core of the Margolin '724 DETAILED DESCRIPTION. The remainder of the
- 6 Margolin '724 DETAILED DESCRIPTION teaches additional topics such as Flight Control (with
- 7 headings Flight Control, Direct Control Non-Remotely Piloted Vehicles, Computer Mediated Non-
- 8 Remotely Piloted Vehicles, Second Order Flight Control Mode, First Order Flight Control Mode
- 9 {See Column 6, line 19 Column 8, line 3}, the features of a Control Panel (See Column 8, line 64
- Column 9, line 18}, the use of a Head-Mounted Display {See Column 9, lines 19 32}, the use of
- the invention for training {See Column 9, lines 33 63}, and **The Database** {See Column 9, line 64
- 12 Column 10, line 50.}

13

- 14 The Examiner cites Figures 1 7 in Margolin '724. These constitute all the figures in Margolin
- 15 '724.

- 17 The Examiner also cites the Abstract in Margolin '724. According to **608.01(b)** Abstract of the
- 18 **Disclosure** [R-7]:
- 19 **37 CFR 1.72 Title and abstract.**

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 21 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1	****
2	(b) A brief abstract of the technical disclosure in the specification must commence on a
3	separate sheet, preferably following the claims, under the heading "Abstract" or "Abstract of
4	the Disclosure." The sheet or sheets presenting the abstract may not include other parts of the
5	application or other material. The abstract in an application filed under 35 U.S.C. 111 may not
6	exceed 150 words in length. The purpose of the abstract is to enable the United States Patent
7	and Trademark Office and the public generally to determine quickly from a cursory inspection
8	the nature and gist of the technical disclosure.
9	(Emphasis added)
1011	{Emphasis added}
12	The popular interpretation of 608.01(b) is that the purpose of the Abstract is to provide search
13	terms. In any event, the Abstract in Margolin '724 does not say anything about civilian airspace.
14	terms. In any event, the Abstract in Wargoim 724 does not say anything about ervinan anspace.
15	The Examiner has made a conclusory statement by repeating the title of Applicant's invention
16	(leaving out the words "and method") and citing the core of the DETAILED DESCRIPTION in
17	Margolin '724.
18	
19	In the remaining sections of the Examiner's rejection of Applicant's Claim 5 he asserts that he has
20	found all of the elements and limitations of Applicant's invention.
21	
22	It is not surprising that some of the elements of Applicant's invention are present in Margolin '724
23	since Margolin '724 is probably the pioneering patent for the use of what is now called synthetic
24	vision in remotely piloted aircraft (now commonly called Unmanned Aerial Vehicles) and
25	Applicant's present invention uses synthetic vision as an element.
26	
27	However, there are limitations in Applicant's current invention that are not present in Margolin
28	'724 .
29	
30	Examiner:
31	whereas said remote pilot uses said synthetic vision system to control said unmanned aerial
32	vehicle during at least selected phases of the flight of said unmanned aerial vehicle, and during

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 22 of 241

Serial Number: 11/736,356 Filed: 04/17/20 Examiner: Ronnie M. Mancho Art Unit: 3664

1	those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is
2	not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an
3	autonomous control system, and
4	whereas the calcuted whereas of the flight of said warmanned eariel webiele commisse.
5	whereas the selected phases of the flight of said unmanned aerial vehicle comprise:
6	(a) when said unmanned aerial vehicle is within a selected range of an airport or other designated
7	location and is below a first specified altitude;
8	(b) when said unmanned aerial vehicle is outside said selected range of an airport or other
9 10	designated location and is below a second specified altitude.
10	The Examiner has not even attempted to show where these limitations are taught in Margolin '724.
12	As noted, he has cited the core of the Margolin '724 DETAILED DESCRIPTION, all of the
13	drawings, and the abstract. His rejection is purely conclusory and does not follow the requirements
14	for making a <i>prima facie</i> rejection required by MPEP § 2143.03 All Claim Limitations Must Be
15	Considered, KSR, and Wehling, as well as MPEP § 2142 ESTABLISHING A PRIMA FACIE
16	CASE OF OBVIOUSNESS.
17	CASE OF OBVIOUSIVESS.
18	The Examiner continues:
19	Margolin did not disclose that the vehicle is flown using an autonomous control system.
20	However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian
21	airspace comprising:
22	a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein
23	during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a
24	synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial
25	vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot,
26	sec 0346 to 0350, 0390-0329).
27	Therefore, it would have been obvious to one of ordinary skill in the art at the time the
28	invention was made to modify Margolin as taught by Duggan for the purpose of incorporating
29	an autopilot to ensure smooth transitions (Duggna abstract, sec 0014, 0085, 0086).

Examiner: Ronnie M. Mancho Art Unit: 3664

The different embodiments in both prior arts are combinable as it would be obvious to ne

having ordinary skill in the art.

1

<u>Examiner</u>	<u>Duggan</u>
Margolin did not disclose that the	[0352] In one aspect of the present invention, an operator
vehicle is flown using an	station (also referred to as the ground control station or GCS)
autonomous control system.	is designed to accommodate command and control of multiple
However, Duggan teach of a	vehicles or a single vehicle by a single operator. In accordance
system for safely flying an	with one embodiment, the ground control station is platform
unmanned aerial vehicle in civilian	independent and implements an application program interface
airspace comprising:	that provides windowing and communications interfaces (e.g.,
a ground station controlling an	the platform is implemented in Open Source wxWindows
unmanned aerial vehicle (sec.	API). The underlying operating system is illustratively
0352,	masked and enables a developer to code in a high level
	environment.
00353),	[0353] In one embodiment, the ground control station
	incorporates several specialized user interface concepts
	designed to effectively support a single operator tasked to
	control multiple vehicles. The GCS also illustratively supports
	manual control and sensor steering modes. In the manual
	control mode, the operator can assume control authority of the
	vehicles individually from the ground control station at any
	time in flight. In the sensor steering mode, a vehicle will
	autonomously fly in the direction the operator is manually
	pointing the on-board imaging sensor (e.g., operator views
	video output from a digital camera on a TV interface,
	computer screen display, etc.). A custom data link is
	illustratively, utilized to support a two-way transfer of data
	between the ground control station and the UAV's. These
	design concepts together provide a flexible, multiple vehicle

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 24 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

control system. The details of the concepts are discussed below.

wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, [0318] If the pilot chooses a surveillance location outside the total FOV, then the outer loop guidance will illustratively follow a command-to-LOS mode guide law until the UAV flight path points toward the target. Once the desired staring-point comes within a minimum range threshold, the guidance automatically trips into a loiter pattern (either constant-radius or elliptical) to maintain a station with a single key-click while he/she conducts other activities. FIGS. 22A & 22B together demonstrate the surveillance-point approach scenario.

0322,

[0322] In accordance with one aspect of the present invention, sensor-slave mode commands are generated by an autonomous line-of-sight driven function, in which the command objectives are generated by the necessities of the function rather than by an operator. For example, a function designed to command a raster-scan of a particular surveillance area, or a function designed to scan a long a roadway could be used to generate sensor slave commands. Another example is a function designed to generate line-of-sight commands for UAV-to-UAV rendezvous formation flying.

0353)

[0353] In one embodiment, the ground control station incorporates several specialized user interface concepts designed to effectively support a single operator tasked to control multiple vehicles. The GCS also illustratively supports manual control and sensor steering modes. In the manual control mode, the operator can assume control authority of the vehicles individually from the ground control station at any

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 25 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

time in flight. In the sensor steering mode, a vehicle will autonomously fly in the direction the operator is manually pointing the on-board imaging sensor (e.g., operator views video output from a digital camera on a TV interface, computer screen display, etc.). A custom data link is illustratively, utilized to support a two-way transfer of data between the ground control station and the UAV's. These design concepts together provide a flexible, multiple vehicle control system. The details of the concepts are discussed below.

when a synthetic vision (sec. 0356,

[0356] a synthetic vision display

0365,

[0365] The two video monitors are illustratively used to display real-time data linked camera imagery from two air vehicles having cameras (of course, fewer, more or none of the vehicles might have cameras and the number of monitor displays can be altered accordingly). In accordance with one embodiment, camera imagery is recorded on videotapes during a mission. In accordance with one embodiment, the two repeater displays are used to provide redundant views of the GUI and synthetic vision display. The laptop illustratively serves as a GUI backup in the event that the main GUI fails.

0388,

[0388] In one aspect of the present invention, synthetic vision display technical approach of the present invention is based upon integrating advanced simulated visuals, originally developed for training purposes, into UAV operational systems. In accordance with one embodiment, the simulated visuals are integrated with data derived from the ground control station during flight to enable real-time synthetic

Examiner: Ronnie M. Mancho Art Unit: 3664

visuals.

0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system [0390] In one aspect of the present invention, through GUI display 2622, an operator can maintain a variable level of control over a UAV, from fully manual to fully autonomous, with simple user-friendly inputs. For example, if an operator decides to divert a UAV to a new route, the operator has a plurality of options to select from. The following are examples of some of the options that an operator has. Those skilled in the art should recognize that this is not an exhaustive list. In one embodiment, the operator could graphically edit the existing route on mission situation display 2629 by adding a waypoint or orbit pattern in the vicinity of a desired target region. Prior to accepting the edited route, the control system evaluates the revised route against the vehicle performance capability as well as terrain obstructions. If the route is within acceptable bounds, the control system registers the modified route and maneuvers the vehicle accordingly. In another embodiment, the operator could select a park mode on selections pane 2630. After selected, the control system queues the operator to click the location of and graphical size (via a mouse) the desired orbit pattern in which the vehicle will fly while "parked" over a desired target. In another embodiment, the operator can select a manual control mode on selections pane 2630. By selecting RDC (remote directional command), for example, the control system controls the UAV into a constant altitude, heading and speed flight until the operator instructs a maneuver. While in RDC mode, the operator can either pseudo-manually direct the UAV using the control stick (e.g. joystick) or the operator can program a fixed heading, altitude and speed using the control

Examiner: Ronnie M. Mancho Art Unit: 3664

options provided in selections pane 2630.

(autopilot, sec 0346 to 0350,

[0346] In accordance with one embodiment, an exemplary translation layer implementation will now be provided. After the guidance algorithms execute, the outputs are translated to the native vehicle autopilot commands. The equations below provide example kinematic translations from the guidance acceleration commands to native vehicle autopilot commands. These equations demonstrate the principal that vehicle motion is activated through acceleration. The methods that various vehicles employ to generate acceleration are numerous (bank angle autopilot, acceleration autopilot, heading control autopilot, altitude control autopilot, etc). Since the control algorithms described herein generate acceleration commands that can be kinematically translated into any of these native autopilot commands, the guidance algorithms truly provide a generalized library of control laws that can control any vehicle through that vehicle's native atomic functions. Ubiquitous acceleration control techniques enable VACS to synthesize control commands for any vehicle, including air, ground, or sea-based. 35 a v = vertical plane acceleration command a h = horizontal plane acceleration command = tan - 1 (a h a v) = bank angle command a T = a v 2 + a h 2 = total bodyacceleration command i = a h V = turn rate command i = i - 1+ . t = heading command . = (a v - g) V = flight path ratecommand i = i - 1 + .t = flight path angle command h. = V $\sin () = \text{climb rate command h } i = \text{h } i = 1 + \text{h} . t = \text{altitude}$ command Eq. 57

[0347] Additional functionality that can be enabled in a translation layer is means for discouraging or preventing an

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 28 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

operator (e.g., the human or non-human operator interfacing the VACS architecture) from overdriving, stalling, or spinning the vehicle frame. This being said, limiting algorithms can also be employed in the guidance or autopilot functions.

[0348] X. Autopilot

[0349] As has been addressed, the present invention is not limited to, and does not require, a particular autopilot system. The control system and architecture embodiments of the present invention can be adapted to accommodate virtually any autopilot system.

[0350] For the purpose of providing an example, an illustrative suitable autopilot software system will now be described. The illustrative autopilot system incorporates a three-axis design (pitch and yaw with an attitude control loop in the roll axis) for vehicle stabilization and guidance command tracking. The autopilot software design incorporates flight control techniques, which allow vehicle control algorithms to dynamically adjust airframe stabilization parameters in real-time during flight. The flight computer is programmed directly with the airframe physical properties, so that it can automatically adjust its settings with changes in airframe configuration, aerodynamic properties, and/or flight state. This provides for a simple and versatile design, and possesses the critical flexibility needed when adjustments to the airframe configuration become necessary. The three-loop design includes angular rate feedback for stability augmentation, attitude feedback for closed-loop stiffness, and acceleration feedback for command tracking. In addition, an

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 29 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

integral controller in the forward loop illustratively provides enhanced command tracking, low frequency disturbance rejection and an automatic trim capability.

0390-0329).

{The Examiner may have meant 0390-0392. Otherwise the range is not credible}

[0390] In one aspect of the present invention, through GUI display 2622, an operator can maintain a variable level of control over a UAV, from fully manual to fully autonomous, with simple user-friendly inputs. For example, if an operator decides to divert a UAV to a new route, the operator has a plurality of options to select from. The following are examples of some of the options that an operator has. Those skilled in the art should recognize that this is not an exhaustive list. In one embodiment, the operator could graphically edit the existing route on mission situation display 2629 by adding a waypoint or orbit pattern in the vicinity of a desired target region. Prior to accepting the edited route, the control system evaluates the revised route against the vehicle performance capability as well as terrain obstructions. If the route is within acceptable bounds, the control system registers the modified route and maneuvers the vehicle accordingly. In another embodiment, the operator could select a park mode on selections pane 2630. After selected, the control system queues the operator to click the location of and graphical size (via a mouse) the desired orbit pattern in which the vehicle will fly while "parked" over a desired target. In another embodiment, the operator can select a manual control mode on selections pane 2630. By selecting RDC (remote directional command), for example, the control system controls the UAV into a constant altitude, heading and speed

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 30 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

flight until the operator instructs a maneuver. While in RDC mode, the operator can either pseudo-manually direct the UAV using the control stick (e.g. joystick) or the operator can program a fixed heading, altitude and speed using the control options provided in selections pane 2630.

[0391] The described Intelligent displays with smart variables represent an effective approach to actively displaying information for different types of vehicles. However, a problem can arise when a new vehicle is integrated into the ground control station with a completely foreign command and control interface. Under these circumstances, the ground control station is not concerned about displaying data, but is tasked to provide a command and control interface for the operator to perform the required operations. This conundrum is the motivation for another embodiment of the present invention, namely, the integration of vehicle specific panels in the ground control station.

[0392] In one embodiment, a generic vehicle class (GVC) is illustratively a software component that provides a rapid development environment API to add new vehicle classes and types to the ground control station. The GVC also illustratively serves as a software construct that allows the inclusion of multiple vehicles within the ground control station framework. One of the variables in the application is a vector of pointers to a generic vehicle class. This list is constructed by allocating new specific vehicles and returning a type case to the base generic vehicle class. When a new vehicle is integrated into the ground control station, the generic vehicle class provides all of the virtual functions to

Filed: 04/17/2007 Sheet 31 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

Serial Number: 11/736,356

integrate with system control components (e.g., to integrate with a map display, a communications package, PCIG imagery and/or appropriate display windows). An important object in the application framework is illustratively a pointer to the current vehicle generic class. When the user switches vehicles, this pointer is updated and all displays grab the appropriate smart variables from the pointer to the new base class. This is the mechanism by which windows immediately update to the current vehicle information whenever the user switches vehicles. The default windows use the pointer to the current vehicle to grab information. In this manner, if the user switches to a new vehicle with a different set of datalink variables, that fact is immediately apparent on the display windows.

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggna abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne[sic] having ordinary skill in the art.

Abstract

Embodiments are disclosed for a vehicle control system and related sub-components that together provide an operator with a plurality of specific modes of operation, wherein various modes of operation incorporate different levels of autonomous control. Through a control user interface, an operator can move between certain modes of control even after vehicle deployment. Specialized autopilot system components and methods are employed to ensure smooth transitions between

Examiner: Ronnie M. Mancho Art Unit: 3664

control modes. Empowered by the multi-modal control system, an operator can even manage multiple vehicles simultaneously.

[0014] Embodiments of the present invention pertain to a hierarchical control system, user interface system, and control architecture that together incorporate a broad range of userselectable control modes representing variable levels of autonomy and vehicle control functionality. A unified autopilot is provided to process available modes and mode transitions. An intelligence synthesizer is illustratively provided to assist in resolving functional conflicts and transitioning between control modes, although certain resolutions and transitions can be incorporated directly into the functional sub-components associated with the different control modes. In accordance with one embodiment, all modes and transitions are funneled through an acceleration-based autopilot system. Accordingly, control commands and transitions are generally reduced to an acceleration vector to be processed by a centralized autopilot system.

[0085] As will be discussed in greater detail below, the control system and architecture embodiments of the present invention essentially enable any autopilot design to support control of a vehicle in numerous control modes that are executed with switches between modes during flight. All control modes are supported even in the presence of sensor errors, such as accelerometer and gyro biases. This robustness is at least partially attributable to the fact that the closed-loop system, in all control modes, is essentially slaved to an inertial path and, hence, the sensor biases wash out in the closed loop,

Examiner: Ronnie M. Mancho Art Unit: 3664

assuming the biases are not so grossly large that they induce stability problems in the autopilot system. Furthermore, winds are generally not an issue in the overall control scheme in that the flight control system will regulate to the inertial path, adjusting for winds automatically in the closed loop. Given the precision afforded by inertial navigation aided by GPS technology, inertial path regulation offers a highly effective and robust UAV control approach. Generally speaking, the autopilot system functions such that winds, medium Dryden turbulence levels, sensor errors, airframe aerodynamic and mass model parameter uncertainties, servo non-linearity (slew rate limits, etc.), and various other atmospheric and noise disturbances will non have a critically negative impact on flight path regulation.

[0086] Component 408 receives commands generated by component 404 and filtered by autopilot component 406. The commands received by component 408 are executed to actually manipulate the vehicle's control surfaces. Autopilot component 406 then continues to monitor vehicle stabilization and/or command tracking, making additional commands to component 408 as necessary.

1 2

3

4

5

At the beginning of this subsection, the Examiner asserts, "Margolin did not disclose that the vehicle is flown using an autonomous control system. However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising: ..."

6 7

The Examiner's statement, "However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising: ..." is conclusory and is not supported by the Examiner's citations to Duggan.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 34 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 In addition, none of the Duggan citations teach the limitations in Applicant's Claim 5 that either 2 synthetic vision or Duggan's Variable Autonomy System is used: 3 1. "during at least selected phases of the flight of said unmanned aerial vehicle" 4 that the selected phases comprise: 5 (a) when said unmanned aerial vehicle is within a selected range of an airport or other 6 designated location and is below a first specified altitude; 7 (b) when said unmanned aerial vehicle is outside said selected range of an airport or other 8 designated location and is below a second specified altitude. 9 10 Duggan fails to teach the limitation that his Variable Autonomy System is used during selected 11 phases of a UAV's flight and Margolin '724 fails to teach the limitation that synthetic vision is used 12 during selected phases of a UAV's flight. Therefore, the combination of Duggan and Margolin '724 13 does not read on Applicant's Claim 5. 14 As cited above by Applicant, MPEP 2143.03 "All Claim Limitations must be Considered" states: 15 16 "all words in a claim must be considered in judging the patentability of that claim against the prior 17 art." In re Wilson, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970)." 18 19 The Examiner has failed his duty under MPEP 2143.03 (and in view of Wehling) to present a prima 20 facie case of obviousness for rejecting Applicant's Claim 5. 21 22 Examiner's Regarding Claim 6, a claim dependent on Claim 5. Applicant has shown that Claim 5 23 is nonobvious. Therefore, under 2143.03 All Claim Limitations Must Be Considered, Claim 6 is 24 non-obvious. 25 2143.03 All Claim Limitations Must Be **>Considered< [R-6] 26 ** "All words in a claim must be considered in judging the patentability of that claim against 27 the prior art." In re Wilson, 424 F.2d 1382, 1385, 165 USPO 494, 496 (CCPA 1970). If an

independent claim is nonobvious under 35 U.S.C. 103, then any claim depending therefrom is

nonobvious. In re Fine, 837 F.2d 1071, 5 USPQ2d 1596 (Fed. Cir. 1988).

2930

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 35 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 <u>Examiner's Regarding Claim 7</u>, a claim dependent on Claim 5. Applicant has shown that Claim 5

- 2 is nonobvious. Therefore, under **2143.03** All Claim Limitations Must Be Considered, Claim 7 is
- 3 non-obvious.

4

9

- 2143.03 All Claim Limitations Must Be **>Considered< [R-6]
- 5 ** "All words in a claim must be considered in judging the patentability of that claim against
- 6 the prior art." *In re Wilson*, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970). If an
- 7 independent claim is nonobvious under <u>35 U.S.C. 103</u>, then any claim depending therefrom is
- 8 nonobvious. *In re Fine*, 837 F.2d 1071, 5 USPQ2d 1596 (Fed. Cir. 1988).

10 **Examiner:**

Regarding claim 8, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose a method for safely flying an unmanned aerial vehicle as part of a unmanned aerial system equipped with a synthetic vision system in civilian airspace comprising the steps of-

- (a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle an autonomous control system is used to fly said unmanned aerial vehicle;
- (b) providing a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot.

12 **Applicant:**

- 13 In Margolin '724: Column 3, lines 8-67; Column 4, lines 1-67; and Column 5, lines 1-67 form a
- 14 continuous passage from Column 3, line 8 to Column 5, line 67. This passage of approximately
- 15 1619 words forms the core of the Margolin '724 DETAILED DESCRIPTION. The remainder of the
- Margolin '724 DETAILED DESCRIPTION teaches additional topics such as **Flight Control** (with
- 17 headings Flight Control, Direct Control Non-Remotely Piloted Vehicles, Computer Mediated Non-
- 18 Remotely Piloted Vehicles, Second Order Flight Control Mode, First Order Flight Control Mode
- 19 {See Column 6, line 19 Column 8, line 3}, the features of a Control Panel (See Column 8, line 64
- Column 9, line 18}, the use of a Head-Mounted Display {See Column 9, lines 19 32}, the use of

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 36 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 the invention for training {See Column 9, lines 33 - 63}, and **The Database** {See Column 9, line 64 2 - Column 10, line 50.} 3 4 The Examiner cites Figures 1 - 7 in Margolin '724. These constitute all the figures in Margolin 5 [.]724. 6 7 The Examiner also cites the Abstract in Margolin '724. According to 608.01(b) Abstract of the 8 Disclosure [R-7]: 9 37 CFR 1.72 Title and abstract. **** 10 11 (b) A brief abstract of the technical disclosure in the specification must commence on a 12 separate sheet, preferably following the claims, under the heading "Abstract" or "Abstract of 13 the Disclosure." The sheet or sheets presenting the abstract may not include other parts of the 14 application or other material. The abstract in an application filed under 35 U.S.C. 111 may not 15 exceed 150 words in length. The purpose of the abstract is to enable the United States Patent 16 and Trademark Office and the public generally to determine quickly from a cursory inspection 17 the nature and gist of the technical disclosure.< 18 19 {Emphasis added} 20 21 The popular interpretation of 608.01(b) is that the purpose of the Abstract is to provide search 22 terms. In any event, the Abstract in Margolin '724 does not say anything about civilian airspace. 23 24 The Examiner has made a conclusory statement by repeating the title of Applicant's invention 25 (leaving out the words "and method") and citing the core of the DETAILED DESCRIPTION in 26 Margolin '724. 27 28 In the remaining sections of the Examiner's rejection of Applicant's Claim 8 he asserts that he has 29 found the elements and limitations of Applicant's invention. 30 (a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at 31 least selected phases of the flight of said unmanned aerial vehicle, and during those phases of

the flight of said unmanned aerial vehicle when said synthetic vision system is not used to

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 37 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1	control said unmanned aerial vehicle an autonomous control system is used to fly said	
2	unmanned aerial vehicle;	
3	(b) providing a system onboard said unmanned aerial vehicle for detecting the presence and	
4	position of nearby aircraft and communicating this information to said remote pilot.	
5		
6	The Examiner has not even attempted to show where these limitations are taught in Margolin '724.	
7	He has particularly failed to show where the following is taught:	
8	(a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at	
9	least selected phases of the flight of said unmanned aerial vehicle, and during those phases of	
10	the flight of said unmanned aerial vehicle when said synthetic vision system is not used to	
11	control said unmanned aerial vehicle an autonomous control system is used to fly said	
12	unmanned aerial vehicle;	
13		
14	As noted, he has cited the core of the Margolin '724 DETAILED DESCRIPTION, all of the	
15	drawings, and the abstract. His rejection is purely conclusory and does not follow the requirement	
16	for making a prima facie rejection required by MPEP § 2143.03 All Claim Limitations Must Bo	
17	Considered, KSR, and Wehling, as well as MPEP § 2142 ESTABLISHING A PRIMA FACIE	
18	CASE OF OBVIOUSNESS.	
19		
20	The Examiner continues:	
21	Margolin did not disclose that the vehicle is flown using an autonomous control system.	
22	However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian	
23	airspace comprising:	
24	a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein	
25	during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a	
26	synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial	
27	vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot,	
28	sec 0346 to 0350, 0390-0329).	
29	Therefore, it would have been obvious to one of ordinary skill in the art at the time the	

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggna abstract, sec 0014, 0085, 0086).

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 38 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

The different embodiments in both prior arts are combinable as it would be obvious to ne having ordinary skill in the art.

3

1

<u>Examiner</u>	<u>Duggan</u>
Margolin did not disclose that the	[0352] In one aspect of the present invention, an operator
vehicle is flown using an	station (also referred to as the ground control station or GCS)
autonomous control system.	is designed to accommodate command and control of multiple
However, Duggan teach of a	vehicles or a single vehicle by a single operator. In accordance
system for safely flying an	with one embodiment, the ground control station is platform
unmanned aerial vehicle in civilian	independent and implements an application program interface
airspace comprising:	that provides windowing and communications interfaces (e.g.,
a ground station controlling an	the platform is implemented in Open Source wxWindows
unmanned aerial vehicle (sec.	API). The underlying operating system is illustratively
0352,	masked and enables a developer to code in a high level
	environment.
00353),	[0353] In one embodiment, the ground control station
	incorporates several specialized user interface concepts
	designed to effectively support a single operator tasked to
	control multiple vehicles. The GCS also illustratively supports
	manual control and sensor steering modes. In the manual
	control mode, the operator can assume control authority of the
	vehicles individually from the ground control station at any
	time in flight. In the sensor steering mode, a vehicle will
	autonomously fly in the direction the operator is manually
	pointing the on-board imaging sensor (e.g., operator views
	video output from a digital camera on a TV interface,
	computer screen display, etc.). A custom data link is
	illustratively, utilized to support a two-way transfer of data
	between the ground control station and the UAV's. These

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 39 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

design concepts together provide a flexible, multiple vehicle control system. The details of the concepts are discussed below.

wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, [0318] If the pilot chooses a surveillance location outside the total FOV, then the outer loop guidance will illustratively follow a command-to-LOS mode guide law until the UAV flight path points toward the target. Once the desired staring-point comes within a minimum range threshold, the guidance automatically trips into a loiter pattern (either constant-radius or elliptical) to maintain a station with a single key-click while he/she conducts other activities. FIGS. 22A & 22B together demonstrate the surveillance-point approach scenario.

0322.

[0322] In accordance with one aspect of the present invention, sensor-slave mode commands are generated by an autonomous line-of-sight driven function, in which the command objectives are generated by the necessities of the function rather than by an operator. For example, a function designed to command a raster-scan of a particular surveillance area, or a function designed to scan a long a roadway could be used to generate sensor slave commands. Another example is a function designed to generate line-of-sight commands for UAV-to-UAV rendezvous formation flying.

0353)

[0353] In one embodiment, the ground control station incorporates several specialized user interface concepts designed to effectively support a single operator tasked to control multiple vehicles. The GCS also illustratively supports manual control and sensor steering modes. In the manual control mode, the operator can assume control authority of the

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 40 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

vehicles individually from the ground control station at any time in flight. In the sensor steering mode, a vehicle will autonomously fly in the direction the operator is manually pointing the on-board imaging sensor (e.g., operator views video output from a digital camera on a TV interface, computer screen display, etc.). A custom data link is illustratively, utilized to support a two-way transfer of data between the ground control station and the UAV's. These design concepts together provide a flexible, multiple vehicle control system. The details of the concepts are discussed below.

when a synthetic vision (sec. 0356,

[0356] a synthetic vision display

0365.

[0365] The two video monitors are illustratively used to display real-time data linked camera imagery from two air vehicles having cameras (of course, fewer, more or none of the vehicles might have cameras and the number of monitor displays can be altered accordingly). In accordance with one embodiment, camera imagery is recorded on videotapes during a mission. In accordance with one embodiment, the two repeater displays are used to provide redundant views of the GUI and synthetic vision display. The laptop illustratively serves as a GUI backup in the event that the main GUI fails.

0388,

[0388] In one aspect of the present invention, synthetic vision display technical approach of the present invention is based upon integrating advanced simulated visuals, originally developed for training purposes, into UAV operational systems. In accordance with one embodiment, the simulated visuals are integrated with data derived from the ground

control station during flight to enable real-time synthetic visuals.

0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system

[0390] In one aspect of the present invention, through GUI display 2622, an operator can maintain a variable level of control over a UAV, from fully manual to fully autonomous, with simple user-friendly inputs. For example, if an operator decides to divert a UAV to a new route, the operator has a plurality of options to select from. The following are examples of some of the options that an operator has. Those skilled in the art should recognize that this is not an exhaustive list. In one embodiment, the operator could graphically edit the existing route on mission situation display 2629 by adding a waypoint or orbit pattern in the vicinity of a desired target region. Prior to accepting the edited route, the control system evaluates the revised route against the vehicle performance capability as well as terrain obstructions. If the route is within acceptable bounds, the control system registers the modified route and maneuvers the vehicle accordingly. In another embodiment, the operator could select a park mode on selections pane 2630. After selected, the control system queues the operator to click the location of and graphical size (via a mouse) the desired orbit pattern in which the vehicle will fly while "parked" over a desired target. In another embodiment, the operator can select a manual control mode on selections pane 2630. By selecting RDC (remote directional command), for example, the control system controls the UAV into a constant altitude, heading and speed flight until the operator instructs a maneuver. While in RDC mode, the operator can either pseudo-manually direct the UAV using the control stick (e.g. joystick) or the operator can

program a fixed heading, altitude and speed using the control options provided in selections pane 2630.

(autopilot, sec 0346 to 0350,

[0346] In accordance with one embodiment, an exemplary translation layer implementation will now be provided. After the guidance algorithms execute, the outputs are translated to the native vehicle autopilot commands. The equations below provide example kinematic translations from the guidance acceleration commands to native vehicle autopilot commands. These equations demonstrate the principal that vehicle motion is activated through acceleration. The methods that various vehicles employ to generate acceleration are numerous (bank angle autopilot, acceleration autopilot, heading control autopilot, altitude control autopilot, etc). Since the control algorithms described herein generate acceleration commands that can be kinematically translated into any of these native autopilot commands, the guidance algorithms truly provide a generalized library of control laws that can control any vehicle through that vehicle's native atomic functions. Ubiquitous acceleration control techniques enable VACS to synthesize control commands for any vehicle, including air, ground, or sea-based. 35 a v = vertical plane acceleration command a h = horizontal plane acceleration command = tan - 1 (a h a v) = bank angle command a T = a v 2 + a h 2 = total bodyacceleration command i = a h V = turn rate command i = i - 1+ . t = heading command . = (a v - g) V = flight path ratecommand i = i - 1 + . t = flight path angle command <math>h . = V $\sin () = \text{climb rate command h } i = \text{h } i = 1 + \text{h} . t = \text{altitude}$ command Eq. 57

[0347] Additional functionality that can be enabled in a

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 43 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

translation layer is means for discouraging or preventing an operator (e.g., the human or non-human operator interfacing the VACS architecture) from overdriving, stalling, or spinning the vehicle frame. This being said, limiting algorithms can also be employed in the guidance or autopilot functions.

[0348] X. Autopilot

[0349] As has been addressed, the present invention is not limited to, and does not require, a particular autopilot system. The control system and architecture embodiments of the present invention can be adapted to accommodate virtually any autopilot system.

[0350] For the purpose of providing an example, an illustrative suitable autopilot software system will now be described. The illustrative autopilot system incorporates a three-axis design (pitch and yaw with an attitude control loop in the roll axis) for vehicle stabilization and guidance command tracking. The autopilot software design incorporates flight control techniques, which allow vehicle control algorithms to dynamically adjust airframe stabilization parameters in real-time during flight. The flight computer is programmed directly with the airframe physical properties, so that it can automatically adjust its settings with changes in airframe configuration, aerodynamic properties, and/or flight state. This provides for a simple and versatile design, and possesses the critical flexibility needed when adjustments to the airframe configuration become necessary. The three-loop design includes angular rate feedback for stability augmentation, attitude feedback for closed-loop stiffness, and

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 44 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

acceleration feedback for command tracking. In addition, an integral controller in the forward loop illustratively provides enhanced command tracking, low frequency disturbance rejection and an automatic trim capability.

0390-0329).

{The Examiner may have meant 0390-0392. Otherwise the range is not credible}

[0390] In one aspect of the present invention, through GUI display 2622, an operator can maintain a variable level of control over a UAV, from fully manual to fully autonomous, with simple user-friendly inputs. For example, if an operator decides to divert a UAV to a new route, the operator has a plurality of options to select from. The following are examples of some of the options that an operator has. Those skilled in the art should recognize that this is not an exhaustive list. In one embodiment, the operator could graphically edit the existing route on mission situation display 2629 by adding a waypoint or orbit pattern in the vicinity of a desired target region. Prior to accepting the edited route, the control system evaluates the revised route against the vehicle performance capability as well as terrain obstructions. If the route is within acceptable bounds, the control system registers the modified route and maneuvers the vehicle accordingly. In another embodiment, the operator could select a park mode on selections pane 2630. After selected, the control system queues the operator to click the location of and graphical size (via a mouse) the desired orbit pattern in which the vehicle will fly while "parked" over a desired target. In another embodiment, the operator can select a manual control mode on selections pane 2630. By selecting RDC (remote directional command), for example, the control system

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 45 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

controls the UAV into a constant altitude, heading and speed flight until the operator instructs a maneuver. While in RDC mode, the operator can either pseudo-manually direct the UAV using the control stick (e.g. joystick) or the operator can program a fixed heading, altitude and speed using the control options provided in selections pane 2630.

[0391] The described Intelligent displays with smart variables represent an effective approach to actively displaying information for different types of vehicles. However, a problem can arise when a new vehicle is integrated into the ground control station with a completely foreign command and control interface. Under these circumstances, the ground control station is not concerned about displaying data, but is tasked to provide a command and control interface for the operator to perform the required operations. This conundrum is the motivation for another embodiment of the present invention, namely, the integration of vehicle specific panels in the ground control station.

[0392] In one embodiment, a generic vehicle class (GVC) is illustratively a software component that provides a rapid development environment API to add new vehicle classes and types to the ground control station. The GVC also illustratively serves as a software construct that allows the inclusion of multiple vehicles within the ground control station framework. One of the variables in the application is a vector of pointers to a generic vehicle class. This list is constructed by allocating new specific vehicles and returning a type case to the base generic vehicle class. When a new vehicle is integrated into the ground control station, the

Serial Number: 11/736,356 Examiner: Ronnie M. Mancho

Art Unit: 3664

Filed: 04/17/2007

generic vehicle class provides all of the virtual functions to integrate with system control components (e.g., to integrate with a map display, a communications package, PCIG imagery and/or appropriate display windows). An important object in the application framework is illustratively a pointer to the current vehicle generic class. When the user switches vehicles, this pointer is updated and all displays grab the appropriate smart variables from the pointer to the new base class. This is the mechanism by which windows immediately update to the current vehicle information whenever the user switches vehicles. The default windows use the pointer to the current vehicle to grab information. In this manner, if the user switches to a new vehicle with a different set of datalink variables, that fact is immediately apparent on the display windows.

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggna abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne[sic] having ordinary skill in the art.

Abstract

Embodiments are disclosed for a vehicle control system and related sub-components that together provide an operator with a plurality of specific modes of operation, wherein various modes of operation incorporate different levels of autonomous control. Through a control user interface, an operator can move between certain modes of control even after vehicle deployment. Specialized autopilot system components and methods are employed to ensure smooth transitions between

control modes. Empowered by the multi-modal control system, an operator can even manage multiple vehicles simultaneously.

[0014] Embodiments of the present invention pertain to a hierarchical control system, user interface system, and control architecture that together incorporate a broad range of userselectable control modes representing variable levels of autonomy and vehicle control functionality. A unified autopilot is provided to process available modes and mode transitions. An intelligence synthesizer is illustratively provided to assist in resolving functional conflicts and transitioning between control modes, although certain resolutions and transitions can be incorporated directly into the functional sub-components associated with the different control modes. In accordance with one embodiment, all modes and transitions are funneled through an acceleration-based autopilot system. Accordingly, control commands and transitions are generally reduced to an acceleration vector to be processed by a centralized autopilot system.

[0085] As will be discussed in greater detail below, the control system and architecture embodiments of the present invention essentially enable any autopilot design to support control of a vehicle in numerous control modes that are executed with switches between modes during flight. All control modes are supported even in the presence of sensor errors, such as accelerometer and gyro biases. This robustness is at least partially attributable to the fact that the closed-loop system, in all control modes, is essentially slaved to an inertial path and, hence, the sensor biases wash out in the closed loop,

assuming the biases are not so grossly large that they induce stability problems in the autopilot system. Furthermore, winds are generally not an issue in the overall control scheme in that the flight control system will regulate to the inertial path, adjusting for winds automatically in the closed loop. Given the precision afforded by inertial navigation aided by GPS technology, inertial path regulation offers a highly effective and robust UAV control approach. Generally speaking, the autopilot system functions such that winds, medium Dryden turbulence levels, sensor errors, airframe aerodynamic and mass model parameter uncertainties, servo non-linearity (slew rate limits, etc.), and various other atmospheric and noise disturbances will non have a critically negative impact on flight path regulation.

[0086] Component 408 receives commands generated by component 404 and filtered by autopilot component 406. The commands received by component 408 are executed to actually manipulate the vehicle's control surfaces. Autopilot component 406 then continues to monitor vehicle stabilization and/or command tracking, making additional commands to component 408 as necessary.

1

2

3

4

6

7

At the beginning of this subsection, the Examiner asserts, "Margolin did not disclose that the

vehicle is flown using an autonomous control system. However, Duggan teach of a system for

safely flying an unmanned aerial vehicle in civilian airspace comprising: ..."

5

The Examiner's statement, "However, Duggan teach of a system for safely flying an unmanned

aerial vehicle in civilian airspace comprising: ..." is conclusory and is not supported by the

8 Examiner's citations to Duggan.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 49 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 In addition, none of the Duggan citations teach the limitations in Applicant's Claim 8 that either 2 synthetic vision or Duggan's Variable Autonomy System comprises the step of: 3 (a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at 4 least selected phases of the flight of said unmanned aerial vehicle, and during those phases of 5 the flight of said unmanned aerial vehicle when said synthetic vision system is not used to 6 control said unmanned aerial vehicle an autonomous control system is used to fly said 7 unmanned aerial vehicle; 8 9 Duggan fails to teach the limitation that his Variable Autonomy System is used during selected 10 phases of a UAV's flight and Margolin '724 fails to teach the limitation that synthetic vision is used 11 during selected phases of a UAV's flight. Therefore, the combination of Duggan and Margolin '724 12 does not read on Applicant's Claim 8. 13 14 As cited above by Applicant, MPEP 2143.03 "All Claim Limitations must be Considered" states: 15 "all words in a claim must be considered in judging the patentability of that claim against the prior 16 art." In re Wilson, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970)." 17 18 The Examiner has failed his duty under MPEP 2143.03 (and in view of Wehling) to present a prima 19 facie case of obviousness for rejecting Applicant's Claim 8. 20 21 Examiner's Regarding Claim 9, a claim dependent on Claim 8. Applicant has shown that Claim 8 22 is nonobvious. Therefore, under 2143.03 All Claim Limitations Must Be Considered, Claim 9 is 23 non-obvious. 24 2143.03 All Claim Limitations Must Be **>Considered< [R-6] 25 ** "All words in a claim must be considered in judging the patentability of that claim against 26 the prior art." In re Wilson, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970). If an independent claim is nonobvious under 35 U.S.C. 103, then any claim depending therefrom is 27 28 nonobvious. In re Fine, 837 F.2d 1071, 5 USPQ2d 1596 (Fed. Cir. 1988). 29 30 Examiner's Regarding Claim 10, a claim dependent on Claim 8. Applicant has shown that Claim 31 8 is nonobvious. Therefore, under 2143.03 All Claim Limitations Must Be Considered, Claim 10

32

is non-obvious.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 50 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 2143.03 All Claim Limitations Must Be **>Considered< [R-6]

- 2 ** "All words in a claim must be considered in judging the patentability of that claim against
- 3 the prior art." *In re Wilson*, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970). If an
- 4 independent claim is nonobvious under 35 U.S.C. 103, then any claim depending therefrom is
- 5 nonobvious. *In re Fine*, 837 F.2d 1071, 5 USPQ2d 1596 (Fed. Cir. 1988).

6

- 7 Examiner's Regarding Claim 11, a claim dependent on Claim 8. Applicant has shown that Claim
- 8 8 is nonobvious. Therefore, under **2143.03 All Claim Limitations Must Be Considered**, Claim 11
- 9 is non-obvious.
- 10 2143.03 All Claim Limitations Must Be **>Considered< [R-6]
- ** "All words in a claim must be considered in judging the patentability of that claim against
- the prior art." *In re Wilson*, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970). If an
- independent claim is nonobvious under <u>35 U.S.C. 103</u>, then any claim depending therefrom is
- nonobvious. *In re Fine*, 837 F.2d 1071, 5 USPQ2d 1596 (Fed. Cir. 1988).

15

16

Examiner:

Regarding claim 12, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose a method for safely flying an unmanned aerial vehicle as part of a unmanned aerial system equipped with a synthetic vision system in civilian airspace comprising the steps of:

- (a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle an autonomous control system is used to fly said unmanned aerial vehicle;
- (b) providing a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot;

whereas said selected phases of the flight of said unmanned aerial vehicle comprise:

(a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 51 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

(b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

1

2

Applicant:

- 3 In Margolin '724: Column 3, lines 8-67; Column 4, lines 1-67; and Column 5, lines 1-67 form a
- 4 continuous passage from Column 3, line 8 to Column 5, line 67. This passage of approximately
- 5 1619 words forms the core of the Margolin '724 DETAILED DESCRIPTION. The remainder of the
- 6 Margolin '724 DETAILED DESCRIPTION teaches additional topics such as **Flight Control** (with
- 7 headings Flight Control, Direct Control Non-Remotely Piloted Vehicles, Computer Mediated Non-
- 8 Remotely Piloted Vehicles, Second Order Flight Control Mode, First Order Flight Control Mode
- 9 {See Column 6, line 19 Column 8, line 3}, the features of a Control Panel (See Column 8, line 64
- Column 9, line 18}, the use of a Head-Mounted Display {See Column 9, lines 19 32}, the use of
- the invention for training {See Column 9, lines 33 63}, and **The Database** {See Column 9, line 64
- 12 Column 10, line 50.}

13

- 14 The Examiner cites Figures 1 7 in Margolin '724. These constitute all the figures in Margolin
- 15 '724.

16

19

- 17 The Examiner also cites the Abstract in Margolin '724. According to **608.01(b)** Abstract of the
- 18 **Disclosure** [R-7]:
 - 37 CFR 1.72 Title and abstract.

20 *****

- 21 (b) A brief abstract of the technical disclosure in the specification must commence on a
- separate sheet, preferably following the claims, under the heading "Abstract" or "Abstract of
- 23 the Disclosure." The sheet or sheets presenting the abstract may not include other parts of the
- application or other material. The abstract in an application filed under 35 U.S.C. 111 may not
- exceed 150 words in length. The purpose of the abstract is to enable the United States Patent
- 26 and Trademark Office and the public generally to determine quickly from a cursory inspection
- 27 <u>the nature and gist of the technical disclosure.</u><

28

29 {Emphasis added}

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 52 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 The popular interpretation of 608.01(b) is that the purpose of the Abstract is to provide search

2 terms. In any event, the Abstract in Margolin '724 does not say anything about civilian airspace.

3

- 4 The Examiner has made a conclusory statement by repeating the title of Applicant's invention
- 5 (leaving out the words "and method") and citing the core of the DETAILED DESCRIPTION in
- 6 Margolin '724.

7

In the remaining sections of the Examiner's rejection of Applicant's Claim 8 he asserts that he has found the elements and limitations of Applicant's invention.

10 11

12

13

- (a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used
- 14 to control said unmanned aerial vehicle an autonomous control system is used to fly said
- unmanned aerial vehicle;
 - (b) providing a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot;

18

16

17

- whereas said selected phases of the flight of said unmanned aerial vehicle comprise:
- 20 (a) when said unmanned aerial vehicle is within a selected range of an airport or other 21 designated location and is below a first specified altitude;
 - (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

24

27

28

29

30

31

22

- The Examiner has not even attempted to show where these limitations are taught in Margolin '724.

 He has particularly failed to show where the following is taught:
 - (a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle an autonomous control system is used to fly said unmanned aerial vehicle;

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 53 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

ane	

whereas said selected phases of the flight of said unmanned aerial vehicle comprise:

- (a) when said unmanned aerial vehicle is within a selected range of an airport or other
 designated location and is below a first specified altitude;
 - (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

7

5

6

As noted, he has cited the core of the Margolin '724 DETAILED DESCRIPTION, all of the

- 9 drawings, and the abstract. His rejection is purely conclusory and does not follow the requirements
- 10 for making a *prima facie* rejection required by MPEP § 2143.03 All Claim Limitations Must Be
- 11 Considered, KSR, and Wehling, as well as MPEP § 2142 ESTABLISHING A PRIMA FACIE
- 12 CASE OF OBVIOUSNESS.

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

The Examiner continues:

Margolin did not disclose that the vehicle is flown using an autonomous control system. However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0329).

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggna abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne having ordinary skill in the art.

<u>Examiner</u>	<u>Duggan</u>
Margolin did not disclose that the	[0352] In one aspect of the present invention, an operator

vehicle is flown using an autonomous control system.

However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:
a ground station controlling an unmanned aerial vehicle (sec. 0352,

station (also referred to as the ground control station or GCS) is designed to accommodate command and control of multiple vehicles or a single vehicle by a single operator. In accordance with one embodiment, the ground control station is platform independent and implements an application program interface that provides windowing and communications interfaces (e.g., the platform is implemented in Open Source wxWindows API). The underlying operating system is illustratively masked and enables a developer to code in a high level environment.

00353),

[0353] In one embodiment, the ground control station incorporates several specialized user interface concepts designed to effectively support a single operator tasked to control multiple vehicles. The GCS also illustratively supports manual control and sensor steering modes. In the manual control mode, the operator can assume control authority of the vehicles individually from the ground control station at any time in flight. In the sensor steering mode, a vehicle will autonomously fly in the direction the operator is manually pointing the on-board imaging sensor (e.g., operator views video output from a digital camera on a TV interface, computer screen display, etc.). A custom data link is illustratively, utilized to support a two-way transfer of data between the ground control station and the UAV's. These design concepts together provide a flexible, multiple vehicle control system. The details of the concepts are discussed below.

wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318,

[0318] If the pilot chooses a surveillance location outside the total FOV, then the outer loop guidance will illustratively

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 55 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

follow a command-to-LOS mode guide law until the UAV flight path points toward the target. Once the desired staring-point comes within a minimum range threshold, the guidance automatically trips into a loiter pattern (either constant-radius or elliptical) to maintain a station with a single key-click while he/she conducts other activities. FIGS. 22A & 22B together demonstrate the surveillance-point approach scenario.

0322,

[0322] In accordance with one aspect of the present invention, sensor-slave mode commands are generated by an autonomous line-of-sight driven function, in which the command objectives are generated by the necessities of the function rather than by an operator. For example, a function designed to command a raster-scan of a particular surveillance area, or a function designed to scan a long a roadway could be used to generate sensor slave commands. Another example is a function designed to generate line-of-sight commands for UAV-to-UAV rendezvous formation flying.

0353)

[0353] In one embodiment, the ground control station incorporates several specialized user interface concepts designed to effectively support a single operator tasked to control multiple vehicles. The GCS also illustratively supports manual control and sensor steering modes. In the manual control mode, the operator can assume control authority of the vehicles individually from the ground control station at any time in flight. In the sensor steering mode, a vehicle will autonomously fly in the direction the operator is manually pointing the on-board imaging sensor (e.g., operator views video output from a digital camera on a TV interface, computer screen display, etc.). A custom data link is

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 56 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

illustratively, utilized to support a two-way transfer of data between the ground control station and the UAV's. These design concepts together provide a flexible, multiple vehicle control system. The details of the concepts are discussed below.

when a synthetic vision (sec. 0356,

[0356] a synthetic vision display

0365,

[0365] The two video monitors are illustratively used to display real-time data linked camera imagery from two air vehicles having cameras (of course, fewer, more or none of the vehicles might have cameras and the number of monitor displays can be altered accordingly). In accordance with one embodiment, camera imagery is recorded on videotapes during a mission. In accordance with one embodiment, the two repeater displays are used to provide redundant views of the GUI and synthetic vision display. The laptop illustratively serves as a GUI backup in the event that the main GUI fails.

0388,

[0388] In one aspect of the present invention, synthetic vision display technical approach of the present invention is based upon integrating advanced simulated visuals, originally developed for training purposes, into UAV operational systems. In accordance with one embodiment, the simulated visuals are integrated with data derived from the ground control station during flight to enable real-time synthetic visuals.

0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown [0390] In one aspect of the present invention, through GUI display 2622, an operator can maintain a variable level of control over a UAV, from fully manual to fully autonomous,

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 57 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

using an autonomous control system

with simple user-friendly inputs. For example, if an operator decides to divert a UAV to a new route, the operator has a plurality of options to select from. The following are examples of some of the options that an operator has. Those skilled in the art should recognize that this is not an exhaustive list. In one embodiment, the operator could graphically edit the existing route on mission situation display 2629 by adding a waypoint or orbit pattern in the vicinity of a desired target region. Prior to accepting the edited route, the control system evaluates the revised route against the vehicle performance capability as well as terrain obstructions. If the route is within acceptable bounds, the control system registers the modified route and maneuvers the vehicle accordingly. In another embodiment, the operator could select a park mode on selections pane 2630. After selected, the control system queues the operator to click the location of and graphical size (via a mouse) the desired orbit pattern in which the vehicle will fly while "parked" over a desired target. In another embodiment, the operator can select a manual control mode on selections pane 2630. By selecting RDC (remote directional command), for example, the control system controls the UAV into a constant altitude, heading and speed flight until the operator instructs a maneuver. While in RDC mode, the operator can either pseudo-manually direct the UAV using the control stick (e.g. joystick) or the operator can program a fixed heading, altitude and speed using the control options provided in selections pane 2630.

(autopilot, sec 0346 to 0350,

[0346] In accordance with one embodiment, an exemplary translation layer implementation will now be provided. After the guidance algorithms execute, the outputs are translated to

the native vehicle autopilot commands. The equations below provide example kinematic translations from the guidance acceleration commands to native vehicle autopilot commands. These equations demonstrate the principal that vehicle motion is activated through acceleration. The methods that various vehicles employ to generate acceleration are numerous (bank angle autopilot, acceleration autopilot, heading control autopilot, altitude control autopilot, etc). Since the control algorithms described herein generate acceleration commands that can be kinematically translated into any of these native autopilot commands, the guidance algorithms truly provide a generalized library of control laws that can control any vehicle through that vehicle's native atomic functions. Ubiquitous acceleration control techniques enable VACS to synthesize control commands for any vehicle, including air, ground, or sea-based. 35 a v = vertical plane acceleration command a h = horizontal plane acceleration command = tan - 1 (a h a v) = bank angle command a T = a v 2 + a h 2 = total bodyacceleration command i = a h V = turn rate command i = i - 1+ . t = heading command . = (a v - g) V = flight path ratecommand i = i - 1 + .t = flight path angle command <math>h . = V $\sin () = \text{climb rate command h } i = \text{h } i = 1 + \text{h} . t = \text{altitude}$ command Eq. 57

[0347] Additional functionality that can be enabled in a translation layer is means for discouraging or preventing an operator (e.g., the human or non-human operator interfacing the VACS architecture) from overdriving, stalling, or spinning the vehicle frame. This being said, limiting algorithms can also be employed in the guidance or autopilot functions.

Serial Number: 11/736,356 Sheet 59 of 241 Jed Margolin Filed: 04/17/2007

Examiner: Ronnie M. Mancho Art Unit: 3664

[0348] X. Autopilot

[0349] As has been addressed, the present invention is not limited to, and does not require, a particular autopilot system. The control system and architecture embodiments of the present invention can be adapted to accommodate virtually any autopilot system.

[0350] For the purpose of providing an example, an illustrative suitable autopilot software system will now be described. The illustrative autopilot system incorporates a three-axis design (pitch and yaw with an attitude control loop in the roll axis) for vehicle stabilization and guidance command tracking. The autopilot software design incorporates flight control techniques, which allow vehicle control algorithms to dynamically adjust airframe stabilization parameters in real-time during flight. The flight computer is programmed directly with the airframe physical properties, so that it can automatically adjust its settings with changes in airframe configuration, aerodynamic properties, and/or flight state. This provides for a simple and versatile design, and possesses the critical flexibility needed when adjustments to the airframe configuration become necessary. The three-loop design includes angular rate feedback for stability augmentation, attitude feedback for closed-loop stiffness, and acceleration feedback for command tracking. In addition, an integral controller in the forward loop illustratively provides enhanced command tracking, low frequency disturbance rejection and an automatic trim capability.

The Examiner may have meant 0390-0392. Otherwise the

0390-0329).

range is not credible}

[0390] In one aspect of the present invention, through GUI display 2622, an operator can maintain a variable level of control over a UAV, from fully manual to fully autonomous, with simple user-friendly inputs. For example, if an operator decides to divert a UAV to a new route, the operator has a plurality of options to select from. The following are examples of some of the options that an operator has. Those skilled in the art should recognize that this is not an exhaustive list. In one embodiment, the operator could graphically edit the existing route on mission situation display 2629 by adding a waypoint or orbit pattern in the vicinity of a desired target region. Prior to accepting the edited route, the control system evaluates the revised route against the vehicle performance capability as well as terrain obstructions. If the route is within acceptable bounds, the control system registers the modified route and maneuvers the vehicle accordingly. In another embodiment, the operator could select a park mode on selections pane 2630. After selected, the control system queues the operator to click the location of and graphical size (via a mouse) the desired orbit pattern in which the vehicle will fly while "parked" over a desired target. In another embodiment, the operator can select a manual control mode on selections pane 2630. By selecting RDC (remote directional command), for example, the control system controls the UAV into a constant altitude, heading and speed flight until the operator instructs a maneuver. While in RDC mode, the operator can either pseudo-manually direct the UAV using the control stick (e.g. joystick) or the operator can program a fixed heading, altitude and speed using the control options provided in selections pane 2630.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 61 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

[0391] The described Intelligent displays with smart variables represent an effective approach to actively displaying information for different types of vehicles. However, a problem can arise when a new vehicle is integrated into the ground control station with a completely foreign command and control interface. Under these circumstances, the ground control station is not concerned about displaying data, but is tasked to provide a command and control interface for the operator to perform the required operations. This conundrum is the motivation for another embodiment of the present invention, namely, the integration of vehicle specific panels in the ground control station.

[0392] In one embodiment, a generic vehicle class (GVC) is illustratively a software component that provides a rapid development environment API to add new vehicle classes and types to the ground control station. The GVC also illustratively serves as a software construct that allows the inclusion of multiple vehicles within the ground control station framework. One of the variables in the application is a vector of pointers to a generic vehicle class. This list is constructed by allocating new specific vehicles and returning a type case to the base generic vehicle class. When a new vehicle is integrated into the ground control station, the generic vehicle class provides all of the virtual functions to integrate with system control components (e.g., to integrate with a map display, a communications package, PCIG imagery and/or appropriate display windows). An important object in the application framework is illustratively a pointer to the current vehicle generic class. When the user switches vehicles, this pointer is updated and all displays grab the

Sheet 62 of 241 Filed: 04/17/2007

Examiner: Ronnie M. Mancho

Serial Number: 11/736,356

Art Unit: 3664

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggna

The different embodiments in both prior arts are combinable as it would be obvious to ne[sic] having ordinary skill in the art.

abstract, sec 0014, 0085, 0086).

appropriate smart variables from the pointer to the new base class. This is the mechanism by which windows immediately update to the current vehicle information whenever the user switches vehicles. The default windows use the pointer to the current vehicle to grab information. In this manner, if the user switches to a new vehicle with a different set of datalink variables, that fact is immediately apparent on the display windows.

Abstract

Embodiments are disclosed for a vehicle control system and related sub-components that together provide an operator with a plurality of specific modes of operation, wherein various modes of operation incorporate different levels of autonomous control. Through a control user interface, an operator can move between certain modes of control even after vehicle deployment. Specialized autopilot system components and methods are employed to ensure smooth transitions between control modes. Empowered by the multi-modal control system, an operator can even manage multiple vehicles simultaneously.

[0014] Embodiments of the present invention pertain to a hierarchical control system, user interface system, and control architecture that together incorporate a broad range of user-

selectable control modes representing variable levels of autonomy and vehicle control functionality. A unified autopilot is provided to process available modes and mode transitions. An intelligence synthesizer is illustratively provided to assist in resolving functional conflicts and transitioning between control modes, although certain resolutions and transitions can be incorporated directly into the functional sub-components associated with the different control modes. In accordance with one embodiment, all modes and transitions are funneled through an acceleration-based autopilot system. Accordingly, control commands and transitions are generally reduced to an acceleration vector to be processed by a centralized autopilot system.

[0085] As will be discussed in greater detail below, the control system and architecture embodiments of the present invention essentially enable any autopilot design to support control of a vehicle in numerous control modes that are executed with switches between modes during flight. All control modes are supported even in the presence of sensor errors, such as accelerometer and gyro biases. This robustness is at least partially attributable to the fact that the closed-loop system, in all control modes, is essentially slaved to an inertial path and, hence, the sensor biases wash out in the closed loop, assuming the biases are not so grossly large that they induce stability problems in the autopilot system. Furthermore, winds are generally not an issue in the overall control scheme in that the flight control system will regulate to the inertial path, adjusting for winds automatically in the closed loop. Given the precision afforded by inertial navigation aided by GPS technology, inertial path regulation offers a highly effective

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 64 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

and robust UAV control approach. Generally speaking, the autopilot system functions such that winds, medium Dryden turbulence levels, sensor errors, airframe aerodynamic and mass model parameter uncertainties, servo non-linearity (slew rate limits, etc.), and various other atmospheric and noise disturbances will non have a critically negative impact on flight path regulation.

[0086] Component 408 receives commands generated by component 404 and filtered by autopilot component 406. The commands received by component 408 are executed to actually manipulate the vehicle's control surfaces. Autopilot component 406 then continues to monitor vehicle stabilization and/or command tracking, making additional commands to component 408 as necessary.

1 2

3

4

5

At the beginning of this subsection, the Examiner asserts, "Margolin did not disclose that the vehicle is flown using an autonomous control system. However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising: ..."

6 7

8

9

The Examiner's statement, "However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising: ..." is conclusory and is not supported by the Examiner's citations to Duggan.

10 11

12

In addition, none of the Duggan citations teach the limitations in Applicant's Claim 12 that either synthetic vision or Duggan's Variable Autonomy System comprises the step of:

1314

15

16

(a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle an autonomous control system is used to fly said

17 18

and

unmanned aerial vehicle;

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 65 of 241

Examiner: Ronnie M. Mancho Art	t Unit: 3664	1
--------------------------------	--------------	---

1	whereas said selected phases of the flight of said unmanned aerial vehicle comprise:
2	(a) when said unmanned aerial vehicle is within a selected range of an airport or other
3	designated location and is below a first specified altitude;
4	(b) when said unmanned aerial vehicle is outside said selected range of an airport or other
5	designated location and is below a second specified altitude.
6	
7	Duggan fails to teach the limitation that his Variable Autonomy System is used during selected
8	phases of a UAV's flight and Margolin '724 fails to teach the limitation that synthetic vision is used
9	during selected phases of a UAV's flight. Therefore, the combination of Duggan and Margolin '724
10	does not read on Applicant's Claim 12.
11	
12	As cited above by Applicant, MPEP 2143.03 "All Claim Limitations must be Considered" states:
13	"all words in a claim must be considered in judging the patentability of that claim against the prior
14	art." In re Wilson, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970)."
15	
16	The Examiner has failed his duty under MPEP 2143.03 (and in view of Wehling) to present a prima
17	facie case of obviousness for rejecting Applicant's Claim 12.
18	
19	Examiner's Regarding Claim 13, a claim dependent on Claim 12. Applicant has shown that Claim
20	12 is nonobvious. Therefore, under 2143.03 All Claim Limitations Must Be Considered, Claim
21	13 is non-obvious.
22	2143.03 All Claim Limitations Must Be **>Considered< [R-6]
23	** "All words in a claim must be considered in judging the patentability of that claim against
24	the prior art." In re Wilson, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970). If an
25	independent claim is nonobvious under 35 U.S.C. 103, then any claim depending therefrom is
26	nonobvious. In re Fine, 837 F.2d 1071, 5 USPQ2d 1596 (Fed. Cir. 1988).
27	
28	Examiner's Regarding Claim 14, a claim dependent on Claim 12. Applicant has shown that Claim
29	12 is nonobvious. Therefore, under 2143.03 All Claim Limitations Must Be Considered, Claim
30	14 is non-obvious.

2143.03 All Claim Limitations Must Be **>Considered< [R-6]

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 66 of 241

Serial Number: 11/736,356 Filed: 04/17/20 Examiner: Ronnie M. Mancho Art Unit: 3664

1	** "All words in a claim must be considered in judging the patentability of that claim against
2	the prior art." In re Wilson, 424 F.2d 1382, 1385, 165 USPQ 494, 496 (CCPA 1970). If an
3	independent claim is nonobvious under 35 U.S.C. 103, then any claim depending therefrom is
4	nonobvious. In re Fine, 837 F.2d 1071, 5 USPQ2d 1596 (Fed. Cir. 1988).
5	
6	Part B - The Present Applicant is the named inventor on 5,904,724.
7	The present Applicant (Jed Margolin) is the named inventor on U.S. Patent 5,904,724. See the
8	attached DECLARATION OF JED MARGOLIN. The Examiner is barred from citing '724 as prior
9	art in a 35 U.S.C. §103 rejection. See ISCO INTERN v. Conductus, Inc, 279 F.Supp.2d 489 (D.Del.
10	2003) Footnote 4:
11	[4] Although § 102 relates to prior invention by another, anticipation, and abandonment, its
12	standard for determining prior art is applied to the § 103 obviousness inquiry as well. See, e.g.,
13	Panduit Corp. v. Dennison Mfg. Co., 810 F.2d 1561, 1568 (Fed.Cir.1987), cert. denied, 481
14	U.S. 1052, 107 S.Ct. 2187, 95 L.Ed.2d 843 (1987) ("Before answering Graham's `content'
15	inquiry, it must be known whether a patent or publication is in the prior art under 35 U.S.C. §
16	102.") (citing Graham v. John Deere Co., 383 U.S. 1, 86 S.Ct. 684, 15 L.Ed.2d 545 (1966)); Ex
17	parte Andresen, 212 U.S.P.Q. 100, 102 (Pat.& Tr. Office Bd.App. 1981) (citing congressional
18	committee record and commentary and concluding that Congress intended § 103 to "includ[e]
19	all of the various bars to a patent as set forth in section 102").
20	
21	As MPEP 2129 explains, "However, even if labeled as "prior art," the work of the same inventive
22	entity may not be considered prior art against the claims unless it falls under one of the statutory
23	categories."
24	2129 Admissions as Prior Art [R-6]
25	I. ADMISSIONS BY APPLICANT CONSTI-TUTE PRIOR ART
26	A statement by an applicant >in the specification or made< during prosecution identifying the
27	work of another as "prior art" is an admission **>which can be relied upon for both
28	anticipation and obviousness determinations, regardless of whether the admitted prior art would

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 67 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 otherwise qualify as prior art under the statutory categories of 35 U.S.C. 102. Riverwood Int'l 2 Corp. v. R.A. Jones & Co., 324 F.3d 1346, 1354, 66 USPO2d 1331, 1337 (Fed. Cir. 2003); 3 Constant v. Advanced Micro-Devices Inc., 848 F.2d 1560, 1570, 7 USPQ2d 1057, 1063 (Fed. Cir. 1988).< However, even if labeled as "prior art," the work of the same inventive entity may 4 5 not be considered prior art against the claims unless it falls under one of the statutory 6 categories. Id.; see also Reading & Bates Construction Co. v. Baker Energy Resources Corp., 7 748 F.2d 645, 650, 223 USPQ 1168, 1172 (Fed. Cir. 1984) ("[W]here the inventor continues to 8 improve upon his own work product, his foundational work product should not, without a 9 statutory basis, be treated as prior art solely because he admits knowledge of his own work. It is 10 common sense that an inventor, regardless of an admission, has knowledge of his own work."). 11 Consequently, the examiner must determine whether the subject matter identified as "prior art" 12 is applicant's own work, or the work of another. In the absence of another credible explanation, 13 examiners should treat such subject matter as the work of another. 14 15 Part D - Applicant's invention meets a long felt but unmet need. 16 According to the article **NASA Plans UAS Push** (Exhibit 1 at 81): 17 NASA is seeking industry feedback on its plans for a new five-year, \$150-million program to 18 help integrate unmanned aircraft into civil airspace. The feedback is likely to be mixed, as the 19 agency's last major unmanned aircraft research program was canceled before it got off the 20 ground, despite industry backing. 21 22 Briefed to industry experts in early August, the Unmanned Air Systems (UAS) Integration in 23 the National Airspace System (NAS) project is planned to begin in Fiscal 2011. It would be 24 NASAs first major unmanned aircraft effort since the High-Altitude Long-Endurance Remotely 25 Operated Aircraft (HALE ROA) project was killed in 2005. 26 27 The new program would focus on separation assurance and collision avoidance, pilot-aircraft 28 interface, certification requirements and communications, involving a series of increasingly 29 complex flight demonstrations. The main goal is to generate data to help the FAA and

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 68 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

standards organizations develop guidelines and regulations for the design and operation of

UASs in the NAS. The research is expected to have an impact in the 2015-25 timeframe.

3

2

- 4 Applicant's invention solves a long-felt unmet need to safely fly UAVs in civilian airspace. (See
- 5 MPEP 716.04 Long-Felt Need and Failure of Others.) Otherwise it would not be necessary for
- 6 NASA to set up "a new five-year, \$150-million program to help integrate unmanned aircraft into
- 7 civilian airspace."

8

9

Part E - The Duggan Application.

- The Examiner's choice of Duggan Patent Application US 2005004723 as a reference is interesting.
- By a coincidence Applicant ("Margolin") discovered the Duggan Application not long after the
- 12 USPTO published it.

13 14

Margolin analyzed the Dugan claims and found some deficiencies. For example, Duggan Claim 1:

15 16

18

19

20

21

22

23

24

25

26

27

28

1. A computer-implemented method for providing an operator of a vehicle with a plurality of

17 control modes, wherein the system is configured to support transitioning between control

modes during operation of the vehicle, the method comprising: receiving a first operator input

that corresponds to a first control mode; generating a first directional representation of the first

operator input; processing the first directional representation through a unified autopilot system

so as to generate a first control output; mechanically adjusting a control component associated

with the vehicle based on the first control output; receiving a second operator input that

corresponds to a request to transition from the first control mode to a second control mode;

transitioning from the first control mode to the second control mode; receiving a third operator

input that corresponds to the second control mode; generating a second directional

representation of the third operator input; processing the second directional representation

through the unified autopilot system so as to generate a second control output; and

mechanically adjusting a control component associated with the vehicle based on the second

29 control output.

{Emphasis added}

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 69 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 This claims a method where the operator of a vehicle is able to select two or more control modes 2 and the system transitions between them. The claim does not say how the system transitions 3 between them other than that the autopilot does it. The term "directional representation" does not 4 appear in the Specification. What is the "directional representation" of an operator input? Common 5 English usage suggests that it is the line or course along which the operator moves the joystick or 6 mouse. Also, by definition an autopilot mechanically adjusts control components so this part of the 7 claim is redundant. 8 9 Duggan's Dependent claim 2 is redundant. Duggan's Claim 1 already specifies the use of a unified 10 autopilot. 11 2. The method of claim 1, wherein said transitioning comprises processing a transition 12 command through the unified autopilot system. 13 14 Duggan Dependent claim 3: 15 3. The method of claim 1, wherein generating a first directional representation comprises 16 generating a first set of acceleration and bank angle commands. 17 Finally, something real. A directional representation can be a set of acceleration and bank angle 18 19 commands. What else can a "directional representation" be? Duggan does not teach it, so Claim 1 is 20 indistinct. 21 22 Even so, this may have already been done. For example see U.S. Patent 4,155,525 Maneuver 23 detector circuit for use in autothrottle control systems having thrust and flight path control 24 decoupling issued May 22, 1979 to Peter-Contesse (assigned to Boeing). From Column 1, lines 15-25 28: 26 It is an object of this invention to provide a flight control system having thrust and flight path 27 control decoupling utilizing maneuver detector and limited integrator circuit means in lieu of 28 the aforementioned time-constant programmer circuit means. 29 30 It is yet another object of this invention to provide circuit means responsive to elevator, normal 31 acceleration, and pitch attitude signals for providing a signal having a first predetermined 32 polarity when a purposeful maneuver of the aircraft is effected and a further signal having a

polarity opposite to said first predetermined polarity when a non-maneuver is indicated, a

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 70 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 purposeful maneuver being defined as one initiated by the pilot as contrasted to non-pilot 2 initiated aircraft maneuvers. 3 4 There is also U.S. Patent 6,062,513 Total energy based flight control system issued May 16, 2000 5 to Lambregts (also assigned to Boeing). From Column 6, line 65 - Column 7, line 14: 6 The present invention modifies the known TEC system by using an alternate control strategy 7 and flight path command .gamma..sub.C processing scheme. This alternate strategy is used 8 during manual control mode (using a control column or the like) when the thrust has been 9 driven to a preset value (such as a maximum or minimum thrust limit) or when the automatic 10 throttle is disengaged. Under these circumstances, instead of reverting to a pure path priority 11 scheme for stick or control column inputs (by opening switch 30 and letting the airspeed 12 increase or decreases until a speed limit is reached as is done in the known TEC system), the 13 present invention transitions to a combined speed and path priority scheme, where flight path 14 angle is the short term control priority and the set speed command is the long term priority. In 15 this scheme, switch 30' remains closed and the normal speed control feedback is continued after 16 thrust reaches a limit. 17 Duggan Claim 31: 18 19 31. A multi-modal variable autonomy control system, the system comprising: 20 a plurality of control mode components each corresponding to a different mode of control and 21 22 being configured to respond to command inputs by generating directionally descriptive control 23 commands; and 24 25 a unified autopilot component for processing said directionally descriptive control commands. 26 27 an vehicle control component for receiving processed commands from the unified autopilot 28 system and actuating control devices accordingly. 29 30 This claim contains inexcusable punctuation errors. These errors were not introduced by the Patent 31 Office; they are in the Application in the File Wrapper. See Exhibit 2 at 83.

32

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 71 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 Margolin gave his analysis to Optima Technology, Inc. (now Optima Technology Group) who was 2 then acting as Margolin's agent for selling or licensing his patents. Optima contacted Geneva 3 Aerospace, the assignee of the Duggan application. 4 5 Geneva responded by filing a Supplemental IDS listing all of Margolin's patents (even though only 6 5,566,073 and 5,904,724 were relevant), U.S. Patents 4,155,525 and 6,062,513, along with some of 7 the non-patent literature that Margolin had presented, such as: 8 9 Beringer, D.; Applying Performance-Controlled Systems, Fuzzy Logic, and Fly-By-Wire 10 Controls to General Aviation, Office of Aerospace Medicine, May 2002. 11 12 Abernathy, M.; "Virtual Cockpit Window" for a Windowless Aerospacecraft. 13 http://www.nasatech.com/Briefs/Jan03/MSC23096.html Jan. 2003. 14 15 See Exhibit 2 at 84-88. 16 17 Geneva also licensed Margolin Patents 5,566,073 and 5,904,724. See Exhibit 3 at 91. 18 19 It came as a complete surprise to Applicant when the Duggan Application was allowed as filed 20 (despite its defects) in the FOAM. Geneva's attorneys may have been surprised as well. They had to 21 ask the Duggan Examiner to correct the punctuation errors in Duggan Claim 31. See Exhibit 2 at 89. 22 23 Perhaps the Duggan Examiner was preoccupied with financial problems. See Exhibit 4 at 109. But 24 where were the Second Set of Eyes? Perhaps they were sleeping that day. 25 26 Margolin wishes to note that the Examiner in the present case cited the Duggan Application even 27 though it had already issued as U.S. Patent 7,343,232 ('232) Vehicle control system including 28 related methods and components on March 11, 2008. 29 30 The Duggan Application may have other problems as well. The Duggan Application claims priority 31 from Provisional Application Ser. No. 60/480,192, filed Jun. 20, 2003. According to 35 U.S.C. 102 32 Conditions for patentability; novelty and loss of right to patent. 33 A person shall be entitled to a patent unless -

34 *****

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 72 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1

2

3

4

5

6

7

8

9

10

11

12 13

14

15

16

17

18

19

20

21

22

23

24

2526

27

28

29

30

31

32

(b) the invention was patented or described in a printed publication in this or a foreign country or in public use or on sale in this country, more than one year prior to the date of application for patent in the United States. There is evidence that this might have occurred. The paper UCAV Distributed Mission Training Testbed: Lessons Learned and Future Challenges by Dr. Dutch Guckenberger and Matt Archer; The Interservice/Industry Training, Simulation & Education Conference (I/ITSEC), Volume: 2000 (Conference Theme: Partnerships for Learning in the New Millennium) was presented at the I/ITSEC Conference in 2000. The title page and page 7 are reproduced in Exhibit 5 at 180. On document page 7 (Exhibit 5 at 183), under the heading Variable Autonomy Control System (VACS) it refers to Geneva Aerospace's Variable Autonomy Control System: As a portion of the DMT UCAV Testbed development, the Geneva AeroSpace Variable Autonomy Control System (VACS) was added to LiteFlite. The VACS is designed to be effective for UAV and UCAV systems as usable to individuals whose training is focused on the requirements of a given mission or the usability of the payload, rather than on the aviation of the vehicle. As the dependence on UAVs for military operations grows and UAV technology is integrated into the emerging global command and control architecture, the cost and complexity of managing and controlling these assets can easily become substantial. The VACS solution to this UAV control problem lies in the appropriate functional allocation between the human and the machine. By merging modern stand-off missile flight control, advanced aircraft flight control, and state-of-the-art communications technologies, Geneva has developed a novel hierarchical flight control structure with varied levels of remote operator input to address the human-machine functional allocation problem. The VACS has been successfully demonstrated enabling a diverse range of users to effectively operate UAVs. Furthermore, the VACS solution eliminates the requirement for UAVs to be controlled by highly trained, rated pilots. In a continuing development and demonstration effort VACS is to be used Joint STARS MTE workstation and the Freewing Scorpion 100-50 UAV and conduct a flight test demonstration. This program will demonstrate the benefits of the variable autonomy flight control system design with simplified manual control modes, demonstrate the compatibility of such a system with the military s emerging C4I Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 73 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 architecture, and demonstrate the synergism between Joint STARS and UAVs using the 2 simplified UAV flight control technology. 3 4 {Emphasis added} 5 6 Geneva Aerospace filed a trademark application with the USPTO on 1/22/2004 for the trademark "Variable Autonomy Control System." See Exhibit 6 at 185. In the application Geneva Aerospace 7 8 declared, under penalty of perjury: 9 10 The applicant, or the applicant's related company or licensee, is using the mark in commerce, 11 and lists below the dates of use by the applicant, or the applicant's related company, licensee, or 12 predecessor in interest, of the mark on or in connection with the identified goods and/or 13 services. 15 U.S.C. Section 1051(a), as amended. 14 15 International Class 009: computer software for autonomous aerial vehicle guidance and 16 control systems 17 18 In International Class 009, the mark was first used at least as early as 09/01/1998, and first 19 used in commerce at least as early as 09/01/1998, and is now in use in such commerce. The 20 applicant is submitting or will submit one specimen for each class showing the mark as used in 21 commerce on or in connection with any item in the class of listed goods and/or services, 22 consisting of a(n) Portion of company website describing product. 23 24 {Emphasis added} 25 26 The mark "Variable Autonomy Control System" is for "computer software for autonomous aerial 27 vehicle guidance and control systems". 28 29 Geneva declares that the "Variable Autonomy Control System" was first used in commerce as early 30 as 09/01/1998, which is more than one year prior to the 6/20/2003 filing date of the provisional 31 application.

32

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 74 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 Is the "Variable Autonomy Control System" in the Duggan '232 patent the same "Variable 2 Autonomy Control System" that Geneva wished to trademark? Their trademark application 3 included a portion of the company website describing the product, which states (Exhibit 6 at 188): 4 **Products: Variable Autonomy Control System (VACS)**TM 5 6 7 <u>Under Air Force Research Lab funding</u> Geneva has developed an innovative UAV control 8 design that combines state-of-the-art missile technologies with fixed-wing aircraft control. Our 9 design balances autonomous flight control With manual control to provide variable levels of 10 <u>directional independence</u> and minimizes the personnel and training requirements for the 11 operation of the UAV, The truly enabled UAV operator is not required to be a trained aviator, 12 but still retains a wide range of control flexibility in order to successfully execute the mission 13 objectives that call upon his/her specialized expertise. 14 15 Our solution is a hierarchical flight control structure with multiple levels of remote 16 operator input combined with an off-board controller software package and intuitive 17 human system interface. Research of the UAV control problem has indicated that the best 18 solution lies in the appropriate functional allocation between the human and the machine, 19 leading to the organization of the control problem between the two fundamental categories: 20 flight governance and flight management. 21 22 {Emphasis added} 23 24 It sounds like it is. 25 26 Therefore, the Duggan '232 patent is invalid for failing to meet the requirements of 35 U.S.C 102. 27 28 Note that the Duggan "Variable Autonomy Control System" was developed under Air Force 29 Research Lab funding. That would give the Government certain patent rights in the invention. This 30 is not stated in the Duggan '232 patent. 31 32 Geneva also filed an application to trademark "VCAS". They made the same declaration as they did 33 for "Variable Autonomy Control System" and included the same company website page. See

34

Exhibit 7 at 190.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 75 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 Dave Duggan of Geneva Aerospace and Luis A. Piñeiro of AFRL presented a paper at the 2002 2 AUVSI Symposium. The paper from the Proceedings is reproduced as Exhibit 8 at 195. From 3 Exhibit 8 at 196, last paragraph under the heading VACS Overview: 4 5 Funding for the variable autonomy control concept was provided under the Small Business 6 Innovative Research (SBIR) program Phase I, Phase II, and Phase III funding vehicles through 7 the Air Force Research Laboratory (AFRL) Human Effectiveness and Air Vehicles Integration 8 Directorates (Reference 1). 9 10 Reference 1 says: 11 1. Duggan, David S., "Demonstration of an Integrated Variable Autonomy UAV Flight 12 Control System", Phase II SBIR Final Report, AFRL-HE-WP-TR-2001-0035, January 2001 13 14 Applicant has not been able to obtain this reference from DTIC. 15 16 However, Duggan/Geneva Aerospace's Provisional Application (Application Number 60/480,192) 17 contains Geneva Aerospace's Small Business Innovation Research (SBIR) Program Projects 18 Summary, Topic Number AF98-179 (Exhibit 9 at 211), which shows that Geneva Aerospace had 19 the invention described in '232 in its possession as early as the date the SBIR Project Summary for 20 AF98-179 was submitted. According to the Air Force SBIR Web site at 21 http://www.afsbirsttr.com/TechMall/Default.aspx?kwa=AF98-179 the SBIR Phase I Contract 22 started 5/14/1998, ended 2/14/1999, and the date of the DTIC report is 3/20/2001. See Exhibit 10 at 23 235. 24 25 This suggests that Geneva Aerospace was being truthful in their Trademark Applications, that the 26 products named Variable Autonomy Control Systems and VACS were first used commercially as 27 early as 09/01/1998. 28 29 The '232 patent claims priority from Provisional Application 60/480,192 filed June 20, 2003 and 30 incorporates the Provisional Application in its entirety in the '232 patent. See '232 Column 1, lines 31 6 - 9. However, Provisional Application 60/480,192 was not made available to the public on PAIR 32 until November 22, 2010. See Margolin Declaration § 14. As a result, the public was not able to

33

read the entire '232 patent until November 22, 2010.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 76 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1	
2	The Duggan Provisional Application contains an Information Disclosure Statement (PTO-1449),
3	filed July 29, 2004 listing a number of patent references. See Exhibit 11 at 237. With the exception
4	of U.S. Patent 5,904,724 none of the other patent references are listed on the '232 patent. And, with
5	the exception of 5,904,724 none of the references cited by Duggan in his Provisional Application
6	are marked as having been considered by the Duggan Examiner.
7	
8	The irregularities surrounding the '232 patent would call for an investigation by the USPTO's
9	Inspector General, but the USPTO does not seem to have an Inspector General.
10	
11	Section 3.
12	
13	For the foregoing reasons, Applicant submits that all objections and rejections have been overcome.
14	Applicant requests that the rejection of pending claims 1-14 be withdrawn and that the application
15	be allowed as filed.
16	
17	Respectfully submitted,
18	
19	/Jed Margolin/ Date: November 29, 2010
20	Jed Margolin
21	
22	
23	Jed Margolin
24	1981 Empire Rd.
25	Reno, NV 89521-7430
26	(775) 847-7845
27	
28	
29	

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 77 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE 1 2 In re Application of Jed Margolin 3 4 Serial No.: 11/736,356 Examiner: Ronnie M. Mancho 5 Filed: 04/17/2007 Art Unit: 3664 6 For: SYSTEM AND METHOD FOR SAFELY FLYING UNMANNED AERIAL VEHICLES 7 IN CIVILIAN AIRSPACE 8 9 **DECLARATION OF JED MARGOLIN** 10 11 I, Jed Margolin, declare as follows: 12 1. I am the Applicant in the above patent application. 13 14 2. I am the named inventor (Jed Margolin) on U.S. Patent 5,904,724 Method and apparatus for 15 remotely piloting an aircraft issued May 18, 1999. 16 17 3. Exhibit 1 is a true and accurate reproduction of the article NASA Plans UAS Push by Graham 18 19 Warwick that appeared in Aviation Week & Space Technology, August 16, 2010, page 13. 20 4. Exhibit 2 is a true and accurate reproduction of documents from the image filewrapper for the 21 Duggan Application 10/871,612 that I downloaded from the USPTO's PAIR Web site on or about 22 November 1, 2010. 23 24 5. Exhibit 3 is a true and accurate reproduction of the License Agreement between Geneva 25 Aerospace, Optima Technology, Inc., and myself. I have redacted financial information as per 26 Federal Rules of Civil Procedure Rule 5.2. I have also redacted other sensitive information. (Note 27 that Optima Technology, Inc. subsequently changed their name to Optima Technology Group.) 28 29 6. Exhibit 4 is a true and accurate reproduction of public documents that I downloaded from the 30 Palm Beach County, Florida Web site at http://oris.co.palm-beach.fl.us/or web1/or sch 1.asp 31 between approximately August 30, 2010 and September 13, 2010. 32

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 78 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1 7. Exhibit 5 is a true and accurate reproduction of the Web page that I downloaded from

- 2 http://ntsa.metapress.com/link.asp?id=4mrrc0aupmjpf8e6 on or about November 16, 2010, showing
- 3 the availability of the paper Lessons Learned and Future Challenges by Dr. Dutch Guckenberger
- 4 and Matt Archer presented at the 2000 Interservice/Industry Training, Simulation & Education
- 5 Conference (I/ITSEC), and part of Volume: 2000 (Conference Theme: Partnerships for Learning in
- 6 the New Millennium, followed by the title page and the seventh page from the paper that I
- 7 purchased from Meta Press on or about November 16, 2010.

8

- 9 8. Exhibit 6 is a true and accurate reproduction of documents filed by Geneva Aerospace in
- 10 Trademark Application, Serial Number 78355947 for "Variable Autonomy Control System" that I
- downloaded from the USPTO Trademark Document Retrieval (TDR) Web site at
- http://tmportal.uspto.gov/external/portal/tow on or about November 17, 2010.

13

- 9. Exhibit 7 is a true and accurate reproduction of documents filed by Geneva Aerospace in
- 15 Trademark Application, Serial Number 78355939 for "VACS" that I downloaded from the USPTO
- 16 Trademark Document Retrieval (TDR) Web site at http://tmportal.uspto.gov/external/portal/tow on
- or about November 17, 2010.

18

- 19 10. Exhibit 8 is a true and accurate reproduction of the paper Development and Testing of a
- 20 Variable Autonomy Control System (VACS) for UAVs by Dave Duggan of Geneva Aerospace
- and Luis A. Piñeiro of AFRL contained in the Proceedings AUVSI Symposium, 2002, that was
- given to me by AUVSI (Association of Unmanned Vehicles International) on November 18, 2010.

23

- 24 11. Exhibit 9 is a true and accurate reproduction of the document contained in Geneva Aerospace
- 25 Provisional Application 60/480,192 Small Business Innovation Research (SBIR) Program
- Projects Summary, Topic Number AF98-179, that I downloaded from PAIR on November 22.
- 27 2010.

28

- 29 12. Exhibit 10 is a true and accurate reproduction of the Web page containing Geneva Phase I
- 30 Contract information for AF98-179 that I downloaded from the Air Force SBIR Web site at
- 31 http://www.afsbirsttr.com/TechMall/Default.aspx?kwa=AF98-179 on November 26, 2010.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 79 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

13. Exhibit 11 is a true and accurate reproduction of the Information Disclosure Statement in the 1 Duggan Provisional Application 60/480,192 that I downloaded from PAIR on November 22, 2010. 2 3 14. November 22, 2010 was the first day that Provisional Application 60/480,192 became available 4 5 to the public on PAIR. Provisional Application 60/480,192 became available to the public on PAIR 6 only as a result of my telephone conversations with Mr. Don Levin (Director of SEARCH AND INFORMATION RESOURCES ADMINISTRATION) and Mr. Richard Fernandez (of that same 7 8 office) the previous week. 9

10

I hereby declare under the penalty of perjury that the foregoing is true and correct to the best of my

12 knowledge and belief.

13

14

15

Dated: November 29,2010

Jed Mongolin Jed Margolin Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 80 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1

2

Exhibit 1 – AWST Article NASA Plans UAS Push


LEADING EDGE



Filed: 04/17/2007

BY GRAHAM WARWICK

Senior Editor-Technology Graham Warwick blogs at: AviationWeek.com/leadingedge warwick@aviationweek.com

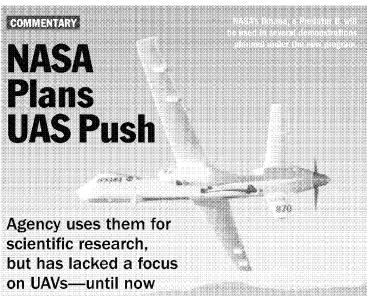

NASA/IIM ROSS

ASA is seeking industry feedback on its plans for a new five-year, \$150-million program to help integrate unmanned aircraft into civil airspace. The feedback is likely to be mixed, as the agency's last major unmanned aircraft research program was canceled before it got off the ground, despite industry backing.

Briefed to industry experts in early August, the Unmanned Air Systems (UAS) Integration in the National Airspace System (NAS) project is planned to begin in Fiscal 2011. It would be NASA's first major unmanned aircraft effort since the High-Altitude Long-Endurance Remotely Operated Aircraft (HALE ROA) project was killed in 2005.

The new program would focus on separation assurance and collision avoidance, pilot-aircraft interface, certification requirements and communications, involving a series of increasingly complex flight demonstrations. The main goal is to generate data to help the FAA and standards organizations develop guidelines and regulations for the design and operation of UASs in the NAS. The research is expected to have an impact in the 2015-25 timeframe.

NASA has tried to avoid duplication with, and identify gaps in, UAS civil-airspace integration efforts already underway, says Jeff Bauer, project planning lead. "Scope has been the biggest thing we have struggled with—what are the right things to do," he says. The result is a hodge-podge, lacking the singular vision of the HALE ROA project, which was the intended centerpiece of a government-industry plan to enable routine operations by long-endurance UAVs in airspace above 18,000 ft.

Some industry experts believe the new program is too near-term and that NASA should focus on longer-term challenges such as autonomy. Others think the program is "late to need" and that some of the data to be generated are required urgently to support efforts in progress to certify small unmanned aircraft and secure

dedicated frequency spectrum for UAS command-and-control links.

NASA did not have free rein in scoping out the program as its direction from Congress and the Obama administration was to coordinate with the FAA and Defense and Homeland Security departments to address operational and safety issues with UAS integration into the NAS while avoiding duplication.

As a result, the separation assurance and collision-avoidance project will focus on real-time trajectory and contingency monitoring to provide an additional layer of safety for air traffic controllers and UAS operators. NASA will also develop mission planning tools to automate contingency procedures after communications or systems failures while minimizing the impact of UAS operations on air transport system capacity and delays.

The pilot-aircraft interface project will develop guidelines for designing or modifying ground control stations to be compliant with NAS requirements. This could involve adding audible, tactile and visual cues, and will culminate in a proof-of-concept demonstration using a Predator B ground station modified for NAS compliance.

Initially, the communications project will support work underway to secure dedicated "safety of flight" spectrum for UAS command-and-control links at the 2012 World Radiocommunication Conference. Subsequently, the project will develop and test prototypes of a data link radio that meets safety, security and scalability requirements.

Finally, NASA plans to provide the FAA with a methodology for developing airworthiness requirements for the certification of UAS. While some argue that manned aircraft certification rules should be the starting point, the agency believes the balance between probability of failure and severity of consequences used to define airworthiness requirements for passenger-carrying aircraft needs to be reassessed for unmanned aircraft. NASA also plans to assess UAS-specific hazards and risks and develop guidance for type design, focusing on the automation aspects. ©

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 82 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

2 <u>Exhibit 2</u> – Duggan Filewrapper Documents

1

-154-

to support transition between the first and second modes of control.

- 31. A multi-modal variable autonomy control system, the system comprising:
 - a plurality of control mode components each corresponding to a different mode of control and being configured to respond to command inputs by generating directionally descriptive control commands; and
 - a unified autopilot component for processing said directionally descriptive control commands.
 - an vehicle control component for receiving processed commands from the unified autopilot system and actuating control devices accordingly.
- 32. The system of claim 31, wherein said plurality of control mode components are associated with more than three different modes of control.
- 33. The system of claim 31, wherein said plurality of control mode components are associated with both autonomous and user-input-based modes of control.
- 34. The system of claim 31, wherein said plurality of control modes are further configured to respond to

Jed Margolin

NOV 2 1 2005

Serial Number: 11/736,356

6,356 Filed: 04/17/2007

Sheet 84 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

IFW

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

First Named

Inventor : David S. Duggan et al.

Appln. No.: 10/871,612

Filed : June 18, 2004

Group Art Unit: 3661

For

VEHICLE CONTROL SYSTEM INCLUDING RELATED METHODS

AND COMPONENTS

Docket No.: G46.12-0001

Examiner:

SUPPLEMENTAL INFORMATION DISCLOSURE STATEMENT

Commissioner for Patents P.O. Box 1450 Alexandria, VA 22313-1450 I HEREBY CERTIFY THAT THIS PAPER IS BEING SENT BY U.S. MAIL, FIRST CLASS, TO THE COMMISSIONER FOR PATENTS, P.O. BOX 1450, ALEXANDRIA, VA 22313-1450, THIS

9 DAY OF NOV EMBER

PATENT ATTORNEY

Sir:

The patents or publications listed on the enclosed PTO Form-1449 are submitted pursuant to 37 C.F.R. § 1.97. Copies of the foreign references or "other art" references are included.

LIST REFERENCES NOT SUBMITTED

TIME OF FILING

The information disclosure statement is being filed:

- X
 Within three months of the filing date of a national application other that a Continued Prosecution Application (CPA);
 - Within three months of the date of entry of the National Stage international application;
 - 3. Before the mailing date of a first Office Action on the merits; or
 - Before the mailing of a first Office Action after the filing of a Request for Continue Examination (RCE).

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007

Examiner: Ronnie M. Mancho Art Unit: 3664

Sheet 85 of 241

-2-

after the time period specified in paragraph 1 above, but before the mailing date of a final action under 37 C.F.R. § 1.113 or notice of allowance under 37 C.F.R. § 1.311. Therefore, in accordance with 37 C.F.R. § 1.97(c), submitted herewith is:

(check either A or B below)

- A. ___ a statement as specified in 37 C.F.R. § 1.97(e).
- B. ___ the fee set forth in 37 C.F.R. § 1.17(p) for submission of an information disclosure statement under 37 C.F.R. § 1.97(c).
- after the mailing date of either a final action under 37 C.F.R. § 1.113 or a notice of allowance under 37 C.F.R. § 1.311, whichever occurs first, but before payment of the issue fee. Therefore, Applicant petitions for consideration and submits herewith:
 - A. a statement as specified in 37 C.F.R. § 1.97(e);
 - B. the petition fee set forth in 37 C.F.R. § 1.17(p).

STATEMENT

(check appropriate paragraph)

that each item of information contained in this Information Disclosure Statement was first cited in any communication from a foreign patent office in a counterpart foreign application not more than three months prior to the filing of this statement. 37 C.F.R. § 1.97(e)(1).

OR

that no item of information contained in this Information Disclosure Statement was cited in a communication from a foreign patent office in a counterpart foreign application or, to the knowledge of the person signing the certification after making reasonable inquiry, was known to any individual designated in 37 C.F.R. § 1.56(c) more than

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 86 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

-3-

three months prior to the filing of this statement. 37 C.F.R. § 1.97 (e) (2).

METHOD OF PAYMENT

X No fee is required.
Attached is a check in the amount of \$____.

The Director is authorized to charge any fee deficiency required by this paper or credit any overpayment to Deposit Account No. 23-1123.

Respectfully submitted,

WESTMAN, CHAMPLIN & KELLY, P.A.

Christopher L. Holt, Reg. No. 45,844
Suite 1400 - International Centre

900 Second Avenue South

Minneapolis, Minnesota 55402-3319

Phone: (612) 334-3222 Fax: (612) 334-3312

CLH:rkp

Filed: 04/17/2007

Sheet 1 of 1

FORM PTO-1449	Atty. Docket No.: Appl. No.: 10/871,612
LIST OF PATENTS AND PUBLICATIONS FOR APPLICANT'S INFORMATION DISCLOSURE STATEMENT	First Named Inventor:
OIPE	David S. Duggan et al.
(NOV 0.7.2007 A	Filing Date Group Art:
NOV 2 1 2005	June 18, 2004 3661
U.S. PATENT	DOCUMENTS

U.S. PATENT DOCUMENTS

Examiner Initial	Document No. Date N		Name	Name Class	Sub Class	Filing Date If Appropriate
AA	U.S. 11/2005 Marg Patent Pub. No. US 2005- 0256938 A1	Margolin	709	218		
AB	5,666,531	09/1997	Martin	395	620	
AC	5,422,998	06/1995	Margolin	395	166	
AD	5,553,229	09/1996	Margolin	395	166	
AE	5,933,156	08/1999	Margolin	345	509	
AF	5,566,073	10/1996	Margolin	364	449	
AG	5,904,724	05/1999	Margolin	701	120	
АН	5,974,423	10/1999	Margolin	707	104	
AI	6,023,278	02/2000	Margolin	345	419	
AJ	6,377,436	04/2002	Margolin	361	230	
AK	6,177,943	01/2001	Margolin	345	419	
AL	5,978,488	11/1999	Margolin	381	61	

FOREIGN PATENT DOCUMENTS

	Document No.	Date	Country	Class	Sub Class	Transla Yes	tion No
 AM					·		

OTHER ART (Including Author, Title, Date, Pertinent Pages, Etc.)

AN	
AO	
AP	

EXAMINER: DATE CONSIDERED:

Initial if citation considered, whether or not citation is in conformance with MPEP 609; draw line through citation if not in conformance and not considered. copy of this form with next communication to applicant. Include Serial Number: 11/736,356

Examiner: Ronnie M. Mancho Art Unit: 3664

-5*-*

		Sheet 2 of 2	
ORM PTO-1449	Atty. Docket No.: G46.12-0001	Appl. No.: 10/871,612	
LIST OF PATENTS AND PUBLICATIONS FOR APPLICANT'S INFORMATION DISCLOSURE STATEMENT	First Named Inventor:		
DIDEBOOKE CIAINING	David S. Duggan et al.		
	Filing Date	Group Art:	
	June 18, 2004	3661	

Examiner Initial	Document No.	Date	Name	Class	Sub Class	Filing Date If Appropriate
AQ	6,862,501	03/2005	Не	701	3	
AR	6,062,513	05/2000	Lambregts	244	175	
AS	4,155,525	05/1979	Peter-Contesse	244	182	
AT	6,304,819	10/2001	Agnew et al.	701	207	
AU	6,064,939	05/2000	Nishida et al.	701	120	
AV	6,498,984	12/2002	Agnew et al.	701	207	
AW						

FOREIGN PATENT DOCUMENTS

	Document No.	Date	Country	Class	Sub Class	Translation Yes No
ΑX						

OTHER ART (Including Author, Title, Date, Pertinent Pages, Etc.)

AY	RIS Press Releases - http://www.landform.com/pages/PressReleases.htm. 4 pgs.
AZ	Beringer, D.; "Applying Performance-Controlled Systems, Fuzzy Logic, and Fly-By-Wire Controls to General Aviation Office of Aerospace Medicine, May 2002, pgs. 1-8.
ВА	R. Parrish et al.; "Spatial Awareness Comparisons Between Large-Screen, Integrated Pictorial Displays and Conventional EFIS Displays During Simulated Landing Approaches," NASA Technical Paper 3467, CECOM Technical Report 94-E-1, October 1994, 1-22.
ВВ	Office of the Secretary of Defense, Airspace Integration Plan for Unmanned Aviation November 2004.
BC	Abernathy, M.; "Virtual Cockpit Window" for a Windowless Aerospacecraft. http://www.nasatech.com/Briefs/Ian03/MSC23096.html, Jan. 2003. 2 pgs.
YAMINED.	DATE CONSIDERED.

EXAMINER: DATE CONSIDERED:

EXAMINER: Initial if citation considered, whether or not citation is in conformance with MPEP 609; draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

Jed Margolin

Filed: 04/17/2007

Sheet 89 of 241

Serial Number: 11/736,356 Filed: 04/17/20 Examiner: Ronnie M. Mancho Art Unit: 3664

	Application No.		Applicant(s)					
Interview Summary	10/871,612		DUGGAN ET AL.					
mornion cummary	Examiner		Art Unit					
	Gertrude Arthur-J	eanglaude	3661					
All participants (applicant, applicant's representative, PTO personnel):								
(1) <u>Gertrude Arthur-Jeanglaude</u> .	(3)							
(2) Christopher Holt (Reg # 45,844).	(4)							
Date of Interview: 26 November 2007.								
Type: a)⊠ Telephonic b)□ Video Conference c)□ Personal [copy given to: 1)□ applicant 2)□ applicant's representative]								
Exhibit shown or demonstration conducted: d) Yes If Yes, brief description:	e)⊠ No.							
Claim(s) discussed: 31.								
Identification of prior art discussed: none.								
Agreement with respect to the claims f)⊠ was reached. g) was not reached. h) N/A.								
Substance of Interview including description of the general reached, or any other comments: <u>To amned claim 31 to contact to the contact to t</u>		as agreed to	if an agreement was					
(A fuller description, if necessary, and a copy of the amend allowable, if available, must be attached. Also, where no callowable is available, a summary thereof must be attached	opy of the amend	examiner agi ments that w	reed would render the claims ould render the claims					
THE FORMAL WRITTEN REPLY TO THE LAST OFFICE ACTION MUST INCLUDE THE SUBSTANCE OF THE INTERVIEW. (See MPEP Section 713.04). If a reply to the last Office action has already been filed, APPLICANT IS GIVEN A NON-EXTENDABLE PERIOD OF THE LONGER OF ONE MONTH OR THIRTY DAYS FROM THIS INTERVIEW DATE, OR THE MAILING DATE OF THIS INTERVIEW SUMMARY FORM, WHICHEVER IS LATER, TO FILE A STATEMENT OF THE SUBSTANCE OF THE INTERVIEW. See Summary of Record of Interview requirements on reverse side or on attached sheet.								
·								
ļi.	,							
Examiner Note: You must sign this form unless it is an Attachment to a signed Office action.	Exa	aminer's sign	ature, if required					

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 90 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1

2 <u>Exhibit 3</u> – Geneva License Agreement

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 91 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1



Geneva Aerospace, Inc 4240 International Parkway, Suite 100 Carrollton, TX 75007 469-508-2376 Fax 469-568-2101

May 17th, 2006

SAMUELS, GREEN, STEEL & ADAMS, LLP Mr. Scott Albrecht, Esq. 19800 MacArthur Blvd, Suite 1000 IRVINE, CA, 92612

SUBJECT: RPV NON-EXCLUSIVE LICENSE AGREEMENT

Dear Mr. Albrecht,

I am enclosing two (2) originals of a "RPV NON-EXCLUSIVE LICENSE AGREEMENT". Please, have both copies signed and dated. Retain one executed original for your files and return one executed copy to Mr. Alan Barker at the above address.

Best regards,

Corinne Leroux Assistant

RPV NON-EXCLUSIVE LICENSE AGREEMENT

This Agreement is made this 01day of May, 2006 ("Effective Date") by and between Optima Technology Inc. (hereinafter referred to as "Licensor"), a Delaware corporation, Mr. Jed Margolin (hereinafter referred to as "Inventor"), an individual, both having a place of business at 2222 Michelson Drive, Suite 1830, Irvine, California 92612 USA, and Geneva Aerospace®, Inc., a Texas corporation (hereinafter referred to as "Licensee"), having its principal place of business at 4240 International Parkway, Suite 100, Carrollton, TX 75007, individually referred to as "Party" and collectively as the "Parties."

WITNESSED THAT

WHEREAS, as is demonstrated by the document(s) attached hereto as Exhibit A, Licensor has obtained from Inventor the right to provide a license under certain patents as herein identified; and

WHEREAS, Inventor is the named inventor in one or more of said patents; and

WHEREAS, Licensee desires to obtain, and Licensor is willing to grant Licensee, a non-exclusive license as hereafter defined and under the terms and provisions herein specified.

NOW, THEREFORE, in consideration of the promises and mutual agreements herein contained Licensor, Inventor and Licensee agree as follows:

TERMS

1. DEFINITIONS

- 1.1 The term "consist" limits and covers only the elements expressly recited. By contrast, the utilization of the terms "include," "such as," and "for example" are not limited and therefore cover more elements than those recited.
- 1.2 "Affiliate" shall mean any corporation or the like at least fifty percent (50%) of whose voting share capital is owned or directly or indirectly controlled by or under common control with a Party as of the Effective Date of this Agreement or at any time during the term of this Agreement and any other entity over which a Party exercises effective managerial control.
- 1.3 "Days" shall mean calendar days.
- 1.4 "RPV" shall mean "remotely piloted vehicle." A "remotely piloted aircraft" is an RPV. "UAV" shall mean "unmanned aerial vehicle." RPV is an older term for UAV. "UCAV" shall mean "Unmanned Combat Aerial Vehicle." UCAV is also sometimes defined as an "Uninhabited Combat Aerial Vehicle." UCAV is a UAV

that is intended for use in combat. UCAS means "Unmanned Combat Air System."

- 1.5 "Synthetic Vision" is the current term for "Synthetic Environment" and is the three dimensional projected image data presented to the pilot or other observer.
- 1.6 "Patent Portfolio" shall mean the portfolio consisting of United States Patent Numbers 5,904,724 (Method and Apparatus for Remotely Piloting an Aircraft), 5,566,073 (Pilot Aid Using a Synthetic Environment), and those future United States patents that may be added in accordance with the covenants and warranties set forth in Section 8.1.
- 1.7 "Royalty Products" shall mean only the product identified as Licensee Part Number 606-0069-001 missionTEK Synthetic Image Module described as situational awareness aid for a UAV operator using missionTEK. This Part Number excludes the SDS Acuity IG software package hosted on a rack mount computer. This Part Number interfaces to mission TEK through an Ethernet connection and creates a synthetic image of a UAV that is driven by the current vehicle telemetry stream on the product order form attached hereto as Exhibit B. The other products and options identified in Exhibit B are specifically excluded from the definition of "Royalty Products." It is to be understood that Royalty Products shall include systems or components that are manufactured outside the United States, its territories, or possessions and which can reasonably be expected to be used or sold within the United States, its territories, or possessions and/or including and covering all countries on planet Earth and surrounding planets/systems, so long as those systems or components are also identified in Exhibit B as Licensee Part Number 606-0069-001 missionTEK Synthetic Image Module described as situational awareness aid for a UAV operator using missionTEK. This Part Number excludes the SDS Acuity IG software package hosted on a rack mount computer. This Part Number interfaces to mission TEK through an Ethernet connection and creates a synthetic image of a UAV that is driven by the current vehicle telemetry stream.
- 1.8 "Sale or Sold" shall mean selling, leasing, or otherwise transferring ownership, possession, or use to another party, of a Royalty Product (except as scrap), either directly or through a chain of distribution, and shall be deemed to have occurred upon invoicing of a Royalty Product to a third party, or if not invoiced, when ownership, possession, or use is transferred to a third party directly or indirectly.
- 1.9 "Claims" shall mean one or more patent claims identified within the body of a Patent (s).
- 1.10 "Claims in the Patent Portfolio" shall mean Claims identified within the body of a Patent(s) included in the Patent Portfolio (defined in Section 1.6 of this Agreement).

2. LICENSE GRANT

- 2.1 Subject to the terms and provisions of this Agreement, and to Licensee making the payments required under Section 4.1, Licensor and Inventor grants to Licensee a royalty bearing non-exclusive, personal, non-transferable, worldwide right and license under the Claims in the Patent Portfolio to test, make, have made, use, import, export, distribute, offer for sale, sell, lease, and/or otherwise dispose of products in, or for, the United States and its territories and possessions, subject to any applicable export laws and regulations of the United States.
- 2.2 Subject to the terms and provisions of this Agreement, and to Licensee making the payments required under Section 4.1, Licensor and Inventor grants to Licensee the right to extend to its direct and indirect distributors, suppliers, dealers, and customers its right, under the Claims in the Patent Portfolio, to test, make, have made, use, import, export, distribute, offer for sale, sell, lease, and/or otherwise dispose of products in, or for, the United States and its territories and possessions subject to any applicable exports laws and regulations of the United States.
- 2.3 Subject to execution of this agreement by the Parties, Licensor and Inventor release and forever discharge Licensee (and its direct and indirect distributors, suppliers, dealers and customers) from any and all claims, liens, demands, causes of action, obligations, losses, damages, and liabilities, known or unknown, suspected or unsuspected, liquidated or unliquidated, fixed or contingent, that they have had in the past or now have or may have in the future under any of the Claims in the Patent Portfolio based on or arising out of products Sold, prior to and including May 01, 2006 by Licensee in, or for, the United States and its territories and possessions.
- 2.4 Subject to the terms and provisions of this Agreement, and to Licensee making the payment required under Section 4.1 and during the term of the life of this Agreement, Licensor and Inventor further represent, covenant and agree that neither they nor any entity directly or indirectly controlled by either will bring suit or otherwise assert a claim for infringement against Licensee (or its direct and indirect distributors, suppliers, dealers or customers) before any court or administrative agency in any country of the world based on or arising out of products Sold by Licensee in, or for, the United States and its territories and possessions.
- 2.5 The release and covenant not to sue provided in Sections 2.3 and 2.4, as well as any other releases or covenants not to sue set out in this Agreement, shall bind any assignee or other person to whom the Assignor or Inventor may assign ownership or control of Claims in the Patent Portfolio.
- 2.6 Licensor and Inventor grants to Licensee the right to sublicense to an Affiliate of Licensee the rights granted to Licensee under this Agreement; provided that the

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 95 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

Affiliate is bound by the terms and provisions of this Agreement as if it were named in the place of Licensee, and provided that the Affiliate shall pay and account, directly or through Licensee, to the Licensor the royalties payable under this Agreement as a result of the activities of the Affiliate as if it were named in the place of Licensee. Any rights granted to an Affiliate shall terminate automatically and without notice on the date such Affiliate ceases to be an Affiliate; provided, however, that such termination shall not affect the rights granted to the Affiliate for acts occurring prior to the effective date of such termination. Upon written request from Licensor as to whether a particular entity or entities is an Affiliate, Licensee will answer such request in writing within thirty (30) Days from receipt of the request.

- 2.7 The rights, grants, covenants, and terms of Section 2.1, 2.2, 2.4, and 4.1 shall not apply to Royalty Products Sold by Licensee to a third party after Licensee was notified by Licensor that such third party has or had, directly or through others, asserted in any judicial proceeding or judicial document, at any time during the lifetime of this Agreement, that any of the Claims in the Patent Portfolio are invalid and/or not infringed.
- 2.8 The rights, grants, covenants, and terms of Sections 2.1, 2.2, 2.3, 2.4, and 4.1 shall not apply to Royalty Products Sold by Licensee to a third party for sale under a brand not owned or controlled by Licensee unless: (i) such third party has executed with Licensor a License Agreement; and/or (ii) Licensee pays the Royalty, under Sections 4.1 and 4.2, to Licensor for every Royalty Product Sold by such third party in, or for, the United States and its territories and possessions.

3. LIMITS ON SCOPE OF LICENSE GRANT

- 3.1 Any license grant or other authorization that may be provided by Licensor or Inventor to Licensee under this Agreement or to a third party does not provide, directly, by implication, or otherwise, any license grant, or authorization to Licensee to make, have made, use, import, export, distribute, offer for sale, sell, rent, or otherwise dispose of RPV systems for use by R/C hobbyists; and/or to make, have made, test, use, import, export, distribute, offer for sale, sell or lease, or otherwise dispose of equipment used to product or manufacture RPV systems for use by R/C hobbyists.
- 3.2 Any third party which acquires rights under this agreement is bound by the requirements of section 3.1.

4. ROYALTY AND PAYMENTS

4.1 In consideration for the licenses, covenants not to sue, and other rights granted by Licensor and Inventor to Licensee under this Agreement relative to Royalty Products Sold by Licensee in, or for, the United States and its territories and possessions and/or including and covering all countries on planet Earth and

surrounding planets/systems after May, 01, 2006, Licensee agrees to pay Licensor a continuing "Royalty" throughout the term of this Agreement equal to five percent (5%) for each such Royalty Product.

4.2 [DELETED BY PARTIES DURING NEGOTIATION]

- 4.3 Only one Royalty shall be paid on any Royalty Product with respect to the Claims in the Patent Portfolio regardless as to whether the Royalty Product is encompassed by one or more of the Claims in the Patent Portfolio. Licensee shall not be required to make payments under Section 4.1 as to Royalty Products Sold by Licensee where the Royalty due has been paid to Licensor by a third party. Licensee shall not be required to make payments under Section 4.1 as to Royalty Products Sold by Licensee and subsequently found defective and returned to Licensee for full credit, and not thereafter Sold by Licensee in, or for, the United States and its territories and possession and/or including and covering all countries on planet Earth and surrounding planets/systems.
- 4.4 The Parties understand that there should be no taxes imposed by any foreign country on the income of Licensor paid under this Agreement. However, to the extent, if any, that such taxes are imposed for any reason: (i) such taxes shall be borne by Licensor; (ii) Licensee will deduct such tax from the amounts payable to Licensor and pay such tax to the appropriate authority in the name of and on behalf of Licensor; (iii) Licensee shall send to Licensor certificates of tax payment in due course after each payment of the tax; and (iv) Licensee agrees to submit and to file any document to the competent foreign revenue office, that is required to have such certificate issued.
- 4.5 If any other entity is granted a license under any of the Claims in the Patent Portfolio with respect to Royalty Products under any more favorable economic terms than those granted to Licensee under this Agreement, then Licensor shall disclose, in writing, to Licensee the terms and provisions of each such license within thirty (30) Days of its execution, and Licensee shall have the right, within ninety (90) Days of receipt of such disclosure, to substitute all of the terms and provisions in this Agreement with all of the terms and provisions of the subsequent license, retroactive to the date that the subsequent license agreement was executed.

5. REPORTS

5.1 Licensee shall keep sales records of all Royalty Products Sold by Licensee during the term of this Agreement in, or for, the United States and its territories and possessions and/or including and covering all countries on planet Earth and surrounding planets/systems. These sales records shall be of sufficient detail to permit verification in accordance with the accuracy and completeness of the information and the royalties required to be reported and paid under this

Agreement. Licensee shall keep such records for at least five (5) years after each due date for royalty payments under this Agreement.

- 5.2 Licensee shall send Licensor a written "Royalty Report", accompanied in the manner provided for in Section 5.7 by the proper amount then payable to Licensor as shown in such Royalty Report,:
 - on or before the thirtieth (30th) day after termination of this Agreement;
 and
 - (b) on or before the last day of the months of January, April, July and October of each year during the term of this Agreement. However, if less than one thousand Royalty Products are Sold by Licensee in, or for, the United States and its territories and possessions and/or including and covering all countries on planet Earth and surrounding planets/systems during a calendar year, then the four (4) quarterly reports and payments for the next calendar year immediately following may be combined in a single annual Royalty Report and payment made on or before the last day of January immediately following such next calendar year.
- 5.3 The Royalty Report shall be certified in its correctness by Licensee's representative responsible for paying such on Licensee's behalf in the normal course of Licensee's business, and providing information such as:
 - (a) the total number of Royalty Products, by product category, Sold by Licensee in; or for, the United States and its territories and possessions and/or including and covering all countries on planet Earth and surrounding planets/systems during the preceding calendar quarter;
 - (b) the royalty amount due for such calendar quarter; and
 - (c) the total number of Royalty Products, by product category, Sold by Licensee in, or for, the United States and its territories and possessions and/or including and covering all countries on planet Earth and surrounding planets/systems during such calendar quarter for which the Royalty due from Licensee was paid for by a third party and an identification of each such third party.
- 5.4 In the event that any Royalty Report and payment are not made by or on behalf of Licensee by the date provided under this Agreement, interest shall be payable on the past due amounts at the rate of the prime lending rate as published in the Wall Street Journal from time to time plus 2%, compounded semi-annually. This interest shall be calculated from the date payment was due to the payment date. This interest payment shall be in addition to any other remedy provided to Licensor by law or by this Agreement.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 98 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

5.5 Licensor shall maintain Royalty Reports of Licensee as "Confidential Information" in accordance with Article 9 of this Agreement. Confidential Information shall also include any other information provided by Licensee to Licensor and which is designated in good faith as confidential by Licensee.

- 5.6 Licensor shall have the right, during reasonable business hours and at the reasonable convenience of Licensee, to have the correctness of any Royalty Report of Licensee audited, at licensor's expense, by a firm of independent public accountants, selected by Licensor, and reasonably acceptable to Licensee. The independent public accountants shall examine Licensee's records only on matters pertinent to this Agreement. Nor more than one such audit shall be performed per year, unless Licensee has underreported as provided in the following sentence. In the event it is determined by the independent public accountants, at any time, that Licensee has underreported in an amount in excess of five percent (5%) of the royalties properly due with respect to one or more Royalty Reports, then Licensee, in addition to any other remedy provided Licensor by law or by this Agreement, agrees and is bound to:
 - (a) Reimburse Licensor's full cost and expense associated with the audit; and
 - (b) Pay Licensor an amount equal to one hundred and twenty-five (125%) of the amount that Licensee has failed to report or pay, along with interest at the rate of the prime lending rate as published in the Wall Street Journal from time to time plus two percent (2%), compounded semi-annually, calculated from the date each royalty accrued to the date of payment under this Section.

Any payments due under this Section shall be due and payable within thirty (30) Days following notice from Licensor of such failure, breach or default.

5.7 All royalty payments under this Agreement shall be paid in United States currency, without deductions of taxes of any kind other than as provided for in Section 4.4, payable to Licensor c/o SAMUELS, GREEN, STEEL & ADAMS, LLP, Scott Albrecht, Esq.; at 19800 Macarthur Blvd., Suite 1000, Irvine, California 92612-2433, U.S.A. by wire transfer to:

SAMUELS, GREEN, STEEL & ADAMS, LLP Scott Albrecht, Esq.; P.C. Client Trust

[Financial Information Redacted]

or to any other U.S.A. accounts, as instructed jointly and in writing by Licensor and Scott Albrecht, Esq.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 99 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

5.8 In the event applicable exchange control regulations shall prevent remittance of United States currency payment hereunder by Licensee, Licensee agrees, at Licensor's option and in accordance with the requirement to make payments without deductions of taxes of any kind other than as provided for in Section 4.4, to deposit an equivalent amount in a currency as designated by Licensor, in a bank designated by Licensor for the account of Licensor, such equivalent amounts to be calculated using currency tables published in the Wall Street Journal.

6. TERM AND TERMINATION

- 6.1 This Agreement shall continue in full force and effect, unless sooner terminated by specific provisions in this Agreement, until the expiration date of the last remaining of the Claims in the Patent Portfolio, or until a final decree of invalidity from which no appeal or other judicial recourse can be, or is, taken of the last remaining of the Claims in the Patent Portfolio.
- 6.2 Licensee may terminate this Agreement at any time by sixty (60) Days written notice to Licensor.
- 6.3 Licensor may terminate this Agreement forthwith upon written notice to Licensee if:
 - (a) Licensee remains in default in making any payment or supplying a Royalty report or fails to comply with any other provision for a period of thirty (30) Days, in each case after written notice of such default or failure is given by Licensor to Licensee, unless a genuine and good faith dispute exists as to the amount due and any amounts not in dispute are timely paid;
 - (b) Licensee shall make an assignment for the benefit of creditors, or any order for the compulsory liquidation of Licensee shall be made by any court.
 - (c) Licensee shall be finally determined by a court of competent jurisdiction to have (i) willfully or deliberately violated any material provision of this Agreement; (ii) concealed from Licensor any failure to comply with this Agreement including, but not limited to, the deliberate or willful understatement of royalties payable or the express refusal to timely pay royalties; and/or (iii) acted in bad faith in breaching any material provision of this Agreement. In such an event, the termination shall be effective as of the date of notice given by Licensor; and
 - (d) Licensee and/or any of its Affiliates, during the term of the Agreement, directly or through others, assert in any judicial proceeding or judicial document that any of the Claims in the Patent Portfolio are invalid.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 100 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

6.4 Any termination of this Agreement shall not relieve Licensee of its liability for any payments accrued or owing prior to the effective date of such termination, or for any payments on Royalty Products manufactured by Licensee, in whole or in part, and located in the United States and its territories and possessions and/or including and covering all countries on planet Earth and surrounding planets/systems, prior to the effective date of such termination and Sold after the termination date.

ASSIGNMENTS

- 7.1 This Agreement may be assigned by Licensor provided that the assignment does not operate to terminate, impair or in any way change any obligations or rights that Licensor currently has under this Agreement, or any of the obligations or rights that Licensee would have had, if the assignment has not occurred. In the event the assignment is to a competitor of Licensee, Licensor and Inventor will continue to receive Royalty Reports made by Licensee on a confidential basis and will not reveal the contents of the Royalty Reports to the assignee.
- 7.2 This Agreement shall inure to the benefit of, and be binding upon, the successors and assigns of the Parties, but no purported assignment or transfer by Licensee of this Agreement or any part thereof shall have any force or validity whatsoever unless and until approved in writing by Licensor, except an assignment to a direct or indirect wholly-owned subsidiary of Licensee, or to a buyer of all or substantially all of an entire business unit or product line of Licensee to which this license pertains. However, any purported conveyance or any attempt by Licensee to confer or extend the benefits and privileges of this Agreement upon or to any entity shall be void and ineffective if that entity: (I) shall have, directly or indirectly, rejected or declined to accept a license from Licensor upon like, similar or more favorable terms as embodiment herein; and/or (ii) directly or through others, asserted in any judicial proceeding or document that any of the Claims in the Patent Portfolio are invalid.

8. COVENNANTS, REPRESENTATIONS AND WARRANTIES

8.1 Licensor and Inventor warrant and covenant that: (i) if during the term of this Agreement, they own, control or acquire additional Claim(s), this Agreement will be supplemented to include such additional Claim(s) without the payment by Licensee of any royalties other than those required to be paid under this Agreement; (ii) they have the entire right, title and interest in and to the Claims in the Patent Portfolio; (iii) they have the right and authority to enter into this Agreement; (iv) they do not own or control any foreign issued patents or foreign pending patent applications; and (v) there are no liens, conveyances, mortgages, assignments, encumbrances or other agreements to which Licensor or Inventor are a party, or by which they are bound, that would prevent or impair the full exercise

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 101 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

of all substantive rights granted to Licensee by Licensor pursuant to the terms and provisions of this Agreement.

- 8.2 Licensor and inventor make no representation or warranty that Royalty Products will not infringe, directly, contributorily or by inducement under the laws of the United States or any foreign country, any patent or other intellectual property right of a third party.
- 8.3 Any dispute arising under or relating to this Agreement or in any dispute arising with respect or related to the subject matter of the Claims in the Patent Portfolio, which cannot be resolved by negotiation in good faith between the parties hereto, shall be resolved by an action brought in, and the Parties and their Affiliates who have agreed to be bound by this Agreement consent to the jurisdiction and venue of a court in the State of Delaware, U.S.A. Without regard to those laws relating to conflict of laws and the parties to this agreement hereby submit to the jurisdiction of the courts in the State of Delaware, U.S.A. in connection with any disputes arising out of this Agreement.
- 8.4 Licensee hereby submits for itself and its property in any legal action or proceeding relating to this Agreement, or for recognition and any enforcement of any judgment in respect thereof, to the non-exclusive general jurisdiction and forum of the courts of the State of Delaware in the United States of America, the courts of the United States of America for the District of Delaware, and appellate courts from any thereof. Licensee agrees not to raise, and waives, any objections or defenses based upon venue or forum non conveniens, except that Licensor may seek temporary injunctive relief in any venue of its choosing.
- 8.5 Licensee hereby designates the following agent in the United States for any service of any summons, complaint or other process in connection with any litigation arising out of this Agreement and Licensee agrees and certifies that such agent shall have full authority to accept the same on behalf of Licensee:

Name: W. Alan Barker, Geneva Legal Counsel Address: 4240 International Parkway

Suite 100

Carrollton, Texas 75007

Tel.: (469) 568-2376 x112 Fax: (469) 568-2100

Email: abarker@genevaaerospace.com

8.6 Licensee represents and warrants that Licensee assumes responsibility for obtaining all necessary official government approval, validation, and/or consent from the appropriate governmental authorities for the performance of this Agreement and for remittance of payment pursuant hereto and for registering or recording this Agreement as required; provided, however, that Licensee shall use its best efforts to provide that Licensor shall have the right to participate or be

represented in any proceeding, hearing, negotiation or the like with governmental authorities relating to such approval, validation and/or consent.

- 8.7 Licensee and its Affiliates shall, upon request, grant to Licensor, Inventor, and/or their Affiliates a non-exclusive license to and release from any and all claims of infringement of any patents that are necessarily infringed when implementing the Intellectual Property or claiming technologies for which there is no realistic alternative in implementing the Intellectual Property and with respect to which Licensee has or may in the future obtain rights or controls, directly or indirectly, to grant such a license and release. Any such licenses and release shall be granted upon fair, reasonable, and non-discriminatory terms and provisions.
- 8.8 Every Party represents and warrants that in executing this Agreement, other than the promises, warranties and representations expressly made in this Agreement, it does not rely on any promises, inducements, or representations made by any Party or third party with respect to this Agreement or any other business dealings with any Party or third party, now or in the future.
- 8.9 Every Party represents and warrants that it is not presently the subject of a voluntary or involuntary petition in bankruptcy or the equivalent thereof, is not presently contemplating filing any such voluntary petition, and does not presently have reason to believe that such an involuntary petition will be filed against it.
- 8.10 Other than the express warranties of this Article, there are no other warranties, express or implied.

9. CONFIDENTIAL INFORMATION

- 9.1 For a period of five (5) years as measured from the first date of disclosure of Confidential Information pursuant to this Agreement, Licensor and Inventor agree to use reasonable care and discretion, at least commensurate with that degree of reasonable care they use to protect similar information of their own, to avoid disclosure, publication or dissemination of Confidential Information, outside of those employees, attorneys or consultants of Licensor, and independent public accountants selected by Licensor pursuant to Section 5.6, who have a need to know Confidential Information, and are bound by the terms of this Article to keep Confidential Information in confidence.
- 9.2 Disclosure by Licensor or Inventor of Confidential Information under Section 9.1 of this Agreement shall be permitted in the following circumstances; provided, that Licensor and Inventor shall have first given reasonable notice to Licensee that such disclosure is to be made:
 - (a) in response to an order of a court, government or governmental body;
 - (b) otherwise as required by law; or

Serial Number: 11/736,356

Filed: 04/17/2007

Sheet 103 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

- (c) to the independent public accountants selected in accordance with Section 5.6 who agree in writing to maintain Confidential Information in confidence.
- 9.3 Notwithstanding any other provisions of this Agreement, the obligations specified in Section 9.1 of this Agreement will not apply to any Confidential Information that:
 - (a) is or become publicly available without breach of this Agreement;
 - (b) is released for disclosure by written consent of Licensee;
 - (c) can be shown by written documentation to have already been in Licensor's or Inventor's possession at the time of its receipt from Licensee; or
 - (d) is disclosed to Licensor or Inventor by a third party without Licensor's or Inventor's knowledge of any breach of any obligation or confidentiality owed to Licensee.

10. MISCELLANEOUS

10.1 All notices to, demands, consents, and communications that any Party may desire to give to the other, and/or may be required under this Agreement, must be in writing. The notice shall be effective upon receipt in the United States after having been sent by registered or certified mail or sent by facsimile transmission; and shall be effective upon receipt outside the United States after having been delivered prepaid to a reputable international delivery service or courier or sent by facsimile transmission; and addressed to the address designated below:

For notice to Licensor:

SAMUELS, GREEN, STEEL & ADAMS, LLP, Mr. Mark Adams, Esq. 19800 MacArthur Blvd., Suite 1000 Irvine, CA 92612

For notice to Licensee:

W. Alan Barker, Geneva Legal Counsel4240 International ParkwaySuite 100Carrollton, Texas 75007

Tel: (469) 568-2376 x112 Fax: (469) 568-2100

Email: abarker@genevaaerospace.com

Or to such address that the Party to whom notices are to be sent may from time to time designate in writing.

- 10.2 No failure or delay to act upon any default or to exercise any right, power or remedy under this Agreement will operate as a waiver of any such default, right, power or remedy.
- 10.3 This Agreement constitutes the entire understanding of the Parties with respect to its subject matter and supersedes all prior oral or written negotiations, agreements and understandings. This Agreement may not be modified or amended except in writing duly signed by authorized persons on behalf of the Parties.
- 10.4 The validity, construction, interpretation and performance of this Agreement, and any disputes or legal actions arising under or from this Agreement, shall be governed by the laws and regulations of the United States of America as to patent law, and the State of Delaware as applied to contracts.
- 10.5 Each of the terms and provisions of this Agreement is material. Without such terms and provisions the Parties would not have entered into this Agreement. If any term or provision of this Agreement is, becomes, or is deemed invalid, illegal or unenforceable under the applicable laws or regulations in the United States or any of its jurisdictions including, for example, the State of Delaware, such term or provision may be amended, by mutual agreement between Licensor and Licensee, to the extent necessary to conform to applicable laws or regulations without materially altering the intention of the parties or, if it cannot be so amended by good-faith negotiations and agreement between Licensor and Licensee then this Agreement shall be terminated sixty (60) days following such term or provision becoming or being deemed invalid, illegal or unenforceable.
- 10.6 This Agreement does not constitute either Party the agent of the other Party for any purpose whatsoever, nor does either Party have the right or authority to assume, create or incur any liability of any kind, express or implied, against or in the name or on behalf of the other Party.
- 10.7 The English language form of this Agreement shall control and determine its interpretation.

Serial Number: 11/736,356

Examiner: Ronnie M. Mancho

Filed: 04/17/2007 Art Unit: 3664

07 5

Sheet 105 of 241

IN WITNESS WHEREOF, the parties hereto have caused this RPV License Agreement to be executed by their respective duly authorized officers as of the Effective Date.

OPTIMA TECHNOLOGY INC.

Date: May 01, 2006

Robert Wdams

As CEO, Optima Technology Inc.

Date: May 25, 2006.

By: Ild Margolin

Inventor

GENEVA AEROSPACE®, INC

Date: // , 2006.

David Helio
As CEO/President

Geneva Aerospace, Inc.

This Agreement shall not be effective unless an original or a fax copy of this signature page fully executing this Agreement is received by Licensor within twenty-one (21) Days of the Effective Date.

Jed Margolin

Serial Number: 11/736,356

Filed: 04/17/2007

Sheet 106 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

Exhibit A

Optima Technology
Proprietary & Confidential
Information

[Redacted]

Serial Number: 11/736,356 Filed: 04/17/2007 Examiner: Ronnie M. Mancho Art Unit: 3664 Jed Margolin Sheet 107 of 241



Commercial Price List

EVLIHIT B

Fight Exercises Fight Exercises Fight Exercises with mismal GPS and face with YACS exhause. No catching or GPS and services Fight Exercises with mismal GPS and face with YACS exhause. No catching or GPS and services Fight Exercises Fight E		sides of CIAY contro	Exhibit B		
15 15 15 15 15 15 15 15			Colombia de la Colombia del Colombia de la Colombia del Colombia de la Colombia del Colombia de la Colombia del Colombia de la Colombia de la Colombia de la Colombia de la Colombia de la Colombia de la Colombia de la Colombia de la Colombia de la Colombia de la Colombia de la Colombia de la Colombia del Colombia de la Colombia del Colombia de la Colombia de la Colombia del Colomb		ist Price
Surrie as above with the addition of a web interface that permits the customer to modify the addition of a web interface that permits the customer to modify the addition of a web interface that permits the customer to modify the addition of a web interface that permits the customer to modify the addition of a web interface that permits the customer to modify the addition of a web interface that permits the customer to modify the addition of a web interface that permits the customer to modify the addition of a web interface that permits the customer to modify the addition of a web interface that permits the customer to modify the addition of a web interface that permits the customer to modify the addition of a web interface that permits the customer to modify the addition of the addition of the addition of the addition of the addition of the addition of the addition of the addition of the addition of the addition of the addition of the addition of the addition addition of the addition of the addition addition of the addition of the addition addition of the addition of th			flightTEK computer with internal GPS and fixed wing VACS software. No cabling or GPS antenna.	\$	11,900.0
ablefold given. Septimizer A systip Extended Use Same as ablow with the address of that permits the customer to modely the stateptic given.	606-0023-001	flightTEK for Airship No Navigator	flightTEK computer with internal GPS and airship VACS software. No cabling or GPS antenna.	S	20,500.0
Same as stoorward for all whether countries for control for the country of specific X sharper Cable Set sharper Sender of the Cable Set Starres Cable Set Starres Sender with the countries of the Cable Set Starres Sender	606-0022-002	flightTEK Extended Use		ş	11,900.0
Secretary Control SeguiTTRS Plantana Coale Set Secretary Coales and not including the PRP Fig. Page to Seaso the Dakobs configuration. SeguiTTRS PLL Labor Set Seguitary Plantana Set Seguitary Plantana Set Seguitary Plantana Set Seguitary Plantana Set Seguitary Plantana Set Seguitary Plantana Set Seguitary Plantana Set Seguitary Plantana Set Seguitary Plantana Set Seguitary Plantana Set Seguitary Plantana Set Seguitary Plantana Set Seguitary Plantana Set Seguitary Plantana Set Seguitary Plantana Set Seguitary Seguitary Plantana Set Seguitary Seguitary Plantana Seguitary Plantan	606-0023-002	flightTEK Airship Extended Use	Same as above with the addition of a web interface that permits the customer to modify the	S	20,500.0
Contract of Cont	606-0024-001	flightTEK Standard Cable Set		s	2,900.0
Comes with a single cable set to act in it, chacks and infegration. Fig.NTEK Crusion Cable Set Single cables set to act in it, chacks and infegration. Fig.NTEK Crusion Cable Set Single cables set to act in it. Fig.NTEK Crusion Cable Set Single cables set to general cable set to separate set to separate set. Fig.NTEK Crusion Cable Set Single cables set to set to separate set to separate set. Fig.NTEK Crusion Cable Set to set to separate set to separate set to separate set. Fig.NTEK Crusion Cable Set to set to separate set to separa				5	1,200.0
Sec. Control Sec. Sec. Sec. Sec. Sec. Sec. Sec. Sec.			Comes with a single cable set to aid in fit checks and integration.		3,100.0
### Seption of the Comment of the Co	design				490.0
193-00-11-00. Navigato Sellwere 11-5 stale kalman filter that provides the full multiplation sales 1 10-60-008-00. Stu 600F SDK	132- N. N. WINNER				**************************************
mode of the arrand and set the fight TEX pain settings against the arrande model. Includes a price-completing for section and 750 Sand value of 1-10 complete environment and provided the provided of the arrand and set the fight TEX. Allows the user to create a rodde of the arrand and set the fight TEX, allows the user to create a rodde of the arrand and set the fight TEX, allows the user to create a rodde of the arrand and set the fight TEX, allows the user to create a rodde of the arrand and set the fight TEX, allows the user to create a rodde of the arrand and set the fight TEX, allows the user to create a rodde of the arrand and set the fight TEX, allows the user to create a rodde of the arrand and set the fight TEX, allows the user to create a rodde of the arrand and set the fight TEX, allows the user to create a rodde of the arrand and set the fight TEX, allows the user to create a rodde of the arrand and set the set of the arrand and set the set of the arrand and set the set of the arrand and set of the arrand an	820-0011-001	Navigator Software	15 state Kalman filter that provides the full navigation state.		1,000.0
model of the arcraft and lest he flightTEK (pair sellings against the airframe model in a real-time PJUHL environment, includes a pre-completed timory rous on a lance aprelated 80 pp. 60-502-501. System Domer CMIGTSI III NS hydroxy (28) pp. 60-502-501. OSS-002-501. CMIGTS Mount (28) pp. 60-502-501. Sinandar Davids mount with interface cative and whose vinited active the vinited or selling and state of the complete of the co	506-0058-001	SIL 6DOF SDK	model of the aircraft and test the flightTEK gain settings against the airframe model. Includes a	\$	15,000.0
Bede-Code-Ord System Domer CMIGITS III III III Bild		•	model of the aircraft and test the flightTEK gain settings against the airframe model in a real-time PILHIL environment. Includes a pre-compiled library for use on a Linux OS and a preloaded Book PC.	\$	5,000.00
Section				utivi	30,850.00
System Demen MMQ IMU Assembly Includes the MMQ hardware, LVSS board converter, TSD in, cable between MMQ and LVQS \$ 7.2					2,000.00
System Demen MMQ IMU Assembly Includes the MMQ hardware, LVSS board converter, TSD in, cable between MMQ and LVQS \$ 7.2	606-0030-001	CMIGITS Mount (28v)	Standard Dakota mount with interface cable without power converter (28v)	\$	1,500.0
Includes Microstrain MAU			Includes the MMQ hardware, LVDS board converter, TBD in, cable between MMQ and LVDS board, and the software interface driver		7,200.00
Interface Panel				_	4,900.0
808-0039-001 ADS Sensor - Surra					7,000.0
ADS sensor ADS					550.00
Bobb Link For Air Vehicles Build St. Build Build St. Build Build St. Build Build St. Build S					550.00
Framentic date Mark TEK DV Framentic date Mark TEK DV Framentic date Mark TEK DV Framentic date Mark TEK DV Framentic date Mark TEK DV Framentic date Mark TEK DV Framentic date Mark TEK DV Framentic date Mark TEK DV Framentic date Mark TEK DV Framentic date Mark TEK DV Framentic date Mark TEK DV Mark DV Mar					
Section 27-001 IninTEK D Same as InkTEK D V Dut does not include video. \$ 9.25	606-0036-001	linkTEK DV	transmitted as digital data compressed using JPEG2000 compression. 4 ethernet ports on an internal switch are provided. If flightTEK is used, one ethernet port will be used. 1 watt internal	5	9,950.00
September Sept				\$	8,600.00
SATCOM - 1 SATCOM - 1 SATCOM - 1 SATCOM - 1 SATCOM - 2 Satcom modern enclosure with a single GlobalStar modern, TBD in. of RF cable, 24 in. serial interface cable, and a single GlobalStar enclosure. Satcom modern enclosure with two GlobalStar moderns, TBD in. of RF cables, 24 in. serial interface cable, and two GlobalStar enclosure. SATCOM - 2 Satcom modern enclosure with two GlobalStar moderns, TBD in. of RF cables, 24 in. serial interface cable, and two GlobalStar antennas. SOB-0041-001 InixTEK Developer Kit Power cable, power supply, and RJ45 cable, and 3" rubber duck antenna 5.5.2 SOB-00402-001 Serial Datalink 205-400 MHz Radio hardware with TBD in. RF cable and vehicle antenna 5.5.2 SOB-00402-001 Serial Datalink 900 MHz Radio hardware with TBD in. RF cable and vehicle antenna 5.5.2 SOB-00402-001 Serial Datalink 900 MHz Radio hardware with TBD in. RF cable and vehicle antenna 5.5.2 SOB-00402-001 Serial Datalink 900 MHz Radio hardware with TBD in. RF cable and vehicle antenna 5.5.2 SOB-00402-001 Serial Datalink 900 MHz Radio hardware with TBD in. RF cable and vehicle antenna 5.5.2 SOB-00402-001 Serial Datalink 900 MHz Radio hardware with TBD in. RF cable and vehicle antenna 6.5.1 SOB-00402-001 missionTEK Sortware 7 InixTEK Developer Kit Runs on Windows 2000, NT, or XP. Capable of commanding all available flight modes. 5.9. SOB-00402-001 missionTEK Sortware 7 InixTEK Developer Kit Runs on Windows 2000, NT, or XP. Capable of commanding all available flight modes. 5.9. SOB-00402-001 missionTEK Sortware 7 InixTEK Developer Kit Runs on Windows 2000, NT, or XP. Capable of commanding all available flight modes. 5.9. SOB-00402-001 missionTEK Sortware 7 InixTEK Developer Kit Runs on Windows 2000, NT, or XP. Capable of commanding all available flight modes. 5.9. SOB-00402-001 missionTEK Sortware 8 Runs on Windows 2000, NT, or XP. Capable of commanding all available flight modes. 5.9. SOB-00404001 Sobre Commanding Mission Runs on Windows 2000, NT, or XP. Capable of commanding all available flight modes. 5.9. SOB-004					9,200.00
Interface cable, and a single GlobalStra randems, TBD in, of RF cables, 24 in, sarial \$ 7.2					8,000.0
inlerface çable, and Iwo GlobalStar antennas. 5. 9. 506-0039-001 Serial Datalink 225-400 MHz Radio hardware with TBD in. RF cable and 3" rubber duck antenna. 5. 9. 506-0039-001 Serial Datalink 225-400 MHz Radio hardware with TBD in. RF cable and vehicle antenna 5. 5.2 506-0040-001 Serial Datalink Developer Kit Power cable, power supply, and RJAS and vehicle antenna 5. 9. 5. 9. 5. 9. 5. 9. 1. 1. 2. 2. 2. 2. 2. 2. 2. 2. 2. 2. 2. 2. 2.			interface cable, and a single GlobalStar antenna.		4,400.0
Serial Datalink 225-400 MHz Radio hardware with TBD in, RF cable and vehicle antenna \$ 5.52			interface cable, and two GlobalStar antennas.		7,200.0
Radio hardware with TBD in. RF cable and vehicle antenna S 1.7					950.0
Control Stations Control Sta					1,750.00
Runs on Windows 2000, NT, or XP. Capable of commanding all available flight modes. \$ 15,0 820-0012-001 missionTEK Software Includes a Panasonic Toughbook, mouse, and joystick. \$ 4,5 606-0019-001 missionTEK Synthetic image Module This product is an Interface module that enables mission TEK support unmanned vehicle operator situational awareness aids. The product provides an interface to the AAcuty® PC-IG System sold by SDS International. The product requires missionTEK to be connected to the PC-IG system through an Ethernel connection and provides the PC-IG system periodic vehicle data that is used to generate a synthetic image of the vehicle relative to a 3-D terrain environment. \$ 9,7 606-0037-003 tinkTEK D-GCS Same as linkTEK D for the air vehicle and includes power supply, power cable, interface cables, and 3" quarter wave rubber duck antenna. \$ 9,7 606-0037-004 tinkTEK D No Amp - GCS Same as linkTEK D - GCS except no 802.11b power amp. \$ 9,0 606-0038-003 \$ ATCOM - 1 - GCS \$ Same as linkTEK D - GCS except no 802.11b power amp. \$ 9,0 606-0038-004 \$ SATCOM - 2 - GCS \$ Same as SATCOM - 1 except an additional GlobalStar modem, RF cable, and antenna is included. \$ 8,6 606-0039-004 \$ SATCOM - 2 - GCS \$ Same as SATCOM - 1 except an additional GlobalStar modem, RF cable, and antenna is included. \$ 1,2 606-0039-002 \$ Serial Datalink 900 MHz - GCS \$ 255-400 MHz radio hardware in ruggedized enclosure with ground power cord \$ 4,6 606-0043-002 \$ Serial Datalink 1nterface Cable Inerface cable required when using linkTEK to support multi-vehicle control \$ 1,9 606-0043-002 \$ Serial Datalink Comm Kit \$ 900 MHz radio hardware in ruggedized enclosure with ground power cord \$ 4,6 606-0043-002 \$ Serial Datalink Comm Kit \$ 900 MHz radio hardware in ruggedized enclosure with ground power cord \$ 4,6 606-0043-002 \$ Serial Datalink Comm Kit \$ 900 MHz radio hardware in ruggedized enclosure with ground power cord \$ 4,6 606-0043-002 \$ Serial Datalink Comm Kit \$ 900 MHz radio hardware in ruggedized enclo					950.00
E08-0010-001 missionTEK Computer Includes a Panasonic Toughbook, mouse, and joystick. S 4,5	Fire Car	ontrol Stations			
### Sproduct is an Interface module that enables mission TEK support Lumranned vehicle operator situational awareness aids. The product provides an interface to the AAcuty® PC-IG System sold by SDS International. The product provides an interface to the AAcuty® PC-IG System of through an Ethernel connection and provides the PC-IG system periodic vehicle data that is used to generate a synthetic image of the vehicle relative to a 3-D terrain environment. #### Same as Interface as a synthetic image of the vehicle relative to a 3-D terrain environment. #### Same as Interface as a synthetic image of the vehicle relative to a 3-D terrain environment. #### Same as Interface as a synthetic image of the vehicle relative to a 3-D terrain environment. #### Same as Interface as a synthetic mage of the vehicle and includes power supply, power cable, interface cables, and 3 "quarter wave rubber duck antenna. #### Same as Interface as a synthetic mage of the vehicle and includes power supply, power cable, interface cable, and 3 "quarter wave rubber duck antenna. #### Same as Interface as a synthetic mage of the vehicle and includes power supply, power cable, interface cable, and a single Global Star modern, TBD in. of RF cable, 24 in. serial interface cable, and a single Global Star modern, RF cable, and antenna is 5.8.6 included. ##### Same as SATCOM - 1 except an additional Global Star modern, RF cable, and antenna is 5.8.6 included. ##### Same as SATCOM - 1 except an additional Global Star modern, RF cable, and antenna is 5.8.6 included. ##### Same as SATCOM - 1 except an additional Global Star modern, RF cable, and antenna is 5.8.6 included. ##### Same as SATCOM - 1 except an additional Global Star modern, RF cable, and antenna is 5.8.6 included. ###### Same as SATCOM - 1 except an additional Global Star modern, RF cable, and antenna is 5.8.6 included. ###### Same as SATCOM - 1 except an additional Global Star modern, RF cable, and antenna is 6.8 included. ###### Same as SATCOM - 1 except an additional Globa					15,000.0
situational awareness aids. The product provides an interface to the AAculty® PC-IG System sold by SDS International. The product requires missionTEK to be connected to the PC-IG system through an Ethernet connection and provides the PC-IG system periodic vehicle data that is used to generate a synthetic image of the vehicle relative to a 3-D terrain environment. 506-0037-003 linkTEK D - GCS Same as InkTEK D for the air vehicle and includes power supply, power cable, interface cables, and 3" quarter wave rubber duck antenna. 5 9,7 5 9,0 606-0037-004 linkTEK D No Amp - GCS Same as InkTEK D - GCS except no 802.11b power amp. 5 9,0 606-0038-004 SATCOM - 1 - GCS Satcom modern enclosure with a single GlobalStar modern, TBD in. of RF cable, 24 in. serial interface cable, and a single GlobalStar anderna. 5 8,6 606-0038-004 SATCOM - 2 - GCS Same as SATCOM - 1 except an additional GlobalStar modern, RF cable, and antenna is included. 606-0038-004 SATCOM - 2 - GCS Satcom MITER Comm Kil Soc. 11b antenna, RF cables, antenna masts, and a single GlobalStar modern, RF cable, and antenna is included. 606-0039-002 Serial Datalink 225-400 MHz - GCS Soc. 11b antenna, RF cables, antenna masts, with pround power cord Soc. 205 MITER Comm Kil Soc. 11b antenna, RF cables, antenna masts, mast pround power cord Soc. 205 MITER Common Miter acid hardware in ruggedized enclosure with ground power cord Soc. 205 MITER Common Miter C					4,500.0
and 3" quarter wave rubber duck antenna. Same as InkTEK D No Amp - GCS Same as InkTEK D - GCS except no 802.11b power amp. \$ 9.0	,	inission E.A. Symbolic image whouse	situational awareness aids. The product provides an interface to the AAcuity® PC-IG System sold by SDS International. The product requires missionTEK to be connected to the PC-IG system through an Ethernet connection and provides the PC-IG system periodic vehicle data that is used to generate a synthetic image of the vehicle relative to a 3-D terrain environment.	ð	2,000.0
Satcom modem enclosure with a single GlobalStar modem, TBD in. of RF cable, 24 in. serial interface cable, and a single GlobalStar anchem. SATCOM - 1 - GCS Same as SATCOM - 1 except an additional GlobalStar modem, RF cable, and antenna is included. Serial Datalink 25-400 MHz - GCS Same as SATCOM - 1 except an additional GlobalStar modem, RF cable, and antenna is included. SC - 110 antenna, RF cables, and lenna masts. Serial Datalink 25-400 MHz - GCS Serial Datalink 900 MHz - GCS Some as SATCOM - 1 except an additional GlobalStar modem, RF cable, and antenna is included. SC - 110 antenna, RF cables, antenna masts. Serial Datalink 25-400 MHz - GCS Some MHz radio hardware in ruggedized enclosure with ground power cord SC - 20-2004-002 Serial Datalink 900 MHz - GCS Some MHz radio hardware in ruggedized enclosure with ground power cord SC - 20-2004-002 Serial Datalink Comm Kit Some MHz radio hardware in ruggedized enclosure with ground power cord SC - 20-2004-002 Serial Datalink Comm Kit Som MHz radio hardware in ruggedized enclosure with ground power cord SC - 20-2004-002 Serial Datalink Comm Kit Som MHz radio hardware in ruggedized enclosure with ground power cord SC - 20-2004-003 Serial Datalink Comm Kit Som MHz radio hardware in ruggedized enclosure with ground power cord SC - 20-2004-001 Serial Datalink 900 MHz - GCS Som MHz radio hardware in ruggedized enclosure with ground power cord SC - 20-2004-001 Serial Datalink 900 MHz - GCS Som MHz radio hardware in ruggedized enclosure with ground power cord SC - 20-2004-001 Serial Datalink 900 MHz - GCS Serial Datalink 900 MHz - GCS Som MHz radio hardware in ruggedized enclosure with ground power cord SC - 20-2004-001 Serial Datalink 900 MHz - GCS Serial Datalink 900 MHz - GCS Som MHz radio hardware in ruggedized enclosure with ground power cord SC - 20-2004-001 Serial Datalink 900 MHz - GCS Serial Datalink 900 MHz - GCS Serial Datalink 900 MHz - GCS Serial Datalink 900 MHz - GCS Serial Datalink 900 MHz - GCS Serial Datal			and 3" quarter wave rubber duck antenna.	,	9,700.00
interface cable, and a single GlobalStar antenna. Same as SATCOM - 2 - GCS Same as SATCOM - 1 except an additional GlobalStar modern, RF cable, and antenna is included. 606-0043-001 linkTEK Comm Kil 802.11b antenna, RF cables, antenna masts, 606-0040-002 Senal Datalink 225-400 MHz - GCS 900 MHz radio hardware in ruggedized enclosure with ground power cord \$ 2,0. \$ 1,2 \$ 4,6 \$ 606-0040-002 Senal Datalink 900 MHz - GCS 900 MHz radio hardware in ruggedized enclosure with ground power cord \$ 2,0. \$ 1,0 \$ 1				_	9,000.00
included. Included			Interface cable, and a single GlobalStar antenna.		5,200.0 8,600.0
606-0039-002 Senai Datalink 225-400 MHz - GCS 225-400 MHz radio hardware in ruggedized enclosure with ground power cord \$ 4,6 606-0040-002 Senai Datalink 225-400 MHz - GCS 900 MHz radio hardware in ruggedized enclosure with ground power cord \$ 2,0 501-xxxx-xxx linkTex / Senai Datalink linkTex for support multi-vehicle control \$ 2,0 1 for face cable required when using linkTex for support multi-vehicle control \$ 5 1,0 1 606-0043-002 Senai Datalink Comm Kit 900 MHz Ormil antenna, 3d8 Ormidirectional UHF antenna, 3d° RF cable, antenna masts, mast 9 9 mounting kit, mast stand 606-0051-001 Ground Control Station - Packaged Option GCS Box with power supply and integrated with purchased Control Station Components \$ 1,9 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1			included.		1,250.0
606-0040-002 Senal Datalink 900 MHz - GCS 900 MHz radio hardware in ruggedized enclosure with ground power cord \$ 2.0 fineface cable inferace cable required when using linkTEK to support multi-vehicle control \$ 1 606-0043-002 Serial Datalink Interface Cable 900 MHz Omni antenna, 3d8 Omnidirectional UHF antenna, 30° RF cable, antenna masts, mast mounting kit, mast stand 900 MHz Omni antenna, 3d8 Omnidirectional UHF antenna, 3d° RF cable, antenna masts, mast mounting kit, mast stand 900 MHz Omni antenna, 3d° RF cable, antenna masts, mast mounting kit, mast stand 900 MHz Omni antenna, 3d° RF cable, antenna masts, mast mounting kit, mast stand 900 MHz Omni antenna, 3d° RF cable, antenna masts, mast mounting kit, mast stand 900 MHz Omni antenna, 3d° RF cable, antenna 900 MHz Omni					4,600.0
501-xxxx-xxx					2,000.0
506-0043-002 Serial Datalink Comm Kii 900 MHz Omni antenna, 3dB Omnidirectional UHF antenna, 30' RF cable, antenna masts, mast mounting kit, mast stand GCS Box with power supply and integrated with purchased Control Station Components \$ 1,9 Flight Termination: 606-0044-001 safeTEK Air Receiver, backup battery pack, TBD in, RF cable, and antenna \$ 4,5 602-0042-001 safeTEK Ground Rack mount with ability to independently command 3 safeTEK air units. Comes with power cord. \$ 8,7				-	130.0
606-0044-001 safeTEK Air Receiver, backup battery pack, TBD in, RF cable, and antenna \$ 4,5 conduction of the conduction			900 MHz Omni antenna, 3dB Omnidirectional UHF antenna, 30' RF cable, antenna masts, mast	_	950.0
606-0044-001 safeTEK Air Receiver, backup battery pack, TBD in. RF cable, and antenna \$ 4,5 cores with power cord. \$ 8,7 cores with power cord. \$ 8,7 cores with power cord. \$ 8,7 cores with power cord. \$ 1,7 cores with power cord.		Ground Control Station - Packaged Option	GCS Box with power supply and integrated with purchased. Control Station Components	\$	1,900.0
602-0042-001 safeTEK Ground Rack mount with ability to Independently command 3 safeTEK air units. Comes with power cord. \$ 8,7					
					4,500.0 8,750.0
606-0043-003 safeTEK Ground Comm Kit LAntenna, RE cable, mast	506-0043-003	safeTEK Ground Comm Kit	Antenna, RF cable, mast	s	1,950.0

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 108 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

2 Exhibit 4 - Public Records from Palm Beach County, Florida

1

1

 \odot PLETURN TO:

NOVA TITLE COMPANY 1401 UNIVERSITY DR. SUITE 402 CORAL SPRINGS, FL 33071-8909 (954) 755-9889

CFN 20060462327 OR BK 20706 PG 0325 RECORDED 08/08/2006 15:46:06 Palm Beach County, Florida AMT 1,012,602.00 Doc Stamp 7,088.90 Sharon R. Bock, CLERK & COMPTROLLER Pgs 0325 - 326; (2pgs)

SPECIAL WARRANTY DEED

THIS INDENTURE is made this Odd and of August, 2006, between BOYNTON BEACH ASSOCIATES XVI, LLLE For Florida limited liability limited partnership ("Seller") whose post office address is 1600 Sawgrass Corporate Parkway, Suite 300, Sunrise, Florida 33323, and Jan Bruner Jeanglaude and Gertrude Arthur—Jeanglaude, husband and wife ("Buyer"), whose Social Security Numbers are (and respectively, and whose post office address is 8671 Thombrook Terrace Point, Boynton Beach, Florida 33437.

WITNESSETH, that Seller, for and in consideration of the sum of TEN AND NO/100 DOLLARS (\$10.00) and other good and valuable consideration to Seller in hand paid by Buyer, the receipt and sufficiency of which are hereby acknowledged, has granted, bargained and sold, and hereby grants, bargains and sells to Buyer, and Buyer's heirs, successors and assigns forever, the following described land, with a Property Appraiser's Identification Number of 00 42 45 32 03 000 1170.

Lot 117 , CANYON SEES PLAT ONE, according to the plat thereof, as recorded in Plat Book 105 at Page 1, of the Public Records of Palm Beach County, Florida.

THIS CONVEYANCE AND TITLE TO SAID PROPERTY is subject to: (a) taxes and assessments for the present year and subsequent years, including, but not implications, easements and other matters of record or imposed by governmental authorities having jurisdiction or control over the subject property, but this reference shall not operate to reimpose any of same; (c) all laws, ordinances, regulations, restrictions, prohibitions and other requirements imposed by governmental authorities, including, but not limited to, all applicable zoning, building, buildhead, land use and environmental ordinances, rules and regulations, and rights or interests vested in the United States of America and/or the State of Florida; (d) those certain covenants, restrictions, agrieuments and lien rights set forth in Exhibit "A" attached hereto and by this reference made a part hereof; (e) the Declaration of Covenants, Restrictions and Easements for Canyon Isles and as a control of the Canyon Isles and reputations. In the Canyon Isles are recorded in Plat Book 105, at Page 1 of the Public Records of Palm Beach County, Florida, (g) the plat of Canyon Isles — Plat Two, as recorded in Plat Book 105, at Page 1 of the Public Records of Palm Beach County, Florida; (g) the plat of Canyon Isles — Plat Two, as recorded in Plat Book 105, at Page 40 of the Public Records of Palm Beach County, Florida; (g) the plat of Canyon Isles — Plat Three, as recorded in Plat Book 106, at Page 61 of the Public Records of Palm Beach County, Florida.

SELLER does hereby specially warrant the title to said land, subject to the foregoing matters, and will defend same against the lawful claims of all persons claiming by, through or under Seller and no others.

IN WITNESS WHEREOF, Seller has hereunto set Seller's hand and seal the day and year first above written.

WITNESSES

BOYNTON BEACH ASSOCIATES XVI, LLLP, a Florida limited liability limited partnership

Boynton Beach XVI Corporation, a Florida corporation, its general partner

N. Maria Menendez, Vise President

are neverda

(Clony) A (2)

STATE OF FLORIDA

Print Name of Witness: Evelyo Duenas

The foregoing instrument was acknowledged before me this 0.3 day of August, 2006, by N. Maria Menendez, as Vice President of Boynton Beach XVI Corporation, a Florida corporation, the general partner of Boynton Beach Associates XVI, LLLP, a Florida limited liability limited partnership, on behalf of said corporation and limited liability limited partnership. She is personally known to me

y Public

My Commission Expires:

COUNTY OF BROWARD

This instrument prepared by: HENRY W. JOHNSON, ESQ. HUME & JOHNSON, P.A. 1401 University Drive, #301 Coral Springs, Florida 33071 (954) 755-9880

EVELYN DUENAS Notary Public - State of Florida My Commission Expires Aug 8, 2009 Commission # DD459453 Bonded By National Notary Assn

Book20706/Page325

Page 1 of 2

EXHIBIT "A" COVENANTS, RESTRICTIONS, AGREEMENTS AND LIEN RIGHTS

The title to the property described in the Special Warranty Deed to which this <u>Exhibit "A"</u> is attached (the "Deed") shall be subject to and burdened by the covenants, restrictions, agreements and lien rights set forth below:

1. <u>Capitalized Terms and Definitions</u>. All initial capitalized terms used in this <u>Exhibit "A"</u> but not defined herein shall have the meanings given to such terms as set forth in the Deed. The following terms as used in this <u>Exhibit "A"</u> shall have the meanings given to such terms as set forth below.

"Gain" statistical and refer to the amount, if any, by which: (i) the gross selling price of the Property (less and except: (y) the actual, documented costs of any physical improvements made by Buyer after the date of the Deed to the exterior of the home on the Property such as pools, patios, screen enclosures and extensions, and (z) the actual commented closing costs required to be paid by Buyer in connection with the sale of the Property such as documentary stamp taxes, recording fees and/or brokerage commissions), exceeds (ii) the "Total Purchase Price" paid to Seller by Buyer pursuant to and as defined in the Purchase Contract executed by Seller and Buyer.

"Hardship Event" shall mean and refer to a sale, transfer, lease or sublet of the Property, as appropriate, following a divorce of the Buyers (if married to each other), death or serious disability of one or more of the Buyers, job transfer of one or more of the Buyers to a location greater than fifty (50) miles from the Property, or other reason acceptable of Seller in Seller's sole and absolute discretion, as evidenced by a written waiver of this provision given by Seller.

"Property" shall mean and refer to the property described in the Deed together with the improvements thereon.

"Transfer Advertisement or Agreement" shall mean and refer to any or all of the following: (i) any listing or advertisement for the sale or least of the Property or any portion thereof made with a broker, in any multiple listing service, in any classified or other advertisement, or otherwise (including, without limitation, "by owner"), (ii) any agreement (verbal or written) for transfer of title to the Property to any third party, and/or (iii) any agreement (verbal or written) for the leasing and/or subletting of the Property or any portion thereof, notwithstanding anything to the contrary in the Declaration.

- 2. <u>Sales/Transfers of the Property</u> (The event that Buyer sells or transfers title to the Property (directly or indirectly): (a) at any time within one (1) year following the date of the Deed, and/or (b) at any time thereafter if such sale or transfer results from a Transfer Advertisement or Agreement made or entered into within one (1) year following the date of the Deed, then except only in the event of a Hardship Event released by Seller as provided in Paragraph 4 below, Buyer shall pay to Seller from the proceeds of such sale or transfer, an amount equal to one-hundred percent (100%) of the Gain realized from such sale or transfer.
- 3. No Leasing of the Property. Notwithstanding anything to the contrary in the Declaration, for a period of one (1) year following the date of the Deed, except only in the event of a Hardship Event released by Seller as provided in paragraph 4 below, Buyer shall not lease and/or sublet the Property or any portion thereof. Any such lease and/or sublet shall be void and unenforceable. All other leases or sublets, including those resulting from such a Hardship Event, shall be subject to the terms and conditions of the Declaration.
- 4. <u>Lien Rights: Releases.</u> There is and shall be a lien against the Property to secure Buyer's obligations set forth in this <u>Exhibit "A"</u>, which lien may be foreclosed on by Seller if Buyer breaches any of its obligations hereunder. In the event of a proposed sale, transfer, lease or sublet of the Property due to a Hardship Event, Buyer must first provide to Seller evidence of such Hardship Event acceptable to Seller in Seller's sole and absolute discretion, and if acceptable to Seller, Seller shall deliver to Buyer a written acknowledgment of the Hardship Event and waiver of Seller's rights hereunder with respect only to such sale, transfer, lease or sublet. In addition, upon written request from Buyer to Seller and payment of the Gain due to Seller in connection with any sale or transfer of the Property as provided in this <u>Exhibit "A"</u>, then Seller shall provide to Buyer a written acknowledgment of such payment and release of Seller's lien rights with respect only to such sale or transfer provided that Buyer provides Seller with evidence satisfactory to Seller in Seller's sole and absolute discretion of the amount of the Gain due, including, without limitation closing or other settlement statements. Any release provided by Seller shall be specific only to the particular sale, transfer, lease or sublet described in the release and not to any subsequent sale, transfer, lease or sublet which shall remain subject to this Exhibit "A".
- 5. <u>Binding and Running with Title to the Property.</u> The covenants, restrictions, agreements and lien rights set forth in this <u>Exhibit "A"</u> shall burden and run with title to the Property.
- 6. Remedies. In addition to its right of foreclosure, Seller shall have all remedies at law and/or in equity for a breach by Buyer under this Exhibit "A". In the event that Seller prevails in any action (legal or otherwise) to enforce its rights and/or Buyer's obligations, Seller shall be entitled to recover all of its costs incurred including, without limitation, reasonable attorneys' fees, through and including all appellate levels. By acceptance of the Deed to the Property, Buyer, for itself, and its successors and assigns waives any homestead or other exemption now or hereafter existing or enacted under either Florida or federal law as same may relate to Seller's rights hereunder.
- 7. <u>Subordination</u>. This <u>Exhibit "A"</u> shall be subordinate to the right of any holder of an institutional first mortgage on the Property and shall not apply to any sales or leases by an institutional first mortgagee who acquires title to the Property by foreclosure or deed in lieu of foreclosure.
- 8. <u>Miscellaneous</u>. This <u>Exhibit "A"</u> shall be construed in accordance with the laws of the State of Florida and shall be binding on Buyer and Buyer's heirs, successors and assigns. In that regard, all references to Buyer in this <u>Exhibit "A"</u> shall also mean and refer to each and every of Buyer's heirs, successors and/or assigns. Should any term or provision of this <u>Exhibit "A"</u> be ruled to be illegal or otherwise invalid by a court of competent jurisdiction, such term or provision shall be given its nearest legal meaning or be construed as deleted as such court determines, and the same will not invalidate the remaining terms and provisions of this <u>Exhibit "A"</u>, which terms, provisions and portions of this Contract will remain in full force and effect. This <u>Exhibit "A"</u> may not be amended or modified except by an instrument in writing executed by Seller.

Filed: 04/17/2007

Sheet 111 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

RETURN 1Q NOVA TITLE COMPANY 1401 UNIVERSITY DR. SUITE 402 CORAL SPRINGS, FL 33071-8909 (954) 755-9669

CFN 20060518682 OR BK 20826 PG 1476 RECORDED 09/08/2006 13:31:09 Palm Beach County, Florida ANT 10.00

Doc Stamp 0.70

Sharon R. Bock, CLERK & COMPTROLLER

Pgs 1476 - 1477; (2pgs)

CORRECTIVE

84 2/4/2

SPECIAL WARRANTY DEED

THIS INDENTURE is made this day of September, 2006, between BOYNTON BEACH ASSOCIATES XVI, LLLP, a Florida limited liability limited partnership ("Seller") whose post office address is 1600 Sawgrass Oprporate Parkway, Suite 300, Sunrise, Florida 33323, and Jean Bruner Jeanglaude and Gertrude Arthur Jeanglaude, husband and wife ("Buyer"), whose Social Security Numbers are and and properties of the security of the securit Terrace Point, Boypton Beach, Florida 33437.

WITNESSETH, that & for and in consideration of the sum of TEN AND NO/100 DOLLARS (\$10.00) and other good and valuable consideration to Seller in hand paid by Buyer, the receipt and sufficiency of which are hereby acknowledged, has granted, bargained and sold, and hereby grants, bargains and sells to Buyer, and Buyer's heirs, successors and assigns forever, the following described land, with a Property Appraiser's Identification Number of 00 42 45 32 03 000 1170.

117 , CANYON ISLES PLAT TWO, according to the plat thereof, as recorded in Plat Book 40 at Page 43, of the Public Records of Palm Beach County, Florida.

THIS CONVEYANCE AND TITLE TO SAID PROPERTY is subject to: (a) taxes and assessments for the present year and subsequent years, including, but hist limited to, pending and certified county or municipal improvement liens; (b) restrictions, reservations, conditions, limitations, easements and other matters of record or imposed by governmental authorities having jurisdiction or control over the subject property, but this reference shall not operate to reimpose any of same; (c) all laws, ordinances, regulations, restrictions, prohibitions and other requirements imposed by governmental authorities, including, but not limited to, ally applicable zoning, butliding, butlond, and use and environmental authorities, rules and regulations, and rights 6r interests vested in the United States of America andor the State of Florida; (d) those certain covenants, restrictions, agreements and lien rights set forth in Exhibit "A" attached hereto and by this reference made a part hereof; (e) the Dectariation of Covenants, Restrictions and Essements for Camyon Isles, dated January 18, 2006 and recorded January 20, 2006 in Official Records Book 19820, at Page 216 of the Public Records of Palm Beach County, Florida, as amended and/or supplemented from time to time; (f) the plat of Canyon Isles — Plat Two, as recorded in Plat Book 105, at Page 1 of the Public Records of Palm Beach County, Florida; (g) the plat of Canyon Isles — Plat Two, as recorded in Plat Book 105, at Page 40 of the Public Records of Palm Beach County, Florida.

SELLER does hereby specially warrant the title to said land, subject to the foregoing matters, and will defend same against the lawful claims of all persons claiming by, through or under Seller and no others

IN WITNESS WHEREOF. Seller has hereunto set Seller's hand and seal the day and year first above

WITNESSES:

BOYNTON BEACH ASSOCIATES XVI, LLLP, a Florida limited liability limited partnership

Boystor Beach XVI Corporation, a Florida corporation, its general partner

Rresident

Witness: Kathken Brows

tuu) M Coffman Name of Witness: Kilthilun H Coffman

STATE OF FLORIDA COUNTY OF BROWARD

The foregoing instrument was acknowledged before me this <u>f</u> day of September, 2006, by N. Maria Menendez, as Vice President of Boynton Beach XVI Corporation, a Florida corporation, the general partner of Boynton Beach Associates XVI, LLLP, a Florida limited liability limited partnership, on behalf of said corporation and limited liability limited partnership. She is personally known to me.

Klthur M Coffner

My Commission Expires:

This instrument prepared by: HENRY W. JOHNSON, ESQ. HUME & JOHNSON, P.A. 1401 University Drive, #301 Coral Springs, Florida 33071 (954) 755-9880

KATHLEEN M. COFFMAN Notary Public - State of Florida Commission Expires Mar 18, 2009 Commission # DD 391078 Bonded By National Notary Assn

THIS DEED IS BEING RECORDED TO CORRECT THE LEGAL DESCRIPTION CONTAINED IN THE ORIGINAL DEED DATED 08/03/06 AND RECORDED 08/08/06 IN OFFICIAL RECORDS BOOK 20706 AT PAGE 325 OF THE PUBLIC RECORDS OF PALM BEACH COUNTY, FLORIDA

Book20826/Page1476

Page 1 of 2

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 112 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

<u>EXHIBIT "A"</u> COVENANTS, RESTRICTIONS, AGREEMENTS AND LIEN RIGHTS

The title to the property described in the Special Warranty Deed to which this <u>Exhibit "A"</u> is attached (the "Deed") shall be subject to and burdened by the covenants, restrictions, agreements and lien rights set forth below:

1. <u>Cepitalized Terms and Definitions</u>. All initial capitalized terms used in this <u>Exhibit "A"</u> but not defined herein stiall have the meanings given to such terms as set forth in the Deed. The following terms as used in this <u>Exhibit "A"</u> shall have the meanings given to such terms as set forth below.

"Gain" shall mean and refer to the amount, if any, by which: (i) the gross selling price of the Property (less and except: (y) the actual, documented costs of any physical improvements made by Buyer after the date of the Deed to this exterior of the home on the Property such as pools, patios, screen enclosures and extensions, and (z) the actual; documented closing costs required to be paid by Buyer in connection with the sale of the Property such (as' documentary stamp taxes, recording fees and/or brokerage commissions), exceeds (ii) the "Total Purchase Price" paid to Seller by Buyer pursuant to and as defined in the Purchase Contract executed by Seller and Buyer.

"Hardship Event" shall mean and refer to a sale, transfer, lease or sublet of the Property, as appropriate, following a divorce of the Buyers (if married to each other), death or serious disability of one or more of the Buyers, job transfer of one or more of the Buyers to a location greater than fifty (50) miles from the Property, or other reason acceptable to Seller in Seller's sole and absolute discretion, as evidenced by a written waiver of this provision given by Seller.

"Property" shall mean and refer to the property described in the Deed together with the improvements thereon.

"Transfer Advertisement or Agricument" shall mean and refer to any or all of the following: (i) any listing or advertisement for the sale or fease of the Property or any portion thereof made with a broker, in any multiple listing service, in any classified protiber advertisement, or otherwise (including, without limitation, "by owner"), (ii) any agreement (verbal or written) for transfer of title to the Property to any third party, and/or (iii) any agreement (verbal or written) for the leasing and/or subletting of the Property or any portion thereof, notwithstanding anything to the contrary in the Declaration.

- 2. <u>Sales/Transfers of the Property.</u> (In the event that Buyer sells or transfers title to the Property (directly or indirectly): (a) at any time within one (1) year following the date of the Deed, and/or (b) at any time thereafter if such sale or transfer results from a Transfer/Advertisement or Agreement made or entered into within one (1) year following the date of the Deed, then except only in the event of a Hardship Event released by Seller as provided in Paragraph 4 below, Buyer shall pay its Seller from the proceeds of such sale or transfer, an amount equal to one-hundred percent (100%) of the Gain realized from such sale or transfer.
- 3. No Leasing of the Property. Notwithstanding anything to the contrary in the Declaration, for a period of one (1) year following the date of the Deed, except only in the event of a Hardship Event released by Seller as provided in paragraph 4 below, Buyer shall not lease and/or sublet the Property or any portion thereof. Any such lease and/or sublet shall be void and unenforceable. All other leases or sublets, including those resulting from such a Hardship Event, shall be subject to the terms and conditions of the Declaration.
- 4. <u>Lien Rights: Releases.</u> There is and shall be a lien against the Property to secure Buyer's obligations set forth in this <u>Exhibit "A"</u>, which lien may be foreclosed on by Seller if Buyer breaches any of its obligations hereunder. In the event of a proposed sale, transfer, lease or sublet of the Property due to a Hardship Event, Buyer must first provide to Seller evidence of such Hardship Event acceptable to Seller in Seller's sole and absolute discretion, and if acceptable to Seller, Seller shall deliver to Buyer a written acknowledgment of the Hardship Event and waiver of Seller's rights hereunder with respect only to such sale, transfer, lease or sublet. In addition, upon written request from Buyer to Seller and payment of the Gain due to Seller in connection with any sale or transfer of the Property as provided in this <u>Exhibit "A"</u>, then Seller shall provide to Buyer a written acknowledgment of such payment and release of Seller's lien rights with respect only to such sale or transfer provided that Buyer provides Seller with evidence satisfactory to Seller in Seller's sole and absolute discretion of the amount of the Gain due, including, without limitation closing or other settlement statements. Any release provided by Seller shall be specific only to the particular sale, transfer, lease or sublet described in the release and not to any subsequent sale, transfer, lease or sublet which shall remain subject to this <u>Exhibit "A"</u>.
- Binding and Running with Title to the Property. The covenants, restrictions, agreements and lien rights set forth in this <u>Exhibit "A"</u> shall burden and run with title to the Property.
- 6. <u>Remedies.</u> In addition to its right of foreclosure, Seller shall have all remedies at law and/or in equity for a breach by Buyer under this <u>Exhibit "A"</u>. In the event that Seller prevails in any action (legal or otherwise) to enforce its rights and/or Buyer's obligations, Seller shall be entitled to recover all of its costs incurred including, without limitation, reasonable attorneys' fees, through and including all appellate levels. By acceptance of the Deed to the Property, Buyer, for itself, and its successors and assigns waives any homestead or other exemption now or hereafter existing or enacted under either Florida or federal law as same may relate to Seller's rights hereunder.
- 7. <u>Subordination</u>. This <u>Exhibit "A"</u> shall be subordinate to the right of any holder of an institutional first mortgage on the Property and shall not apply to any sales or leases by an institutional first mortgagee who acquires title to the Property by foreclosure or deed in lieu of foreclosure.
- 8. <u>Miscellaneous</u>. This <u>Exhibit "A"</u> shall be construed in accordance with the laws of the State of Florida and shall be binding on Buyer and Buyer's heirs, successors and assigns. In that regard, all references to Buyer in this <u>Exhibit "A"</u> shall also mean and refer to each and every of Buyer's heirs, successors and/or assigns. Should any term or provision of this <u>Exhibit "A"</u> be ruled to be illegal or otherwise invalid by a court of competent jurisdiction, such term or provision shall be given its nearest legal meaning or be construed as deleted as such court determines, and the same will not invalidate the remaining terms and provisions of this <u>Exhibit "A"</u>, which terms, provisions and portions of this Contract will remain in full force and effect. This <u>Exhibit "A"</u> may not be amended or modified except by an instrument in writing executed by Seiler.

RETURN TO NOVA TITLE COMPANY 401 UNIVERSITY DR. SUITE 408 CORAL SPRINGS, FL 33071-8909 (954) 755-9886

CORRECTIVE

CFN 20060567208 OR BK 20927 PG 0647 RECORDED 10/04/2006 12:56:16 Paim Beach County, Florida ART 10.00 Doc Stamp 0.70 Sharon R. Bock, CLERK & COMPTROLLER

Pgs @647 - 648; (2pgs)

SPECIAL WARRANTY DEED

THIS INDENTURE is made this ASSOCIATES XVI, LLLP, a Florida limited liability limited partnership ("Seller") whose post office address is 1600 Sawgrass Corporate Parkway, Suite 300, Sunrise, Florida 33323, and Jean Bruner Jeanglaude and Gertrude Aithur Jeanglaude, husband and wife ("Buyer"), whose Social Security Numbers are 25 THIS INDENTURE is made this Arguer Jeanglaude, husband and wife ("Buyer"), whose Social Security Numbers are Terrace Point, Boynton Beach, Florida 33437.

WITNESSETH, that Seller, for and in consideration of the sum of TEN AND NO/100 DOLLARS (\$10.00) and other good and valuable consideration to Seller in hand paid by Buyer, the receipt and sufficiency of which are hereby acknowledged has granted, bargained and sold, and hereby grants, bargains and sells to Buyer, and Buyer's heirs, successors and assigns forever, the following described land, with a Property Appraiser's Identification Number of 00.42.45 32 03 000 1170.

117 , CANYON SLES - PLAT TWO, according to the plat thereof, as recorded in Plat Book 105 at Page 40, of the Public Records of Palm Beach County, Florida.

THIS CONVEYANCE AND TITLE TO SAID PROPERTY is subject to: (a) taxes and assessments for the present year and subsequent years, including, but not limited to, pending and certified county or municipal improvement itens; (b) restrictions, reservations, conditions, limitedions, easements and other matters of record or imposed by governmental authorities having jurisdiction or control over the subject property, but this reference shall not operate to reimpose any of same; (c) elt laws, ordinances, regulations, restrictions, prohibitions and other requirements imposed by governmental ordinances, rules and regulations, and rights or interests vested in the United States of America and/or the State of Florida; (d) those certain covenants, restrictions/agreements and lien rights set forth in Exhibit "A" attached hereto and by this reference made a part hereof; (e) the Declaration of Covenants, Restrictions and Easements for Canyon Isles, dated January 18, 2006 and recorded January 29, 2006 in Official Records Book 19820, at Page 216 of the Public Records of Palm Beach County, Florida, as amended and/or supplemented from time to time; (f) the plat of Canyon Isles. Plat Yone, as recorded in Plat Book 105, at Page 1 of the Public Records of Palm Beach County, Florida; (g) the plat of Canyon Isles. Plat Three, as recorded in Plat Book 105, at Page 40 of the Public Records of Palm Beach County, Florida.

SELLER does hereby specially warrant the title to said land, subject to the foregoing matters, and will defend same against the lewful claims of all persons claiming by, through or under Seller and no others.

IN WITNESS WHEREOF, Seller has hereunto set Seller's hand and seal the day and year first above

WITNESSES:

BOYNTON BEACH ASSOCIATES XVI, LLLP, a Florida limited liability limited partnership

Boynton Beach XVI Corporation, a Florida corporation, its general partne

EKEKA

N. Maria Menondez, Vice President

STATE OF FLORIDA COUNTY OF BROWARD

Clory DAD

HALLUN M COSTMEN H CO FEMINION

My Commission Expires:

This instrument prepared by: HENRY W. JOHNSON, ESQ. HUME & JOHNSON, P.A. 1401 University Drive, #301

Coral Springs, Florida 33071 (954) 755-9880

THIS DEED IS BEING RECORDED TO CORRECT TEH LEGAL DESCRIPTION CONTAINED IN THE CORRECTIVE DEED DATED SEPTEMBER 5, 2006 AND RECORDED SEPTEMBER 8, 2006 in ORBOOK 20826 AT PAGE 1476 OF THE PUBLIC RECORDS OF PALM BEACH COUNTY, FLORIDA

KATHLEEN M. COFFMA Notary Public - State of Florida Commission Expires Mar 18, 2009 Commission # DD 391078 nded By National Notary Assn.

Book20927/Page647

Page 1 of 2

Serial Number: 11/736,356 Filed: 04/17/2007

Sheet 114 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

EXHIBIT "A" COVENANTS, RESTRICTIONS, AGREEMENTS AND LIEN RIGHTS

The title to the property described in the Special Warranty Deed to which this <u>Exhibit "A"</u> is attached (the "Deed") shall be subject to and burdened by the covenants, restrictions, agreements and lien rights set forth below:

1. <u>Capitalized Terms and Definitions</u>. All initial capitalized terms used in this <u>Exhibit "A"</u> but not defined herein shall have the meanings given to such terms as set forth in the Deed. The following terms as used in this <u>Exhibit "A"</u> shall have the meanings given to such terms as set forth below.

"Gain" Shall mean and refer to the amount, if any, by which: (i) the gross selling price of the Property (less and except: (ii) the actual, documented costs of any physical improvements made by Buyer after the date of the Deed to the exterior of the home on the Property such as pools, patios, screen enclosures and extensions, and (z) the actual, documented closing costs required to be paid by Buyer in connection with the sale of the Property such as documentary stamp taxes, recording fees and/or brokerage commissions), exceeds (ii) the "Total Purchase Price" paid to Seller by Buyer pursuant to and as defined in the Purchase Contract executed by Seller and Buyer.

"Hardship Event" shall mean and refer to a sale, transfer, lease or sublet of the Property, as appropriate, following a divorce of the Buyers (if married to each other), death or serious disability of one or more of the Buyers, job transfer of one or more of the Buyers to a location greater than fifty (50) miles from the Property, or other reason acceptable to Seller in Seller's sole and absolute discretion, as evidenced by a written waiver of this provision given by Seller:

"Property" shall mean and refer to the property described in the Deed together with the improvements thereon.

"Transfer Advertisement or Agreement" shall mean and refer to any or all of the following: (i) any listing or advertisement for the sale or lease of the Property or any portion thereof made with a broker, in any multiple listing service, in any classified by other advertisement, or otherwise (including, without limitation, "by owner"), (ii) any agreement (verbal or written) for transfer of title to the Property to any third party, and/or (iii) any agreement (verbal or written) for the leasing and/or subletting of the Property or any portion thereof, notwithstanding anything to the contrary in the Declaration.

- 2. <u>Sales/Transfers of the Property.</u> In the event that Buyer sells or transfers title to the Property (directly or indirectly): (a) at any time within one (1) year-following the date of the Deed, and/or (b) at any time thereafter if such sale or transfer results from a Transfer Advertisement or Agreement made or entered into within one (1) year following the date of the Deed, then except only in the event of a Hardship Event released by Seller as provided in Paragraph 4 below, Buyer shall pay to Seller from the proceeds of such sale or transfer, an amount equal to one-hundred percent (100%) of the Gain regilized from such sale or transfer.
- 3. No Leasing of the Property. Notwithstanding anything to the contrary in the Declaration, for a period of one (1) year following the date of the Deed, except only in the event of a Hardship Event released by Seller as provided in paragraph 4 below, Buyer shall not lease and/or sublet the Property or any portion thereof. Any such lease and/or sublet shall be void and unenforceable. All other leases or sublets, including those resulting from such a Hardship Event, shall be subject to the terms and conditions of the Declaration.
- 4. <u>Lien Rights; Releases.</u> There is and shall be a lien against the Property to secure Buyer's obligations set forth in this <u>Exhibit "A"</u>, which lien may be foreclosed on by Seller if Buyer breaches any of its obligations hereunder. In the event of a proposed sale, transfer, lease or sublet of the Property due to a Hardship Event, Buyer must first provide to Seller evidence of such Hardship Event acceptable to Seller in Seller's sole and absolute discretion, and if acceptable to Seller, Seller shall deliver to Buyer a written acknowledgment of the Hardship Event and waiver of Seller's rights hereunder with respect only to such sale, transfer, lease or sublet. In addition, upon written request from Buyer to Seller and payment of the Gain due to Seller in connection with any sale or transfer of the Property as provided in this <u>Exhibit "A"</u>, then Seller shall provide to Buyer a written acknowledgment of such payment and release of Seller's lien rights with respect only to such sale or transfer provided that Buyer provides Seller with evidence satisfactory to Seller in Seller's sole and absolute discretion of the amount of the Gain due, including, without limitation closing or other settlement statements. Any release provided by Seller shall be specific only to the particular sale, transfer, lease or sublet described in the release and not to any subsequent sale, transfer, lease or sublet described in the release
- Binding and Running with Title to the Property. The covenants, restrictions, agreements and lien rights set forth in this <u>Exhibit "A"</u> shall burden and run with title to the Property.
- 6. <u>Remedies.</u> In addition to its right of foreclosure, Seller shall have all remedies at law and/or in equity for a breach by Buyer under this <u>Exhibit "A"</u>. In the event that Seller prevails in any action (legal or otherwise) to enforce its rights and/or Buyer's obligations, Seller shall be entitled to recover all of its costs incurred including, without limitation, reasonable attorneys' fees, through and including all appellate levels. By acceptance of the Deed to the Property, Buyer, for itself, and its successors and assigns waives any homestead or other exemption now or hereafter existing or enacted under either Florida or federal law as same may relate to Seller's rights hereunder.
- 7. <u>Subordination</u>. This <u>Exhibit "A"</u> shall be subordinate to the right of any holder of an institutional first mortgage on the Property and shall not apply to any sales or leases by an institutional first mortgage who acquires title to the Property by foreclosure or deed in lieu of foreclosure.
- 8. <u>Miscellaneous</u>. This <u>Exhibit "A"</u> shall be construed in accordance with the laws of the State of Florida and shall be binding on Buyer and Buyer's heirs, successors and assigns. In that regard, all references to Buyer in this <u>Exhibit "A"</u> shall also mean and refer to each and every of Buyer's heirs, successors and/or assigns. Should any term or provision of this <u>Exhibit "A"</u> be ruled to be illegal or otherwise invalid by a court of competent jurisdiction, such term or provision shall be given its nearest legal meaning or be construed as deteted as such court determines, and the same will not invalidate the remaining terms and provisions of this <u>Exhibit "A"</u>, which terms, provisions and portions of this Contract will remain in full force and effect. This <u>Exhibit "A"</u> may not be amended or modified except by an instrument in writing executed by Seller.

Š

8

Examiner: Ronnie M. Mancho Art Unit: 3664

Sheet 115 of 241

METURN TO NOVA TO COMPANY 1401 UNIVERSITY DR DUTE 402 CORAL SPRINGS, FL 33071-8908 This instru**984).756.9999** red by:

John Hume, Esq. Hume & Johnson P.A. 1401 University Drive, Suite 402 Coral Springs, Florida 33071 CFN 20060567209 OR BK 20927 PG 0649 RECORDED 10/04/2006 12:56:16 Palm Beach County, Florida Sharen R. Bock, CLERK & COMPTROLLER Pg 0649; (1pg)

CORRECTION AND RATIFICATION AGREEMENT

AGREEMENT made this **76** day of **OMICE**, by JEAN BRUNER JEANGLAUDE AND GETTRUDE ARTHUR JEANGLAUDE, husband and wife ("Borrowers"), whose post office address is 8671 Thornbrook Terrace Point, BOYNTON BEACH, FLORIDA 33437.

Recitals:

(§) A. Borrowers are the owners of the real property located at , 8671 Thornbrook Terrace Point Boynton Beach, Florida 33437 more particularly described as follows: Lot 117, CANYON ISLES PLATIMO, according to the plat thereof, as recorded in Plat Book 105 at Page 40 of the Public Records of Palm Beach County, Florida

- B. Borrowers accisized title to the property by Warranty Deed dated September 5, 2006 and recorded September 8, 2006 in Official Records Book 20826 at Page 1476 of the Public Records of Palm Beach County, Florida.
- C. In conjunction with their purchase of the property, Borrowers encumbered the property with a mortgage in favor of GL FINANCIAL SERVICES, LLC., which mortgage secured a loan in the amount of \$550,000.00. The mortgage was dated August 3, 2006 and recorded August 8, 2006 in Official Records Book 20706 at Page 0327 of the Public Records of Palm Beach County, Florida.
 - D. RECORDED WITH INCORRECT LEGAL DESCRIPTION

THEREFORE, in consideration of the original mortgage loan and for other good and valuable considerations, the receipt of which is hereby acknowledged, Borrowers agree as follows:

- Recitals. The above recitals are true and correct.
- 2. Correction. (INCORRECT LEGAL DESCRIPTION):
- Ratification. Except as otherwise modified herein, all of the original terms and provisions of the mortgage are hereby ratified and confirmed and incorporated herein by reference.

Jean Bruner Jeanslande Jean Bruner Jeanglaude

STATE OF FLORIDA

COUNTY OF BROWARD

The foregoing instrument was acknowledged before me this 26 day of September, 2006 by JEAN BRUNER JEANCLAUDE AND GERTRUDE ARTHUR JEANGLAUDE, who are personally known to me or produced drives () as identification.

My commission expires:

Maureen E. Roxberry Commission #DD299658 Expires: Mar 11, 2008 Bonded Thru Atlantic Bonding Co., Inc.

ີ້ຄ

Examiner: Ronnie M. Mancho Art Unit: 3664

Serial Number: 11/736,356

NETURAL L ant of a coper of the control to 1400 CORAL SPRINGS, FL 33071-8900 (954) 772 4569
This i strument prepared by:
John Hume, Esq.
Hume & Johnson P.A. 1403 University Drive, Suite 402 Coral Springs, Florida 33071 Coral

CFN 20060567210 OR BK 20927 PG 0650 RECORDED 10/04/2006 12:56:16 Palm Beach County, Florida Sharon R. Bock, CLERK & COMPTROLLER Pg 0650; (1pg)

CORRECTION AND RATIFICATION AGREEMENT

AGREEMENT made this 76 day of 09 6 by JEAN BRUNER JEANGLAUDE AND GERTRUPS ARTHUR JEANGLAUDE, husband and wife ("Borrowers"), whose post office address is 8671 Thornbrook Terrace Point, BOYNTON BEACH, FLORIDA 33437.

Recitals:

Borrowers are the owners of the real property located at , 8671 Thornbrook Terrace Point Boynuon Beach, Florida 33437 more particularly described as follows: Lot 117, CANYON ISLES PLAT 1900, according to the plat thereof, as recorded in Plat Book 105 at Page 40 of the public Records of Palm Beach County, Florida

- B. Borrowers accounted title to the property by Warranty Deed dated September 5, 2006 and recorded September 8, 2006 in Official Records Book 20826 at Page 1476 of the Public Records of Palm Beach County, Florida.
- C. In conjunction with their purchase of the property, Borrowers encumbered the property with a mortgage fig. favor of GL FINANCIAL SERVICES, LLC., which mortgage secured a loan in the amount of \$141,120.00. The mortgage was dated August 3, 2006 and recorded August 8, 2006 in Official Records Book 20706 at Page 0344 of the Public Records of Palm Beach County, Florida.
 - D. RECORDED WITH INCORRECT LEGAL DESCRIPTION

THEREFORE, in consideration of the original mortgage loan and for other good and valuable considerations, the receipt of which is hereby acknowledged, Borrowers agree as follows:

- 1. Recitals. The above recitals are true and correct.
- 2. Correction. (INCORRECT LEGAL DESCRIPTION):
- 3. Ratification. Except as otherwise modified herein, all of the original terms and provisions of the mortgage are hereby ratified and confirmed and incorporated herein by reference.

Entrade Athur

STATE OF FLORIDA

COUNTY OF BROWARD

The foregoing instrument was acknowledged before me this day of September, 2006 by JEAN BRUNER JEANGLAUDE AND GERTRUDE ARTHUR JEANGLAUDE, who are personally known to me or produced wire learning as identification.

My commission expires

Maureen E. Roxberry
Commission #DD299658
Expires: Mar 17, 2008
Bonded Thru
Atlantic Bonding Co., Inc.

Examiner: Ronnie M. Mancho Art Unit: 3664

Filed: 04/17/2007



8

After Recording Return To:
COUNTRYWIDE HOME LOANS, INC. MS SV-79 DOCUMENT PROCESSING P.O.Box 10423 Van Nuys, CA 91410-0423 This document was prepared by:

RETURN TO.

CFN 20060462328 OR BK 20706 PG 0327 NOVA TITLE COMPANIES TO BE SOLVED BY

(954) 755-9839 Deed Doc 2, 2/3. 66
Intang 1, 300. 00
Sharon R. Bock, CLERK & COMPTROLLER
Pgs 0327 - 343; (17pgs)

YVERTE ZAPATA GE FINANCIAL SERVICES, LLC.

> 210 N. UNIVERSITY DR STE 601 CORAL SPRINGS, FL 33071

> > [Space Above This Line For Recording Data]

00013884537607006

[Doc ID #]

MORTGAGE

MIN 1000157-0006863972-9

DEFINITIONS

Words used in multiple sections of this document are defined below and other words are defined in Sections 3, 11, 13, 18, 20 and 21. Certain rules regarding the usage of words used in this document are also provided in

(A) "Security Instrument" means this document, which is dated AUGUST 03, 2006 , together with all Riders to this document.

(B) "Borrower" is

JEAN B JEANGLAUDE, AND GERTRUDE ARTHUR-JEANGLAUDE, HUSBAND AND WIFE

Borrower is the mortgagor under this Security Instrument.

(C) "MERS" is Mortgage Electronic Registration Systems, Inc. MERS is a separate corporation that is acting solely as a nominee for Lender and Lender's successors and assigns. MERS is the mortgagee under this Security Instrument. MERS is organized and existing under the laws of Delaware, and has an address and telephone number of P.O. Box 2026, Flint, MI 48501-2026, tel. (888) 679-MERS. (D) "Lender" is

GL FINANCIAL SERVICES, LLC.

Lender is a BANK

organized and existing under the laws of FLORIDA

Lender's address is

210 N. UNIVERSITY DR STE 601, CORAL SPRINGS, FL 33071

(E) "Note" means the promissory note signed by Borrower and dated AUGUST 03, 2006 Note states that Borrower owes Lender

SIX HUNDRED FIFTY THOUSAND and 00/100

Dollars (U.S. \$ 650,000.00) plus interest. Borrower has promised to pay this debt in regular Periodic Payments and to pay the debt in full not later than SEPTEMBER 01, 2036 .

(F) "Property" means the property that is described below under the heading "Transfer of Rights in the Property.

FLORIDA-Single Family-Fannie Mae/Freddie Mac UNIFORM INSTRUMENT WITH MERS

Page 1 of 11 -6A(FL) (0005) CHL (08/05)(d) VMP Mortgage Solutions, Inc. (800)521-7291

Form 3010 1/01





Filed: 04/17/2007 Examiner: Ronnie M. Mancho Art Unit: 3664

Ź	1	,		
due under the Note, and a	ill sums due under this Sec	te, plus interest, an urity Instrument, pl		te charges
	by Borrower [check box a		executed by Borrower. The	Tollowing
Adjustable Rate R Balloon Rider VA Rider		evelopment Rider	Second Home Rider 1-4 Family Rider Other(s) [specify]	
	pative rules and orders (th		state and local statutes, re of law) as well as all applica	
(J) "Community Assoc	ation Dues, Fees, and A		as all dues, fees, assessments arm association, homeowners a	
(K) "Electronic Funds" draft, or similar paper in computer, or magnetic ta account. Such term ind transactions, transfers ini	nstrument which is initial ape so as to order, instruc- ludes, but is not limite	ted through an elect et, or authorize a fir d to, point-of-sale ransfers, and autom	than a transaction originated stronic terminal, telephonic in nancial institution to debit or e transfers, automated teller ated elearinghouse transfers.	nstrument eredit ar
(M) "Miscellaneous Pro any third party (other that to, or destruction of, the conveyance in lieu of c condition of the Property	nceeds" means any compen insurance proceeds paid Property; (ii) condemnation; or (iv) mis	nsation, settlement, under the coverage on or other taking srepresentations of	award of damages, or proceeds described in Section 5) for: (of all or any part of the Prog, or omissions as to, the val	(i) damage perty; (iii) tue and/or
Loan.			st the nonpayment of, or defar e for (i) principal and interest	
Note, plus (ii) any amour (P) "RESPA" means the implementing regulation, any additional or success Security Instrument, "RI	ats under Section 3 of this ic Real Estate Settlement Regulation X (24 C.F.R. sor legislation or regulati ESPA" refers to all requi	Security Instrument Procedures Act (1 Part 3500), as they on that governs the rements and restrictions.		q.) and its to time, o sed in this egard to a
(Q) "Successor in Inter-	est of Borrower" means a orrower's obligations unde		aken title to the Property, whet his Security Instrument.	her or no
modifications of the No Security Instrument and MERS (solely as nomine	secures to Lender: (i) the ste; and (ii) the performa the Note. For this purpo	nce of Borrower's se, Borrower does s successors and as	Loan, and all renewals, exter covenants and agreements thereby mortgage, grant and signs) and to the successors as	under this convey to
COL	NTY	of	PALM BEACH	
	ding Jurisdiction] TTACHED HERETÓ ANI		Name of Recording Jurisdiction] HEREOF.	

Page 2 of 11

CHL (08/05)

-6A(FL) (0005)

Form 3010 1/01

Filed: 04/17/2007 Sheet 119 of 241

Serial Number: 11/736,356 Filed: 04/17/20 Examiner: Ronnie M. Mancho Art Unit: 3664

DOC ID #: 00013884537607006

Parcel ID Number:

8671 THORNBROOK TERRACE POINT, Boynton Beach

[Street/City]

Florida 33437-4882 ("Property Address"):

[Street/City]

TOGETHER WITH all the improvements now or hereafter erected on the property, and all easements, appurtenances, and fixtures now or hereafter a part of the property. All replacements and additions shall also be covered by this Security Instrument. All of the foregoing is referred to in this Security Instrument as the "Property." Borrower understands and agrees that MERS holds only legal title to the interests granted by Borrower in this Security Instrument, but, if necessary to comply with law or custom, MERS (as nominee for Lender and Lender's successors and assigns) has the right: to exercise any or all of those interests, including, but not limited to, the right to foreclose and sell the Property; and to take any action required of Lender including, but not limited to, releasing and canceling this Security Instrument.

BORROWER COVENANTS that Borrower is lawfully seised of the estate hereby conveyed and has the right to mortgage, grant and convey the Property and that the Property is unencumbered, except for encumbrances of record. Borrower warrants and will defend generally the title to the Property against all claims and demands, subject to any encumbrances of record.

THIS SECURITY INSTRUMENT combines uniform covenants for national use and non-uniform covenants with limited variations by jurisdiction to constitute a uniform security instrument covering real property.

UNIFORM COVENANTS. Borrower and Lender covenant and agree as follows:

1. Payment of Principal, Interest, Escrow Items, Prepayment Charges, and Late Charges. Borrower shall pay when due the principal of, and interest on, the debt evidenced by the Note and any prepayment charges and late charges due under the Note Borrower shall also pay funds for Escrow Items pursuant to Section 3. Payments due under the Note and this Security Instrument shall be made in U.S. currency. However, if any check or other instrument received by Lender as payment under the Note or this Security Instrument is returned to Lender unpaid, Lender may require that any or all subsequent payments due under the Note and this Security Instrument be made in one or more of the following forms, as selected by Lender; (a) cash; (b) money order; (c) certified check, bank check, treasurer's check or cashier's check, provided any such check is drawn upon an institution whose deposits are insured by a federal agency, instrumentality, or entity; or (d) Electronic Funds Transfer.

Payments are deemed received by Lender when received at the location designated in the Note or at such other location as may be designated by Lender in accordance with the notice provisions in Section 15. Lender may return any payment or partial payment are insufficient to bring the Loan current, Lender may accept any payment or partial payment insufficient to bring the Loan current, lender may accept any payment or partial payment insufficient to bring the Loan current, without waiver of any rights hereunder or prejudice to its rights to refuse such payment or partial payments in the future, but Lender is not obligated to apply such payments at the time such payments are accepted. If each Periodic Payment is applied as of its scheduled due date, then Lender need not pay interest on unapplied funds. Lender may hold such unapplied funds until Borrower makes payment to bring the Loan current. If Borrower does not do so within a reasonable period of time, Lender shall either apply such funds or return them to Borrower. If not applied carlier, such funds will be applied to the outstanding principal balance under the Note immediately prior to foreclosure. No offset or claim which Borrower might have now or in the future against Lender shall relieve Borrower from making payments due under the Note and this Security Instrument or performing the covenants and agreements secured by this Security Instrument.

or performing the covenants and agreements secured by this Security Instrument.

2. Application of Payments or Proceeds. Except as otherwise described in this Section 2, all payments accepted and applied by Lender shall be applied in the following order of priority: (a) interest due under the Note; (b) principal due under the Note; (c) amounts due under Section 3. Such payments shall be applied to each Periodic Payment in the order in which it became due. Any remaining amounts shall be applied first to late charges, second to any other amounts due under this Security Instrument, and then to reduce the principal balance of the Note.

If Lender receives a payment from Borrower for a delinquent Periodic Payment which includes a sufficient amount to pay any late charge due, the payment may be applied to the delinquent payment and the late charge. If more than one Periodic Payment is outstanding, Lender may apply any payment received from Borrower to the repayment of the Periodic Payments if, and to the extent that, each payment can be paid in full. To the extent that any excess exists after the payment is applied to the full payment of one or more Periodic Payments, such excess may be applied to any late charges due. Voluntary prepayments shall be applied first to any prepayment charges and then as described in the Note.

-6A(FL) (0005) CHL (08/05) Page 3 of 11 Form 3010 1/01

DOC ID #: 00013884537607006

Any application of payments, insurance proceeds, or Miscellaneous Proceeds to principal due under the Note shall not extend or postpone the due date, or change the amount, of the Periodic Payments.

3. Finds for Escrow Items. Borrower shall pay to Lender on the day Periodic Payments are due under the Note, until the Note is paid in full, a sum (the "Funds") to provide for payment of amounts due for: (a) taxes and assessments and other items which can attain priority over this Security Instrument as a lien or encumbrance on the Property; (b) leasehold payments or ground rents on the Property, if any; (c) premiums for any and all insurance required by Lender under Section 5; and (d) Mortgage Insurance premiums, if any, or any sums payable by Borrower to Lender in lieu of the payment of Mortgage Insurance premiums in accordance with the provisions of Section 10. These items are called "Escrow Items." At origination or at any time during the term of the Loan, Lender may require that Community Association Dues, Fees, and Assessments, if any, be escrowed by Borrower, and such dues, fees and assessments shall be an Escrow Item Borrower shall promptly furnish to Lender all notices of amounts to be paid under this Section. Borrower shall pay Lender the Funds for Escrow Items unless Lender waives Borrower's obligation to pay the Funds for any or all Escrow Items. Lender may waive Borrower's obligation to pay to Lender Funds for any or all Escrow Items at any time. Any such waiver may only be in writing. In the event of such waiver, Borrower shall pay directly, when and where payable, the amounts due for any Escrow Items for which payment of Funds has been waived by Lender and, if Lender requires, shall furnish to Lender receipts evidencing such payment within such time period as Lender may require. Borrower's obligation to make such payments and to provide receipts shall for all purposes be deemed to be a covenant and agreement contained in this Security Instrument, as the phrase "covenant and agreement" is used in Section 9. If Borrower is obligated to pay Escrow Items directly, pursuant to a wayver, and Borrower fails to pay the amount due for an Escrow Item, Lender may exercise its rights under Section 9 and pay such amount and Borrower shall then be obligated under Section 9 to repay to Lender any such amount. Lender may revoke the waiver as to any or all Escro Items at any time by a notice given in accordance with Section 15 and, upon such revocation, Borrower shall pay to Lender all Funds, and in such amounts, that are then required under this Section 3.

Lender may, at any time, collect and hold Punds in an amount (a) sufficient to permit Lender to apply the Funds at the time specified under RESPA, and (b) not to exceed the maximum amount a lender can requ under RESPA. Lender shall estimate the amount of Funds due on the basis of current data and reasonable estimates of expenditures of future Escrow Items or otherwise in accordance with Applicable Law.

The Funds shall be held in an institution whose deposits are insured by a federal agency, instrumentality, or entity (including Lender, if Lender is an institution whose deposits are so insured) or in any Federal Home Loan Bank, Lender shall apply the Funds to pay the Escrow Items no later than the time specified under RESPA. Lender shall not charge Borrower for holding and applying the Funds, annually analyzing the escrow account, or verifying the Escrow Items, unless Lender pays Borrower interest on the Funds and Applicable Law permits Lender to make such a charge. Unless an agreement is made in writing or Applicable Law requires interest to be paid on the Funds, Lender shall not be required to pay Borrower any interest or earnings on the Funds. Borrower and Lender can agree in writing, however, that interest shall be paid on the Funds. Lender shall give to Borrower, without charge, an annual accounting of the Funds as required by RESPA

If there is a surplus of Funds held in escrow, as defined under RESPA, Lender shall account to Borrower for the excess funds in accordance with RESPA. If there is a shortage of Funds held in escrow, as defined under RESPA, Lender shall notify Borrower as required by RESPA, and Borrower shall pay to Lender the amount necessary to make up the shortage in accordance with RESPA, but in no more than 12 monthly payments. If there is a deficiency of Funds held in escrow, as defined under RESPA, Lender shall notify Borrower as required by RESPA, and Borrower shall pay to Lender the amount necessary to make up the deficiency in accordance with RESPA, but in no more than 12 monthly payments.

Upon payment in full of all sums secured by this Security Instrument, Lender shall promptly refund to

Borrower any Funds held by Lender.

4. Charges; Liens. Borrower shall pay all taxes, assessments, charges, fines, and impositions attributable to the Property which can attain priority over this Security Instrument, leasehold payments or ground rents on the Property, if any, and Community Association Dues, Fees, and Assessments, if any. To the extent that these items are Escrow Items, Borrower shall pay them in the manner provided in Section 3.

Borrower shall promptly discharge any lien which has priority over this Security Instrument unless Borrower: (a) agrees in writing to the payment of the obligation secured by the lien in a manner acceptable to Lender, but only so long as Borrower is performing such agreement; (b) contests the lien in good faith by, or defends against enforcement of the lien in, legal proceedings which in Lender's opinion operate to prevent the enforcement of the lien while those proceedings are pending, but only until such proceedings are concluded; or (c) secures from the holder of the lien an agreement satisfactory to Lender subordinating the lien to this Security Instrument. If Lender determines that any part of the Property is subject to a lien which can attain priority over this Security Instrument, Lender may give Borrower a notice identifying the lien. Within 10 days of the date on which that notice is given, Borrower shall satisfy the lien or take one or more of the actions set forth above in this Section 4

-6A(FL) (0005)

CHL (08/05)

Form 3010 1/01



service used by Lender in connection with this Loan.

5. Expectly Insurance. Borrower shall keep the improvements now existing or hereafter erected on the Property insured against loss by fire, hazards included within the term "extended coverage," and any other hazards including, but not limited to, earthquakes and floods, for which Lender requires insurance. This insurance shall be maintained in the amounts (including deductible levels) and for the periods that Lender requires. What Lender requires pursuant to the preceding sentences can change during the term of the Loan. The insurance carrier providing the insurance shall be chosen by Borrower subject to Lender's right to disapprove Borrower's choice, which right shall not be exercised unreasonably. Lender may require Borrower to pay, in connection with this Loan, either: (a) a one-time charge for flood zone determination and certification services and subsequent charges each time remappings or similar changes occur which reasonably might affect such determination or certification. Borrower shall also be responsible for the payment of any fees imposed by the Federal Emergency Management Agency in connection with the review of any flood zone determination resulting from an objection by Borrower.

If Borrower fails to maintain any of the coverages described above, Lender may obtain insurance coverage, at Lender's option and Borrower's expense. Lender is under no obligation to purchase any particular type or amount of coverage. Therefore, such coverage shall cover Lender, but might not protect Borrower, Borrower's equity in the Property, or the contents of the Property, against any risk, hazard or liability and might provide greater or desser coverage than was previously in effect. Borrower acknowledges that the cost of the insurance coverage, so obtained might significantly exceed the cost of insurance that Borrower could have obtained. Any amounts disbursed by Lender under this Section 5 shall become additional debt of Borrower secured by this Security Instrument. These amounts shall bear interest at the Note rate from the date of disbursement and shall be payable, with such interest, upon notice from Lender to Borrower requesting payment.

All insurance policies required by Lender and remeals of such policies shall be subject to Lender's right to disapprove such policies, shall include a standard mortgage clause, and shall name Lender as mortgages and/or as an additional loss payee. Lender shall have the right to hold the policies and renewal certificates. If Lender requires, Borrower shall promptly give to Lender all receipts of paid premiums and renewal notices. If Borrower obtains any form of insurance coverage, not otherwise required by Lender, for damage to, or destruction of, the Property, such policy shall include a standard mortgage clause and shall name Lender as mortgage and/or as an additional loss payee.

In the event of loss, Borrower shall give prompt notice to the insurance carrier and Lender. Lender may make proof of loss if not made promptly by Borrower. Unless Lender and Borrower otherwise agree in writing, any insurance proceeds, whether or not the underlying insurance was required by Lender, shall be applied to restoration or repair of the Property, if the restoration or repair is economically feasible and Lender's security is not lessened. During such repair and restoration period, Lender shall have the right to hold such insurance proceeds until Lender has had an opportunity to inspect such Property to ensure the work has been completed to Lender's satisfaction, provided that such inspection shall be undertaken promptly. Lender may disburse proceeds for the repairs and restoration in a single payment or in a series of progress payments as the work is completed. Unless an agreement is made in writing or Applicable Law requires interest to be paid on such insurance proceeds, Lender shall not be required to pay Borrower any interest or earnings on such proceeds. Fees for public adjusters, or other third parties, retained by Borrower any interest or earnings on the insurance proceeds and shall be the sole obligation of Borrower. If the restoration or repair is not economically feasible or Lender's security would be lessened, the insurance proceeds shall be applied to the sums secured by this Security Instrument, whether or not then due, with the excess, if any, paid to Borrower. Such insurance proceeds shall be applied in the order provided for in Section 2.

If Borrower abandons the Property, Lender may file, negotiate and settle any available insurance claim

If Borrower abandons the Property, Lender may file, negotiate and settle any available insurance claim and related matters. If Borrower does not respond within 30 days to a notice from Lender that the insurance carrier has offered to settle a claim, then Lender may negotiate and settle the claim. The 30-day period will begin when the notice is given. In either event, or if Lender acquires the Property under Section 22 or otherwise, Borrower hereby assigns to Lender (a) Borrower's rights to any insurance proceeds in an amount not to exceed the amounts unpaid under the Note or this Security Instrument, and (b) any other of Borrower's rights (other than the right to any refund of unearned premiums paid by Borrower) under all insurance policies covering the Property, insofar as such rights are applicable to the coverage of the Property. Lender may use the insurance proceeds either to repair or restore the Property or to pay amounts unpaid under the Note or this Security Instrument, whether or not then due.

- SA(FL) (0005) CHL (08/05) Page 5 of 11 Form 3010 1/01

Examiner: Ronnie M. Mancho Art Unit: 3664

DOC ID #: 00013884537607006

6. Occupancy. Borrower shall occupy, establish, and use the Property as Borrower's principal residence within 50 days after the execution of this Security Instrument and shall continue to occupy the Property as Borrower's principal residence for at least one year after the date of occupancy, unless Lender otherwise agrees in Writing, which consent shall not be unreasonably withheld, or unless extenuating circumstances exist which are beyond Borrower's control.

7. Preservation, Maintenance and Protection of the Property; Inspections. Borrower shall not destroy, damage or impair the Property, allow the Property to deteriorate or commit waste on the Property. Whether or not Borrower is residing in the Property, Borrower shall maintain the Property in order to prevent the Property from deteriorating or decreasing in value due to its condition. Unless it is determined pursuant to Section 5 that repair or restoration is not economically feasible, Borrower shall promptly repair the Property if damaged to avoid further deterioration or damage. If insurance or condemnation proceeds are paid in connection with damage its or the taking of, the Property, Borrower shall be responsible for repairing or restoring the Property only if Lender has released proceeds for such purposes. Lender may disburse proceeds for the repairs and restoration in a single payment or in a series of progress payments as the work is completed. If the insurance of condemnation proceeds are not sufficient to repair or restore the Property, Borrower is not relieved of Borrower's obligation for the completion of such repair or restoration.

Lender or its agent may make reasonable entries upon and inspections of the Property. If it has reasonable cause, Lender may inspect the interior of the improvements on the Property. Lender shall give Borrower notice at the time of or prior to spech an interior inspection specifying such reasonable cause.

8. Borrower's Loan Application. Borrower shall be in default if, during the Loan application process, Borrower or any persons or entities acting at the direction of Borrower or with Borrower's knowledge or consent gave materially false, misleading or inaccurate information or statements to Lender (or failed to provide Lender with material information) in connection with the Loan. Material representations include, but are not limited to, representations concerning Borrower's occupancy of the Property as Borrower's principal residence.

9. Protection of Lender's Interest in the Property and Rights Under this Security Instrument. If (a) Borrower fails to perform the covenants and agreements contained in this Security Instrument, (b) there is a legal proceeding that might significantly affect Lender's interest in the Property and/or rights under this Security Instrument (such as a proceeding in bankruptey, probate, for condemnation or forfeiture, for enforcement of a lien which may attain priority over this Security Instrument or to enforce laws or regulations), or (c) Borrower has abandoned the Property, then Lender may do and pay for whatever is reasonable or appropriate to protect Lender's interest in the Property and rights under this Security Instrument, including protecting and/or assessing the value of the Property, and securing and/or repairing the Property. Lender's actions can include, but are not limited to: (a) paying any sums secured by a lien which has priority over this Security Instrument; (b) appearing in court; and (c) paying reasonable attorneys' fees to protect its interest in the Property and/or rights under this Security Instrument, including its secured position in a bankruptcy proceeding. Securing the Property includes, but is not limited to, entering the Property to make repairs, change locks, replace or board up doors and windows, drain water from pipes, climinate building or other code violations or dangerous conditions, and have utilities turned on or off. Although Lender may take action under this Section 9, Lender does not have to do so and is not under any duty or obligation to do so. It is agreed that Lender incurs no liability for not taking any or all actions authorized under this Section 9.

Any amounts disbursed by Lender under this Section 9 shall become additional debt of Borrower secured by this Security Instrument. These amounts shall bear interest at the Note rate from the date of disbursement and shall be payable, with such interest, upon notice from Lender to Borrower requesting payment.

If this Security Instrument is on a leasehold, Borrower shall comply with all the provisions of the lease. If Borrower acquires fee title to the Property, the leasehold and the fee title shall not merge unless Lender agrees to the merger in writing.

agrees to the merger in writing.

10. Mortgage Insurance. If Lender required Mortgage Insurance as a condition of making the Loan, Borrower shall pay the premiums required to maintain the Mortgage Insurance in effect. If, for any reason, the Mortgage Insurance coverage required by Lender ceases to be available from the mortgage insurer that previously provided such insurance and Borrower was required to make separately designated payments toward the premiums for Mortgage Insurance, Borrower shall pay the premiums required to obtain coverage substantially equivalent to the Mortgage Insurance previously in effect, at a cost substantially equivalent to the cost to Borrower of the Mortgage Insurance previously in effect, from an alternate mortgage insurer selected by Lender. If substantially equivalent Mortgage Insurance coverage is not available, Borrower shall continue to pay to Lender the amount of the separately designated payments that were due when the insurance coverage ceased to be in effect. Lender will accept, use and retain these payments as a non-refundable loss reserve in lieu of Mortgage Insurance. Such loss reserves shall be non-refundable, notwithstanding the fact that the Loan is ultimately paid in full, and Lender shall not be required to pay Borrower any interest or earnings on such loss reserve. Lender can no longer require loss reserve payments if Mortgage Insurance coverage (in the

-6A(FL) (0005)

CHL (08/05)

Page 6 of 11

Form 3010 1/0



amount and for the period that Lender requires) provided by an insurer selected by Lender again becomes available, is obtained, and Lender requires separately designated payments toward the premiums for Mortgage Insurance. In Lender required Mortgage Insurance as a condition of making the Loan and Borrower was required to make separately designated payments toward the premiums for Mortgage Insurance, Borrower shall pay the promiums required to maintain Mortgage Insurance ends in accordance with any written agreement between Borrower and Lender providing for such termination or until termination is required by Applicable Law. Nothing in this Section 10 affects Borrower's obligation to pay interest at the rate provided in the Note.

Mortgage Insurance reimburses Lender (or any entity that purchases the Note) for certain losses it may incur if Borrower does not repay the Loan as agreed. Borrower is not a party to the Mortgage Insurance.

Mortgage insurers evaluate their total risk on all such insurance in force from time to time, and may enter into agreements with other parties that share or modify their risk, or reduce losses. These agreements are on terms and conditions that are satisfactory to the mortgage insurer and the other party (or parties) to these agreements. These agreements may require the mortgage insurer to make payments using any source of funds that the mortgage insurer may have available (which may include funds obtained from Mortgage Insurance premiums).

As a result of these agreements, Lender, any purchaser of the Note, another insurer, any reinsurer, any other entity, or any affiliate of any of the foregoing, may receive (directly or indirectly) amounts that derive from (or might be characterized as) a postion of Borrower's payments for Mortgage Insurance, in exchange for sharing or modifying the mortgage insurer's risk, or reducing losses. If such agreement provides that an affiliate of Lender takes a share of the insurer's risk in exchange for a share of the premiums paid to the insurer, the arrangement is often termed "captive reinsurance." Further:

(a) Any such agreements will not affect the amounts that Borrower has agreed to pay for Mortgage

(a) Any such agreements will not affect the amounts that Borrower has agreed to pay for Mortgage Insurance, or any other terms of the Loan Such agreements will not increase the amount Borrower will owe for Mortgage Insurance, and they will not entitle Borrower to any refund.

(b) Any such agreements will not affect the rights Borrower has - if any - with respect to the Mortgage Insurance under the Homeowners Protection Act of 1998 or any other law. These rights may include the right to receive certain disclosures, to request and obtain cancellation of the Mortgage Insurance, to have the Mortgage Insurance terminated automatically, and/or to receive a refund of any Mortgage Insurance premiums that were unearned at the time of such cancellation or termination.
11. Assignment of Miscellaneous Proceeds; Forfeiture, All Miscellaneous Proceeds are hereby

11. Assignment of Miscellaneous Proceeds; Forfeiture, All Miscellaneous Proceeds are hereby assigned to and shall be paid to Lender.

If the Property is damaged, such Miscellaneous Proceeds shall be applied to restoration or repair of the Property, if the restoration or repair is coonomically feasible and Lender's security is not lessened. During such repair and restoration period, Lender shall have the right to hold such Miscellaneous Proceeds until Lender has had an opportunity to inspect such Property to ensure the work has been completed to Lender's satisfaction, provided that such inspection shall be undertaken promptly. Lender may pay for the repairs and restoration in a single disbursement or in a series of progress payments as the work is completed. Unless an agreement is made in writing or Applicable Law requires interest to be paid on such Miscellaneous Proceeds, Lender shall not be required to pay Borrower any interest or earnings on such Miscellaneous Proceeds. If the restoration or repair is not economically feasible or Lender's security would be lessened, the Miscellaneous Proceeds shall be applied to the sums secured by this Security Instrument, whether or not then due, with the excess, if any, read to Borrower. Such Miscellaneous Proceeds shall be applied to the sums secured by this Security Instrument, whether or not then due, viith the excess, if any, read to Borrower. Such Miscellaneous Proceeds shall be applied in the order provided for in Section 2.

paid to Borrower. Such Miscellaneous Proceeds shall be applied in the order provided for in Section 2. In the event of a total taking, destruction, or loss in value of the Property, the Miscellaneous Proceeds shall be applied to the sums secured by this Security Instrument, whether or not then due, with the excess, if any, paid to Borrower.

In the event of a partial taking, destruction, or loss in value of the Property in which the fair market value of the Property immediately before the partial taking, destruction, or loss in value is equal to or greater than the amount of the sums secured by this Security Instrument immediately before the partial taking, destruction, or loss in value, unless Borrower and Lender otherwise agree in writing, the sums secured by this Security Instrument shall be reduced by the amount of the Miscellaneous Proceeds multiplied by the following fraction: (a) the total amount of the sums secured immediately before the partial taking, destruction, or loss in value divided by (b) the fair market value of the Property immediately before the partial taking, destruction, or loss in value. Any balance shall be paid to Borrower.

In the event of a partial taking, destruction, or loss in value of the Property in which the fair market value of the Property immediately before the partial taking, destruction, or loss in value is less than the amount of the sums secured immediately before the partial taking, destruction, or loss in value, unless Borrower and Lender otherwise agree in writing, the Miscellaneous Proceeds shall be applied to the sums secured by this Security Instrument whether or not the sums are then due.

-5A(FL) (0005) CHL (08/05) Page 7 of 11 Form 3010 1/01

Examiner: Ronnie M. Mancho Art Unit: 3664

DOC ID #: 00013884537607006

Fig. 1. Property is abandoned by Borrower, or if, after notice by Lender to Borrower that the Opposing Party (as defined in the next sentence) offers to make an award to settle a claim for damages, Borrower fails to respond to Eender within 30 days after the date the notice is given, Lender is authorized to collect and apply the Miscellaneous Proceeds either to restoration or repair of the Property or to the sums secured by this Security Instrument, whether or not then due. "Opposing Party" means the third party that owes Borrower Miscellaneous Proceeds or the party against whom Borrower has a right of action in regard to Miscellaneous Proceeds.

Borrower shall be in default if any action or proceeding, whether civil or criminal, is begun that, in Lender's judgment, could result in forfeiture of the Property or other material impairment of Lender's interest in the Property or rights under this Security Instrument. Borrower can cure such a default and, if acceleration has occurred, reinstate as provided in Section 19, by causing the action or proceeding to be dismissed with a ruling that, in Lender's judgment, precludes forfeiture of the Property or other material impairment of Lender's interest in the Property-or cights under this Security Instrument. The proceeds of any award or claim for damages that are attributable to the impairment of Lender's interest in the Property are hereby assigned and shall be paid to Lender.

All Miscellaneous Proceeds that are not applied to restoration or repair of the Property shall be applied in the order provided for in Section 2:

12. Borrower Not Released. Forbearance By Lender Not a Waiver. Extension of the time for payment or modification of amonization of the sums secured by this Security Instrument granted by Lender to Borrower or any Successor in Interest of Borrower shall not be required to commence proceedings against any Successor in Interest of Borrower or to refuse to extend time for payment or otherwise modify amortization of the sums secured by this Security Instrument by reason of any demand made by the original Borrower or any successors in Interest of Borrower, Any stobearance by Lender in exercising any right or remedy including, without limitation, Lender's acceptance of payments from third persons, entities or Successors in Interest of Borrower or in amounts less than the amount then due, shall not be a waiver of or preclude the exercise of any right or remedy.

13. Joint and Several Liability; Co-signess: Successors and Assigns Bound. Borrower covenants and agrees that Borrower's obligations and liability shall be joint and several. However, any Borrower who co-signs this Security Instrument but does not execute the Note (a "co-signer"): (a) is co-signing this Security Instrument only to mortgage, grant and convey the co-signer's interest in the Property under the terms of this Security Instrument; (b) is not personally obligated to pay the sums secured by this Security Instrument; and (c) agrees that Lender and any other Borrower can agree to extend, modify, forbear or make any accommodations with regard to the terms of this Security Instrument or the Note without the co-signer's consent

Subject to the provisions of Section 18, any Successor in Interest of Borrower who assumes Borrower's obligations under this Security Instrument in writing, and is approved by Lender, shall obtain all of Borrower's rights and benefits under this Security Instrument. Borrower shall not be released from Borrower's obligations and liability under this Security Instrument unless Lender agrees to such release in writing. The covenants and agreements of this Security Instrument shall bind (except as provided in Section 20) and benefit the successors and assigns of Lender.

14. Loan Charges. Lender may charge Borrower fees for services performed in connection with

14. Loan Charges. Lender may charge Borrower fees for services performed in connection with Security Instrument, including, but not limited to, attorneys fees, property and rights under this Security Instrument, including, but not limited to, attorneys fees, property inspection and valuation fees. In regard to any other fees, the absence of express authority in this Security Instrument to charge a specific fee to Borrower shall not be construed as a prohibition on the charging of such fee. Lender may not charge fees that are expressly prohibited by this Security Instrument or by Applicable Law.

are expressly prohibited by this Security Instrument or by Applicable Law.

If the Loan is subject to a law which sets maximum loan charges, and that law is finally interpreted so that the interest or other loan charges collected or to be collected in connection with the Loan exceed the permitted limits, then: (a) any such loan charge shall be reduced by the amount necessary to reduce the charge to the permitted limit; and (b) any sums already collected from Borrower which exceeded permitted limits will be refunded to Borrower. Lender may choose to make this refund by reducing the principal owed under the Note or by making a direct payment to Borrower. If a refund reduces principal, the reduction will be treated as a partial prepayment without any prepayment charge (whether or not a prepayment charge is provided for under the Note). Borrower's acceptance of any such refund made by direct payment to Borrower will constitute a waiver of any right of action Borrower might have arising out of such overcharge.

constitute a waiver of any right of action Borrower might have arising out of such overcharge.

15. Notices. All notices given by Borrower or Lender in connection with this Security Instrument must be in writing. Any notice to Borrower in connection with this Security Instrument shall be deemed to have been given to Borrower when mailed by first class mail or when actually delivered to Borrower's notice address if sent by other means, Notice to any one Borrower shall constitute notice to all Borrowers unless Applicable Law expressly requires otherwise. The notice address shall be the Property Address unless

-6A(FL) (0005) CHL (08/05) Page 8 of 11 Form 3010 1/01



Borrower has designated a substitute notice address by notice to Lender. Borrower shall promptly notify Lender of Borrower's change of address, If Lender specifies a procedure for reporting Borrower's change of address, then Borrower shall only report a change of address through that specified procedure. There may be only one designated notice address under this Security Instrument at any one time. Any notice to Lender shall be given by delivering it or by mailing it by first class mail to Lender's address stated herein unless Lender has designated another address by notice to Borrower. Any notice in connection with this Security Instrument shall not be deemed to have been given to Lender until actually received by Lender. If any notice required by this Security Instrument is also required under Applicable Law, the Applicable Law requirement will satisfy the corresponding regimement under this Security Instrument.

16. Governing Law; Severability; Rules of Construction. This Security Instrument shall be governed by federal law and the law of the jurisdiction in which the Property is located. All rights and obligations contained in this Security Instrument are subject to any requirements and limitations of Applicable Law. Applicable Law might explicitly or implicitly allow the parties to agree by contract or it might be stient, but such silence shall not be construed as a prohibition against agreement by contract. In the event that any provision or clause of this Security Instrument or the Note conflicts with Applicable Law, such conflict shall not affect other provisions of this Security Instrument or the Note which can be given effect without the conflicting provision.

As used in this Security Instrument: (a) words of the masculine gender shall mean and include corresponding neuter words or words of the feminine gender; (b) words in the singular shall mean and include the plural and vice versa; and (c) the word "may" gives sole discretion without any obligation to take any action.

17. Borrower's Copy. Borrower shall be given one copy of the Note and of this Security Instrument.

18. Transfer of the Property or a Beneficial Interest in Borrower. As used in this Section 18, "Interest in the Property" means any legal or beneficial interest in the Property, including, but not limited to, those beneficial interest transferred in a bond for deed, contract for deed, installment sales contract or escrow agreement, the intent of which is the transfer of differ by Borrower at a future date to a purchaser.

If all or any part of the Property or any Interest in the Property is sold or transferred (or if Borrower is not a natural person and a beneficial interest in Borrower is sold or transferred) without Lender's prior written consent, Lender may require immediate payment in full of all sums secured by this Security Instrument. However, this option shall not be exercised by Lender if such exercise is prohibited by Applicable Law.

If Lender exercises this option, Lender shall give Borrower notice of acceleration. The notice shall provide a period of not less than 30 days from the date the notice is given in accordance with Section 15 within which Borrower must pay all sums secured by this Security Instrument. If Borrower fails to pay these sums prior to the expiration of this period, Lender may invoke any remedies permitted by this Security Instrument without further notice or demand on Borrower.

19. Borrower's Right to Reinstate After Acceleration. If Borrower meets certain conditions, Borrower shall have the right to have enforcement of this Security Instrument discontinued at any time prior to the earliest of: (a) five days before sale of the Property pursuant to any power of sale contained in this Security Instrument; (b) such other period as Applicable Law might specify for the termination of Borrower's right to reinstate; or (e) entry of a judgment enforcing this Security Instrument. Those conditions are that Borrower: (a) pays Lender all sums which then would be due under this Security Instrument and the Note as if no acceleration had occurred; (b) cures any default of any other covenants or agreements; (c) pays all expenses incurred in enforcing this Security Instrument, including, but not limited to, reasonable attorneys' fees, property inspection and valuation fees, and other fees incurred for the purpose of protecting Lender's interest in the Property and rights under this Security Instrument; and (d) takes such action as Lender may reasonably require to assure that Lender's interest in the Property and rights under this Security Instrument, and Borrower's obligation to pay the sums secured by this Security Instrument, shall continue unchanged. Lender may require that Borrower pay such reinstatement sums and expenses in one or more of the following forms, as selected by Lender: (a) cash; (b) money order; (c) certified check, bank check, treasurer's check or cashier's check, provided any such check is drawn upon an institution whose deposits are insured by a federal agency. instrumentality or entity; or (d) Electronic Funds Transfer. Upon reinstatement by Borrower, this Security Instrument and obligations secured hereby shall remain fully effective as if no acceleration had occurred. However, this right to reinstate shall not apply in the case of acceleration under Section 18.

20. Sale of Note; Change of Loan Servicer; Notice of Grievance. The Note or a partial interest in the Note (together with this Security Instrument) can be sold one or more times without prior notice to Borrower. A sale might result in a change in the entity (known as the "Loan Servicer") that collects Periodic Payments due under the Note and this Security Instrument and performs other mortgage loan servicing obligations under the Note, this Security Instrument, and Applicable Law. There also might be one or more changes of the Loan Servicer unrelated to a sale of the Note. If there is a change of the Loan Servicer, Borrower will be given written notice of the change which will state the name and address of the new Loan Servicer, the address to

-6A(FL) (0005)

CHL (08/05)

Page 9 of 11

Form 3010 1/01

DOC ID #: 00013884537607006

which payments should be made and any other information RESPA requires in connection with a notice of transfer of servicing. If the Note is sold and thereafter the Loan is serviced by a Loan Servicer other than the purchaser of the Note, the mortgage loan servicing obligations to Borrower will remain with the Loan Servicer or be transferred to a successor Loan Servicer and are not assumed by the Note purchaser unless otherwise provided by the Note purchaser.

Neither Borrower nor Lender may commence, join, or be joined to any judicial action (as either an individual litigan) or the member of a class) that arises from the other party's actions pursuant to this Security Instrument or that alleges that the other party has breached any provision of, or any duty owed by reason of, this Security Instrument, until such Borrower or Lender has notified the other party (with such notice given in compliance with the requirements of Section 15) of such alleged breach and afforded the other party hereto a reasonable period after the giving of such notice to take corrective action. If Applicable Law provides a time period which must elapse before certain action can be taken, that time period will be deemed to be reasonable for purposes of this paragraph. The notice of acceleration and opportunity to cure given to Borrower pursuant to Section 22 and the notice of acceleration given to Borrower pursuant to Section 18 shall be deemed to satisfy the notice and opportunity to take corrective action provisions of this Section 20.

21. Hazardous Substances. As used in this Section 21: (a) "Hazardous Substances" are those substances defined as toxic or hazardous substances, pollutants, or wastes by Environmental Law and the following substances: gasoline, kerosene, other llammable or toxic petroleum products, toxic pesticides and herbicides, volatile solvents, materials containing asbestos or formaldehyde, and radioactive materials; (b) "Environmental Law" means federal laws and laws of the jurisdiction where the Property is located that relate to health, safety or environmental projection; (c) "Environmental Cleamp" includes any response action, remedial action, or removal action, as defined in Environmental Law; and (d) an "Environmental Condition" means a condition that can cause, contribute to, or otherwise trigger an Environmental Cleanup.

Borrower shall not cause or permit the presence, use, disposal, storage, or release of any Hazardous Substances, or threaten to release any Hazardous Substances, on or in the Property. Borrower shall not do, nor allow anyone else to do, anything affecting the Property (a) that is in violation of any Environmental Law, (b) which creates an Environmental Condition, or (c) which, due to the presence, use, or release of a Hazardous Substance, creates a condition that adversely affects the value of the Property. The preceding two sentences shall not apply to the presence, use, or storage on the Property of small quantities of Hazardous Substances that are generally recognized to be appropriate to normal residential uses and to maintenance of the Property (including, but not limited to, hazardous substances in consumer products).

Borrower shall promptly give Lender written notice of (a) any investigation, claim, demand, lawsuit or other action by any governmental or regulatory agency or private party involving the Property and any Hazardous Substance or Environmental Law of which Borrower has actual knowledge, (b) any Environmental Condition, including but not limited to, any spilling, leaking, discharge, release or threat of release of any Hazardous Substance, and (c) any condition caused by the presence, use or release of a Hazardous Substance which adversely affects the value of the Property. If Borrower learns, or is notified by any governmental or regulatory authority, or any private party, that any removal or other remediation of any Hazardous Substance affecting the Property is necessary, Borrower shall promptly take all necessary remedial actions in accordance with Environmental Law. Nothing herein shall create any obligation on Lender for an Environmental Cleanup.

NON-UNIFORM COVENANTS, Borrower and Lender further covenant and agree as follows:

22. Acceleration; Remedies. Lender shall give notice to Borrower prior to acceleration following Borrower's breach of any covenant or agreement in this Security Instrument (but not prior to acceleration under Section 18 unless Applicable Law provides otherwise). The notice shall specify: (a) the default; (b) the action required to cure the default; (c) a date, not less than 30 days from the date the notice is given to Borrower, by which the default must be cured; and (d) that failure to cure the default on or before the date specified in the notice may result in acceleration of the sums secured by this Security Instrument, foreclosure by judicial proceeding and sale of the Property. The notice shall further inform Borrower of the right to reinstate after acceleration and the right to assert in the foreclosure proceeding the non-existence of a default or any other defense of Borrower to acceleration and foreclosure. If the default is not cured on or before the date specified in the notice, Lender at its option may require immediate payment in full of all sums secured by this Security Instrument without further demand and may foreclose this Security Instrument by judicial proceeding. Lender shall be entitled to collect all expenses incurred in pursuing the remedies provided in this Section 22, including, but not limited to, reasonable attorneys' fees and costs of title evidence.

23. Release. Upon payment of all sums secured by this Security Instrument, Lender shall release this Security Instrument. Borrower shall pay any recordation costs. Lender may charge Borrower a fee for releasing this Security Instrument, but only if the fee is paid to a third party for services rendered and the charging of the fee is permitted under Applicable Law.

-6A(FL) (0005)

CHL (08/05)

Page 10 of 11

Form 3010 1/01

Filed: 04/17/2007 Sheet 127 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

DOC ID #: 00013884537607006

24. Attorneys' Fees. As used in this Security Instrument and the Note, attorneys' fees shall include those awarded by an appellate court and any attorneys' fees incurred in a bankruptcy proceeding.

25. July Trial Waiver. The Borrower hereby waives any right to a trial by jury in any action, proceeding, claim, or counterclaim, whether in contract or tort, at law or in equity, arising out of or in any way related to this Security Instrument or the Note.

BY SIGNING BELOW, Borrower accepts and agrees to the terms and covenants contained in this Security Instrument and in any Rider executed by Borrower and recorded with it.

Signed, sealed and delivered in the presence of:

(Seal)	Dean Brune Jeanslande	attina
-Borrower	JEAN B. JEANGLAUDE	
(Address)	11 HEMMING DR STAFFORD, VA 22554	N
Laude (Scal)	I was gestrude to the Jeang	M
-Borrower	GERTRUDE ARTHUR-JEANGLAUDE() 11 HEMMING DR	
(Address)	STAFFORD, VA 22554	
(Seal)	(<i>O</i>)	
-Borrower		
(Address)		
(Seal)		
-Borrower		
(Address)		

UA.	-	and was
STATE OF FIGURE A, The foregoing instrument was JEAN B JEANGLAUDE A	as acknowledged before me this <u>August</u> AND GERTRUDE ARTHUR JEANGLAUDE	County ss: All sac
who is personally known to me or	who has produceddriver's licens	ses as identification.
	GO) 4	111 -
	Notary Public 3/3/	07
	·	
MP - 64/EL) (2006) CHI (68/05)) Page 11 of 11	Form 3010 1/01

Serial Number: 11/736,356 Examiner: Ronnie M. Mancho Art Unit: 3664

Sheet 128 of 241

Prepared by: YVETTE ZAPATA

GL FINANCIAL SERVICES, LLC.

08/03/2006

210 N. UNIVERSITY DR STE 601 CORAL SPRINGS, FL 33071 Phone: (954)825-4300 Brk Fax No.: (954)825-4320

00013884537607006

BORROWER: JEAN B. JEANGLAUDE PROPERTY ADDRESS: 8671 THORNBROOK TERRACE POINT Boynton Beach, FL 33437-4882

LEGAL DESCRIPTION EXHIBIT A

Lot 117, CANYON ISLES PLAT ONE, according to the plat thereof, as recorded in Plat Book 105 at Page of the Public Records of Palm Beach County, Florida

FHAVACONV Legai Description Exhibit A 2C404-XX (04/03)(d)





Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 129 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

PLANNED UNIT DEVELOPMENT RIDER

After Recording Return To: COUNTRYWIDE HOME LOANS, INC. MS SV-79 DOCUMENT PROCESSING P.O.Box 10423 Van Nuys, CA 97410-0423

Prepared By: YVETTE ZAPATA GL FINANCIAL SERVICES LLC.

210 N. UNIVERSITY DR STE 601 CORAL SPRINGS, FL 33071

> 00013884537607006 [Doc ID #]

THIS PLANNED UNIT DEVELOPMENT RIDER is made this THIRD day of AUGUST, 2006 , and is incorporated into and shall be deemed to amend and supplement the, Mortgage, Deed of Trust, or Security Deed (the "Security Instrument") of the same date, given by the undersigned (the "Borrower") to secure Borrower's Note to GL FINANCIAL SERVICES, LLC.

(the "Lender") of the same date and covering the Property described in the Security Instrument and located at:

8671 THORNBROOK TERRACE POINT Boynton Beach, FL 33437-4882 [Property Address]

The Property includes, but is not limited to, a parcel of land improved with a dwelling, together with

MULTISTATE PUD RIDER - Single Family - Fannie Mae/Freddie Mac UNIFORM INSTRUMENT

7R (0405) CHL (06/04)(d) Page 1 of 3 Initials 3 USJ2 -7R (0405) CHL (06/04)(d) Page 1 of 3 Form 3150 1/01

VMP Mortgage Solutions, Inc. (800)521-7291





Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 130 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

DOC ID #: 00013884537607006

other such parcels and certain common areas and facilities, as described in

THE COVENANTS, CONDITIONS, AND RESTRICTIONS FILED OF RECORD

THAT AFFECT THE PROPERTY

ORB 19820, PG 216

(the "Declaration") The Property is a part of a planned unit development known as CANYON ISLES

[Name of Planned Unit Development]

(the "PUD"). The Property also includes Borrower's interest in the homeowners association or equivalent entity owning or managing the common areas and facilities of the PUD (the "Owners

Association") and the uses, benefits and proceeds of Borrower's interest.

PUD COVENANTS. It addition to the covenants and agreements made in the Security Instrument, Borrower and Lender further covenant and agree as follows:

- A. PUD Obligations. Borrower shall perform all of Borrower's obligations under the PUD's Constituent Documents. The "Constituent Documents" are the (i) Declaration; (ii) articles of incorporation, trust instrument or any equivalent document which creates the Owners Association; and (iii) any by-laws or other rules or regulations of the Owners Association. Borrower shall promptly pay, when due, all dues and assessments imposed pursuant to the Constituent Documents
- B. Property Insurance. So long as the Owners Association maintains, with a generally accepted insurance carrier, a "master" or "blanket" policy insuring the Property which is satisfactory to Lender and which provides insurance coverage in the amounts (including deductible levels), for the periods, and against loss by fire, hazards included within the term "extended coverage," and any other hazards, including, but not limited to, earthquakes and floods, for which Lender requires insurance, then: (i) Lender waives the provision in Section 3 for the Periodic Payment to Lender of the yearly premium installments for property insurance on the Property; and (ii) Borrower's obligation under Section 5 to maintain property insurance coverage on the Property is deemed satisfied to the extent that the required coverage is provided by the Owners Association policy

What Lender requires as a condition of this waiver can change during the term of the loan.

Borrower shall give Lender prompt notice of any lapse in required property insurance coverage

provided by the master or blanket policy.

- In the event of a distribution of property insurance proceeds in lieu of restoration or repair following a loss to the Property, or to common areas and facilities of the PUD, any proceeds payable to Borrower are hereby assigned and shall be paid to Lender. Lender shall apply the proceeds to the sums secured by the Security Instrument, whether or not then due, with the excess, if any, paid to
- C. Public Liability Insurance. Borrower shall take such actions as may be reasonable to insure that the Owners Association maintains a public liability insurance policy acceptable in form, amount, and extent of coverage to Lender.
- D. Condemnation. The proceeds of any award or claim for damages, direct or consequential, payable to Borrower in connection with any condemnation or other taking of all or any part of the Property or the common areas and facilities of the PUD, or for any conveyance in lieu of condemnation, are hereby assigned and shall be paid to Lender. Such proceeds shall be applied by Lender to the sums secured by the Security Instrument as provided in Section 11.
- E. Lender's Prior Consent. Borrower shall not, except after notice to Lender and with Lender's prior written consent, either partition or subdivide the Property or consent to: (i) the abandonment or termination of the PUD, except for abandonment or termination required by law in the case of substantial destruction by fire or other casualty or in the case of a taking by condemnation or eminent domain; (ii) any amendment to any provision of the "Constituent Documents" if the provision is for the

-7R (0405)

CHL (06/04)

Page 2 of 3

MODE CAT Form 3150 1/01

Filed: 04/17/2007

Sheet 131 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

DOC ID #: 00013884537607006

express benefit of Lender; (iii) termination of professional management and assumption of self-management of the Owners Association; or (iv) any action which would have the effect of rendering the public liability insurance coverage maintained by the Owners Association unacceptable to Lender

to Lender.

F. Remedies. If Borrower does not pay PUD dues and assessments when due, then Lender may pay them. Any amounts disbursed by Lender under this paragraph F shall become additional debt of Borrower seoured by the Security Instrument. Unless Borrower and Lender agree to other terms of payment, these amounts shall bear interest from the date of disbursement at the Note rate and shall be payable, with interest, upon notice from Lender to Borrower requesting payment.

BY SIGNING BELOW Borrower accepts and agrees to the terms and provisions contained in this PUD Rider.

(Seal)	lan Bruner Hankande	1
- Borrower	JEAN B FANGLAUDE	(1
	11 HEMMING DR	V
	STAFFORD VA 22554	
(Seal)	Crestrude Arthur-Jeanglande	
- Borrower	GERTRUDE ARTHUR-JEANGLAUDE	~
	11 HEMMING (PR)	(
	STAFFORD, VA 22554	
(Seal)	9	
- Borrower		
	Committee and the second	
		
(Seal)		
 Borrower 		

-7R (0405) CHL (06/04)

Page 3 of 3

Form 3150 1/01

Sheet 132 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664



SECOND HOME RIDER

After Recording Return To:
COUNTRYWIDE HOME LOANS, INC.
MS SV-79 DOCUMENT PROCESSING
P.O.Box 10423
Van Nuys, CA 91410 0423

Prepared By:
YVETTE ZAPATA
GL FINANCIAL SERVICES, FAC.

210 N. UNIVERSITY DR STE 601 CORAL SPRINGS, FL 33071

> 00013884537607006 [Doc ID #]


THIS SECOND HOME RIDER is made this THIRD day of AUGUST, 2006 , and is incorporated into and shall be deemed to amend and supplement the Mortgage, Deed of Trust, or Security Deed (the "Security Instrument") of the same date given by the undersigned (the "Borrower" whether there are one or more persons undersigned) to secure Borrower's Note to GL FINANCIAL SERVICES, LLC.

(the "Lender") of the same date and covering the Property described in the Security Instrument (the "Property"), which is located at:

8671 THORNBROOK TERRACE POINT Boynton Beach, FL 33437-4882 [Property Address]

MULTISTATE SECOND HOME RIDER - Single Family - Fannie Mae/Freddie Mac UNIFORM INSTRUMENT Page 1 of 2 Initials: Argument - 365R (0405) CHL (06/04)(d) Form 3890 1/01 VMP Mortgage Solutions, Inc. (800)521-7291





Filed: 04/17/2007

Examiner: Ronnie M. Mancho Art Unit: 3664

07 Sheet 133 of 241

DOC ID #: 00013884537607006
In addition to the covenants and agreements made in the Security Instrument, Borrower and Lender further covenant and agree that Sections 6 and 8 of the Security Instrument are deleted and are replaced by the

Months of the Property as Borrower's second home.

Borrower's hall keep the Property available for Borrower's exclusive use and enjoyment at all times, and shall not subject the Property to any timesharing or other shared ownership arrangement or to any rental pool of agreement that requires Borrower either to rent the Property or give a management firm or any other herson any control over the occurancy or use of the Property.

or any other person any control over the occupancy or use of the Property.

8. Borrower's: Doan Application. Borrower shall be in default if, during the Loan application process, Borrower or any persons or entities acting at the direction of Borrower or with Borrower's knowledge or consent gave materially false, misleading, or inaccurate information or statement because (or failed to provide Lender with material information) in connection with the Loan. Material representations included but are not limited to, representations concerning Borrower's occupancy of the Property as Borrower's second home.

BY SIGNING BELOW, Borrower accepts and agrees to the terms and provisions contained in this Second Home Rider.

Series and the series of the s	
Jean Brune Dean Hande	(Seal)
JEAN B. JEANSLAUDE	- Borrower
11 HEMMING DR	
STAFFORD, VA 22584	
Mertrude Arthur-Jeanglande	(Seal)
GERTRUDE ARTHUR-JEANGLAUDE	- Borrower
11 HEMMING DR	
STAFFORD, VA 22554	
	(Seal)
	- Borrower
	(Seal)
	- Borrower

-365R (0405) CHL (06/04)

Page 2 of 2

Form 3890 1/01

Filed: 04/17/2007 Examiner: Ronnie M. Mancho Art Unit: 3664



ຂີ

22

After Recording Return To: COUNTRYWIDE HOME LOANS, INC. PRINCE HER MS SV-79 DOCUMENT PROCESSING THE SOMPANY
P.O.Box 10423
Yan Nuye, CA 91410-0486NALSPRINGS FL 33071-348 This document was prepared by: (954) 755-9889

TYRTTE ZAPATA
GI FINANCIAL SERVICES, LLC.

CFN 20060462329 OR BK 20706 PG 0344 RECORDED 08/08/2006 15:46:06 Palm Beach County, Florida AMT 141,120.00 Deed Doc 494.20 Inteng 282.24 Sharon R. Bock, CLERK & COMPTROLLER Pgs 0344 - 354; (11pgs)

210 N. UNIVERSITY DR STE 601 CORAL SPRINGS, FL 33071

[Space Above This Line For Recording Data]

00013884536807006

[Doc ID #]

MORTGAGE (Line of Credit)

MIN 1000157-0007101590-9

THIS MORTGAGE, dated AUGUST 03, 2006 , is between JEAN B JEANGLAUDE, AND GERTRUDE ARTHUR-JEANGLAUDE, HUSBAND AND WIFE

residing at

11 HEMMING DR

the person or persons signing as "Mortgagor(s)" below and hereinafter referred to as "we," "our," or "us" and MORTGAGE ELECTRONIC REGISTRATION SYSTEMS, INC., ("MERS") a Delaware corporation with an address of P.O. Box 2026, Flint, M1.48561-2026, tel. (888) 679-MERS acting solely as nominee for GL FINANCIAL SERVICES, LLC.

("Lender" or "you") and its successors and assigns. MERS is the "Mortgagee" under this Mortgage.

MORTGAGED PREMISES: In consideration of the loan hereinafter described, we hereby mortgage, grant and convey to MERS (solely as nominee for Lender and Lender's successors and assigns) and to the successors and assigns of MERS, the premises located at: 8671 THORNBROOK TERRACE POINT

Street

BOYNTON BEACH

PALM BEACH County

Municipality (the "Premises"). 33437 \mathbf{FL}

and further described as:

SEE EXHIBIT "A" ATTACHED HERETO AND MADE A PART HEREOF.

• MERS HELOC - FL MORTGAGE 2D993-FL (11/04)(d)

Page 1 of 5





DOC ID #: 00013884536807006

The Premises includes all buildings and other improvements now or in the future on the Premises and all rights and interests which derive from our ownership, use or possession of the Premises and all appurtenances thereto.

WE UNDERSTAND and agree that MERS is a separate corporation acting solely as nominee for Lender and Lender's successors and assigns, and holds only legal title to the interests granted by us in this Mortgage, but, if necessary to comply with law or custom, MERS (as nominee for Lender and Lender's successors and assigns) has the right: to exercise any or all of those interests, including, but not limited to, the right to foreclose and sell the Property, and to take any action required of Lender including, but not limited to, releasing or canceling this Mortgage

LOAN: This Mortgage will secure Lender's loan to us in the principal amount of or so much thereof as may be advanced and readvanced from time to time to \$ 141,120.00 JEAN B. JEANGLAUDE GERTRUDE ARTHUR-JEANGLAUDE

.and

Sheet 135 of 241

the Borrower(s) under the Home Equity Credit Line Agreement And Disclosure Statement (the "Note") dated 08/03/2006 plus interest and costs, late charges and all other charges related to the loan, all of which sums are repayable according to the Note. This Mortgage will also secure the performance of all of the promises and agreements made by us and each Borrower and Co-Signer in the Note, all of our promises and agreements in this Mortgage, any extensions, renewals, amendments, supplements and other modifications of the Note, and any amounts advanced by you under the terms of the section of this Mortgage entitled "Our Authority To You." Loans under the Note may be made, repaid and remade from time to time in accordance with the terms of the Note and subject to the Credit Limit set forth in the Note.

OWNERSHIP: We are the sole owner(s) of the Premises. We have the legal right to mortgage the Premises

OUR IMPORTANT OBLIGATIONS:

- (a) TAXES: We will pay all real estate taxes, assessments, water charges and sewer rents relating to the Premises when they become due. We will not claim any credit on, or make deduction from, the loan under the Note because we pay these taxes and charges. We will provide Lender with proof of payment upon
- (b) MAINTENANCE: We will maintain the building(s) on the Premises in good condition. We will not make major changes in the building(s) except for normal repairs. We will not tear down any of the building(s) on the Premises without first getting Lender's consent. We will not use the Premises illegally. If this Mortgage is on a unit in a condominium or a planned unit development, we shall perform all of our obligations under the declaration or covenants creating or governing the condominium or planned unit development, the by-laws and regulations of the condominium or planned unit development and constituent
- (c) INSURANCE: We will keep the building(s) on the Premises insured at all time against loss, by fire, flood and any other hazards Lender may specify. We may choose the insurance company, but our choice is subject to Lender's reasonable approval. The policies must be for at least the amounts and the time periods that Lender specifies. We will deliver to Lender upon Lender's request the policies of other proof of the insurance. The policies must name Lender as "mortgagee" and "loss-payee" so that Lender will receive payment on all insurance claims, to the extent of this Mortgage, before we do. The insurance policies must also provide that Lender be given not less than 10 days prior written notice of any cancellation or reduction in coverage, for any reason. Upon request, we shall deliver the policies, certificates or other evidence of insurance to Lender. In the event of loss or damage to the Premises, we will immediately notify Lender in writing and file a proof of loss with the insurer. Lender may file a proof of loss on our behalf if we fail or refuse to do so. Lender may also sign our name to any check, draft or other order for the payment of insurance proceeds in the event of loss or damage to the Premises. If Lender receives payment of a claim, Lender will have the right to choose to use the money either to repair the Premises or to reduce the amount owing on the Note.

(d) CONDEMNATION: We assign to Lender the proceeds of any award or claim for damages, direct or consequential, in connection with any condemnation or other taking of the Premises, or part thereof, or for conveyance in lieu of condemnation, all of which shall be paid to Lender, subject to the terms of any Prior Mortgage.

MERS HELOC - FL MORTGAGE 20993-FL (11/04)

Page 2 of 5

N3TG

Serial Number: 11/736,356 Examiner: Ronnie M. Mancho

DOC ID #: 00013884536807006

Art Unit: 3664

(e) SECURITY INTEREST: We will join with you in signing and filing documents and, at our expense, in doing whatever you believe is necessary to perfect and continue the perfection of your lien and security interest in the Premises. It is agreed that the Lender shall be subrogated to the claims and liens of all parties, whose claims or liens are discharged or paid with the proceeds of the Agreement secured hereby.

OUR AUTHORITY TO YOU: If we fail to perform our obligations under this Mortgage, Lender may, if fender chooses, perform our obligations and pay such costs and expenses. Lender will add the amounts Lender advances to the sums owing on the Note, on which Lender will charge interest at the interest rate set forth in the Note. If, for example, we fail to honor our promises to maintain insurance in effect, or to pay filing fees, taxes or the costs necessary to keep the Premises in good condition and repair or to perform any of our agreements with Lender, Lender may, if Lender chooses, advance any sums to satisfy any of our agreements with Lender or MERS and charge us interest on such advances at the interest rate set forth in the Note. This Mortgage secures all such advances. Lender's payments on our behalf will not cure our failure to perform our promises in this Mortgage. Any replacement insurance that Lender obtains to cover loss or damages to the Premises may be limited to the amount owing on the Note plus the amount of any Prior Mortgages.

(g) PRIOR MORTSAGE: If the provisions of this paragraph are completed, this Mortgage is subject and subordinate to a prior stortgage dated 08/03/2006 and given by us to AWL

as mortgagee, in the original amount of \$ 650,000.00 (the "Prior Mortgage"). We shall not increase, amend or modify the Prior Mortgage without your prior written consent and shall upon receipt of any written notice from the holder of the Prior Mortgage promptly deliver a copy of such notice to you. We shall pay and perform all of our obligations under the Prior Mortgage as and when required under the Prior Mortgage.

- (h) HAZARDOUS SUBSTANCES we shall not cause or permit the presence, use, disposal, storage, or release of any Hazardous Substances on or in the Premises. We shall not do, nor allow anyone else to do, anything affecting the Premises that is in violation of any Brivinonmental Law. The preceding two sentences shall not apply to the presence, use, or storage on the Premises of small quantities of Hazardous Substances that are generally recognized to be appropriate to normal residential uses and to maintenance of the Premises. As used in this paragraph, "Hazardous Substances are those substances defined as toxic or hazardous substances by Environmental Law and the following substances: gasoline, kerosene, other flammable or toxic petroleum products, toxic pesticides and herbicides, volatile solvents, materials containing asbestos or formaldehyde, and radioactive materials. As used in this paragraph, "Environmental Law" means federal laws and laws of the jurisdiction where the Premises are located that relate to health, safety or environmental protection.
- (i) SALE OF PREMISES: We will not sell, transfer ownership of, mortgage or otherwise dispose of our interest in the Premises, in whole or in part, or permit any other lien or claim against the Premises without Lender's prior written consent.
 - (j) INSPECTION: We will permit Lender to inspect the Premises at any reasonable time.

NO LOSS OF RIGHTS: The Note and this Mortgage may be negotiated or assigned without releasing us or the Premises. Lender may ad or release any person or property obligated under the Note and this Mortgage with losing rights in the Premises.

DEFAULT: Except as may be prohibited by applicable law, and subject to any advance notice and cure period if required by applicable law, if any event or condition of default as described in the Note occurs, Lender may foreclose upon this Mortgage. This means that Lender may arrange for the Premises to be sold, as provided by law, in order to pay off what we owe on the Note and under this Mortgage. If the money Lender receive from the sale is not enough to pay off what we owe, we will still owe the difference which Lender may seek to collect from us in accordance with applicable law, In addition, Lender may, in accordance with applicable law, (i) enter on and take possession of the Premises; (ii) collect the rental payments, including over-due rental payments, directly from tenants; (iii) manage the Premises; and (iv) sign, cancel and change leases. We agree that the interest rate set forth in the Note will continue before and after a default, entry of a judgment and foreclosure. In addition, Lender shall be entitled to collect all reasonable fees and costs actually incurred by Lender in proceeding to foreclosure, including, but not limited to, reasonable attorneys fees and costs of documentary evidence, abstracts and title reports.

ASSIGNMENT OF RENTS; APPOINTMENT OF RECEIVER: As additional security, we assign to you the rents of the Premises. You or a receiver appointed by the courts shall be entitled to enter upon, take possession of and manage the Premises and collect the rents of the Premises including those past due.

● MERS HELOC · FL MORTGAGE 2D993-FL (11/04)

Page 3 of 5

Initials: LAT

DOC ID #: 00013884536807006

WAIVERS: To the extent permitted by applicable law, we waive and release any error or defects in proceedings to enforce this Mortgage and hereby waive the benefit of any present or future laws providing for stay of execution, extension of time, exemption from attachment, levy and sale and homestead exemption.

BINDING EFFECT: Each of us shall be fully responsible for all of the promises and agreements in this Mortgage Until the Note has been paid in full and the obligation to make further advances under the Note has been terminated, the provisions of this Mortgage will be binding on us, our legal representatives, our heirs and all inture owners of the Premises. This Mortgage is for MRRS and Lender's benefit and for the benefit of anyone to whom it may be assigned. Upon payment in full of all amounts owing under the Note and this Mortgage and provided any obligation to make further advances under the Note has terminated, this Mortgage and your rights in the Premises shall end.

NOTICE: Except for any notice required under applicable law to be given in another manner, (a) any notice to us provided for in this Deed of Trust shall be given by delivering it or by mailing such notice by regular first class mail addressed to us at the last address appearing in your records or at such other address as we may designate by notice to you as provided herein, and (b) any notice to you shall be given by certified mail, return receipt requested, to your address at For MERS:

P.O. Box 2026, Flint, MI 48501-2026

For Lender:

210 N. UNIVERSITY DR \$78 601, CORAL SPRINGS, FL 33071

or to such other address as you may designate by notice to us. Any notice provided for in this Mortgage shall be deemed to have been given to us or you when given in the manner designated herein.

RELEASE: Upon payment of all sums secured by this Mortgage and provided the obligation to make further advances under the Note has terminated you, shall discharge this Mortgage without charge to us, except that we shall pay any fees for recording of a satisfaction of this Mortgage.

GENERAL: You can waive or delay enforcing any of your rights under this Mortgage without losing them. Any waiver by you of any provisions of this Mortgage will not be a waiver of that or any other provision on any other occasion.

• MERS HELOC - FL MORTGAGE 2D993-FL (11/04)

Page 4 of 5

Initials: GA

THIS MORTGAGE has been signed by each of us under seal on the date first above written.

WITNESS

WITNESS

JEAN B. JEANGLAUDE

11 HEMMING DR

STAFFORD, VA 22554

JEANGLAUDE

17 HEMMING DR

STAFFORD, VA 22554

Mortgagor:

(SEAL)

Mortgagor:

(SEAL)

Mortgagor:

County ss:

The foregoing instrument was acknowledged before me this August 3, 2006

JEAN B. JEANGLAUDE AND GERTRUDE ARTHUR JEANGLAUDE

who is personally known to me or who has produced

driver's licenses

as identification.

• MERS HELOC - FL MORTGAGE 2D993-FL (11/04)

Page 5 of 5

Prepared by: YVETTE ZAPATA

GL FINANCIAL SERVICES, LLC.

08/03/2006

210 N. UNIVERSITY DR STE 601 CORAL SPRINGS, FL 33071 Phone: (954)825-4300 Brk Fax No.: (954)825-4320

Sheet 139 of 241

00013884536807006

BORRÓWER: JEAN B. JEANGLAUDE PROPERTY ADDRESS: 8671 THORNBROOK TERRACE POINT BOYNTON BEACH, FL 33437

LEGAL DESCRIPTION EXHIBIT A

Lot 117, CANYON ISLES PLAT ONE, according to teh plat thereof, as recorded in Plat Book 105 at Page 1 of the Public Records of Palm Beach County, Florida

FHAVA/CONV Legal Description Exhibit A 2C404-XX (04/03)(d)





Serial Number: 11/736,356 Filed: 04/17/2007

Sheet 140 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

PLANNED UNIT DEVELOPMENT RIDER

After Recording Return To:
COUNTRYWIDE SOME LOANS, INC.
MS SV-79 DOCUMENT PROCESSING
P.O.Box 10423
Van Nuys, CA 91410-0423

Prepared By: YVETTE ZAPATA GL FINANCIAL SERVICES LLC.

210 N. UNIVERSITY DR STE 601 CORAL SPRINGS, FL 33071

> 00013884536807006 [Doc ID #]

THIS PLANNED UNIT DEVELOPMENT RIDER is made this <code>THIRD</code> day of <code>AUGUST</code>, <code>2006</code>, and is incorporated into and shall be deemed to amend and supplement the, <code>Montgage</code>, <code>Ded of Trust</code>, or <code>Security Deed</code> (the "Security Instrument") of the same date, given by the <code>undersigned</code> (the "Borrower") to <code>secure Borrower's Note to GL FINANCIAL SERVICES</code>, <code>LLC</code>.

(the "Lender") of the same date and covering the Property described in the Security Instrument and located at:

8671 THORNBROOK TERRACE FOINT BOYNTON BEACH, FL 33437 [Property Address]

The Property includes, but is not limited to, a parcel of land improved with a dwelling, together with

MULTISTATE PUD RIDER - Single Family - Fannie Mae/Freddie Mac UNIFORM INSTRUMENT
-7R (0405) CHL (06/04)(d) Page 1 of 3 Initials:

VMP Mortgage Solutions, Inc. (800)521-7291 Form (150)/01





•••

DOC ID #: 00013884536807006

other such parcels and certain common areas and facilities, as described in THE COVENANTS, CONDITIONS, AND RESTRICTIONS FILED OF RECORD

THAT REFECT THE PROPERTY

ORB 19820, PG 216

(the "Declaration"). The Property is a part of a planned unit development known as

[Name of Planned Unit Development]

(the "PUD"). The Property also includes Borrower's interest in the homeowners association or equivalent entity owning or managing the common areas and facilities of the PUD (the "Owners Association") and the uses, benefits and proceeds of Borrower's interest.

Association") and the uses, benefits and proceeds of Borrower's interest.

PUD COVENANTS. In addition to the covenants and agreements made in the Security
Instrument, Borrower and Lender further covenant and agree as follows:

- A. PUD Obligations. Borrowe's shall perform all of Borrower's obligations under the PUD's Constituent Documents. The "Constituent Documents" are the (i) Declaration; (ii) articles of incorporation, trust instrument or any equivalent document which creates the Owners Association; and (iii) any by-laws or other rules or regulations of the Owners Association. Borrower shall promptly pay, when due, all dues and assessments imposed pursuant to the Constituent Documents.
- (ii) any by-laws or other intes or regulators of the Constituent Documents.

 B. Property Insurance. So long as the Owners Association maintains, with a generally accepted insurance carrier, a "master" or "blanket" policy insuring the Property which is satisfactory to Lender and which provides insurance coverage in the amounts (including deductible levels), for the periods, and against loss by fire, hazards included within the term "extended coverage," and any other hazards, including, but not limited to, earthquakes and floods, for which Lender requires insurance, then: (i) Lender waives the provision in Section 3 for the Periodic Payment to Lender of the yearly premium installments for property insurance overage on the Property; and (ii) Borrower's obligation under that the required coverage is provided by the Owners Association policy.

What Lender requires as a condition of this waiver can change during the term of the loan.

Borrower shall give Lender prompt notice of any lapse in required property insurance coverage provided by the master or blanket policy.

- In the event of a distribution of property insurance proceeds in lieu of restoration or repair following a loss to the Property, or to common areas and facilities of the PUD, any proceeds payable to Borrower are hereby assigned and shall be paid to Lender. Lender shall apply the proceeds to the sums secured by the Security Instrument, whether or not then due, with the excess, if any, paid to Borrower
- C. Public Liability Insurance. Borrower shall take such actions as may be reasonable to insure that the Owners Association maintains a public liability insurance policy acceptable in form, amount, and extent of coverage to Lender.
- D. Condemnation. The proceeds of any award or claim for damages, direct or consequential, payable to Borrower in connection with any condemnation or other taking of all or any part of the Property or the common areas and facilities of the PUD, or for any conveyance in lieu of condemnation, are hereby assigned and shall be paid to Lender. Such proceeds shall be applied by Lender to the sums secured by the Security Instrument as provided in Section 11.
- E. Lender's Prior Consent. Borrower shall not, except after notice to Lender and with Lender's prior written consent, either partition or subdivide the Property or consent to: (i) the abandonment or termination of the PUD, except for abandonment or termination required by law in the case of substantial destruction by fire or other casualty or in the case of a taking by condemnation or eminent domain; (ii) any amendment to any provision of the "Constituent Documents" if the provision is for the

-7R (0405)

CHL (06/04)

Page 2 of 3

Initials GA Form 3150 1/0 Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 142 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

· " ·

DOC ID #: 00013884536807006

express benefit of Lender; (iii) termination of professional management and assumption of self-management of the Owners Association; or (iv) any action which would have the effect of rendering fite public liability insurance coverage maintained by the Owners Association unacceptable to Lender.

to Lender.

F. Remedies. If Borrower does not pay PUD dues and assessments when due, then Lender may pay them. Any amounts disbursed by Lender under this paragraph F shall become additional debt of Borrower sebured by the Security Instrument. Unless Borrower and Lender agree to other terms of payment, these camounts shall bear interest from the date of disbursement at the Note rate and shall be payable, with interest, upon notice from Lender to Borrower requesting payment.

BY SIGNING BELOW Borrower accepts and agrees to the terms and provisions contained in this PUD Rider.

n braner Jeansland	(Sea
JEAN B ZEANGLAUDE	- Borrowe
11 HEMMING DR	
STAFFORD VA 22554	
Gertrude, Arthur-Jeanglande	(Sea
GERTRUDE ARTHUR JEANGLAUDE	- Borrowe
11 HEMMING ⊅\$\	
STAFFORD, VA 22554	
	(Sea
V. S. A	- Borrowe
	(Sea
	- Borrowe

-7R (0405) CHL (06/04)

Page 3 of 3

Form 3150 1/01

· ··

Serial Number: 11/736,356

SECOND HOME RIDER

After Recording Return To:
COUNTRYWIDE HOME LOANS, INC.
MS SV-79 DOCUMENT PROCESSING
P.O.Box 10423
Van Nuys, CA 91410-0423

Prepared By:
YVETTE ZAPATA
GL FINANCIAL SERVICES, LLC

210 N. UNIVERSITY DR STE 601 CORAL SPRINGS, FL 33071

> 00013884536807006 [Doc ID #]

THIS SECOND HOME RIDER is made this THIRD day of AUGUST, 2006, and is incorporated into and shall be deemed to amend and supplement the Mortgage, Deed of Trust, or Security Deed (the "Security Instrument") of the same date given by the undersigned (the "Bornower" whether there are one or more persons undersigned) to secure Bornower's Note to GL FINANCIAL SERVICES, LLC.

(the "Lender") of the same date and covering the Property described in the Security Instrument (the "Property"), which is located at:

8671 THORNBROOK TERRACE POINT BOYNTON BEACH, FL 33437 [Property Address]

MULTISTATE SECOND HOME RIDER - Single Family - Fannie Mae/Freddie Mac UNIFORM INSTRUMENT Page 1 of 2 Initials:

365R (0405) CHL (06/04)(d) Form 38

VMP Mortgage Solutions, Inc. (800)521-7291



Serial Number: 11/736,356 Filed: 04/17/2007

Examiner: Ronnie M. Mancho Art Unit: 3664

Sheet 144 of 241

DOC ID #: 00013884536807006 covenant and agree that Sections 6 and 8 of the Security Instrument are deleted and are replaced by the

following:

6. Occupancy. Borrower shall occupy, and shall only use, the Property as Borrower's second home.

Borrower shall keep the Property available for Borrower's exclusive use and enjoyment at all times,

Borrower shall keep the Property available for Borrower's exclusive use and enjoyment at all times, Borrower's nail keep in a Property avanable for borrower's exclusive use and enjoyment at an ames, and shall not subject the Property to any timesharing or other shared ownership arrangement or to any rental pool or agreement that requires Borrower either to rent the Property or give a management firm or any other person any control over the occupancy or use of the Property.

8. Borrower's Louis Application. Borrower shall be in default if, during the Loan application

process, Borrower or any persons or entities acting at the direction of Borrower or with Borrower's knowledge or consent gave materially false, misleading, or inaccurate information or statements to Lender (or failed to provide Lender with material information) in connection with the Loan. Material representations include but are not limited to, representations concerning Borrower's occupancy of the Property as Borrower's second home.

BY SIGNING BELOW, Borrower accepts and agrees to the terms and provisions contained in this Second Home Rider.

	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
(Seal)	Jean Bruner geanplande
- Borrower	JEAN B. (JEANGLAUDE 11 HEMMING DR STAFFORD, VA 22594
(Seal)	Gertrude Arthur-Jeanglande
- Borrower	GERTRUDE ARTHUR-UEANGLAUDE 11 HEMMING DR STAFFORD, VA 22554
(Seal)	
- Borrower	<del>.</del>
(Seal)	
- Borrower	

-365R (0405) CHL (06/04)

Page 2 of 2

Form 3890 1/01

Serial Number: 11/736,356 Examiner: Ronnie M. Mancho

Art Unit: 3664

Sheet 145 of 241

### 

Document Prepared By: Stephan L. Galiano ReconTrust Company, N.A. 1330 W. Southern Ave MS: TPSA-88 Tempe, AZ 85282-4545 (800) 540-2684

CFN 20070183108 OR BK 21628 PG 0225 RECORDED 04/16/2007 15:01:26 Palm Beach County, Florida Sharon R. Bock, CLERK & COMPTROLLER Pg 0225; (1pg)

When recorded return to: JEAN B JEANGLAUDE, GERTRUDE ARTHUR-JEANGLAUDE 11 Hemming Dr Stafford, VA 22554

DOCID#0001388453762005N

#### SATISFACTION OF MORTGAGE

KNOW ALL MEN BY THESE PRESENTS: Mortgage Electronic Registration Systems, Inc. the owner and holder of

KNOW ALL MEN BY THESE PRESENTS: Mortgage Electronic regiserations a certain mortgage deed executed by JEAN B JEANGLAUDE. GERTRUDE ARTHUR-JEANGLAUDE to Mortgage Electronic Registration Systems, Inc. bearing date 08/03/2006, recorded on 08/08/2006 in Official Records Book OR 20706, Page'0327, Instrument # 20060482328 in the office of the Clerk of the Circuit Court of PALM BEACH County State of Flipride, securing a certain note in the principal sum 6550,000.00 Dollars, and certain promises and obligations set-forth in said mortgage deed, upon the property situated in said State and County hereby acknowledge full payment and satisfaction of said note and mortgage deed, and surrenders the same as canceled, and hereby directs the Clerk of the said Circuit Court to cancel the same of record.

IN WITNESS WHEREOF the said Corporation has caused these presents to be executed in its name, and its corporate seal to be herebut directs. The presents to be executed in its name, and its corporate seal to be day of April, 2007.

Mortgage Electronic Registration Systems, Inc.

Witness

Stacey Shirra Assistant Secretary

STATE OF ARIZONA COUNTY OF MARICOPA

On 04/04/2007, before me, Christine Jones, Notary Public, personally appeared Stacey Shirra personally known to me (or proved to me on the basis of satisfactory evidence) to be the person whose name is subscribed to the within instrument and acknowledged to me that he/she executed the same in his/her authorized capacity, and that by his/her signature on the instrument the person, or the entity upon behalf of which the person acted, executed the

Witness my hand and official seal.

Christine Jones, Notary Public Expires: 12/21/2009



OFFICIAL SEAL
CHRISTINE JONES
NOTARY PUBLIC - ARIZONA
MARICOPA COUNTY My Comm. Expires Dec. 21, 2008

Document Prepared By: Steven U. Galiano ReconTrust Company, N.A. 1330 W. Southern Ave. MS: TPSA-88 Tempe, AZ 85282-4545 (800) 540-2684



CFN 20070185466 OR BK 21632 FG 1381 RECORDED 04/17/2007 14:52:07 Palm Beech County, Florida Sharen R. Bock, CLERK & COMPTROLLER Pg 1381; (1pg)

When recorded return to: JEAN B JEANGLAUDE, GERTRUDE ARTHUR-JEANGLAU 11 HEMMING DRIVE STAFFORD VA 22554

DOCID#0001388453682005N

#### SATISFACTION OF MORTGAGE

KNOW ALL MEN BYTHESE PRESENTS: Mortgage Electronic Registration Systems, Inc. the owner and holder of a certain mortgage deed executed by JEAN B JEANGLAUDE, GERTRUDE ARTHUR-JEANGLAU

JEAN B JEANGLAUDE GERTRUDÉ ARTHUR-JEANGLAU
to Mortgage Electronic Régistration Systems, Inc. bearing date 08/03/2006, recorded on 08/08/2006 in Official
Records Book 20706, Pagie 0344, Instrument # 20060462329 in the office of the Clerk of the Circuit Court of PALM
BEACH County State of Florida, securing a certain note in the principal sum of \$141,120.00 Dollars, and certain
promises and obligations self-spirit in said mortgage deed, upon the property situated in said State and County
hereby acknowledge full payment and satisfaction of said note and mortgage deed, and surrenders the same as
canceled, and hereby directs the clerk of the said Circuit Court to cancel the same of record.

(CORPORATE
SEAL)

| N WITNESS WHEREOF the said Corporation has caused these
presents to be executed in its name, and its corporate seal to be
hereunto affixed, by its proper officers thereunto duly authorized, the 03
day of April, 2007.

hereunto amxeu, a day of April, 2007.

Mortgage Electronic Registration Systems, Inc.

Вохапле Вегтеа Assistant Secretary

Signed and delivered in the presence of:

Monica Castro
Witner Witness

Peter Lopez Assistant Secretary

STATE OF ARIZONA COUNTY OF MARICOPA

On 04/03/2007, before me, Mary H. Doyle, Notary Public, personally appeared Peter Lopez personally known to me (or proved to me on the basis of satisfactory evidence) to be the person whose name is subscribed to the within instrument and acknowledged to me that he/she executed the same in his/her authorized capity, and that by his/her signature on the instrument the person, or the entity upon behalf of which the person acted, executed the instrument.

Witness my hand and official seal

Mary H. Doyle, Notary Public Expires: 08/18/2009





Serial Number: 11/736,356 Examiner: Ronnie M. Mancho

Recording Requested by & When Recorded Return To: US Recordings, Inc. PO Box 19989

Louisville, KY 40259 This document was prepared by TRATHER MCLAUGHLIN

QUINTRYWIDE HOME LOANS, INC.

2380 PERFORMANCE DR MSRGV

RICHARDSON TX 75082

CFN 20070188785 OR BK 21639 PG 1219 RECORDED 04/19/2007 08:35:21 Palm Beach County, Florida ANT 807,000.00

Deed Doc 2,824.50

Art Unit: 3664

Intang 1,614.00 Sharon R. Bock,CLERK & COMPTROLLER Pgs 1219 - 1236; (18pgs)

-{Space Above This Line For Recording Data}-

38382630

165070024 [Escrew/Closing #1 00016597093403007

[Doc ID #]

**MORTGAGE** 

MIN 1000157 0007988670 7

T007-040958 DMR NREIS

DEFINITIONS

Words used in multiple sections of this document are defined below and other words are defined in Sections 3, 11, 13, 18, 20 and 21. Certain rules regarding the usage of words used in this document are also provided in

(A) "Security Instrument" means this document, which is dated MARCH 30, 2007 , together with all Riders to this document.

(B) "Borrower" is

JEAN BRUNER JEANGLAUDE, AND GERTRUDE ARTHUR-JEANGLAUDE, HUSBAND AND WIFE

Borrower is the mortgagor under this Security Instrument.

(C) "MERS" is Mortgage Electronic Registration Systems, Inc. MERS is a separate corporation that is acting solely as a nominee for Lender and Lender's successors and assigns. MERS is the mortgagee under this Security Instrument. MERS is organized and existing under the laws of Delaware, and has an address and telephone number of P.O. Box 2026, Flint, MI 48501-2026, tel. (888) 679-MERS.

(D) "Lender" is COUNTRYWIDE HOME LOAMS, INC.

Lender is a CORPORATION

organized and existing under the laws of NEW YORK

4500 Park Granada MSN# SVB-314, Calabasas, CA 91302-1613

(E) "Note" means the promissory note signed by Borrower and dated MARCH 30, 2007 . The Note states that Borrower owes Lender

EIGHT HUNDRED SEVEN THOUSAND and 00/100


Dollars (U.S. \$ 807,000.00 ) plus interest. Borrower has promised to pay this debt in regular Periodic Payments and to pay the debt in full not later than APRIL 01, 2037

(F) "Property" means the property that is described below under the heading "Transfer of Rights in the Property.

FLORIDA-Single Family-Fannie Mee/Freddie Mac UNIFORM INSTRUMENT WITH MERS Page 1 of 11

-8A(FL) (0005) CHL (08/05)(d) VMP Mortgage Solutions, Inc. (800)521-7291

Form 3010 1/01



Filed: 04/17/2007

T.				
(6) "Loan" means the debt of due under the Note, and all sur (H) "Riders" means all Ride Riders are to be executed by B	ms due under this Secur ers to this Security Ins	plus interest, any ity Instrument, plu trument that are e	s interest.	and late charges
Adjustable Rate Rider Balloon Rider VA Rider	Condominium Ric    Planned Unit Dev   Biweekly Paymen	elopmentRider 🗵	Second Home Ride 1-4 Family Rider Other(s) [specify]	r
(I) "Applicable (aw" mea ordinances and administrative non-appealable judicial orbitio	rules and orders (that	olicable federal, s have the effect o	state and local statut f law) as well as all a	les, regulations, applicable final,
(J) "Community Association charges that are imposed on B or similar organization.	Dues, Fees, and Ass			
(K) "Electronic Funds Trans draft, or similar paper instruct computer, or magnetic tape se account. Such term includes transactions, transfers initiated (L) "Escrow Hems" means th (M) "Miscellaneous Proceed- any third party (other than inst to, or destruction of, the Prop conveyance in lieu of conder	which is initiated of as to order, instruct, so but is not limited by telephone, wire transone items that are deser "means any compens mance proceeds paid unerty; (ii) condemnation	I through an electron authorize a fine to, point-of-sale asfers, and automatished in Section 3. ation, settlement, a dide the coverages or other taking of	ronic terminal, telepheancial institution to de transfers, automated ed clearinghouse trans tward of damages, or p described in Section 5 if all or any part of the	onic instrument, ebit or credit an teller machine sfers. proceeds paid by ) for: (i) damage to Property; (iii)
condition of the Property.  (N) "Mortgage Insurance" n Loan.		-		
(O) "Periodic Payment" mer Note, plus (ii) any amounts un			for (i) principal and in	iterest under the
(P) "RESPA" means the Re- implementing regulation, Regi- any additional or successor k Security Instrument, "RESPA "federally related mortgage to under RESPA.	al Estate Settlement Pro- ulation X (24 C.F.R. Pa- egislation or regulation." refers to all require.	rocedures Act (12 ort 3500), as they ments and restrict ments and restrict	ight be amended from same subject matter, ions that are imposed	time to time, or As used in this in regard to a
(Q) "Successor in Interest of that party has assumed Borrow				, whether or not
TRANSFER OF RIGHTS IN  This Security Instrument secu- modifications of the Note; a  Security Instrument and the 1  MERS (solely as nominee for of MERS, the following descri-	res to Lender: (i) the r nd (ii) the performant Note. For this purpose, Lender and Lender's s	te of Borrower's of Borrower does huccessors and assi-	covenants and agreen ereby mortgage, gran	ments under this tand convey to
COUNTY  Trung of Recording In		of IN	PALM BEACH ame of Recording Jurisdiction	; on!
Type of Recording M SEE EXHIBIT "A" ATTAC				

Page 2 of 11

MAT US

Form 3010 1/01

-6A(FL) (0005)

CHL (08/05)

Filed: 04/17/2007

Art Unit: 3664

Serial Number: 11/736,356 Examiner: Ronnie M. Mancho

Parcel ID Number:

33.703-000-1170

DOC ID #: 00016597093403007

Which currently has the address of green/Cityl

Florida 33437-4882 ("Property Address"):

TOGETHER WITH all the improvements now or hereafter erected on the property, and all easements, appurtenances, and fixtures now or hereafter a part of the property. All replacements and additions shall also be covered by this Security Instrument. All of the foregoing is referred to in this Security Instrument as the "Property." Borrower understands and agrees that MERS holds only legal title to the interests granted by Borrower in this Security Instrument, but, if necessary to comply with law or custom, MERS (as nominee for Lender and Lender's successors and assigns) has the right: to exercise any or all of those interests, including, but not limited to, the right to foreclose and sell the Property; and to take any action required of Lender including, but not limited to, the right to foreclose and sell the Property; and to take any action required of Lender including, but not limited to, the right to foreclose and sell the Property; and to take any action required of Lender including, but not limited to, the right to exercise and sell the Property.

BORROWER COVERANTS that Borrower is lawfully selsed of the estate hereby conveyed and has the right to mortgage, grant and convey the Property and that the Property is unencumbered, except for encumbrances of record. Borrower warrants and will defend generally the title to the Property against all claims and demands, subject to girly encumbrances of record.

THIS SECURITY INSTRUMENT combines uniform covenants for national use and non-uniform covenants with limited variations by jurisdiction to constitute a uniform security instrument covering real property.

UNIFORM COVENANTS. Borrowce and Lender covenant and agree as follows:

1. Payment of Principal, Interest, Escrow Items, Prepayment Charges, and Late Charges. Borrower shall pay when due the principal of, and interest on, the debt evidenced by the Note and any prepayment charges and late charges due under the Note. Borrower shall also pay funds for Escrow Items pursuant to Section 3. Payments due under the Note and this Security Instrument shall be made in U.S. currency. However, if any check or other instrument received by Lender as payment under the Note or this Security Instrument is returned to Lender unpaid, Lender may require that any or all subsequent payments due under the Note and this Security Instrument be made in one or more of the following forms, as selected by Lender:

(a) eash; (b) money order; (c) certified check, bank check, treasurer's check or cashier's check, provided any such check is drawn upon an institution whose deposits are insured by a federal agency, instrumentality, or entity; or (d) Electronic Funds Transfer.

Payments are deemed received by Lender when received at the location designated in the Note or at such other location as may be designated by Lender in accordance with the notice provisions in Section 15. Lender may return any payment or partial payment or partial payments are insufficient to bring the Loan current. Lender may accept any payment or partial payment insufficient to bring the Loan current, without waiver of any rights hereunder or prejudice to its rights to refuse such payment or partial payments in the future, but Lender is not obligated to apply such payments at the time such payments are accepted. If each Periodic Payment is applied as of its scheduled due date, then Lender need not pay interest on unapplied funds. Lender may hold such unapplied funds until Borrower makes payment to bring the Loan current. If Borrower does not do so within a reasonable period of time, Lender shall either apply such funds or return them to Borrower. If not applied earlier, such funds will be applied to the outstanding principal balance under the Note immediately prior to foreclosure. No offset or claim which Borrower might have now or in the future against Lender shall relieve Borrower from making payments due under the Note and this Security Instrument or performing the covenants and agreements secured by this Security Instrument.

2. Application of Payments or Proceeds. Except as otherwise described in this Section 2, all payments accepted and applied by Lender shall be applied in the following order of priority: (a) interest due under the Note; (b) principal due under the Note; (c) amounts due under Section 3. Such payments shall be applied to each Periodic Payment in the order in which it became due. Any remaining amounts shall be applied first to late charges, second to any other amounts due under this Security Instrument, and then to reduce the principal balance of the Note.

If Lender receives a payment from Borrower for a delinquent Periodic Payment which includes a sufficient amount to pay any late charge due, the payment may be applied to the delinquent payment and the late charge. If more than one Periodic Payment is outstanding, Lender may apply any payment received from Borrower to the repayment of the Periodic Payments if, and to the extent that, each payment can be paid in full. To the extent that any excess exists after the payment is applied to the full payment of one or more Periodic Payments, such excess may be applied to any late charges due. Voluntary prepayments shall be applied first to any prepayment charges and then as described in the Note.

GA(FL) (0005) CHL (88/05) Page 3 of 11 Form 3016 1/01

My CRS

Serial Number: 11/736,356

DOC ID #: 00016597093403007

Any application of payments, insurance proceeds, or Miscellaneous Proceeds to principal due under the Notestial not extend or postpone the due tiate, or change the amount, of the Periodic Payments.

§ Funds for Escrow Items. Borrower shall pay to Lender on the day Periodic Payments are due under the Note, until the Note is paid in full, a sum (the "Funds") to provide for payment of amounts due for. (a) taxes and assessments and other items which can attain priority over this Security Instrument as a lieu or encumbrance on the Property; (b) leasehold payments or ground rents on the Property, if any; (c) premiums for any and all insurance required by Londer under Section 5; and (d) Mortgage Insurance premiums, if any, or any sums payable by Borrower to Lender in lieu of the payment of Mortgage Insurance premiums in accordance with the provisions of Section 10. These items are called "Eserow Items." At origination or at any time during the term of the Loan, Lender may require that Community Association Dues, Fees, and Assessments, if any be escrowed by Borrower, and such dues, fees and assessments shall be an Escrow Item. Borrower shall promptly jurnish to Lender all notices of amounts to be paid under this Section. Borrower shall pay Lender the Funds for Escrow Items unless Lender waives Borrower's obligation to pay the Funds for any or all Escrow Items. Lender may waive Borrower's obligation to pay to Lender Funds for any or all Escrow Items at any time. Any such waiver may only be in writing. In the event of such waiver, Borrower shall pay directly, when and where payable, the amounts due for any Escrow Items for which payment of Funds has been valved by Lender and it Lender requires, shall furnish to Lender receipts evidencing such payment within such time period as Lender may require. Borrower's obligation to make such payments and to provide receipts shall for all purposes be deemed to be a covenant and agreement contained in this Security Instrument, as the phrase "covenant and agreement" is used in Section 9. If Borrower is obligated to pay Bscrow Items directly, pursuant to a/waiver, and Borrower fails to pay the amount due for an Escrow Item, Lender may exercise its rights under Seetion 9 and pay such amount and Borrower shall then be obligated under Section 9 to repay to Lender any such amount. Lender may revoke the waiver as to any or all Escrow Items at any time by a notice given in accordance with Section 15 and, upon such revocation, Borrower shall pay to Lender all Funds, and in such amounts, that are then required under this Section 3.

Lender may, at any time, collect and fiold Funds in an amount (a) sufficient to permit Lender to apply the

Lender may, at any time, collect and hold Punds in an amount (a) sufficient to permit Lender to apply the Funds at the time specified under RESPA, and (b) not to exceed the maximum amount a lender can require under RESPA. Lender shall estimate the amount of Funds due on the basis of current data and reasonable estimates of expenditures of future Escrow Items or otherwise in accordance with Applicable Law.

The Funds shall be held in an institution whose deposits are insured by a federal agency, instrumentality, or entity (including Lender, if Lender is an institution whose deposits are so insured) or in any Federal Home Loan Bank. Lender shall apply the Funds to pay the Escrow Items no later than the time specified under RESPA. Lender shall not charge Borrower for holding and applying the Funds, annually analyzing the escrow account, or verifying the Escrow Items, unless Lender pays Borrower interest on the Funds and Applicable Law permits Lender to make such a charge. Unless an agreement is made in writing or Applicable Law requires interest to be paid on the Funds, Lender shall not be required to pay Borrower any interest or earnings on the Funds. Borrower and Lender can agree in writing, however, that interest shall be paid on the Funds. Lender shall give to Borrower, without charge, an annual accounting of the Funds as required by RESPA.

If there is a surplus of Funds held in escrow, as defined under RESPA, Lender shall account to Borrower for the excess funds in accordance with RESPA. If there is a shortage of Funds held in escrow, as defined under RESPA, Lender shall notify Borrower as required by RESPA, and Borrower shall pay to Lender the amount necessary to make up the shortage in accordance with RESPA, but in no more than 12 monthly payments. If there is a deficiency of Funds held in escrow, as defined under RESPA, Lender shall notify Borrower as required by RESPA, and Borrower shall pay to Lender the amount necessary to make up the deficiency in accordance with RESPA, but in no more than 12 monthly payments.

Upon payment in full of all sums secured by this Security Instrument, Lender shall promptly refund to Borrower any Funds field by Lender.

4. Charges; Liens. Borrower shall pay all taxes, assessments, charges, fines, and impositions attributable to the Property which can attain priority over this Security Instrument, leasehold payments or ground rents on the Property, if any, and Community Association Ducs, Fees, and Assessments, if any. To the extent that these items are Escrow Items, Borrower shall pay them in the manner provided in Section 3.

items are Escrow Items, Borrower shall pay them in the manner provided in Section 3.

Borrower shall promptly discharge any lien which has priority over this Security Instrument unless Borrower: (a) agrees in writing to the payment of the obligation secured by the lien in a manner acceptable to Lender, but only so long as Borrower is performing such agreement; (b) contests the lien in a moner acceptable to Lender, but only so long as Borrower is performing such agreement; (b) contests the lien in good faith by, or defends against enforcement of the lien in, legal proceedings which in Lender's opinion operate to prevent the enforcement of the lien while those proceedings are pending, but only until such proceedings are concluded; or (c) secures from the holder of the lien an agreement satisfactory to Lender subordinating the lien to this Security Instrument. If Lender determines that any part of the Property is subject to a lien which can attain priority over this Security Instrument, Lender may give Borrower a notice identifying the lien. Within 10 days of the date on which that notice is given, Borrower shall satisfy the lien or take one or more of the actions set forth above in this Section 4.

-6A(FL) (0005)

CHL (08/05)

Page 4 of 11

Form 3010 1/01

MA GAS

DOC ID #: 00016597093403007

Lender may require Borrower to pay a one-time charge for a real estate tax verification and/or reporting service used by Lender in connection with this Loan.

Property Insurance. Borrower shall keep the improvements now existing or hereafter erected on the Property insured against loss by fire, hazards included within the term "extended coverage," and any other hazards including, but not limited to, earthquakes and floods, for which Lender requires insurance. This insurance shall be maintained in the amounts (including deductible levels) and for the periods that Lender requires. What Lender requires pursuant to the preceding sentences can change during the term of the Loan. The insurance carrier providing the insurance shall be chosen by Borrower subject to Lender's right to disapprove Borrower's choice, which right shall not be exercised unreasonably. Lender may require Borrower to pay, in connection with this Loan, either: (a) a one-time charge for flood zone determination, certification and tracking services; or (b) a one-time charge for flood zone determination services and subsequent charges each time remappings or similar changes occur which reasonably might affect such determination or certification. Borrower shall also be responsible for the payment of any fees imposed by the Federal Emergency Management Agency in connection with the review of any flood zone determination resulting from an objection by Borrower.

If Borrower fails to maintain any of the coverages described above, Lender may obtain insurance coverage, at Lender's option and Borrower's expense. Lender is under no obligation to purchase any particular type or amount of coverage. Therefore, such coverage shall cover Lender, but might or might not protect Borrower, Borrower's equity in the Property, or the contents of the Property, against any risk, hazard or liability and might provide greater or lesser coverage than was previously in effect. Borrower acknowledges that the cost of the insurance coverage so obtained might significantly exceed the cost of insurance that Borrower could have obtained. Any amounts should be borrower could have obtained. Any amounts should be said become additional debt of Borrower secured by this Security Instrument. These amounts shall bear interest at the Note rate from the date of disbursement and shall be provable, with such interest, upon notice from Lender to Borrower

All insurance policies required by Lender and renewals of such policies shall be subject to Lender's right to disapprove such policies, shall include a standard mortgage clause, and shall name Lender as mortgagee and/or as an additional loss payee. Lender shall have the right to hold the policies and renewal certificates. If Lender requires, Borrower shall promptly give to Lender all receipts of paid premiums and renewal notices. If Borrower obtains any form of insurance coverage, not otherwise required by Lender, for damage to, or destruction of, the Property, such policy shall include a standard mortgage clause and shall name Lender as mortgagee and/or as an additional loss payee.

In the event of loss, Borrower shall give prompt notice to the insurance carrier and Lender. Lender may make proof of loss if not made promptly by Borrower. Unless Lender and Borrower otherwise agree in writing, any insurance proceeds, whether or not the underlying insurance was required by Lender, shall be applied to restoration or repair of the Property, if the restoration or repair is economically feasible and Lender's security is not lessened. During such repair and restoration period, Lender shall have the right to hold such insurance proceeds until Lender has had an opportunity to inspect such Property to ensure the work has been completed to Lender's satisfaction, provided that such inspection shall be undertaked promptly. Lender may disburse proceeds for the repairs and restoration in a single payment or in a series of progress payments as the work is completed. Unless an agreement is made in writing or Applicable Law requires interest to be paid on such insurance proceeds, Lender shall not be required to pay Borrower and Inot be paid out of the insurance proceeds and shall be the sole obligation of Borrower. If the restoration or repair is not economically feasible or Lender's security would be lessened, the insurance proceeds shall be applied to the sums secured by this Security Instrument, whether or not then due, with the excess, if any, paid to Borrower. Such insurance proceeds shall be applied in the order provided for in Section 2.

If Borrower abandons the Property, Lender may file, negotiate and settle any available insurance claim and related matters. If Borrower does not respond within 30 days to a notice from Lender that the insurance carrier has offered to settle a claim, then Lender may negotiate and settle the claim. The 30-day period will begin when the notice is given. In either event, or if Lender acquires the Property under Section 22 or otherwise, Borrower hereby assigns to Lender (a) Borrower's rights to any insurance proceeds in an amount not to exceed the amounts unpaid under the Note or this Security Instrument, and (b) any other of Borrower's rights (other than the right to any refund of unearned premiums paid by Borrower) under all insurance policies covering the Property, insofar as such rights are applicable to the coverage of the Property. Lender may use the insurance proceeds either to repair or restore the Property or to pay amounts unpaid under the Note or this Security Instrument, whether or not then due.

6A(FL) (1005) CHL (08/05) Page 5 of 11 Form 3010 1/01

Mrs Coss

Serial Number: 11/736,356

Examiner: Ronnie M. Mancho

Examiner: Ronnie M. Mancho Art Unit: 3664

DOC ID #: 00016597093403007

6. Occupancy. Borrower shall occupy, establish, and use the Property as Borrower's principal residence within 60 days after the execution of this Security Instrument and shall continue to occupy the Property as Borrower's principal residence for at least one year after the date of occupancy, unless Lender otherwise agrees in writing, which consent shall not be unreasonably withheld, or unless extenuating circumstances exist which are beyond Borrower's control.

7. Preservation, Maintenance and Protection of the Property; Inspections. Borrower shall not deterious, damage or impair the Property, allow the Property to deteriorate or commit waste on the Property. Whether or hell Borrower is residing in the Property, Borrower shall maintain the Property in order to prevent the Property from deterioration of decreasing in value due to its condition. Unless it is determined pursuant to Section 5 that repair or restoration is not economically feasible, Borrower shall promptly repair the Property if damaged to avoid further deterioration or damage. If insurance or condemnation proceeds are paid in connection with damage, to, or the taking of, the Property, Borrower shall be responsible for repairing or restoring the Property only if Lender has released proceeds for such purposes. Lender may disburse proceeds for the repairs and restoration in a single payment or in a series of progress payments as the work is completed. If the insurance or condemnation proceeds are not sufficient to repair or restore the Property, Borrower is not relieved of Borrower's soligation for the completion of such repair or restoration.

Lender or its agent may make reasonable entries upon and inspections of the Property. If it has reasonable cause, Lender may inspect the interior of the improvements on the Property. Lender shall give Borrower notice at the time of or prior to such an interior inspection specifying such reasonable cause.

- 3. Borrower's Loan Application, Borrower shall be in default if, during the Loan application process, Borrower or any persons or entities acting at the direction of Borrower or with Borrower's knowledge or consent gave materially false, misleading or inaccurate information or statements to Lender (or failed to provide Lender with material information) in connection with the Loan. Material representations include, but are not limited to, representations concerning Borrower's occupancy of the Property as Borrower's principal residence.
- 9. Protection of Lender's Interest in the Property and Rights Under this Security Instrument. If (a) Borrower fails to perform the covenants and agreements contained in this Security Instrument, (b) there is a legal proceeding that might significantly affect Lender's interest in the Property and/or rights under this Security Instrument (such as a proceeding in bankruptcy, probate, for condemnation or forfeiture, for enforcement of a lien which may attain priority over this Security Instrument or to enforce laws or regulations), or (c) Borrower has abandoned the Property, then Lender may do and pay for whatever is reasonable or appropriate to protect Lender's interest in the Property and rights under this Security Instrument, including protecting and/or assessing the value of the Property, and securing and/or repairing the Property. Lender's actions can include, but are not limited to: (a) paying any sums secured by a lien which has priority over this Security Instrument; (b) appearing in court; and (c) paying reasonable attorneys' fees to protect its interest in the Property and/or rights under this Security Instrument, including its secured position in a bankruptcy proceeding. Securing the Property includes, but is not limited to, entering the Property to make repairs, change locks, replace or board up doors and windows, dram water from pipes, climinate building or other code violations or dangerous conditions, and have utilities turned on or off. Although Lender may take action under this Section 9, Lender does not have to do so and is not under any duty or obligation to do so. It is accreed that Lender increase in this Section 9.

is agreed that Lender incurs no liability for not taking any or all actions authorized under this Section 9.

Any amounts disbursed by Lender under this Section 9 shall become additional debt of Borrower secured by this Security Instrument. These amounts shall bear interest at the Note rate from the date of disbursement and shall be payable, with such interest, upon notice from Lender to Borrower requesting payment.

If this Security Instrument is on a leasehold, Borrower shall comply with all the provisions of the lease.

If this Security Instrument is on a leasehold, Borrower shall comply with all the provisions of the lease. If Borrower acquires fee title to the Property, the leasehold and the fee title shall not merge unless Lender agrees to the merger in writing.

10. Mortgage Insurance. If Lender required Mortgage Insurance as a condition of making the Loan, Borrower shall pay the premiums required to maintain the Mortgage Insurance in effect. If, for any reason, the Mortgage Insurance coverage required by Lender ceases to be available from the mortgage insurer that previously provided such insurance and Borrower was required to make separately designated payments toward the premiums for Mortgage Insurance, Borrower shall pay the premiums required to obtain coverage substantially equivalent to the Mortgage Insurance previously in effect, at a cost substantially equivalent to the cost to Borrower of the Mortgage Insurance previously in effect, from an alternate mortgage insurer selected by Lender. If substantially equivalent Mortgage Insurance coverage is not available, Borrower shall continue to pay to Lender the amount of the separately designated payments that were due when the insurance coverage ceased to be in effect. Lender will accept, use and retain these payments as a non-refundable loss reserve shall be non-refundable, notwithstanding the fact that the Loan is ultimately paid in full, and Lender shall not be required to pay Borrower any interest or earnings on such loss reserve. Lender can no longer require loss reserve payments if Mortgage Insurance coverage (in the

-6A(FL) (0005) CHL (08/05)

Page 6 of 11

Form 3010 1/01



Serial Number: 11/736,356 Filed: 04/17/2007

Examiner: Ronnie M. Mancho Art Unit: 3664

DOC ID #: 00016597093403007

Sheet 153 of 241

amount and for the period that Lender requires) provided by an insurer selected by Lender again becomes available, is obtained, and Lender requires separately designated payments toward the premiums for Mortgage Insurance. If Lender required Mortgage Insurance as a condition of making the Loan and Borrower was required to make separately designated payments toward the premiums for Mortgage Insurance, Borrower shall pay the premiums required to maintain Mortgage Insurance in effect, or to provide a non-refundable loss reserve, until Lender's requirement for Mortgage Insurance ends in accordance with any written agreement between Borrower and Lender providing for such termination or qualit termination is required by Applicable Law. Nothing in this Section 10 affects Borrower's obligation to pay interest at the rate provided in the Note.

Mongage (naurance reimburses Lender (or any entity that purchases the Note) for certain losses it may incur if Borrower does not repay the Loan as agreed. Borrower is not a party to the Mortgage Insurance.

Mortgage insurers evaluate their total risk on all such insurance in force from time to time, and may enter into agreements with other parties that share or modify their risk, or reduce losses. These agreements are on terms and conditions that are satisfactory to the mortgage insurer and the other party (or parties) to these agreements. These agreements may require the mortgage insurer to make payments using any source of funds that the mortgage insurer may have available (which may include funds obtained from Mortgage Insurance premiums).

As a result of these agreements, Lender, any purchaser of the Note, another insurer, any reinsurer, any other entity, or any affiliate of any of the foregoing, may receive (directly or indirectly) amounts that derive from (or might be characterized as a portion of Borrower's payments for Mongage Insurance, in exchange for sharing or modifying the mongage insurer's risk, or reducing losses. If such agreement provides that an affiliate of Lender takes a share of the insurer's risk in exchange for a share of the premiums paid to the insurer, the arrangement is often termed "captive reinsurance." Further:

(a) Any such agreements will not affect the amounts that Borrower has agreed to pay for Mortgage Insurance, or any other terms of the Loan. Such agreements will not increase the amount Borrower will owe for Mortgage Insurance, and they will not entitle Borrower to any refund.

owe for Mortgage Insurance, and they will hot entitle Borrower to any refund.

(b) Any such agreements will not affect the rights Borrower has - if any - with respect to the Mortgage Insurance under the Homeowners Protection Act of 1998 or any other law. These rights may include the right to receive certain disclosures, to request and obtain cancellation of the Mortgage Insurance, to have the Mortgage Insurance terminated automatically, and/or to receive a refund of any Mortgage Insurance premiums that were unearned at the time of such cancellation or termination.

 Assignment of Miscellaneous Proceeds; Forfeiture. All Miscellaneous Proceeds are hereby assigned to and shall be paid to Lender.

If the Property is damaged, such Miscellaneous Proceeds shall be applied to restoration or repair of the Property, if the restoration or repair is economically feasible and Lender's security is not lessened. During such repair and restoration period, Lender shall have the right to hold such Miscellaneous Proceeds until Lender has had an upportunity to inspect such Property to ensure the work has been completed to Lender's satisfaction, provided that such inspection shall be undertaken promptly. Lender may pay for the repairs and restoration in a single disbursement or in a series of progress payments as the work is completed. Unless an agreement is made in writing or Applicable Law requires interest to be paid on such Miscellaneous Proceeds. Lender shall not be required to pay Borrower any interest or earnings on such Miscellaneous Proceeds. If the restoration or repair is not economically feasible or Lender's security would be lessened, the Miscellaneous Proceeds shall be applied to the sums secured by this Security Instrument, whether or not then due, with the excess, if any, paid to Borrower. Such Miscellaneous Proceeds shall be applied to the sums secured by this Security instrument, whether or not then due, with the excess, if any, paid to Borrower. Such Miscellaneous Proceeds shall be applied in the order provided for in Section 2.

in the event of a total taking, destruction, or loss in value of the Property, the Miscellaneous Proceeds shall be applied to the sums secured by this Security Instrument, whether or not then due, with the excess, if any paid to Borrower.

any, paid to Borrower.

In the event of a partial taking, destruction, or loss in value of the Property in which the fair market value of the Property immediately before the partial taking, destruction, or loss in value is equal to or greater than the amount of the sums secured by this Security Instrument immediately before the partial taking, destruction, or loss in value, unless Borrower and Lender otherwise agree in writing, the sums secured by this Security Instrument shall be reduced by the amount of the Miscellaneous Proceeds multiplied by the following fraction:

(a) the total amount of the sums secured immediately before the partial taking, destruction, or loss in value divided by (b) the fair market value of the Property immediately before the partial taking, destruction, or loss in value. Any balance shall be paid to Borrower.

In the event of a partial taking, destruction, or loss in value of the Property in which the fair market value of the Property immediately before the partial taking, destruction, or loss in value is less than the amount of the sums secured immediately before the partial taking, destruction, or loss in value, unless Borrower and Lender otherwise agree in writing, the Miscellaneous Proceeds shall be applied to the sums secured by this Security Instrument whether or not the sums are then due.

-6A(FL) (0005)

CHL (08/05)

Page 7 of 11

Form 3010 1/01

( CAD

DOC ID #: 00016597093403007

If the Property is abandoned by Borrower, or if, after notice by Lender to Borrower that the Opposing Party fag defined in the next sentence) offers to make an award to settle a claim for damages, Borrower fails to respond to Lender within 30 days after the date the notice is given, Lender is authorized to collect and apply the Miscellaneous Proceeds either to restoration or repair of the Property or to the sums secured by this Security Instrument, whether or not then due. "Opposing Party" means the third party that owes Borrower Miscellaneous Proceeds or the party against whom Borrower has a right of action in regard to Miscellaneous Proceeds.

Borrower shall be in default if any action or proceeding, whether civil or criminal, is begun that, in Lender's judgment, could result in forfeiture of the Property or other material impairment of Lender's interest in the Property or rights under this Security Instrument. Borrower can cure such a default and, if acceleration In the Property of rights that his section 19, by causing the action or proceeding to be dismissed with a ruling that, in Lender's judgment, precludes forfeiture of the Property or other material impairment of Lender's interest in the Property or rights under this Security Instrument. The proceeds of any award or claim for damages that are attributable to the impairment of Lender's interest in the Property are hereby assigned and shall be paid to Lender.

All Miscellaneous Proceeds that are not applied to restoration or repair of the Property shall be applied in the order provided for in Section 2.

12. Borrower Not Released; Forbearance By Lender Not a Waiver, Extension of the time for

payment or modification of anontization of the sums secured by this Security Instrument granted by Lender to Borrower or any Successor in Interest of Borrower shall not operate to release the liability of Borrower or any Successors in Interest of Borrower. Lender shall not be required to commence proceedings against any Successor in Interest of Borrower or to refuse to extend time for payment or otherwise modify amortization of the sums secured by this Security Instrument by reason of any demand made by the original Borrower or any Successors in Interest of Borrower. Any Jorbearance by Lender in exercising any right or remedy including, without limitation, Lender's acceptance of payments from third persons, entities or Successors in Interest of Borrower or in amounts less than the amount then due, shall not be a waiver of or preclude the exercise of any

13. Joint and Several Liability; Co-signers; Successors and Assigns Bound. Borrower covenants and agrees that Borrower's obligations and liability shall be joint and several. However, any Borrower who agrees that Borrower's obligations and monity shall be joint and several. However, any Bourover has been co-signs this Security Instrument but does not execute the Note (a "co-signet"): (a) is co-signing this Security Instrument, (b) is not personally obligated to pay the sums secured by this Security Instrument; (c) agrees that Lender and any other Borrower can agree to extend, modify, forbear or make any accommodations with regard to the terms of this Security Instrument or the Note without the co-signer's

Subject to the provisions of Section 18, any Successor in Interest of Borrower who assumes Borrower's obligations under this Security Instrument in writing, and is approved by Lender, shall obtain all of Borrower's rights and benefits under this Security Instrument. Borrower shall not be released from Borrower's obligations and liability under this Security Instrument unless Lender agrees to such release in writing. The covenants and agreements of this Security Instrument shall bind (except as provided in Section 20) and benefit the successors and assigns of Lender.

14. Loan Charges. Lender may charge Borrower fees for services performed in connection with Borrower's default, for the purpose of protecting Lender's interest in the Property and rights under this Security Instrument, including, but not limited to, attorneys' fees, property inspection and valuation fees. In regard to any other fees, the absence of express authority in this Security Instrument to charge a specific fee to Borrower shall not be construed as a prohibition on the charging of such fee. Lender may not charge fees that are expressly prohibited by this Security Instrument or by Applicable Law.

If the Loan is subject to a law which sets maximum loan charges, and that law is finally interpreted so

that the interest or other loan charges collected or to be collected in connection with the Loan exceed the permitted limits, then: (a) any such loan charge shall be reduced by the amount necessary to reduce the charge to the permitted limit; and (b) any sums already collected from Borrower which exceeded permitted limits will be refunded to Borrower. Lender may choose to make this refund by reducing the principal owed under the Note or by making a direct payment to Borrower. If a refund reduces principal, the reduction will be treated as

Note or by making a direct payment to Borrower. If a retund reduces principal, the reduction will be a partial prepayment without any prepayment charge (whether or not a prepayment charge is provided for under the Note). Borrower's acceptance of any such refund made by direct payment to Borrower will constitute a waiver of any right of action Borrower might have arising out of such overcharge.

15. Notices. All notices given by Borrower or Lender in connection with this Security Instrument must be in writing. Any notice to Borrower in connection with this Security Instrument shall be deemed to have been given to Borrower when mailed by first class mail or when actually delivered to Borrowers notice address if sent by other means. Notice to any one Borrower shall constitute notice to all Borrowers unless Applicable Law expressly requires otherwise. The notice address shall be the Property Address unless

-6A(FL) (0005)

CHL (08/05)

Page 8 of 11

Form 3010 1/01

DOC ID #: 00016597093403007

Borrower has designated a substitute notice address by notice to Lender. Borrower shall promptly notify Leader of Borrower's change of address. If Lender specifies a procedure for reporting Borrower's change of address, then Borrower shall only report a change of address through that specified procedure. There may be only one designated notice address under this Security Instrument at any one time. Any notice to Lender shall be given by delivering it or by mailing it by first class mail to Lender's address stated herein unless Lender has designated another address by notice to Borrower. Any notice in connection with this Security Instrument shall not be designed to have been given to Lender until actually received by Lender. If any notice required by this Security Instrument is also required under Applicable Law, the Applicable Law requirement will satisfy the corresponding equirement under this Security Instrument.

16. Governing Law; Severability; Rules of Construction. This Security Instrument shall be governed by federal law and (fig law of the jurisdiction in which the Property is located. All rights and obligations contained in this Security Instrument are subject to any requirements and limitations of Applicable Law. Applicable Law might-explicitly or implicitly allow the parties to agree by contract or it might be sitent, but such silence shall not be construed as a prohibition against agreement by contract. In the event that any provision or clause of this Security Instrument or the Note conflicts with Applicable Law, such conflict shall not affect other provisions of this Security Instrument or the Note which can be given effect without the conflicting provision.

conflicting provision.

As used in this Security Instrument: (a) words of the masculine gender shall mean and include corresponding neuter words or words of the ferminine gender; (b) words in the singular shall mean and include the plural and vice versa; and (c) the word "may" gives sole discretion without any obligation to take any action.

17. Borrower's Copy. Borrower's half be given one copy of the Note and of this Security Instrument.

18. Transfer of the Property of Beneficial Interest in Borrower. As used in this Section 18, Interest in the Property' means any legal of beneficial interest in the Property, including, but not limited to, those beneficial interests transferred in a bond for deed, contract for deed, installment sales contract or escrow agreement, the intent of which is the transfer of the by Borrower at a future date to a purchaser.

If all or any part of the Property or any Interest in the Property is sold or transferred (or if Borrower is not a natural person and a beneficial interest in Borrower is sold or transferred) without Lender's prior written consent, Lender may require immediate payment in full of all sums secured by this Security Instrument. However, this option shall not be exercised by Lender if such exercise is prohibited by Applicable Law.

If Lender exercises this option, Lender shall give Borrower notice of acceleration. The notice shall

If Lender exercises this option, Lender shall give Borrower notice of acceleration. The notice shall provide a period of not less than 30 days from the date the notice is given in accordance with Section 15 within which Borrower must hap all sums secured by this Security Instrument. If Borrower fails to pay these sums prior to the expiration of this period, Lender may invoke any remedies permitted by this Security Instrument without further notice or demand on Borrower.

19. Borrower's Right to Reinstate After Acceleration. If Borrower meets certain conditions, Borrower shall have the right to have enforcement of this Security Instrument discontinued at any time prior to the earliest of: (a) five days before sale of the Property pursuant to any power of sale contained in this Security Instrument; (b) such other period as Applicable Law might specify for the termination of Borrower's right to reinstate; or (c) entry of a judgment enforcing this Security Instrument. Those conditions are that Borrower; (a) pays Lender all sums which then would be due under this Security Instrument and the Note as if no acceleration had occurred; (b) cures any default of any other covenants or agreements; (c) pays all expenses incurred in enforcing this Security Instrument, including, but not limited to, reasonable attorneys' fees, property inspection and valuation fees, and other fees incurred for the purpose of protecting Lender's interest in the Property and rights under this Security Instrument; and (d) takes such action as Lender may reasonably require to assure that Lender's interest in the Property and rights under this Security Instrument, and Borrower's obligation to pay the sums secured by this Security Instrument, shall continue unchanged. Lender may require that Borrower pay such reinstatement sums and expenses in one or more of the following forms, as selected by Lender; (a) cash; (b) money order; (c) certified check, bank check, treasurer's check or cashier's check, provided any such check is drawn upon an institution whose deposits are insured by a federal agency, instrumentality or entity; or (d) Electronic Funds Transfer. Upon reinstatement by Borrower, this Security Instrument and obligations secured hereby shall remain fully effective as if no acceleration had occurred.

However, this right to reinstate shall not apply in the case of acceleration under Section 18.

20. Sale of Note; Change of Loan Servicer; Notice of Grievance. The Note or a partial interest in the Note (together with this Security Instrument) can be sold one or more times without prior notice to Borrower. A sale might result in a change in the entity (known as the "Loan Servicer") that collects Periodic Payments due under the Note and this Security Instrument and performs other mongage loan servicing obligations under the Note, this Security Instrument, and Applicable Law. There also might be one or more changes of the Loan Servicer unrelated to a sale of the Note. If there is a change of the Loan Servicer, Borrower will be given written notice of the change which will state the name and address of the new Loan Servicer, the address to

-6A(FL) (0005)

CHL (08/05)

Page 9 of 11

Form 3010 1/01

Med Coxy

Serial Number: 11/736,356 Filed: 04/17/20 Examiner: Ronnie M. Mancho Art Unit: 3664

DOC ID #: 00016597093403007

which payments should be made and any other information RESPA requires in connection with a notice of transfer of servicing. If the Note is sold and thereafter the Loan is serviced by a Loan Servicer other than the purchaser of the Note, the mortgage loan servicing obligations to Borrower will remain with the Loan Servicer or be transferred to a successor Loan Servicer and are not assumed by the Note purchaser unless otherwise provided by the Note purchaser.

Neither Borrower nor Lender may commence, join, or be joined to any judicial action (as either an individual litigate or the member of a class) that arises from the other party's actions pursuant to this Security Instrument or that alleges that the other party has breached any provision of, or any duty owed by reason of, his Security Instrument, until such Borrower or Lender has notified the other party (with such notice given in compliance with the requirements of Section 15) of such alleged breach and afforded the other party hereto a reasonable period after the giving of such notice to take corrective action. If Applicable Law provides a time period which must classic before certain action can be taken, that time period will be deemed to be reasonable for purposes of this paragraph. The notice of acceleration given to Borrower pursuant to Section 22 and the hotice of acceleration given to Borrower pursuant to Section 18 shall be deemed to satisfy the notice and opportunity to take corrective action provisions of this Section 20.

21. Hazardous Substances. As used in this Section 21: (a) "Hazardous Substances" are those substances defined as toxic or hazardous substances, pollutants, or wastes by Environmental Law and the following substances: gasoline, kerosene only flammable or toxic petroleum products, toxic pesticides and herbicides, volatile solvents, materials containing asbestos or formaldehyde, and radioactive materials; (b) "Environmental Law" means federal laws and laws of the jurisdiction where the Property is located that relate to health, safety or environmental projection; (c) "Environmental Cleanup" includes any response action, remedial action, or removal action, as defined in Environmental Law; and (d) an "Environmental Condition" means a condition that can cause, contribute to, or otherwise trigger an Environmental Cleanup.

Borrower shall not cause or permit the presence, use, disposal, storage, or release of any Hazardous Substances, or threaten to release any Hazardous Substances, on or in the Property. Borrower shall not do, nor allow anyone else to do, anything affecting the Property (a) that is in violation of any Environmental Law, (b) which creates an Environmental Condition, or (c) which, due to the presence, use, or release of a Hazardous Substance, creates a condition that adversely affects the value of the Property. The preceding two sentences shall not apply to the presence, use, or storage on the Property of small quantities of Hazardous Substances that are generally recognized to be appropriate to normal residential uses and to maintenance of the Property (including, but not limited to, hazardous substances in consumer products).

Borrower shall promptly give Lender written notice of (a) any investigation, claim, demand, lawsuit or other action by any governmental or regulatory agency or private party involving the Property and any Hazardous Substance or Environmental Law of which Borrower has actual knowledge, (b) any Environmental Coudition, including but not limited to, any spilling, leaking, discharge, release or threat of release of any Hazardous Substance, and (c) any condition caused by the presence, use or release of a Hazardous Substance which adversely affects the value of the Property. If Borrower learns, or is notified by any governmental or regulatory authority, or any private party, that any removal or other remediation of any Hazardous Substance affecting the Property is necessary, Borrower shall promptly take all necessary remedial actions in accordance with Environmental Law. Nothing heroin shall create any obligation on Lender for an Environmental Cleanup.

NON-UNIFORM COVENANTS. Borrower and Lender further covenant and agree as follows:

22. Acceleration; Remedies. Lender shall give notice to Borrower prior to acceleration following Borrower's breach of any covenant or agreement in this Security Instrument (but not prior to acceleration under Section 18 unless Applicable Law provides otherwise). The notice shall specify: (a) the default; (b) the action required to cure the default; (c) a date, not less than 30 days from the date the notice is given to Borrower, by which the default must be cured; and (d) that failure to cure the default on or before the date specified in the notice may result in acceleration of the sums secured by this Security Instrument, foreclosure by judicial proceeding and sale of the Property. The notice shall further inform Borrower of the right to reinstate after acceleration and the right to assert in the foreclosure proceeding the non-existence of a default or any other defense of Borrower to acceleration and foreclosure. If the default is not cured on or before the date specified in the notice, Lender at its option may require immediate payment in full of all sums secured by this Security Instrument without further demand and may foreclose this Security Instrument by judicial proceeding. Lender shall be entitled to collect all expenses incurred in pursuing the remedies provided in this Section 22, including, but not limited to, reasonable attorneys' fees and costs of title evidence.

23. Release. Upon payment of all sums secured by this Security Instrument, Lender shall release this Security Instrument. Borrower shall pay any recordation costs. Lender may charge Borrower a fee for releasing this Security Instrument, but only if the fee is paid to a third party for services rendered and the charging of the fee is permitted under Applicable Law.

6A(FL) (0005) CHL (08/05)

Page 10 of 11

Form 3010 1/01

My 000

Sheet 157 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

DOC ID #: 00016597093403007 24. Attorneys' Fees. As used in this Security Instrument and the Note, attorneys' fees shall include those awardedby an appellate court and any attorneys fees incurred in a bankruptcy proceeding.

Trial Waiver. The Borrower hereby waives any right to a trial by jury in any action, proceeding, claim, or counterclaim, whether in contract or tort, at law or in equity, arising out of or in any way related to this Security Instrument or the Note. BY SIGNING BELOW, Borrower accepts and agrees to the terms and covenants contained in this Security Instrument and in any Rider executed by Borrower and recorded with it. Signed, sealed and delivered in the presence of: (Seal) (Address) (Seal) / 11 HEMMING DR STAFFORD, VA 22554 (Address) (Seal) -Berrower (Address) (Seal) (Address) STATE OF FLORIDA, The foregoing instrument was acknowledged before me this MANCh CAN B. JEANGLANCE & GERTRUGE A.S.

-BA(FL) (0005)

CHL (08/05)

Page 11 of 11

Emmanuel C. Booth

Form 3010 1/01

as identification.

Serial Number: 11/736,356

Filed: 04/17/2007

Sheet 158 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

### PLANNED UNIT DEVELOPMENT RIDER

After Recording Return To:
COUNTRY WIDE HOME LOANS, INC.
MS SV-7 DOCUMENT PROCESSING
P.O.BOX 10183

Van Nuys, CA 01410-0423

Prepared By:
HEATHER MCLAUGHLIN
COUNTRYWIDE HOME LOANS, INC.

2380 PERFORMANCE DR MSRGV

C931 RICHARDSON TX 75082

> 165970934 [Escrow/Closing #]

00016597093403007 [Doc ID #]

THIS PLANNED UNIT DEVELOPMENT RIDER is made this THIRTIETH day of MARCH, 2007 , and is incorporated into and shall be deemed to amend and supplement the, Mortgage, Deed of Trust, or Security Deed (the "Security Instrument") of the same date, given by the undersigned (the "Borrower") to secure Borrower's Note to COUNTRYWIDE HOME LOANS, INC.

(the "Lender") of the same date and covering the Property described in the Security Instrument and located at:

8671 THORNBROOK TERRACE PT BOYNTON BEACH, FL 33437-4882 [Property Address]

The Property includes, but is not limited to, a parcel of land improved with a dwelling, together with

MULTISTATE PUD RIDER - Single Family - Fannie Mae/Freddie Mac UNIFORM INSTRUMENT

TO -7R (0405) CHL (06/04)(d) Page 1 of 3 Initials (1477) CHL (06/04)(d) Page 1 of 3 -7R (0405) Form 3150 1/01

VMP Mortgage Solutions, Inc. (800)521-7291



DOC ID #: 00016597093403007

other such parcels and certain common areas and facilities, as described in THE COVENANTS, CONDITIONS, AND RESTRICTIONS FILED OF RECORD THAT AFFECT THE PROPERTY

(the "Declaration"). The Property is a part of a planned unit development known as CANYON ISLES

[Name of Planned Unit Development]

(the "PUD"). The Property also includes Borrower's interest in the homeowners association or equivalent entity owning or managing the common areas and facilities of the PUD (the "Owners Association") and the uses benefits and proceeds of Borrower's interest.

Association") and the uses, benefits and proceeds of Borrower's Interest.

PUD COVENANTS. In addition to the covenants and agreements made in the Security Instrument, Borrower and Lender further covenant and agree as follows:

A. PUD Obligations. Borrower shall perform all of Borrower's obligations under the PUD's Constituent Documents. The "Constituent Documents" are the (i) Declaration; (ii) articles of incorporation, trust instrument or any equivalent document which creates the Owners Association; and (iii) any by-laws or other rules or regulations of the Owners Association. Borrower shall promptly pay, when due, all dues and assessments imposed pursuant to the Constituent Documents.

B. Property Insurance. So long as the Owners Association maintains, with a generally accepted insurance carrier, a "master" or "blanker" policy insuring the Property which is satisfactory to Lender and which provides insurance coverage in the amounts (including deductible levels), for the periods, and against loss by fire, hazards included within the term "extended coverage," and any other hazards, including, but not limited to, earthquakes and floods, for which Lender requires insurance, then: (i) Lender waives the provision in Section 3 for the Periodic Payment to Lender of the yearly premium installments for property insurance on the Property; and (ii) Borrower's obligation under Section 5 to maintain property insurance coverage on the Property is deemed satisfied to the extent that the required coverage is provided by the Owners Association policy.

What Lender requires as a condition of this waiver can change during the term of the loan.

Borrower shall give Lender prompt notice of any lapse in required property insurance coverage provided by the master or blanket policy.

- In the event of a distribution of property insurance proceeds in lieu of restoration or repair following a loss to the Property, or to common areas and facilities of the PUD, any proceeds payable to Borrower are hereby assigned and shall be paid to Lender. Lender shall apply the proceeds to the sums secured by the Security Instrument, whether or not then due, with the excess, if any, paid to Borrower.
- C. Public Llability Insurance. Borrower shall take such actions as may be reasonable to insure that the Owners Association maintains a public liability insurance policy acceptable in form, amount, and extent of coverage to Lender.
- D. Condemnation. The proceeds of any award or claim for damages, direct or consequential, payable to Borrower in connection with any condemnation or other taking of all or any part of the Property or the common areas and facilities of the PUD, or for any conveyance in lieu of condemnation, are hereby assigned and shall be paid to Lender. Such proceeds shall be applied by Lender to the sums secured by the Security Instrument as provided in Section 11.
- E. Lender's Prior Consent. Borrower shall not, except after notice to Lender and with Lender's prior written consent, either partition or subdivide the Property or consent to: (i) the abandonment or termination of the PUD, except for abandonment or termination required by law in the case of substantial destruction by fire or other casualty or in the case of a taking by condemnation or eminent domain; (ii) any amendment to any provision of the "Constituent Documents" if the provision is for the

-7R (0405)

CHL (06/04)

Page 2 of 3

itials: <u>/ 6/4</u> 5

Serial Number: 11/736,356 Filed: 04/17/2007

Examiner: Ronnie M. Mancho Art Unit: 3664

DOC ID #: 00016597093403007

Sheet 160 of 241

express, benefit of Lender; (iii) termination of professional management and assumption of self-management of the Owners Association; or (iv) any action which would have the effect of rendering the public liability insurance coverage maintained by the Owners Association unacceptable

F. Remedies. If Borrower does not pay PUD dues and assessments when due, then Lender may pay them. Any amounts disbursed by Lender under this paragraph F shall become additional debt of Borrower secured by the Security Instrument. Unless Borrower and Lender agree to other terms of payment, these amounts shall bear interest from the date of disbursement at the Note rate and shall be payable, with interest, upon notice from Lender to Borrower requesting payment.

BY SIGNING BELOW, Borrower accepts and agrees to the terms and provisions contained in this PUD Rider.

(Seal	gan foune grandlande
- Borrowe	JEAN BRUNER JEANGLAUDE
	11 HEMMING DR
	STAFFORD, VA 22554
(Seal	Gertride Arthur-Jeanglande
- Borrowe	GERTRUDE ARTHUR-JEANGLAUDE
	11 HEMMING OR
	STAFFORD, VA 22554
(Seal	
- Borrowe	
(Seal	
- Borrowe	

-7R (0405)


CHL (06/04)

Page 3 of 3

Form 3150 1/01

Serial Number: 11/736,356 Filed: 04/17/2007

Examiner: Ronnie M. Mancho Art Unit: 3664



## 1-4 FAMILY RIDER (Assignment of Rents)

After Recording Return to: COUNTRY OF HOME LOAMS, INC. MS SV 9 DOCUMENT PROCESSING P.0 Box 10423 Van Nuys, CA 91410-0423

Prepared By: HEATHER MCLAUGHLIN COUNTRYWIDE HOME LOANS, INC.

2380 PERFORMANCE DR MSRGV C931 RICHARDSON

> 165970934 [Escrow/Closing #]

00016597093403007 [Doc ID #]

Sheet 161 of 241

THIS 1-4 FAMILY RIDER is made this THIRTIETH day of MARCH, 2007 and is incorporated into and shall be deemed to amend and supplement the Mortgage, Deed of Trust, or Security Deed (the "Security Instrument") of the same date given by the undersigned (the "Borrower") to secure Borrower's Note to COUNTRYWIDE HOME LOANS, INC.

(the "Lender") of the same date and covering the Property described in the Security Instrument and located at: 8671 THORNBROOK TERRACE PT BOYNTON BEACH, FL 33437-4882 [Property Address]

1-4 FAMILY COVENANTS. In addition to the covenants and agreements made in the Security Instrument, Borrower and Lender further covenant and agree as follows:

MULTISTATE 1-4 FAMILY RIDER - Fannie Mae/Freddie Mac UNIFORM INSTRUMENT -57R (0401).01 CHL (06/04)(d) Page 1 of 3 VMP Mortgage Solutions, Inc. (800)521-7291

Form 3170 1/01





DOC ID #: 00016597093403007

A ADDITIONAL PROPERTY SUBJECT TO THE SECURITY INSTRUMENT. In addition to the Property described in the Security Instrument, the following items now or hereafter attached to the Property described in the extent they are fixtures are added to the Property description, and shall also constitute the Property covered by the Security Instrument: building materials, appliances and goods of every nature whatsoever now or hereafter foeded in, on, or used, or intended to be used in connection with the Property, including, but not limited to those for the purposes of supplying or distributing heating, cooling, electricity, gas, water, air and light, fire prevention and extinguishing apparatus, security and access control apparatus, purmbing, bath tubs, water heaters, water closets, sinks, ranges, stoves, refrigerators, dishwashers, disposals, washers, dryers, awnings, storm abidious, storm doors, screens, blinds, shades, curtains and curtain rods, attached mirrors, eabinets, paneling and attached floor coverings, all of which, including replacements and additions thereto, shall be deemed to be and cumain a part of the Property covered by the Security Instrument. All of the foregoing together with the Property described in the Security Instrument (or the leasehold estate if the Security Instrument is on a leaseful are referred to in this 1-4 Family Rider and the Security Instrument as the Property."

- B. USE OF PROPERTY: COMPLIANCE WITH LAW. Borrower shall not seek, agree to or make a change in the use of the Property or its zoning classification, unless Lender has agreed in writing to the change. Borrower shall comply with all laws, ordinances, regulations and requirements of any governmental body applicable to the Property.
- C. SUBORDINATE LIENS. Except as permitted by federal law, Borrower shall not allow any lien inferior to the Security Instrument to be perfected against the Property without Lender's prior written permission.
- D. RENT LOSS INSURANCE, Borrower shall maintain insurance against rent loss in addition to the other hazards for which insurance is required by Section 5.
  - E. "BORROWER'S RIGHT TO REINSTATE" DELETED. Section 19 is deleted.
- F. BORROWER'S OCCUPANCY. Unless Lender and Borrower otherwise agree in writing, Section 6 concerning Borrower's occupancy of the Property is deleted.
- G. ASSIGNMENT OF LEASES. Upon Lender's request after default, Borrower shall assign to Lender all leases of the Property and all security deposits made in connection with leases of the Property. Upon the assignment, Lender shall have the right to modify, extend or terminate the existing leases and to execute new leases, in Lender's sole discretion. As used in this paragraph G, the word "lease" shall mean "sublease" if the Security Instrument is on a leasehold.
- H. ASSIGNMENT OF RENTS; APPOINTMENT OF RECEIVER; LENDER IN POSSESSION. Borrower absolutely and unconditionally assigns and transfers to Lender all the rents and revenues ("Rents") of the Property, regardless of to whom the Rents of the Property are payable. Borrower authorizes Lender or Lender's agents to collect the Rents, and agrees that each tenant of the Property shail pay the Rents to Lender or Lender's agents. However, Borrower shall receive the Rents until: (i) Lender has given Borrower notice of default pursuant to Section 22 of the Security Instrument, and (ii) Lender has given notice to the tenant(s) that the Rents are to be paid to Lender or Lender's agent. This assignment of Rents constitutes an absolute assignment and not an assignment for additional security only.

assignment and not an assignment for additional security only.

If Lender gives notice of default to Borrower: (i) all Rents received by Borrower shall be held by Borrower as trustee for the benefit of Lender only, to be applied to the sums secured by the Security Instrument; (ii) Lender shall be entitled to collect and receive all of the Rents of the Property; (iii) Borrower agrees that each tenant of the Property shall pay all Rents due and unpaid to Lender or Lender's agents upon Lender's written demand to the tenant; (iv) unless applicable law provides otherwise, all Rents collected by Lender or Lender's agents shall be applied first to the costs of taking control of and managing the Property and collecting the Rents, including, but not limited to, attorneys' fees, receiver's fees, premiums on receiver's bonds, repair and

-57R (0401).01 CHL (06/04)

Page 2 of 3

Initials: 1875 AT Form 3170 1/01

Serial Number: 11/736,356

Filed: 04/17/2007

Sheet 163 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

DOC ID #: 00016597093403007

maintenance costs, insurance premiums, taxes, assessments and other charges on the Property, and then to the suras secured by the Security Instrument; (v) Lender, Lender's agents or any judicially appointed receiver shall be liable to account for only those Rents actually received; and (vi) Lender shall be entitled to have a receiver appointed to take possession of and manage the Property and collect the Rents and profits derived from the Property software any showing as to the inadequacy of the Property as security.

If the Rents of the Property are not sufficient to cover the costs of taking control of and managing the

If the Rents of the Property are not sufficient to cover the costs of taking control of and managing the Property and of collecting the Rents any funds expended by Lender for such purposes shall become indebtedness off Porrower to Lender secured by the Security Instrument pursuant to Section 9.

indebtedness of Borrower to Lender secured by the Security Instrument pursuant to Section 9.

Borrower represents and warrants that Borrower has not executed any prior assignment of the Rents and has not performed, and will not perform, any act that would prevent Lender from exercising its rights under this paragraph.

Lender, or Lender's agents or a judicially appointed receiver, shall not be required to enter upon, take control of or maintain the Property before or after giving notice of default to Borrower. However, Lender, or Lender's agents or a judicially appointed receiver, may do so at any time when a default occurs. Any application of Rents shall not cure or wave any default or invalidate any other right or remedy of Lender. This assignment of Rents of the Property shall terminate when all the sums secured by the Security Instrument are paid in full.

I. CROSS-DEFAULT PROVISION, Borrower's default or breach under any note or agreement in which Lender has an interest shall be a breach under the Security Instrument and Lender may invoke any of the remedies permitted by the Security Instrument.

BY SIGNING BELOW, Borrower accepts and agrees to the terms and provisions contained in this 14 Family Rider.

	Man Brune glandlande
(Seal	JEAN BRUNER JEANGLAUDE
- Borrower	11 HEMMING DR
(Seal)	Stafford, va 22554 Jestvude Arthur-Jeanzlande
- Borrowe	/GERTRUDE ARTHUR-JEANGLAUDE
	√ 11 HEMMING DR  STAFFORD, VA 22554
(Seal)	otherwise, vir 22004
- Borrower	
(Seal)	
- Borrower	

-57R (0401).01 CHL (06/04)

Page 3 of 3

Form 3170 1/01

EXHIBIT A

SITUATED IN PALM BEACH COUNTY, FLORIDA, THE FOLLOWING DESCRIBED PROPERTY:

CLOT 117, CANYON ISLES - PLAT TWO, ACCORDING TO THE PLAT THEREOF, AS RECORDED IN PLAT BOOK 105 AT PAGE 40, OF THE PUBLIC RECORDS OF PALM BEACH COUNTY, FLORIDA.

THORUSECON TERIALE PLACE
ADDRESS: 8671 THORN BROOK; BOYNTON BEACH, FL 33437 MAP OR PARCEL ID NO.: 00-42-45-32-03-000-1170



U38332630-01NP18 MORTGAGE LOAN# T007-040958 US Recordings

Jed Margolin

Serial Number: 11/736,356

Filed: 04/17/2007

Sheet 165 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

IN THE CIRCUIT COURT FOR PALM BEACH COUNTY, FLORIDA. CIVIL DIVISION

CASE NO.

THE BANK OF NEW YORK MELLON FKA THE BANK OF NEW YORK, AS TRUSTEE FOR THE CERTIFICATEHOLDERS, CWALT, INC., AETERNATIVE LOAN TRUST 2007-12T1 MORTGAGE PASS: THROUGH CERTIFICATES, SERIES 2007-12T1,

Plaintiff,

50 2009 CAO 27 485 XXXX NE

JEAN BRUNER JEANGLAUDE; GERTRUDE ARTHUR JEANGLAUDE AK/A GERTRUDE ARTHUR-JEANGLAUDE; CANYON ISLES HOMEOWNERS ASSOCIATION, INC.; UNKNOWN TENANT NO. 1; UNKNOWN TENANT NO. 2; and ALL UNKNOWN PARTIES CLAIMING INTERESTS BY, THROUGH, UNDER OR AGAINST A NAMED DEFENDANT TO THIS ACTION, OR HAVING OR CLAIMING TO HAVE ANY RIGHT, TITLE OR INTEREST IN THE PROPERTY HEREIN DESCRIBED.

Defendants.

NOTICE OF LIS PENDENS

NOTICE IS HEREBY GIVEN that suit was instituted in the above styled Court on

2009, by the above styled Plaintiff against the above styled Defendants. The purpose of the suit is to foreclose a certain mornage

upon the following property:

LOT 117, CANYON ISLES PLAT TWO, ACCORDING TO THE PLAT THEREOF, AS RECORDED IN PLAT BOOK 105 AT PAGE 40, OF THE PUBLIC RECORDS OF PALM BEACH GOLDSTYLD FLORIDA.

All persons are therefore warned and advised of the pendency of this suit.

SMITH, HIATT & DIAZ, P.A.

Po BOX 11438

Fort Lauderdale, FL 33339-1438

Telephone: (954) 564-007 i

Robert A. Smith
Florida Bar No. 116186
Patrice Tedescko
Florida Bar No. 0628451

Gavin MacMillan Florida Bar No. 0037641 Gabrielle Strauss

Florida Bar No. 0059563 Glenn Matt Lindsay

Florida Bar No. 0059200 Tat-Lin Angus

Florida Bar No. 0051909 Annemarie Bui Tedford

Florida Bar No. 0030143

1183-70318

Jed Margolin

Serial Number: 11/736,356

Filed: 04/17/2007

Sheet 166 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

IN THE CIRCUIT COURT FOR PALM BEACH COUNTY, FLORIDA. CIVIL DIVISION

CASE NO.

THE BANK OF NEW YORK MELLON FKA THE BANK OF NEW YORK, AS TRUSTEE FOR THE CERTIFICATEHOLDERS, CWALT, INC., AETERNATIVE LOAN TRUST 2007-12T1 MORTGAGE PASS-THROUGH CERTIFICATES, SERIES 2007-12T1,

Maintiff,

**50 2009 CA**027 485 XXXX NE

JEAN BRUNER JEANGLAUDE; GERTRUDE ARTHUR JEANGLAUDE A/K/A GERTRUDE ARTHUR-JEANGLAUDE; CANYON ISLES HOMEOWNERS ASSOCIATION, INC.; UNKNOWN TENANT NO. 1; UNKNOWN TENANT NO. 2; and ALL UNKNOWN PARTIES CLAIMING INTERESTS BY, THROUGH, UNDER OR AGAINST A NAMED DEFENDANC TO THIS ACTION, OR HAVING OR CLAIMING TO HAVE ANY RIGHT, TITLE OR INTEREST IN THE PROPERTY HEREIN DESCRIBED,

Defendants.

NOTICE OF LIS PENDENS

NOTICE IS HERESY GIVEN that suit was instituted in the above styled Court on

2009, by the above styled Plaintiff against the above styled Defendants. The purpose of the suit is to foreclose a certain mortgag

upon the following property:

LOT 117, CANYON ISLES PLAT TWO, ACCORDING TO THE PLAT THEREOF, AS RECORDED IN PLAT BOOK 105 AT PAGE 40, OF THE PUBLIC RECORDS OF PALM BEACH GOODSTYLE FLORIDA.

All persons are therefore warned and advised of the pendency of this suit.

SMITH, HIATT & DIAZ, P.A. Attorneys for Plaintiff

BOX 11438

Fort Lauderdale, FL 33339-1438

phone: (954) 564-**007** 

Robert A. Smith Florida Bar No. 116186 Patrice Tedescko Florida Bar No. 0628451

Gavin MacMillan Florida Bar No. 0037641 Gabrielle Strauss

Florida Bar No. 0059563 Glenn Matt Lindsay

Florida Bar No. 0059200 Tat-Lin Angus

Florida Bar No. 0051909 Annemarie Bui Tedford

Florida Bar No. 0030143

1183-70318

3.7

22

ريد.ه

Serial Number: 11/736,356

Filed: 04/17/2007

Sheet 167 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

This document was prepared by and Return to: MICHABL A. TRINKLER, ESQ. MICHABLA TRINKLER, P.A. 5501 University Drive, Suite 101 Coral Springs FI, 33067 Phone: (954) 753-5767 CFN 20100076403
OR BK 23715 PG 1415
RECORDED 03/01/2010 08:30:07
Palm Beach County, florida
AMT 640,000.00
Doc Stamp 4,480.00
Sharon R. Bock, CLERK & COMPTROLLER
Pgs 1415 - 1416; (2pgs)

(Reserved for Use by the Clerk)

#### WARRANTY DEED

THIS INDENTURE is made this 5 day of February, 2010, between, JEAN BRUNER JEANGLAUDE and GERTRUDE ARTHUR JEANGLAUDE, husband and wife, party of the first part, and ROMUALD ALTINE and GEROSE ALTINE, husband and wife, whose post office address is: 8671 Thornbrook Terrace Point, Boynton Beach, FL 33437, party of the second part.

WITNESSETH:

That the party of the first part, for and in consideration of the sum of TEN AND NO/100 (\$10.00) DOLLARS to them in hand paid by the party of the second part, the receipt whereof is hereby acknowledged, has granted, bargained and sold to the party of the second part, their heirs and assigns forever, the following described land, situate and being in the County of PALM BEACH and State of Florida, to-wit:

Lot 117, CANYON ISLES - PLAT TWO, according to the plat thereof, as recorded in Plat Book 105 at Page 40, of the Public Records of Palm Beach County, Florida.

Folio No.: 00-42-45-32-03-000-1170

#### SUBJECT TO:

. Taxes for the year 2010, and subsequent years;

2. Conditions, restrictions, limitations and easements of record; without reimposing same;

Zoning restrictions, prohibitions and other requirements imposed by governmental authority.

And the party of the first part does hereby fully warrant the title to said land, and will defend the same against the lawful claims of all persons whomsoever.

Serial Number: 11/736,356

Filed: 04/17/2007

Sheet 168 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

(Reserved for Use by the Clerk)

IN WITNESS WHEREOF, the party of the first part has hereunto set her hand and seal the day and year first above written.

Signed, Sealed and Delivered In the Presence of:

Print Name of 2nd Witness

Address: 11 Hemming Drive, Stafford, VA 22554

The execution of the foregoing instrument was acknowledged before me this 5 day of February, 2010 by, JEAN BRUNER JEANGLAUDE and GERTRUDE ARTHUR JEANGLAUDE, who are personally known to me or who have produced VR drivers License as identification, and who did not take an oath.

My Commission Expires: 6/30/10

OFFICIAL SEAL KAREN BARRONS ID # 7012279

Serial Number: 11/736,356

Filed: 04/17/2007

Sheet 169 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

IN THE CIRCUIT COURT FOR PALM BEACH COUNTY, FLORIDA. CIVIL DIVISION

CASE NO. 502009CA027485XXXXM8 (AW)

THE BANK OF NEW YORK MELLON FKA THE BANK OF NEW YORK, AS TRUSTEE FOR THE CERTIFICATEHOLDERS, CWALT,ING.,ALTERNATIVE LOAN TRUST 2007-12TY MORTGAGE PASS-THROUGH CERTIFICATES, SERIES 2007-12T1,

Plaintiff,

VS.

JEAN BRUNER JEANGLAUDE; GERTRUDE ARTHUR JEANGLAUDE A/K/A GERTRUDE ARTHUR-JEANGLAUDE; CANYON ISLES HOMEOWNERS ASSOCIATION, INC.; UNKNOWN TENANT NO. 1; UNKNOWN TENANT NO. 2; and ALL UNKNOWN PARTIES CLAIMING INTERESTS BY, THROUGH, UNDER OR AGAINST A NAMED DEFENDANT TO THIS ACTION, OR HAVING OR CLAIMING TO HAVE ANY RIGHT, TITLE OR INTEREST IN THE PROPERTY HEREIN DESCRIBED,

Defendants.

#### SUMMARY FINAL JUDGMENT OF FORECLOSURE

THIS ACTION came before the Court upon pleadings and proofs submitted herein, the motion of the Plaintiff, for the entry of a Summary Final Judgment, and on the evidence presented,

#### IT IS ADJUDGED THAT:

1. This Court has jurisdiction of the subject matter hereof and the parties hereto.

The equities of this action are with the Plaintiff, THE BANK OF NEW YORK MELLON FKA THE

BANK OF NEW YORK, AS TRUSTEE FOR THE CERTIFICATEHOLDERS,

1

#### CWALT, INC., ALTERNATIVE LOAN TRUST 2007-12T1 MORTGAGE PASS-THROUGH

CERTIFICATES, SERIES 2007-12T1, There is due to the Plaintiff, the sums of money as hereafter set

A.	Principal Balance	\$ 807,000.00
В.	6.375% interest at \$140.95 per diem from March 1, 2009 thru October 30, 2009	\$ 34,097.84
} <b>c</b> .	Interest from October 31, 2009 thru January 29, 2010	12,826.45
<b>D</b> ,	Advance for Taxes	\$ 17,066.99
É.	Pre-Acceleration Late Charges	\$ 643.08
F. 😽	Property Preservation Fees	\$ 45.00
G.	Title Search	\$ 325.00
H.	Filing Fee	\$ 1,963.50
I.	Service of Process	\$ 475.00
J.	Corporate Search	\$ 15.00
K.	Attorneys Fees	\$ 1,450.00
	TOTAL C	\$ 875,907.86

- 2. Plaintiff is entitled to receive attorney's fees set forth above as compensation for 12 hours reasonably expended at a rate of \$150.00 per hour, as set forth in the filed affidavit. However, pursuant to the Plaintiff's fee agreement with Smith, Hiatt & Diaz, P.A., the Plaintiff will pay attorneys' fees in the amount of \$1450.00.
- The original promissory note having been presented and delivered to the Court,
   Count I of Plaintiff's Complaint is hereby deemed moot.
- 4. A lien is held by the Plaintiff for the total sum specified in paragraph 1, plus interest, superior in dignity to any right, title, interest, or claim of the Defendants upon the mortgaged property herein foreclosed situate, lying and being in Palm Beach County, Florida, to-wit:

forth

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 171 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

LOT 117, CANYON ISLES – PLAT TWO, ACCORDING TO THE PLAT THEREOF, AS RECORDED IN PLAT BOOK 105 AT PAGE 40, OF THE PUBLIC RECORDS OF PALM BEACH COUNTY, FLORIDA.

- 5. If the total sum due to the Plaintiff, plus interest on the unpaid principal at the rate prescribed in the note and mortgage to date, and at the current statutory interest rate after the date through which interest is calculated in paragraph 1 above, and all costs of this proceeding incurred after the date of this Judgment are not forthwith paid, the Clerk of this Court shall sell that property at public sale at 10:00 a.m. on the 8 day of MARCH , 2010, to the highest bidder or bidders for cash at the www.mypalmbeachclerk.clerkauction.com, after having first given notice as required by Section 45.031, Florida Statutes.
- 6. Plaintiff shall advance the cost of publishing the Notice of Sale and shall be reimbursed by the Clerk out of the proceeds of the sale if the Plaintiff is not the purchaser of the property, but such reimbursement will not be by the Clerk unless the Affidavit of Post Judgment Advances has been filed. The purchaser at the sale shall pay, in addition to the amount bid, the Clerk's fee, Clerk's registry fee and documentary stamps to be affixed to the Certificate of Title.
- The Plaintiff may assign the Judgment or the bid to a third party without further order of the Court.
- 8. If the Plaintiff or Plaintiff's assignee is the purchaser at the sale, the Clerk shall credit on the bid of the Plaintiff or Plaintiff's assignee the total sum herein found to be due the Plaintiff or such portion thereof as may be necessary to pay fully the bid of the Plaintiff or Plaintiff's assignee.
- 9. On filing the Certificate of Title, the Clerk shall distribute the proceeds of the sale to Plaintiff c/o Smith, Hiatt & Diaz, P.A., PO BOX 11438, Fort Lauderdale, FL 33339-1438, so far as they are sufficient, by paying:
  - All of Plaintiff's costs,

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 172 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

B. Plaintiff's attorneys' fees,

- C. The total sum due to Plaintiff as set forth above, less the items paid, with interest at the current statutory interest rate from the date through which interest is calculated in paragraph 1 above to the date of the sale. If, subsequent to the date of the Plaintiff's Affidavit of Indebtedness and prior to the sale contemplated in paragraph 5 hereof, the Plaintiff has to advance money to protect its mortgage lien, including but not limited to post judgment advances for property taxes and insurance, property preservation costs, post judgment attorney's fees and costs and post judgment bankruptcy attorney fees and costs, the Plaintiff or its Attorneys shall certify by affidavit to the Clerk and the amount due to Plaintiff shall be increased by the amount of such advances upon further order of the Court.
- D. The remaining proceeds, if any, shall be retained by the Clerk pending further Order of the Court.
- 10. If the United States of America is a Defendant in this action, they shall have the right of redemption provided by 28 U.S.C. §2410(c) from the issuance of a Certificate of Title, but the right shall thereafter expire.
- Upon filing the Certificate of Sale, the Defendants and all persons claiming under or against them since the filing of the Notice of Lis Pendens shall be foreclosed of all estate or claim in the property, with the exception of any assessments that are superior pursuant to Florida Statutes, Section 718.116 (effective 4/1/1992) or Florida Statutes 720.3085 (effective 7/1/2008), both of which state they are not to be applied retroactively to alter a lien priority existing prior to the effective date of the statute. Upon issuance of the Certificate of Title, the purchaser at the sale shall be let into possession of the property located at 8671 THORNBROOK TERRACE PT, BOYNTON BEACH, FL 33437. Upon further order of the court, the Clerk of the Court is hereby specifically authorized to issue a Writ of Possession for the property which is the subject matter of this action, and the Sheriff is hereby authorized

Jed Margolin

Serial Number: 11/736,356 Filed: 04/17/2007

Sheet 173 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

to serve the Writ forthwith.

IF THIS PROPERTY IS SOLD AT PUBLIC AUCTION, THERE MAY BE ADDITIONAL MONEY FROM THE SALE AFTER PAYMENT OF PERSONS WHO ARE ENTITLED TO BE PAID FROM THE SALE PROCEEDS PURSUANT TO THIS FINAL JUDGMENT.

13. IF YOU ARE A SUBORDINATE LIENHOLDER CLAIMING A RIGHT TO FUNDS REMAINING AFTER THE SALE, YOU MUST FILE A CLAIM WITH THE CLERK NO LATER THAN 60 DAYS AFTER THE SALE. IF YOU FAIL TO FILE A CLAIM, YOU WILL NOT BE ENTITLED TO ANY REMAINING FUNDS.

- 14. FYOU ARE THE PROPERTY OWNER, YOU MAY CLAIM THESE FUNDS YOU ARE NOT REQUIRED TO HAVE A LAWYER OR ANY OTHER REPRESENTATION AND YOU DO NOT HAVE TO ASSIGN YOUR RIGHTS TO ANYONE ELSE IN ORDER FOR YOU TO CLAM ANY MONEY TO WHICH YOU ARE ENTITLED. PLEASE CHECK WITH THE CLERK OF THE COURT, OF PALM BEACH COUNTY WITHIN TEN (10) DAYS AFTER THE SALE TO SEE IF THERE IS ADDITIONAL MONEY FROM THE FORECLOSURE SALE THAT THE CLERK HAS IN THE REGISTRY OF THE COURT.
- IF YOU DECIDE TO SELL YOUR HOME OR HIRE SOMEONE TO HELP YOU CLAIM THE ADDITIONAL MONEY, YOU SHOULD READ VERY CAREFULLY ALL PAPERS YOU ARE REQUIRED TO SIGN, ASK SOMEONE ELSE, PREFERABLY AN ATTORNEY WHO IS NOT RELATED TO THE PERSON OFFERING TO HELP YOU, TO MAKE SURE THAT YOU UNDERSTAND WHAT YOU ARE SIGNING AND THAT YOU ARE NOT TRANSFERRING YOUR PROPERTY OR THE EQUITY IN YOUR PROPERTY WITHOUT THE PROPER INFORMATION. IF YOU CANNOT AFFORD TO PAY AN ATTORNEY, YOU MAY CONTACT THE COUNTY LEGAL AID OFFICE OF FLORIDA RURAL LEGAL SERVICES, 1500 NW AVENUE

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 174 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

"L" UNIT B, BELLE GLADE, FL 33430, PHONE: (888) 993-0003 TO SEE IF YOU QUALIFY FINANCIALLY FOR THEIR SERVICES. IF THEY CANNOT ASSIST YOU, THEY MAY BE ABLE TO REFER YOU TO A LOCAL BAR REFERRAL AGENCY OR SUGGEST OTHER OPTIONS. IF YOU'CHOOSE TO CONTACT PALM BEACH COUNTY AID SERVICES FOR ASSISTANCE, YOU SHOULD DO SO AS SOON AS POSSIBLE AFTER RECEIPT OF THIS NOTICE.

The Court retains jurisdiction of this action to enter further orders as are proper including, without limitation, deficiency judgments.

DONE AND ORDERED in Chambers at the Palm Beach County Courthouse, West Palm

Beach, Florida on

Circuit Judge

Copies furnished:

Gabrielle M Strauss, Esquire SMITH, HIATT & DIAZ, P.A. Attorneys for Plaintiff PO BOX 11438 Fort Lauderdale, FL 33339-1438 Telephone: (954) 564-0071

All parties on the attached service list

1183-70318

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 175 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

# SERVICE LIST Case No. 502009CA027485XXMBAW

JEAN BRUNER JEANGLAUDE 11 Hemming Dr Stafford, VA 22554

GERTRUDE ARTHUR JEANGLAUDE A/K/A GERTRUDE ARTHUR-JEANGLAUDE 11 Hemming Dr Stafford, VA 22554

MICHAEL S. FELDMAN, ESQ Attorney For CANYON ISLES HOMEOWNERS ASSOCIATION, INC. 6111 BROKEN SOUND PKWY NW, STE 200 BOCA RATON, FL 33487 Serial Number: 11/736,356

Filed: 04/17/2007

Sheet 176 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

CFN 20100076403 OR BK 23715 PG 1415 RECORDED 03/01/2010 08:30:07 Palm Beach County, Florida ART 640,000.00 Doc Stamp 4,480.00 Sharon R. Bock, CLERK & COMPTROLLER

Pgs 1415 - 1416; (2pgs)

MICHABLY A: THINDLER, P.A. 5501 University Drive, Suite 101 Coral Springs) FL 33067 Phone: (951) 753-5700 Fax No. (954) 753-5767 - 2

This document was prepared by and Return to: MICHAEL A. TRINKLER, ESQ. MICHAEL A. TRINKLER, P.A.

 $\rightleftharpoons$ (-: 22

ريد.ه

~~> 5

3.7

(Reserved for Use by the Clerk)

#### WARRANTY DEED

THIS INDENTURE is made this 5 day of February, 2010, between, JEAN BRUNER JEANGLAUDE and GERTRUDE ARTHUR JEANGLAUDE, husband and wife, party of the first part, and ROMUALD ALTINE and GETOSE ALTINE, husband and wife, whose post office address is: 8671 Thornbrook Terrace Point, Boyaton Beach, FL 33437, party of the second part.

WITNESSETH:

That the party of the first part for and in consideration of the sum of TEN AND NO/100 (\$10.00) DOLLARS to them in hand paid by the party of the second part, the receipt whereof is hereby acknowledged, has granted, bargained and sold to the party of the second part, their heirs and assigns forever, the following described land, situate and being in the County of PALM BEACH and State of Florida, to-wit:

Lot 117, CANYON ISLES - PLATTWO, according to the plat thereof, as recorded in Plat Book 105 at Page 40, of the Public Records of Palm Beach County, Florida.

Folio No.: 00-42-45-32-03-000-1170

#### SUBJECT TO:

Taxes for the year 2010, and subsequent years;

Conditions, restrictions, limitations and easements of record; without reimposing same;

Zoning restrictions, prohibitions and other requirements imposed by governmental authority.

And the party of the first part does hereby fully warrant the title to said land, and will defend the same against the lawful claims of all persons whomsoever.

Serial Number: 11/736,356

Filed: 04/17/2007

Sheet 177 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

. نيعا لو.

(Reserved for Use by the Clerk)

IN WITNESS WHEREOF, the party of the first part has hereunto set her hand and seal the day and year first above written.

Signed, Sealed and Delivered In the Presence of:

1st Witness Signature

Print Name of 1" Witness:

Vuna Solmus

Nan frumer stanslande

Entrude Hithur Flansk GERTRUDE ARTHUR JEANGLAUDE

Address: 11 Hemming Drive, Stafford, VA 22554

STATE OF VINGIM

COUNTY OF

 $\frac{d \mathbf{k}}{d \mathbf{k}}$  ss:

The execution of the foregoing instrument was acknowledged before me this 5 day of February, 2010 by, JEAN BRUNER JEANGLAUDE and GERTRUDE ARTHUR JEANGLAUDE, who are personally known to me or who have produced VF CNIVEYS LICENTED as identification, and who did not take an oath.

My Commission Expires: 6/30/10

Notary Public

Russian B

OFFICIAL SEAL
MOTARY FINE COMMEMBER OF VIRON
KAPIEN BARRONS
COUNTY OF STAFFORD
ID # 7012279
My Commission Expires
June 30, 2010

Filed: 04/17/2007

Sheet 178 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

# 

Document Prepared By: Document Prepared By: ReconTrust Company, N.A. 2575 W. Chandler Btvd, Mail Stop: AZ1-804-02-11 Chandler, AZ 85224 (800) 540-2684

CFN 20100187212 OR BK 23857 PG Ø153 RECORDED 05/20/2010 09:34:28 Palm Beach County, Florida Sharon R. Bock, CLERK & COMPTROLLER Pg 0153; (1pg)



When recorded return to:
JEAN BRENER JEANGLAUDE
11 Hemming Dr. Stafford VA 22554

DOC ID#0001659709342005N

# SATISFACTION OF MORTGAGE

KNOW ALL MEN BY THESE PRESENTS: Mortgage Electronic regiseration, certain mortgage deed executed by JEAN BRUNER JEANGLAUDE, AND GERTRUDE ARTHUR JEANGLAUDE to Mortgage Electronic Registration Systems, Inc. bearing date 03/30/2007, recorded on 04/19/2007 in Official Records Book CR 21639, Page 1219, Instrument # 2007/0188785 in the office of the Clerk of the Circuit Court of PALM BEACH County State off Florida, securing a certain note in the principal sum of \$807,000.00 Dollars, and certain promises and obligations set forth in said mortgage deed, upon the property situated in said State and County hereby acknowledge full payment and satisfaction of said note and mortgage deed, and surrenders the same as canceled, and hereby directs the Clerk of the said Circuit Court to cancel the same of record.

IN WITNESS WHEREOF the said Corporation has caused these presents to be executed in its name, and its corporate seal to be a secuted in the name, and its corporate seal to be a secuted in the name, and its corporate seal to be a secuted in the name, and its corporate seal to be a secuted in the name, and its corporate seal to be a secuted in the name, and its corporate seal to be a secuted in the name, and its corporate seal to be a secuted in the name, and its corporate seal to be a secuted in the name, and its corporate seal to be a secuted in the name, and its corporate seal to be a secuted in the name, and its corporate seal to be a secuted in the name and its corporate seal to be a secuted in the name and its corporate seal to be a secuted in the name and its corporate seal to be a secuted in the name and its corporate seal to be a secuted in the name and its corporate seal to be a secuted in the name and its corporate seal to be a secuted in the name and its corporate seal to be a secuted in the name and its corporate seal to be a secuted in the name and its corporate seal to be a secuted in the name and its corporate seal to be a secuted in the name and its corporate seal to be a secuted in the name and its corp

ATTEST DeWayne Vardaman

Assistant Secretary

Signed and delivered in the presence of:


Amy DeLaPaz Witness

icela Lopez Vice President

Mortgage Electronic Registration Systems, Inc.

STATE OF ARIZONA COUNTY OF MARICOPA

On S44O ____, before me, Edward Napier, Notary Public, personally appeared Icela Lopez personally known to me (or proved to me on the basis of satisfactory evidence) to be the person whose name is subscribed to the within instrument and acknowledged to me that he/she executed the same in his/her authorized capacity, and that by his/her signature on the instrument the person, or the entity upon behalf of which the person acted, executed the instrument.



Edulas Edward Napier, Notary Public Expires: 09/14/2013

Witness my hand and official seal



Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 179 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1	<b>Exhibit 5</b> - UCAV Distributed Mission Training Testbed:
2	<b>Lessons Learned and Future Challenges</b>
3	by Dr. Dutch Guckenberger and Matt Archer
4	The Interservice/Industry Training, Simulation & Education Conference
5	(I/ITSEC), Volume: 2000 (Conference Theme: Partnerships for Learning in
6	the New Millennium)
7	http://ntsa.metapress.com/link.asp?id=4mrrc0aupmjpf8e6
8	

1

11/16/2010 11:39 AM



Log out genevahunter

Filed: 04/17/2007

Home Back To: Search Results Article

Lof2

About Search

The Interservice/Industry Training, Simulation & Education Conference (I/ITSEC) Volumes

Volume: 2000 (Conference Theme: Partnerships for Learning in the New Account

Millennium)

URL: Linking Options Subscribe

Shopping Cart UCAV Distributed Mission Training Testbed: Lessons Learned and Future **Order History** 

Profile Dr. Dutch Guckenberger A1 and Matt Archer A1

**Services** A1 SDS International Inc., Orlando, FL Alerting

A2 BMH Associates, Inc., Norfolk, VA ActiveSearch

Support

Contact Us

Downloads

The UCAV DMT Testbed research will focus on technologies for: defining effective training strategies for UAV/UCAV operators; assessing the delta in training required for multiple vehicles; advanced displays driven from human factors design; integration of Geneva Aerospace s Variable Autonomy Control System, and integrating several UAV and UCAV Flight Model into the Testbed. Potential applications include direct linkage of UCAV Testbeds as Participants in DMT. This paper chronicles the development of the UCAV DMT Testbed from the perspective of lessons learned and details features planned to support the initial research efforts planned for 2000.

Four successful UCAV DMT demonstrations and experiments are presented from a lessons learned perspective. Starting with the initial separately developed PC-Based UCAV simulations; evolving to the merging of the simulations and initial DMT research experiments including DMTO&I testbed, I/ITSEC99 and planned AFRL Mesa UCAV DMT Demonstrations. Key testbed components included the LiteFlite Flight Simulator, JSAF and SOAR applications, and the Variable Autonomy Control System (VACS). The unique and innovative portions of this paper detail the components integration for UCAV missions and operational concepts, along with the human factors engineering on the VACS human-system interface design and LiteFlite researcher toolkit interfaces. Illustrative examples, are also included with sufficient details to support other government, industry and academic organizations participation in future UCAV DMT experiments and demonstrations

Participating organizations include but are not limited to AFRL Mesa, SDS International, Geneva Aerospace, Eglin 46th Test Wing PRIMES, NASA Dryden Flight Research Center/Tuskegee University, Computer Science Corporation. Future participants may include Navy Pax River (MFS and Distributed Simulation Groups), AFRL Wright-Patterson and Naval Aerospace Medical Research Lab. Additional discussion includes related UCAV DMT Research topics of :

- · LiteFlite UCAV and Testbed Utilization of the Ordnance Server to ensure DMT Fair Fight
- · Innovations associated with a new Distributed Ordnance Server to insure Temporal Correlation of the
- Target/Counter-Measure/Weapon Triad

#### Full Text Access

#### **Full Text Available**

The full text of this article is available. You may view the article as (a):

#### O PDF

The size of this document is 2,135 kilobytes. Although it may be a lengthier download, this is the most authoritative online format.

#### Open Full Text

#### ⊕ HTML

This offers the auickest access for ease of browsing. Please note that some scientific and mathematical characters may not render as precisely as in PDF versions

Open Full Text

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 181 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

2 of 2 11/16/2010 11:39 AM

• An Innovative new concept of handing off UCAV Ownership from the Virtual LiteFlite Host Simulation to

the Constructive JSAF and SOAR Agents to automate tasks for the UCAV operators Results from three initial UCAV integration efforts are presented detailing DIS integration with existing DMT assets and HLA integration with planned DMT configurations I/ITSEC99, USAF Only DMTO&I Demonstration Jan2000, DMT UCAV Testbed development for AFRL/HEA and UAV 2000 Demonstration July 2000. An outline of planned research efforts that will utilize the DMT UCAV Testbed are presented along with Future Research Directions.

08 899

Remote Address: 68.190.187.74 • Server: MPWEB03
HTTP User Agent: Mozilla/5.0 (Windows; U; Windows NT 6.0; en-US; rv:1.9.2.3) Gecko/20100401
Firefox/3.6.3 (.NET CLR 3.5.30729)

1

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 182 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

# UCAV Distributed Mission Training Testbed: Lessons Learned and Future Challenges

Dr. Dutch Guckenberger & Matt Archer SDS International Inc. Orlando, FL <u>dutchg@sdslink.com</u> & <u>marcher@sdslink.com</u> Michael R. Oakes BMH Associates, Inc. Norfolk, VA moakes@bmh.com

#### Abstract

The UCAV DMT Testbed research will focus on technologies for: defining effective training strategies for UAV/UCAV operators; assessing the delta in training required for multiple vehicles; advanced displays driven from human factors design; integration of Geneva Aerospace's Variable Autonomy Control System; and integrating several UAV and UCAV Flight Model into the Testbed. Potential applications include direct linkage of UCAV Testbeds as Participants in DMT. This paper chronicles the development of the UCAV DMT Testbed from the perspective of lessons learned and details features planned to support the initial research efforts planned for 2000.

Four successful UCAV DMT demonstrations and experiments are presented from a lessons learned perspective. Starting with the initial separately developed PC-Based UCAV simulations; evolving to the merging of the simulations and initial DMT research experiments including DMTO&I testbed, I/ITSEC99 and planned AFRL Mesa UCAV DMT Demonstrations. Key testbed components included the LiteFlite Flight Simulator, JSAF and SOAR applications, and the Variable Autonomy Control System (VACS). The unique and innovative portions of this paper detail the components integration for UCAV missions and operational concepts, along with the human factors engineering on the VACS human-system interface design and LiteFlite researcher toolkit interfaces. Illustrative examples, are also included with sufficient details to support other government, industry and academic organizations participation in future UCAV DMT experiments and demonstrations.

Participating organizations include but are not limited to AFRL Mesa, SDS International, Geneva Aerospace, Eglin 46th Test Wing PRIMES, NASA Dryden Flight Research Center/Tuskegee University, Computer Science Corporation. Future participants may include Navy Pax River (MFS and Distributed Simulation Groups), AFRL Wright-Patterson and Naval Aerospace Medical Research Lab. Additional discussion includes related UCAV DMT Research topics of:

- LiteFlite UCAV and Testbed Utilization of the Ordnance Server to ensure DMT Fair Fight
- Innovations associated with a new Distributed Ordnance Server to insure Temporal Correlation of the Target/Counter-Measure/Weapon Triad
- An Innovative new concept of handing off UCAV Ownership from the Virtual LiteFlite Host Simulation to the Constructive JSAF and SOAR Agents to automate tasks for the UCAV operators

Results from three initial UCAV integration efforts are presented detailing DIS integration with existing DMT assets and HLA integration with planned DMT configurations I/ITSEC99, USAF Only DMTO&I Demonstration Jan2000, DMT UCAV Testbed development for AFRL/HEA and UAV 2000 Demonstration July 2000. An outline of planned research efforts that will utilize the DMT UCAV Testbed are presented along with Future Research Directions.


# About the Authors

**Dr. Dutch Guckenberger** is the Chief Scientist at SDS International, with 15 years of experience in the defense simulation and training systems. He has earned degrees in Computer Science, Physics, & Simulation and Training. Research interests include Distributed Mission Training, High Resolution PC-Based Visual Systems, Above Real-Time Training (ARTT), UAV and UCAV Research. He is a member of ACM, IEEE, Human Factors Society & a Link Foundation Fellow in Advanced Simulation & Training.

**Michael Oakes** is a Sr. Systems Engineer with BMH Associates, Inc. He was responsible for the evolution and deployment of high priority classified special access required programs. He is a retired USAF fighter pilot with over 20 years of experience in the Pacific, European, and Southwest Asia theaters of operations and is a USAF F-15 Fighter Weapons School Graduate. Mr. Oakes was the WISSARD Lab Test Director for the STOW-97 ACTD. He continues to provide modeling and military domain expertise for Air Synthetic Force development used in JSAF technologies.

1

1



**Figure** 11. LiteFlite UCAV Situational/ MFD Display replicate based upon the original interface developed by WPAFB Operator Vehicle Interface Lab.

It is important to note that the LiteFlite image above was developed based upon JPEG images from AFRL/HECP Operator Vehicle Interface (OVI) Group. The key to economically supporting the UCAV researchers is effective rapid prototyping. To this end SDS with their DISTI team partner were able to develop the Situational Display and the major portions of the Multifunction Display to functional prototype level including the DIS connectivity in less than 120 Hours. (See figure 11 above for the prototype UCAV Multifunction Display.)


# Variable Autonomy Control System (VACS)

As a portion of the DMT UCAV Testbed development, the Geneva AeroSpace Variable Autonomy Control System (VACS) was added to LiteFlite. The VACS is designed to be effective for UAV and UCAV systems as usable to individuals whose training is focused on the requirements of a given mission or the usability of the payload, rather than on the aviation of the vehicle. As the dependence on UAVs for military operations grows and UAV technology is integrated into the emerging global command and control architecture, the cost and complexity of managing and controlling these assets can easily become substantial. The VACS solution to this UAV control problem lies in the appropriate functional allocation between the human and the machine. By merging modern stand-off missile flight control, advanced aircraft flight control, and state-of-the-art communications technologies, Geneva has developed a novel hierarchical flight control structure with varied levels of remote operator input to address the human-machine functional allocation problem.

The VACS has been successfully demonstrated enabling a diverse range of users to effectively operate UAVs. Furthermore, the VACS solution eliminates the requirement for UAVs to be controlled by highly

trained, rated pilots. In a continuing development and demonstration effort VACS is to be used Joint STARS MTE workstation and the Freewing Scorpion 100-50 UAV and conduct a flight test demonstration. This program will demonstrate the benefits of the variable autonomy flight control system design with simplified manual control modes, demonstrate the compatibility of such a system with the military's emerging C⁴I architecture, and demonstrate the synergism between Joint STARS and UAVs using the simplified UAV flight control technology.

Filed: 04/17/2007

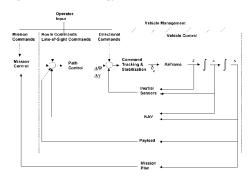

**Figure** 12. Variable Autonomy Control System (VACS)

# JSAF, SOAR & SOAR Speak

Current distributive training technology has evolved towards larger Federations and greater entity resolution. DARPA's STOW has been the only demonstrated large-scale High Level Architecture (HLA) simulation using both large aggregates (for visualization) and entity resolution (for interaction arbitration). Since the October 1997 DoD Advanced Concept Technology Demonstration (ACTD) milestone, STOW has evolved to a viable technology demonstrating high resolution (platform level) simulation to support joint command and staff training, mission visualization capabilities and unit level training. STOW's ability for entity-level resolution has made it an excellent candidate for the USAF Distributed Mission Training (DMT) Program. The STOW Program has evolved into the Joint Semi Autonomous Forces (JSAF) and increased its applications to provide a robust simulation capable of supporting operational training, testing new concepts and doctrine as well as service and joint experimentation issues with direct linkages to realworld C⁴ISR systems in a seamless live, virtual or constructive environment. The current JSAF sponsor is the United States Joint Forces Command (USJFCOM).

Exhibit 6 - Documents from Geneva Aerospace Trademark Application,

Serial Number 78355947 for "Variable Autonomy Control System"

From USPTO Trademark Document Retrieval (TDR) Web Site

<a href="http://tmportal.uspto.gov/external/portal/tow">http://tmportal.uspto.gov/external/portal/tow</a>

Examiner: Ronnie M. Mancho Art Unit: 3664

Filed: 04/17/2007

Sheet 184 of 241

Serial Number: 11/736,356

Jed Margolin

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 185 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

# Trademark/Service Mark Application, Principal Register

Serial Number: 78355947 Filing Date: 01/22/2004

# To the Commissioner for Trademarks:

MARK: (Standard Characters, see mark)

The mark consists of standard characters, without claim to any particular font, style, size, or color.

The literal element of the mark consists of VARIABLE AUTONOMY CONTROL SYSTEM.

The applicant, Geneva Aerospace, Inc., a corporation of Texas, residing at 4312 Sunbelt Dr., Addison, TX, USA, 75001, requests registration of the trademark/service mark identified above in the United States Patent and Trademark Office on the Principal Register established by the Act of July 5, 1946 (15 U.S.C. Section 1051 et seq.), as amended.

The applicant, or the applicant's related company or licensee, is using the mark in commerce, and lists below the dates of use by the applicant, or the applicant's related company, licensee, or predecessor in interest, of the mark on or in connection with the identified goods and/or services. 15 U.S.C. Section 1051(a), as amended.

International Class 009: computer software for autonomous aerial vehicle guidance and control systems

In International Class 009, the mark was first used at least as early as 09/01/1998, and first used in commerce at least as early as 09/01/1998, and is now in use in such commerce. The applicant is submitting or will submit one specimen for *each class* showing the mark as used in commerce on or in connection with any item in the class of listed goods and/or services, consisting of a(n) Portion of company website describing product.

# Specimen - 1

The applicant hereby appoints Alexander M. Parker and R. Steven Jones of Jones & Davis, L.L.P., 15851 Dallas Parkway Suite 1220, Addison, TX, USA, 75001 to submit this application on behalf of the applicant. The attorney docket/reference number is Geneva/TM.

The USPTO is authorized to communicate with the applicant or its representative at the following email address: aparker@jonesdavis-law.com.

A fee payment in the amount of \$335 will be submitted with the application, representing payment for 1 class(es).

### Declaration

The undersigned, being hereby warned that willful false statements and the like so made are punishable by

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 186 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

1

fine or imprisonment, or both, under 18 U.S.C. Section 1001, and that such willful false statements, and the like, may jeopardize the validity of the application or any resulting registration, declares that he/she is properly authorized to execute this application on behalf of the applicant; he/she believes the applicant to be the owner of the trademark/service mark sought to be registered, or, if the application is being filed under 15 U.S.C. Section 1051(b), he/she believes applicant to be entitled to use such mark in commerce; to the best of his/her knowledge and belief no other person, firm, corporation, or association has the right to use the mark in commerce, either in the identical form thereof or in such near resemblance thereto as to be likely, when used on or in connection with the goods/services of such other person, to cause confusion, or to cause mistake, or to deceive; and that all statements made of his/her own knowledge are true; and that all statements made on information and belief are believed to be true.

Signature: /alexander_parker/ Date: 01/22/2004

Signatory's Name: Alexander M. Parker

Signatory's Position: Attorney

Mailing Address: Alexander M. Parker 15851 Dallas Parkway Suite 1220 Addison, TX 75001

RAM Sale Number: 513

RAM Accounting Date: 01/23/2004

Serial Number: 78355947

Internet Transmission Date: Thu Jan 22 18:04:09 EST 2004 TEAS Stamp: USPTO/BAS-6419013490-2004012218040973155

8-78355947-20044c21f938bb7a26d3b3c87a1dc

5be85-CC-513-20040122180300429827

Jed Margolin Filed: 04/17/2007 Sheet 187 of 241

Serial Number: 11/736,356 Filed: 04/17/20 Examiner: Ronnie M. Mancho Art Unit: 3664

# VARIABLE AUTONOMY CONTROL SYSTEM

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 188 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

GENEVA AETOSDACE

Geneva Aetospace

Geneva Aetospace

Juliagialise eyelenta

Nome Services Products Programs Press room About us Contact us

Dakota Unmanned-Aerial Vehide

1

Variable Autonomy Control System (VACS)

Low-Cost UAV Avienics Kit

Hi-Fidelity 600F Engineering Simulation


400 MHz UAV Flight Tesmination System

Multi-UAV IP Datalink System

# Products: Variable Autonomy Control System (VACS)™

Under Air Force Research Lab funding, Geneva has developed an innovative UAV control design that combines state-of-the-art missile technologies with fixed-wing aircraft control. Our design balances autonomous flight control with manual control to provide variable levels of directional independence and minimizes the personnel and training requirements for the operation of the UAV. The truly enabled UAV operator is not required to be a trained aviator, but still retains a wide range of control flexibility in order to successfully execute the mission objectives that call upon his/her specialized expertise.

Our solution is a hierarchical flight control structure with multiple levels of remote operator input combined with an off-board controller software package and intuitive human system interface. Research of the UAV control problem has indicated that the best solution lies in the appropriate functional allocation between the human and the machine, leading to the organization of the control problem between the two fundamental categories: flight governance and flight management.








Exhibit 7 - Documents from Geneva Aerospace Trademark Application,

Serial Number 78355939 for "VACS" From USPTO Trademark Document

Retrieval Web Site<a href="http://tmportal.uspto.gov/external/portal/tow">http://tmportal.uspto.gov/external/portal/tow</a>

Filed: 04/17/2007

Art Unit: 3664

Sheet 189 of 241

Serial Number: 11/736,356

Examiner: Ronnie M. Mancho

Jed Margolin

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 190 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

Serial Number: 78355939 Filing Date: 01/22/2004

# To the Commissioner for Trademarks:

MARK: (Standard Characters, see mark)

The mark consists of standard characters, without claim to any particular font, style, size, or color.

The literal element of the mark consists of VACS.

The applicant, Geneva Aerospace, Inc., a corporation of Texas, residing at 4312 Sunbelt Dr., Addison, TX, USA, 75001, requests registration of the trademark/service mark identified above in the United States Patent and Trademark Office on the Principal Register established by the Act of July 5, 1946 (15 U.S.C. Section 1051 et seq.), as amended.

The applicant, or the applicant's related company or licensee, is using the mark in commerce, and lists below the dates of use by the applicant, or the applicant's related company, licensee, or predecessor in interest, of the mark on or in connection with the identified goods and/or services. 15 U.S.C. Section 1051(a), as amended.

International Class 009: computer software for autonomous aerial vehicle guidance and control systems

In International Class 009, the mark was first used at least as early as 09/01/1998, and first used in commerce at least as early as 09/01/1998, and is now in use in such commerce. The applicant is submitting or will submit one specimen for *each class* showing the mark as used in commerce on or in connection with any item in the class of listed goods and/or services, consisting of a(n) Portion of company website describing product.

# Specimen - 1

The applicant hereby appoints Alexander M. Parker and R. Steven Jones & Davis, L.L.P., 15851 Dallas Parkway Suite 1220, Addison, TX, USA, 75001 to submit this application on behalf of the applicant. The attorney docket/reference number is Geneva/TM.

The USPTO is authorized to communicate with the applicant or its representative at the following email address: aparker@jonesdavis-law.com.

A fee payment in the amount of \$335 will be submitted with the application, representing payment for 1 class(es).

# **Declaration**

The undersigned, being hereby warned that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. Section 1001, and that such willful false statements, and the like, may jeopardize the validity of the application or any resulting registration, declares that he/she is properly authorized to execute this application on behalf of the applicant; he/she believes the applicant to

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 191 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

be the owner of the trademark/service mark sought to be registered, or, if the application is being filed under 15 U.S.C. Section 1051(b), he/she believes applicant to be entitled to use such mark in commerce; to the best of his/her knowledge and belief no other person, firm, corporation, or association has the right to use the mark in commerce, either in the identical form thereof or in such near resemblance thereto as to be likely, when used on or in connection with the goods/services of such other person, to cause confusion, or to cause mistake, or to deceive; and that all statements made of his/her own knowledge are true; and that all statements made on information and belief are believed to be true.

Signature: /alexander parker/ Date: 01/22/2004

Signatory's Name: Alexander M. Parker

Signatory's Position: Attorney

Mailing Address: Alexander M. Parker 15851 Dallas Parkway Suite 1220 Addison, TX 75001

RAM Sale Number: 498

RAM Accounting Date: 01/23/2004

Serial Number: 78355939

Internet Transmission Date: Thu Jan 22 17:58:51 EST 2004 TEAS Stamp: USPTO/BAS-6419013490-2004012217585161254

8-78355939-200bbdc8f49b5e5748ffb87cf9e3f 98ff55-CC-498-20040122175614433791

1


Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 192 of 241

Serial Number: 11/736,356 Filed: 04/17/20 Examiner: Ronnie M. Mancho Art Unit: 3664

# **VACS**

Examiner: Ronnie M. Mancho

1

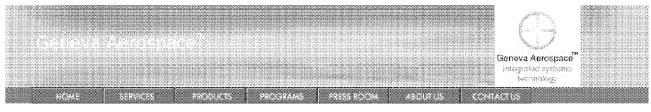

Dakota Unmanned Aerial Vehide

Variable Autonomy Control System (VACS)

Low-Cost UAV Avienics Kit

Hi-Fidelity 600F Engineering Simulation


400 MHz UAV Flight Termination System


Muhi-UAV IP Datalink System

# Products: Variable Autonomy Control System (VACS)^M

Under Air Force Research Lab funding, Geneva has developed an innovative UAV control design that combines state-of-the-art missile technologies with fixed-wing aircraft control. Our design balances autonomous flight control with manual control to provide variable levels of directional independence and minimizes the personnel and training requirements for the operation of the UAV. The truly enabled UAV operator is not required to be a trained aviator, but still retains a wide range of control flexibility in order to successfully execute the mission objectives that call upon his/her specialized expertise.

Our solution is a hierarchical flight control structure with multiple levels of remote operator input combined with an off-board controller software package and intuitive human system interface. Research of the UAV control problem has indicated that the best solution lies in the appropriate functional allocation between the human and the machine, leading to the organization of the control problem between the two fundamental categories: flight governance and flight management.








Exhibit 8 - Development and Testing of a Variable Autonomy
Control System (VACS) for UAVs, by Dave Duggan of Geneva
Aerospace and Luis A. Piñeiro of AFRL contained in the
Proceedings AUVSI Symposium, 2002

Examiner: Ronnie M. Mancho Art Unit: 3664

Sheet 194 of 241

Filed: 04/17/2007

Serial Number: 11/736,356

Jed Margolin

# Development and Testing of a Variable Autonomy Control System (VACS) for UAVs

Dave Duggan
Vice President and Program Manager
Geneva Aerospace
4318 Sunbelt Dr.
Addison, TX 75001
(214) 420-2376 X105
dduggan@genaero.com

Luis A. Piñeiro
Air Force Program Manager
Air Force Research Laboratory
Integration and Demonstration Branch
AFRL/VAAI
2130 8th St. STE 1
WPAFB OH 45433-7542
(937) 255-2857
Luis.Pineiro@wpafb.af.mil

#### Abstract

As the role of UAVs expands throughout the DOD, increased consideration must be given to reduce cost and complexity of managing and controlling UAVs. First generation control schemes focus on either manual control (remote pilot-in-the-loop) or fully autonomous (preprogrammed) control. These schemes impose significant personnel and training requirements on one side, or increased logistics (mission planning and asset allocation) on the other. The objective of the Variable Autonomy Control SystemTM (VACS) program is to improve realtime control capability for UAVs by allowing autonomous route following capability (as it exists in current Air Force UAV systems) while providing for dynamic real-time control to deviate from pre-planned routes to accomplish a wide variety of tasks; and reduce human workload requirements significantly below that of existing UAV systems, thus allowing a single operator to effectively manage and control multiple UAVs as opposed to multiple operators per single UAV. The VACS architecture

provides for varying levels of control autonomy, from fully autonomous control to simplified manual flight control modes, and provides a flexible and simple user interface with a much smaller logistical footprint. Furthermore, the VACS design facilitates manned and unmanned systems interoperability as will be demonstrated in follow-on initiatives.

This paper describes the approach to the system's architecture and design, as well as the testing accomplished to date to validate its capabilities. The effectiveness of the system was evaluated recently in a series of flight demonstrations.

# Background

Although first generation military UAVs have an impressive set of capabilities, real-time control capability may have been somewhat limited by the need to pre-program routes for totally automated platforms, or the need to have rated pilots assigned in non-flying tours of duty to deal with manually controlled assets. Rarely,

Serial Number: 11/736,356 Examiner: Ronnie M. Mancho

however, do real-world missions go exactly as planned. There are time-critical targets that pop up; traffic conflicts with manned aircraft; clouds that get in the way of EO/IR sensors; and, intelligent and devious adversaries who make target location and identification difficult. Realtime control is required to deviate from the planned route to find and identify new targets; to maneuver UAVs to avoid traffic; to fly under the weather; and to get better line-of-sight angles. Skilled pilots can maneuver aircraft, but then an additional operator is necessary to manage the sensors and the dynamic mission. Likewise, as the dependence on UAVs for military operations grows and UAV technology is integrated into the emerging global command and control architecture, the cost and complexity of managing and controlling these assets are expected to become substantial. Hence, an integrated flight control/flight management system that allows for, but minimizes, human intervention is necessary for the Joint Services.

The VACS effort was established with the purpose of addressing the aforementioned concerns, thus simplifying UAV operation and control. As its name suggests, the architecture includes varying levels of control autonomy from fully autonomous control to simplified manual flight control modes. The simplified manual modes are designed to address Air Combat Command's stated need for "improved real-time control of UAVs". Along with the need for improved real-time control capabilities,

efforts exist within the Air Force to investigate the benefits of placing the UAV control onboard an aircraft. Doing this would allow a Joint STARS to capture imagery for positive ID of ground targets detected by radar. AWACS controllers could direct UAVs to jam enemy radar (when EA-6B Prowlers are unavailable) or direct UCAVs to attack radar sites. Rivet Joint controllers could maneuver UAVs to gather electronic intelligence. AC-130 gunship crews could maneuver a UAV below the clouds to identify targets and assess damage from a safe distance. These airborne platforms, however, have limited space on board for a crew dedicated to UAV control, and need a "de-skilled" UAV control system for their existing operators to use.

Filed: 04/17/2007

Art Unit: 3664

#### **VACS Overview**

The VACS architecture is designed to support an emerging generation of autonomous and semi-autonomous air vehicles. The design provides seamless transition between varying levels of control autonomy from fully autonomous control to simplified manual flight control modes. The VACS design evolved from high-performance aircraft and advanced standoff missile flight control technologies. Funding for the variable autonomy control concept was provided under the Small Business Innovative Research (SBIR) program Phase I, Phase II, and Phase III funding vehicles through the Air Force Research Laboratory (AFRL) Human Effectiveness and Air Vehicles Integration Directorates (Reference

1). The VACS is to improve real-time control of UAVs, providing autonomous route following capability (as exists in current Air Force UAV systems) while allowing for dynamic real-time control to:

- Deviate from the planned route
- Find and identify new targets
- Maneuver UAVs to avoid traffic
- Fly under the weather
- Avoid terrain collision and support low altitude terrain following
- Avoid airborne collisions with other manned and unmanned air vehicles
- Get better line-of-sight angles for target identification, bomb damage assessment, and other intelligence gathering missions

The VACS provides the real-time control capability that a flexible, operational UAV system requires to successfully execute a mission, including dynamic sensor control and real-time re-tasking, with human workload requirements significantly below that of existing UAV systems. Currently, the VACS capabilities include:

- Autonomous route navigation with autonomous on-station orbit and target search capabilities
- Real-time route editing
- Mixed/hybrid UAV control, such as execution of programmed, energy efficient

- climb to operator selected altitude mixed with autopilot assisted manual turn capability
- Tight integration of the UAV primary imaging sensor with the outer control loop for automatic sensor slave steering
- Simplified manual control allowing for realtime manual directional control capability (horizontal and vertical) with no operator training or aviation experience required
- Photo-realistic synthetic vision display (SVD) technology supporting synthetically enhanced situation awareness for the UAV operator


Additional capabilities currently being *implemented* are:

- Automatic takeoff and landing with no requirement for external aiding/guidance sensors
- Multi-ship control capability allowing a single operator the capability to simultaneously manage and control four or more UAVs at one time
- Digital terrain elevation database (DTED) based automatic ground collision avoidance
- Optical sensor based autonomous air collision avoidance

Each of these technologies is being implemented and flight-tested through multiple Air Force and Navy Autonomous Operations research and development programs that extend through the

summer of FY2003. The significant UAV capability advancements offered by the VACS design are the culmination of leveraging advanced capabilities developed through several Army, Navy, and Air Force programs.

VACS was designed to offer a core autonomous and semi-autonomous air vehicle flight control and multi-modal management software package that facilitates rapid, affordable advancements in UAV automation while maintaining seamless integration of the operator and the UAV(s) at all levels of control automation. Reviewing a structure for generalized intelligent control architecture provides a method of relating the VACS design to such a core software package. Figure 1 shows the mapping between a generalized intelligent controller hierarchy and the VACS architecture. The VACS design is modular and generic in nature. adaptation of VACS in its entirety or of one or several subcomponents thereof to TCS, VTUAV, TUAV, and other future military UAV systems will be technically trivial and can be done with rapid turn-around for low cost. Geneva is currently engaged in several which VACS proprietary programs in adaptations are under way.



Filed: 04/17/2007

Figure 1 VACS Architecture


A key point to note in the above figure is that the core system architecture, core guidance, navigation, and control algorithms, and major sub-system interfaces are in place. New modules (i.e., new autonomous operations technologies) are added as funding permits. For example, the current AFRL 6.2 program is adding an automatic ground collision system (AutoGCAS, Reference 2). Additionally, an ONR funded Autonomous Operations program is adding an optical sensor-based autonomous "see and avoid" system. Capabilities such as these are modules that "plug" into the core architecture as facilitated by the modular "plugn-play" design of the VACS system.

The VACS architecture is comprised of airborne management and control functions as well as off-board control interfaces and intuitive human-system interfaces. The off-board control station is comprised of faster-than-real-time simulation capability supporting real-time operator situation awareness and decision aids, intuitive graphical user interfaces and situation displays, and

advanced photo-realistic synthetic vision displays.

The combination of high fidelity synthetic visualization tools (offered by Geneva's industry partner - SDS International), faster than real time simulation technology, and variable control provides baseline autonomy architecture that is capable of supporting a new level of real-time UAV control and situation awareness. The synthetically enhanced situation awareness system (SESAS) supports real-time management and control of multiple UAVs by a The synthetic visualization single operator. display includes threat data realistically displayed over mapped and photo-realistic 3D terrain. These visuals are driven (dynamically propagated) by a combination of simulated and real UAV data. The simulated data is generated by the ground control station and propagated at a much higher rate than real data is received from the air vehicle. When real data is received, it is used to correct the simulation solution, thus providing an accurate, continuous representation of the UAV flight state within its environment.

The realism afforded by the synthetic visuals significantly enhances the operator's situation awareness. The synthetic visuals offer multiple views (or frames of reference) and increased field-of-view (FOV) over that of on-board sensors. Figure 2 illustrates the concept.



Filed: 04/17/2007

Figure 2 Synthetically Enhanced Situation Awareness Concept

The Synthetically Enhanced Situation Awareness technology can be utilized to provide a wide FOV that augments live video and sensor feeds while circumventing payload and bandwidth limitations. Specifically, correlated, photo-realistic 3D terrain can be presented on multiple monitors or flat panel displays to provide a wide area FOV and aid controllers in orientation and situation awareness. Furthermore, this photo-realistic representation of the scene can be viewed from various frames of reference with the simple push of a button.

The synthetic vision based enhanced situation awareness concept was recently demonstrated in a flight test conducted over the Army's 10th Mountain Division Ft. Drum training range located in upstate New York. VIPs in attendance noted the realism of the synthetic visuals with respect to the live video feed transmitted from the UAV.

Significant reductions in datalink bandwidth requirements can be achieved with the aid of the simulation. Background and high frequency update information is provided by the simulation, while low-frequency data specific to the UAV - data that changes in real time over long periods of time - is provided via downlinks. By filling in the high frequency gaps with simulated data, very low update rates over the datalink are made feasible in that the operator is provided with a continuous situation awareness that is comprised of mixed live and simulated data. SESAS addresses two key areas of needed technology improvements in the UAV community: datalink bandwidth By significantly reducing the survivability. transmission requirements of the air vehicle, UAV detection becomes more difficult, thus increasing system survivability.

# **VACS Control Modes**

The VACS is designed using a flight control architecture that is predominant in the missile industry. The autopilot software design utilizes state-of the-art flight control techniques, which allow the actuators to dynamically adjust the airframe stabilization properties "on the fly". The flight computer is programmed directly with the airframe physical properties, so that it can automatically adjust its settings with changes in airframe configuration, aerodynamic properties, or flight state. This provides for a simple and

versatile design, and possesses the critical flexibility needed when adjustments to the airframe configuration become necessary during the course of the program.

Sheet 200 of 241

The guidance executive manages path regulation and operator inputs and selects the appropriate guidance law to achieve the desired control requirement, supporting varying levels of control from fully autonomous waypoint / route following to fully manual directional control steering. All of the control capability requirements needed to support management and control of multiple UAVs by a single operator are comprehended in the existing VACS design and have been flight proven on Geneva's Dakota UAV testbed.

The distinguishing aspect of the design is the fluidity with which control levels transitioned. Through algorithm research and human factors engineering trials, we derived a trajectory synthesis based control scheme. This control scheme uses trajectory predictive techniques that allow the operator to effortlessly interact with the control system at any control level from manual through autonomous. The marvel of the control scheme selected, which was derived primarily from advanced missile controls concepts, is its effectiveness in achieving the performance objectives with an uncomplicated. yet advanced, algorithm implementation.

The design is founded on rigorous, tractable mathematical formulations that allow interaction with the operator inputs and allow the operator to instantaneously remove himself from the loop without concern over corresponding vehicle reactions - the vehicle does what the pilot expects. We avoid, however, heuristic techniques networks, artificial (neural intelligence, fuzzy controllers), as they are not needed at this level of control. These techniques will be employed at the observer level for subsystem fault detection in future intelligent autonomy efforts. Consequently, the control system design is robust, predictable, and verifiable. From the UAV perspective, the vehicle that is sent out is the exact same vehicle that returns – a crucial design tenant that allows us to verify safe and predictable performance.

Although human factors played a key role in the design evolution, equally important were robustness, reliability, and affordability. The design features a tolerance to inertial sensor errors and large system latencies. A COTSbased design approach utilizing micro electromechanical systems (MEMS) sensors and commercial grade components was a primary objective in our research. Consequently, the control system design had to provide precision control (e.g., precision path regulation and operator command responsiveness) in the presence of low quality inertial sensors (gyros, accelerometers, pressure transducers) and "sloppy" actuators. The trajectory synthesis

based control solution proved to be robust in the presence of all such sensor errors and subsystem latencies. Mathematically speaking, for example, large inertial measurement unit (IMU) biases wash out in the closed loop at all levels of control. We have demonstrated – in flight tests – precision, highly responsive control (relatively high bandwidth design) with the use of low-grade inertial sensors and low performance actuators.

The VACS implementation currently provides the following set of control modes:

- R/C or Manual Control Mode
- Control-Stick-Steer Mode
- Programmed Maneuver Mode (See Table 1)
- Sensor-Slave Steering Mode
- Waypoint Guidance Mode (See Table 2)
- Park Mode
- Go To Mode (waypoint)
- Return-to-Base (RTB) Mode
- Launch Mode
- Fail-Safe Mode

Table 1: Programmed Maneuvers

Maneuver	Description
MAX CL	Climb at maximum climb
MAXCL	
	rate to input altitude
BEST CL	Climb at best climb (most
	efficient) climb rate to input
	altitude
STEEP	Descend at max descent
DEC	angle to input altitude
SHAL	Descend at approach descent
DEC	angle to input altitude
BEST RNG	Cruise at best range speed
BEST END	Cruise at best endurance
	speed
MAX	Cruise at maximum cruise
(SPD)	speed
MIN (SPD)	Cruise at minimum speed
RT	Turn right an amount equal
	to the input value
LT	Turn left an amount equal to
	the input value
ABS HDG	Turn to the exact heading
	input
DISABLE	Disable the programmed
D	maneuver

Table 2 Waypoint Properties

	*
Event Type	Waypoint, figure 8,
	racetrack, ellipse (circle is
	racetrack with equal length
	and width)
Waypoint	Geodetic latitude of
latitude	waypoint or orbit pattern
	center
Waypoint	Geodetic latitude of
longitude	waypoint or orbit pattern
	center
Waypoint	Ellipsoidal altitude of
Altitude	waypoint or orbit pattern
	center
Waypoint	Speed setting at waypoint
Speed	location
Orbit pattern	Length of desired orbit
length	pattern
Orbit pattern	Width of desired orbit
width	pattern
Orbit pattern	Rotation angle of orbit
orientation	pattern (relative to true
	North)
Number of	Desired number of orbit
orbit laps	laps
Time in	Desired time to maintain
orbit	orbit pattern (overrides
	orbit laps if greater than
	minimum threshold)
Orbit pattern	Offset vector of orbit
center offset	pattern center from known
	target location

Filed: 04/17/2007 Examiner: Ronnie M. Mancho Art Unit: 3664

# **Synthetic Vision Displays**


Geneva's industry partner, SDS International, has emerged as a leader in high-fidelity PC based photo-realistic synthetic visualization technologies. ArchAngel Synthetic Vision Displays (SVD), one of SDS' SVD products provides revolutionary improvements to the efficiency and effectiveness of the war fighters by providing real-time displays of 2D and 3D images that include threats, friendlies, and command and control overlays. The visuals offer complete and current sensor/decision information, plus maker/shooter situation awareness for safety and navigation. ArchAngel utilizes synthetic vision plus simulation functionality assimilated from Distributed Mission Training (DMT), DIS and HLA Tools, and Constructive Simulations to support combat missions.

ArchAngel is aimed at providing innovative visualization technologies as an "Information Portal" based upon XML and Intelligent agents to provide "Pull" and "Push" to address a broad range of sensor-decision maker-shooter issues. ArchAngel's design focus is to provide relevant real-time portions of AWACS, JSTARS, Rivet-Joint and sensor data to the cockpit of the shooters including relaying of Satellite and UAV imagery.

Geneva Aerospace has an ongoing funded effort to adapt the ArchAngel technology to the VACS

UAV control station environment to include incoordinated time and sensor/decision maker/shooter information that is HLA distributed from the VACS ground control station to the synthetic visual displays. displays include threat data realistically displayed over mapped and photo-realistic 3D terrain. Damage Assessment prediction visuals are supported with fire, smoke and even wind blown smoke. The key innovations include the ArchAngel project features of real-time multisource fusion and display via Super-MFD and SDS's Fast-Panel technology.

The following figure illustrates examples of the visualization technologies, including "pathway in the sky" visual overlays and visualization enhancements gained from overlaying / fusing synthetic terrain with ortho-rectified, georegistered imagery.



ho Art Unit: 3664

Filed: 04/17/2007




Figure 3 Photo-Realistic Synthetic Visualization Illustrations

The Synthetic Visuals are driven by the UAV in a manner very similar to the original design intent of a high fidelity flight simulator commanding own ship eye-point, environment and other entities. The main difference being that instead of a high fidelity flight simulator, live UAV state information drives the own ship eye-point. Furthermore, the other entities (ground-based threats, other aircraft, etc.) can be real-world sensed entities as opposed to simulated entities.

The photo-realistic, geo-specific visuals that were originally developed for training and

mission rehearsal are now directly usable in operational UAV contexts. In the simplest terms the GPS and INS data that report UAV position are utilized as inputs to the Synthetic Visual Display's API, which couples the state data with FOV and orientation information from the cameras and sensors onboard the UAV. Replication of the simulated visuals provides "perfect weather", daylight visuals regardless of the night, weather, fog, clouds, or camera/sensor battle damage. The use of wider FOV, multiple screens, augmented symbology and network integrated data exchange support an entire new generation of situation awareness enhancements, tools and operator decision aids, especially in the context of UAVs with flexible ground control stations and network interconnectivity.

The Synthetic Vision Display (SVD) technical approach is based upon integrating advanced simulated visuals originally developed for training purposes, into UAV operational systems. Specifically, the successful integration of SDS's Simulated Visuals with the Geneva VACS Ground Control Station (GCS) during recent AFRL sponsored flight testing at the Army's 10th Mountain Division training range at Ft. Drum, NY is indicative of the potential advances that merging these technologies can have in the near-term. Further, simulated HUDs developed for other training simulations have direct utility in the Synthetic Visuals. A high level description of the technical approach encompasses SDS International's Acuity Visual

Products to provide the basic synthetic visuals and some of the simulated HUD features. Additional "Super-HUD" functions, features and symbologies are being leveraged from AFRL/SDS's UCAV DMT Testbed effort, the Space Maneuver Vehicle Prototype, ArchAngel Prototype and AFRL VR-HMD R&D efforts. SDS's considerable experience with DIS and HLA has also lead to innovations utilizing the Dead Reckoning Algorithm's (DRAs) to reduce the frequency of communication updates required in the UAV operational context.

#### Multi-UAV Control using VACS

Key technology areas that have been employed to support the VACS multi-vehicle control research, development, and flight-testing include communications, controls, vehicle management, human factors, and simulations. The VACS design implements spread-spectrum communications hardware architectures and supporting multi-layered communications software packages that enable multi-vehicle messaging. Furthermore, we have conducted extensive work in multi-vehicle simulation development - both in the area of pure simulation based, network centric multi-vehicle analysis with Geneva's industry partner SDS International as well as in the more pertinent area of real-time system multi-vehicle including Processor-in-the-Loop simulation, (PIL) Hardware-in-the-Loop and (HIL)

simulation. The fundamental difference between the two simulation approaches is that the former approach placed less emphasis on real-world implementation concerns and focused on higher-level concept development whereas the latter is designed entirely around real systems and considers all pertinent real-world implementation concerns. The simulations from the latter approach drive our real-time, flightworthy systems and, therefore, consider all of the limiting factors associated with the communications and flight control systems hardware and operating environments.

The multi-vehicle simulation studies have followed two approaches: 1) the Distributed Mission Training (DIS/HLA network protocols) approach for trade study analysis and 2) realtime, multi-system simulation using Geneva's internally developed multi-layered communications packages across RS232, 115.2 kpbs, using wireless RF (via spread-spectrum datalinks) connectivity between systems. For simulation studies in a non-laboratory environment, approach (2) uses the samelayered communications software package as in the lab environment, however the lowest level of the communications layer uses the Ethernet as opposed to the serial Input/Output device.

Finally, as discussed previously in this paper, we have designed and implemented a novel, variable autonomy vehicle management and control architecture that facilitate multi-vehicle

control with varying levels of functional allocation between the operator and the UAV network. Human factors engineering and live flight-testing have played key roles in the evolution of the VACS design. This gradient control implementation supports the full spectrum of autonomy from manual to supervised, to autonomous. The core architecture is highly flexible and offers a proven, core architecture to support the full evolution of the cooperative control solution.

Included in the VACS core are a set of mission health assessments generated based on much faster-than-real-time simulations that monitor vehicle performance utilizing UAV sensor inputs. Also included in the VACS core is an automated DTED based ground collision avoidance system. These capabilities play an important role, from the human factors perspective, in the multi-vehicle control problem as they offer automated system health monitoring and fault mitigation capabilities that significantly reduce operator workloads associated with managing a network of cooperative and non-cooperative UAVs.

As previously discussed, inherent in our efforts is the design and implementation of novel situation awareness technologies that facilitate effective management and control of multiple UAVs by a single operator. The VACS approach features mixed reality concepts using photo-realistic 3D synthetic vision displays

driven with both sensed and simulated vehicle state information.

Filed: 04/17/2007

Additionally, the work in variable autonomy controls has extended to the areas of automated collision avoidance technologies, where Geneva Aerospace has secured an ONR sponsored Autonomous Operations program to integrate VACS software with multi-vehicle sensing technologies to provide an optical sensor based automated air collision avoidance capability for UAVs. As evidenced by the research so far, the multi-vehicle cooperative behavior and control problem is dependent on both control system and situation awareness technologies.

#### **VACS GCS Software**

The VACS human-system interface (HSI) is a graphical user interface (GUI) that allows the operator to quickly alter the UAV course with little effort. The VACS HSI focuses on the UAV mission tasking rather than vehicle aviation; hence, the VACS interface places minimal significance on standard "cockpit" displays and focuses on situation displays. The operator interacts with VACS through the use of a mouse, a joystick (or game pad), and a keyboard. The software can easily be modified to take advantage of the touch-screen capabilities of the rugged notebook computer.

Push buttons in the main GUI provide access to dialogs that provide vehicle status information, sensor management and control functionality, and information dissemination capability through both data logging and network connectivity. A route editing dialog is accessed from the map display and provides the operator rapid, intuitive point-n-click system interaction for real-time mission planning and route editing capability, as well as map display editing features (zoom, center, change map background, etc). The route editing pop-up dialog provides the operator the capability to either type in known, precise waypoint coordinates or record graphically edited route event coordinates and parameters. The situation (map) display also contains a target editor with the capability to tie targets to UAV mission objectives and a corridor editor set no-fly zones and/or other mission planning boundary constraints.

Currently, the mission / route editing is performed manually by the operator, using the graphical interface "point-n-click" user functionality on the map or "fat-fingering" the coordinates. The interface, however, was designed generically so automated route plans can be accepted. VACS contains automatic route/mission analysis tools to alert the operator if a planned mission is not physically realizable due to vehicle performance constraints or terrain collision issues. Geneva Aerospace is planning efforts with various VACS customers to automate the entire in-flight route planning process by integrating the Air Force's In-Flight Planning modules (3) with the VACS ground control station.

The VACS GCS also contains a Cautions, Alerts, and Warnings (CAWS) panel that alerts the operator to system malfunctions, low fuel, route errors, and various other off-nominal conditions. The CAWS display will alert the operator when a vehicle subsystem fault is detected.

Using the VACS GUI interface, the operator can maintain any level of control over the UAV, from fully manual to fully autonomous, with the simple click of a mouse.

A feature in the VACS GCS GUI is the incorporation of the Digital Terrain Elevation Database (DTED) with the map display and route planning tools. The VACS software includes a module that performs real-time interpolation on the DTED and provides terrain elevation at the vehicle's current geodetic location, along with a terrain elevation projection 5 km along the vehicle's current Additionally, the DTED routine heading. provides a real-time display of the operator's input device pointer location (such as the mouse cursor) over the map to provide rapid feedback of terrain elevation at selected geodetic locations. This DTED feature is used to aid in preflight and real time mission planning.

Serial Number: 11/736,356

Examiner: Ronnie M. Mancho Art Unit: 3664

The DTED capability is currently being extended to the VACS airborne digital flight control system to provide a DTED-based automatic ground collision avoidance system (AutoGCAS) for both cruise missile and UAV applications. This AutoGCAS capability will be flight test demonstrated on the Dakota UAV testbed in late summer 2002.

The VACS design offers enormous flexibility to the UAV operator and reduces the operator workload to a level that facilitates the control of multiple UAVs by a single operator. The synergistic combination of the VACS design, the In-Flight Planning system, and the Synthetic Vision Display provide a comprehensive multimission, multi-vehicle automated UAV mission management and control system.

# **VACS TESTING**

Testing of VACS has consisted of hundreds of thousands of all digital Monte Carlo simulation cycles, hundreds of hardware in-the-loop (HIL) simulations, over a dozen developmental test flights on two different UAV platforms, and one operational scenario demonstration flight at the Army's 10th Mountain Division training range at Ft. Drum, NY.

The live flight exercises have demonstrated that a single operator with no aviation skills can simultaneously manage and control the UAV

and the UAV primary sensor. In these demonstrations, the operator was able to effectively transition control levels, update mission plans, monitor the UAV imagery, monitor the UAV systems status, and trouble shoot system malfunctions from the ground control station while the UAV demonstrated seamless mode transitions and at all times behaved as the operator expected and required. Furthermore, we demonstrated both in simulation and in flight exercises that the design eliminates common pilot induced faults such as pilot induced oscillation, stall, spin, over-g, or other pilot induced phenomena that over-drive the airframe and result in the loss of the vehicle.

Filed: 04/17/2007

During the Phase II effort, Geneva Aerospace teamed with Northrop Grumman Corporation to integrate the Variable Autonomy Control System ground control station with the Joint STARS Moving Target Exploitation (MTE) workstation to demonstrate the effectiveness of the VACS human-system interface and VACS UAV control approach in a real-world, airborne battle management system. The VACS control station proved to offer an effective, intuitive human interface for the Joint STARS operator. This capability was successfully demonstrated in a scenario representative of that of Figure 4, with the Joint STARS participation being simulated by a ground operator utilizing a modified Joint STARS MTE workstation. The next round of demonstration flights is scheduled for the late summer 2002 tests, and will

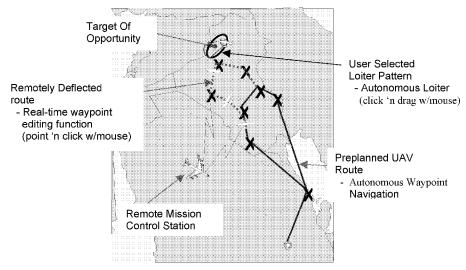


Figure 4 Wide Area Surveillance Sample Mission

showcase the multi-vehicle control, ground collision avoidance, and auto take-off and auto land capabilities.

Conclusions

The Variable Autonomy control System (VACS) is a comprehensive, flight proven air vehicle multi-modal management and control architecture designed to support the emerging generation of autonomous and semi-autonomous UAV systems. The synergistic combination of advanced, gradient control concepts, intuitive human-system interfaces, and photo-realistic synthetic offers vision displays comprehensive, off-the-shelf multi-UAV management and control package and provides a core flight control architecture that will enable

the rapid transition of autonomous UAV technologies to the war fighting community.

# References

- Duggan, David S., "Demonstration of an Integrated Variable Autonomy UAV Flight Control System", Phase II SBIR Final Report, AFRL-HE-WP-TR-2001-0035, January 2001
- Swihart, Donald E., et al, "Joint Development of an Auto Ground Collision Avoidance System", 4th Saint Petersburg International Conference on Integrated Navigation Systems, May 1997
- Leavitt, Charles A., "Real-Time In-Flight Planning", May 1996, USAF Contracts F33615-92-C-3805 and F33615-94-C-1431

1	
2	Exhibit 9 - From Geneva Aerospace Provisional Application 60/480,192
3	Small Business Innovation Research (SBIR) Program Projects
4	Summary, Topic Number AF98-179

Jed Margolin

Serial Number: 11/736,356 Filed: 04/17/20 Examiner: Ronnie M. Mancho Art Unit: 3664

Filed: 04/17/2007

Sheet 210 of 241

APPENDIX B

Sheet 211 of 241

# U.S. DEPARTMENT OF DEFENSE SMALL BUSINESS INNOVATION RESEARCH (SBIR) PROGRAM PROJECT SUMMARY

TOPIC NUMBER:

AF98-179

PROPOSAL TITLE:

Examination of an Integrated Autopilot Design for Simplified UAV

Flight Control

FIRM NAME:

Geneva Aerospace, Inc.

PHASE I or II

Phase I

PROPOSAL:

#### Technical Abstract

In order to be truly versatile, Unmanned Aerial Vehicle (UAV) Systems must be usable to individuals who's training is more focused on the requirements of a given mission or on the usability of the payload, rather than on the aviation of the air vehicle. This suggests that flight control systems must respond to higher level, more intuitive remote commands such as "go left", "go right", "climb", or "dive".

Modern embedded guidance and control processing methods such as those used for autonomously guided cruise missiles or advanced military aircraft demonstrate that low-level stick-and-rudder commands can be eliminated as a requirement on the remote operator. In addition to a more intuitive command-response autopilot, Geneva Aerospace has developed a design which allows the integration of intuitive "mission-level" remote commands into the guidance system, significantly reducing the work-load on the operator as it pertains to the aviation of the UAV.

The guidance system is evaluated on the Freewing Tilt-Body airframe, which provides unique inherent camera stabilization and "Extremely" Short Take-off and Landing properties. The integrated guidance design and systems engineering approach proposed provides a modular core structure that can easily be upgraded and can grow with increasing technology.

# Anticipated Benefits/Potential Commercial Applications of the Research or Development.

A well integrated mixed-reality guidance system could Make UAV's useful for border patrol, speed control, hazardous area investigation, atmospheric sampling, or even motion picture filming by persons who could operate with minimal aviation expertise or manual skill.

# Keywords:

Unmanned Arial Vehicle Guidance/Autopilot Virtual Reality Mixed Reality Autonomous GPS Aided Navigation Ground Station

Proposal page No. 2

Telepresence Ground Station

Nothing on this page is classified or proprietary information/data

# 1.0 Identification and Significance of Opportunity

The nature of this research opportunity is best appreciated by first posing a set of toplevel requirements for an "Ideal UAV System":

The system must be easy to use with minimal training. As recognized in the solicitation, an effective UAV system will respond to more intuitive command motions. This will allow the operator to focus on the payload and mission operations rather than on aircraft piloting. Commercialized products such as video games and CAD utilities provide an excellent model for human interfaces which have already been evaluated and tested on the open market. In fact, the ideal simplified UAV autopilot should be compatible with COTS hardware such as standard joysticks, track-balls, lap-top computers, and Virtual Reality Head Mounted Displays and Glove Input Devices.

The system must be able to operate autonomously as well as respond to high-level remote commands. Autonomous mission capability with the ability to remotely interrupt the mission is essential to minimize the work load of the operator when flying multiple-UAV's from a single ground control station. The ideal guidance concept will nominally operate with enough autonomy even when responding to remote commands that one person will be able to operate several UAV's from the same station.

The system must be adaptable to on-going command-and-control software development efforts. For military applications, the system will be required to operate within the advanced Command, Control, Communications, Computers, and Intelligence (C4I) infrastructure and interface with associated Common Ground Control Stations such as the Joint STARS Common Ground Station. As a commercial application, this could be a lap-top version of a somewhat less complicated, but similar ground control package. The guidance software must have the capability not only to respond to the command interface, but must also be capable of expanding modularly as new capabilities are desired without significant changes in the interface.

Advances in Virtual Reality simulation graphics display technology makes the concept of a Virtual Reality interface to real-time systems feasible. Already used by surgeons in the Medical community, the use of Virtual Reality, such as Telepresence or Mixed Reality systems, in UAVs is not far away. For this reason, we include an evaluation of a Line-of-Sight Slave mode capability in which the operator's point of reference is the image scene transmitted from the UAV's on-board camera (we will refer to this as the "tactical situation display"). In this mode the operator does not provide direct directional commands to the UAV. Instead, the operator focuses his attention on the tactical situation display, commanding the look angle of the UAV's on-board sensor to survey the battlefield (or other topographical region for non-military applications) while the UAV autonomously commands a flight profile which is slaved to the operator's sensor line-of-sight commands. As discussed below, our integrated guidance solution adapts easily to this mode.

The system must be easy to land. Even with directional-response controls, the operator must be capable of commanding the flare and touch-down phase of landing. To

eliminate this operator requirement, the simplified autopilot must be compatible with existing COTS automatic landing systems such as the Sierra Nevada Corporation's UAV Common Automatic Recovery System (UCARS), and hence must be able to land autonomously under nominal conditions. The system must also be able to respond to changes in the terminal approach when the operator detects an obstruction or desires a change in the landing conditions. In addition to its other benefits, the ESTOL capability of the Freewing Tilt-Body airframe design simplifies and reduces the risk of vehicle recovery over that of conventional fixed-wing UAVs

The system will be highly modular, and manufactured from Commercial, Offthe-Shelf (COTS) components. To compete as a marketable product, the system must be affordable, maintainable, and easy to upgrade. For the system to be flexible enough to do so, the guidance software must be designed to work under varying configurations with changing levels of uncertainty. For this reason, a robust, integrated control system design approach will be evaluated.

The above requirements point toward on-going Freewing Tilt-Body UAV development efforts by Freewing Aerial Robitics Corporation and Geneva Aerospace. The proposed SBIR study effort presents an opportunity to evaluate this system against the above desired capabilities, leading to a rapid development and marketing of the "Ideal UAV".

The Geneva guidance concept is founded in the understanding that a UAV can be controlled more like a missile than an airplane because human comfort is not a constraint. We can use a more flexible multivariable controller structure and can allow the airframe to perform conventionally unacceptable maneuvers such as negative accelerations, skidding turns, and high body-rate stabilization. Our controller structure integrates the guidance and autopilot sub-functions (outer loop path commands and inner loop stabilization). As we will show later in this proposal, the simplified autopilot concept is a straightforward augmentation of our integrated guidance design approach.

We have chosen the surveillance mission as a platform for evaluation because of its apparent commercial application potential. A well integrated mixed-reality guidance system could Make UAV's useful for border patrol, speed control, hazardous area investigation, atmospheric sampling, or even motion picture filming by persons who could operate with minimal aviation expertise or manual skill.

# 2.0 Feasibility of Technical Approach

The proposed technical design approach to the simplified autopilot and integrated surveillance system is made feasible by both the maturity and unique aerodynamic features of the host UAV platform, the Freewing Scorpion Model 100-50, and the maturity of the Geneva all-digital Six-Degree-of-Freedom (6DOF) simulation and integrated guidance design solution. A key feature of the Freewing design concept is its inherent ability to automatically neutralize the effects of turbulence on the fuselage, providing a host sensor platform which requires a significantly less expensive gimbal stabilization system than conventional fixed-wing air vehicles.

Geneva Aerospace has independently developed an integrated guidance design solution using modern robust control systems design techniques. This multivariable integrated guidance design solution provides a low-risk systematic design approach for the simplified autopilot application. The integrated guidance design solution uses system model uncertainties in the vehicle controller design, providing a robust controller design over the model uncertainty region.

# 2.1 Simplified Autopilot Feasibility

The simplified autopilot provides a UAV control mechanism which allows the remote pilot to provide intuitive directional commands rather than conventional stick and rudder commands. These so-called intuitive commands can be paralleled to outer loop guidance commands in conventional missile flight control systems. Typically the outer guidance loop in these systems provides fairly low frequency acceleration and bank angle commands to a three-axis (pitch, yaw, and roll) autopilot. It is this autopilot which is responsible for generating the commands to the actuators and performing the higher frequency body rate stabilization, thereby resolving the body accelerations and bank angle to the desired commands in a stable manner and tracking the desired trajectory. Such control systems have been in existence for decades and have been proven both in the test environment as well as on the battle-field. In recent years, the advancement of embedded controller technology (e.g., embedded microprocessors) has driven the industry standard to the use of digital autopilots. High performance microprocessors such as Intel's Pentium processors or Texas Instruments' C40 chips can be procured at relatively low cost, making the use of a fairly high performance digital autopilots in UAV systems cost effective and, therefore, feasible.

Geneva has combined the technology associated with high performance missile and aircraft fly-by-wire autopilots with the application of a remote piloted UAV to develop an integrated design solution which satisfies the need for a simplified UAV autopilot system. Utilizing a robust multivariable control system design approach, we have developed a *single* control structure for a UAV autopilot which is robust and modular in nature, allowing multiple levels of remote pilot control as well as fully autonomous flight. We believe that the proven digital autopilot technology in modern weapon systems and high performance aircraft combined with readily available commercial off-the-shelf (COTS) microprocessors and integrated GPS inertial navigation kits makes our concept the right solution for the next generation UAV autopilot.

# 2.2 Freewing UAV Description

The Freewing Scorpion Model 100-50 has been privately developed by Freewing and represents the culmination of nearly fourteen years of design evolution. The fairly recent formulation of diverse military UAV mission needs has created the venue for which this technology is most attractive. The first UAV variant of the Freewing design flew in 1992, manned variants having flown as early as 1983. The Scorpion evolved through 40% and 50% scale models developed by Freewing with Burt Rutan in 1992 and 1993, respectively. The design featured the freely hinged wing and vectored thrust gained simply by independently rotating the forward fuselage upward relative to the tail boom assembly. The Scorpion 100, also developed with Rutan, first flew in 1994. The Scorpion 100 capabilities include

conventional vehicle-like dash and cruise performance, an extremely short takeoff/landing capability, and turbulence mitigation characteristics. Additionally the vehicle is inherently stable and relatively insensitive to large center-of-gravity changes, making it an appealing platform for a variety of COTS sensors.

The Freewing Scorpion 100-50 provides extremely short takeoff and landing (ESTOL) performance in a simple, modular vehicle that provides a stable sensor platform while retaining all the advantages of a conventional fixed wing aircraft. The freewing tilt-body is a new kind of aircraft, distinct from fixed wings and rotary wings. It is a combination of two tested technologies, the improved free-wing and the tilt-body, which combine to provide an extremely short takeoff and landing aircraft that is stable throughout its flight envelope, while requiring only a few moving parts.

In the Freewing aircraft, the wing is placed on bearings so that it is completely free to rotate in pitch, de-coupling the wing in pitch from the fuselage. Trim surfaces on the trailing edge of the wing are used to control the wing angle of attack and to provide roll control. The resulting "flying wing" has a fraction of the effective pitching moment of inertia compared to an otherwise identical fixed wing vehicle. This allows the wing to rapidly and automatically adjust the angle of attack (as would a weathervane) in response to gusts and other changes in the relative wind. Traditional fixed wing aircraft must overcome the moment of inertia of the entire aircraft to accomplish the same change. But the rapid pitch response of the Freewing allows it to effectively maintain a constant angle of attack with respect to instantaneous wind direction for a given trim surface setting. In addition, the absence of a root moment means that only very small variations in the magnitude/direction of aerodynamic forces are transmitted to the fuselage. The result is a smoother, more stable flight and better sensor resolution since air turbulence is largely neutralized before being transmitted to the fuselage. NASA studies show that accelerations due to gusts are reduced by as much as an order of magnitude in a Freewing aircraft compared to a similar fixed wing aircraft. Conservative estimates developed for the Scorpion by Texas A&M show a 50% reduction in gust loading over the low frequency end of the wind spectrum.

With the Freewing Tilt-body vehicle, the de-coupling between fuselage and wing is taken a step further. Here, fuselage trim surfaces generate body pitching moments independent of the wings, effectively de-coupling the thrust vector from the aircraft velocity vector. The fuselage itself is a lifting body, so the result is a left/right wing pair joined by a rotating spar passing through the lifting body. Both the left/right wing pair and the central lifting body are free to rotate about the span-wise shaft.

The Scorpion tilt-body aircraft has all the attributes of the Freewing Tilt-Body class. The Scorpion 100-50 was designed by Burt Rutan and Scaled Composites, in collaboration with Freewing Aerial Robotics, to meet the original Joint Tactical UAV requirements. The Scorpion was designed to make maximum use of commercial off-the-shelf (COTS) equipment to reduce costs and ensure availability of spares. The following figure shows a side view of the Scorpion in both a take-off/land and cruise configuration. This figure also shows a planform view of the vehicle.

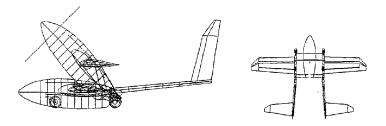


Figure 1: Freewing Side-View and Planform

The following table provides the main physical characteristics of the Scorpion 100-50.

Table 1: Scorpion 100-50 Air Vehicle Physical Properties

table 1: Scorpion 100-30 All v	curcic I hysical I Toperties
Total length	11.8 ft
Span	16.1 ft
Wing area (total)	37.3 sq ft
Freewing area	61% sq ft
Stub wing area	39% sq ft
Total height (cruise mode)	4.1 ft
Total height (tilt body mode)	6.75 ft
Maximum take-off	444 lbs
weight	
Empty weight	322 lbs
Maximum payload weight	50 lbs
Maximum fuel load	72 lbs
Power	52 hp
Max RPM	7000 (3000 output
	shaft)
BSCF	.5257 lbs/hp-hr
Propeller	60" fixed pitch
Direction of rotation	CW (facing propeller)
Static thrust	270 lbs


# 2.2.1 Freewing UAV Capability

The following figures show the Scorpion Model 100-50 climb rate, flight envelope, range efficiency, and loiter efficiency. The predicted rate of climb as a function of airspeed and altitude is given in Figure 2, indicating a service ceiling of about 13 kft and a best climb speed of 60 to 70 knots. The resulting times to climb at full power are 5.0, 11.9 and 17.3 minutes to

Serial Number: 11/736,356

Examiner: Ronnie M. Mancho Art Unit: 3664

5K, 10K and 12K feet, respectively. The maximum level flight envelope and service ceiling are shown on Figure 3. Since the vehicle's wing does not stall, the minimum speed will be determined by control limitations and maximum thrust. The indicated limitation at low speed is based on present flight test experience.






Figure 2: Rate-of-Climb

Figure 3: Flight Envelope

The range factor for this engine at sea-level is about 7 nm/lb at 65 knots. The endurance factor is predicted to be 6.8 min/lb. Data for this engine at altitude will not be available until the completion of the flight test program. We have therefore used the sea-level fuel consumption figures for range and endurance calculations for all altitudes.




Figure 4: Endurance Factor




Figure5: Range Factor

With a maximum fuel load of 72 lbs and an endurance factor of approximately 6.8 min/lb, it is evident that the Scorpion vehicle is capable of providing several hours of time on station. The Scorpion loiter efficiency combined with its inherent insensitivity to turbulence makes this vehicle an attractive platform for the development and test of the simplified UAV autopilot concept.

Filed: 04/17/2007

Sheet 218 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

# 3.0 Phase I Technical Approach

We view the research opportunity for this effort to be two-fold. The Geneva integrated guidance design approach merges the seeker, GPS/Navigator, guidance/autopilot, and remote command sub-functions in a structure that will greatly reduce workload and training requirements for the operator. In addition to the functionality of this design, we will assess a systems engineering design approach which will result in a lower-cost, more produceable, and more maintainable UAV. We therefore additionally propose to gather data which will show a cost benefit to our improved integrated systems engineering process.

# 3.1 Control System Architecture

Our controller design approach introduces several high-level operational modes, with varied levels of automation:

<u>Energy-Optimization</u>: Autonomous flight with only a single observation point and time-on-station requirement. The guidance determines speed, altitudes and flight paths to minimize energy expenditure.

<u>Pre-Planned Waypoint:</u> The vehicle flies the pre-programmed waypoints, either specifying speed and altitude, or allowing the UAV to autonomously determine them from the energy management system.

<u>Real-Time Waypoint Editing:</u> Can be entered at any time during a mission by specifying a waypoint that the UAV can physically reach from its current location, or by changing the location of an existing waypoint.

<u>Directional Response Autopilot</u>: Entered automatically by moving the joystick. The joystick commands immediately override the existing commands and relate to changes in flight path.

<u>Line-of-Sight Slave</u>: The vehicle heading is commanded to align with the camera line-of-sight commands until the vehicle comes within a specified radius, in which case it is commanded to circle the designated point.

These operational modes suggest an hierarchical control structure with varied levels of remote pilot command insertion. For example, when flying in the "stick and rudder" mode, the pilot commands would be inserted at the lowest control level immediately prior to actuation. Conversely when flying the directional-response autopilot, the commands will be inserted as vertical or horizontal flight path turning rates. LOS Slave commands would be inserted at the guidance command level. Figure 6 shows the proposed control loop organization structure:

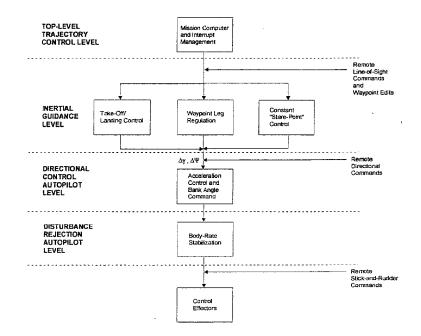


Figure 6 Airframe Control Structure Organization

Perturbations in flight path and ground track angles ( $\Delta\gamma$  and  $\Delta\Psi$ ) provide the command signals used for outer loop guidance because they can be mapped directly to "go up/go down" and "go left/go right" intuitive commands and because they lend themselves well to the inertial control laws which are used for the autonomous guidance modes. Figure 6 shows several parallel processing paths at the guidance level. Processing for the outer-loop control is determined by the top-level trajectory control, which is driven primarily by the remote pilot's mode selection and by inertial trajectory requirements. This controller structure leads to a more modular software architecture, which will be useful for future capabilities or use on other UAV systems.

By mapping joystick motion into  $\Delta\gamma$  and  $\Delta\Psi$ , we can achieve the added benefit that letting go of the joystick (referred to here as "stick-free") will result in constant velocity, straight-and-level flight. This will be valuable to the operator when he/she needs to change to another task such as camera slewing or waypoint editing without having to switch to a completely autonomous autopilot mode.

The primary modes for use, and therefore the focus of the evaluation efforts will be on the directional-response autopilot, the LOS slave mode guidance, and the waypoint editing capability. The following discussion defines the operational concept for each of these modes.

<u>Directional-Response Autopilot</u>. The purpose of directional command response is to enable an untrained operator to maneuver the vehicle in a stable manner as he or she affects

the trajectory from ground-station information without having to compensate the faster loop dynamics of rate stabilization, aerodynamic coupling, or speed control. This can be achieved by associating changes in flight-path with the joystick motion, and by injecting these commands into a multi-variable digital autopilot which autonomously controls engine throttle, thrust vector setting, and body rate stabilization. Figure 7 shows the proposed multi-variable control loop structure, augmented with the higher-level functions.

When operating in directional response mode, the joystick commands are converted to flight-path angle change commands through a scheduled gain. This gain must be scheduled versus thrust setting and body tilit angle to maintain equivalent command-per-joystick deflection slope.

The operator will have command of speed control via a simplified, constant setting on his/her display. The directional commands and velocity setting comprise the command vector entering the autopilot. It should be pointed out that the other operational modes also provide the same command signals after some level of processing.

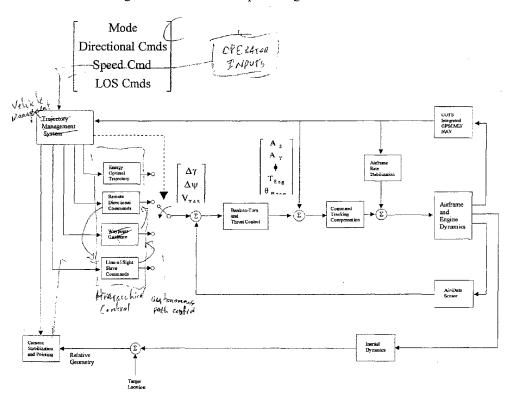


Figure 7 Multivariable Control Loop Structure

The Tilt-Body provides a unique thrust-vectoring capability which is optimally utilized in the thrust vector controller. Figure 8 shows that there are several trim points for most operating conditions across the locus of boom angles and elevator deflections. The data depicted in this figure represent the sum of the aerodynamic force coefficients and installed thrust coefficients at a 50% throttle setting.

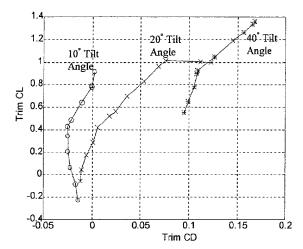


Figure 8: Trimmed Lift vs Drag

The above figure shows both the benefits and penalties associated with the thrust vector. For example, note that when the body tilt is increased from 10 to 40 deg, the total maximum lift capability at 50% power increases by 50%. Also note, however, the severe drag penalty associated with the high boom angle configuration. Consequently, these trim solutions are scheduled as functions of energy management constraints, maneuverability requirements, and desired speed. The curves are synthesized into an integrated multi-variable boom angle and throttle control, which are driven by the operator's speed and mode settings as command inputs. The low speeds available from the Tilt-Body will be a benefit for surveillance purposes, but can result in aerodynamic stall on the tail surfaces. This is particularly a concern when flying at higher boom angles, where the vehicle must fly at slow speeds in order to maintain speed trim. For this reason, the stall limits are multi-dimensional in nature and include a predictive stall-avoidance algorithm.

Because the operator may be inexperienced or otherwise occupied, the system includes control deflection and command limits at several levels to prevent non-linear aerodynamics such as stall and cross-channel coupling, over-expenditure of any mixed control surface in a single axis, structural over-loading, or actuator slew rate limiting.

### LOS-Slave Control.

The directional-response autopilot, combined with the stabilized seeker platform allows a single minimally trained operator to easily conduct a UAV surveillance mission. A further level of user simplification is achieved by combining seeker designation command logic with the outer

loop guidance. This mixing provides Line-of-Sight Slave mode capability in which the operator's point of reference is the image scene transmitted from the UAV's on-board camera. In this mode the operator does not provide direct directional commands to the UAV. Instead, the operator focuses his attention on the tactical situation display, commanding the look angle of the UAV's on-board sensor to survey the battlefield (or other topographical region for non-military applications) while the UAV autonomously commands a flight profile which is slaved to the operator's sensor line-of-sight commands. This integration of the camera platform with the guidance provides the following benefits:

- 1. Time-on-station loiter control which can be easily selected and designated.
- Further reduction of workload on the operator, who can now focus primarily on the surveillance aspects the mission.
- 3. An easily adaptable relative Navigation method.

Figure 9 shows an example of how LOS-slave control would be used with the ground station display. The Navigation display would be a top-view with a schematic of the aircraft for easier conceptualization. This symbology would be added to the set of flight state information normally found on the display. The outer circle around the aircraft is a projection of the entire seeker field-of-view onto the ground. The smaller pie-shaped queue is a ground projection of the current seeker borsight position. These would be calculated by the ground station software from the positional information and seeker angle sent across the data-link.

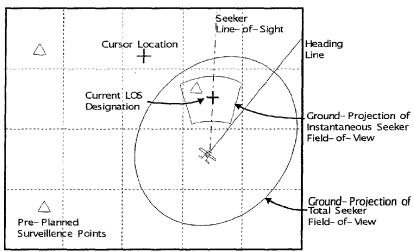


Figure 9 Augmentation to Tactical Situation Display

The remote pilot can opt to either keep the cursor active as the continual steering point, or he/she can designate a "surveillance-point" by clicking on a desired ground location. In the latter case, the staring point would be captured so the cursor could be moved to a new constant location.

If the pilot chooses a surveillance location outside the total FOV, then the outer loop guidance will follow a command-to-LOS mode guide law until the UAV flight path points toward the target. Once the desired staring-point comes within a minimum range threshold, the guidance automatically trips into a loiter pattern (either constant-radius or elliptical) to maintain track on the desired location. This guidance structure allows the operator to park the vehicle at a station with a single key-click while he/she conducts other activities. Figure 10 shows a diagram of the surveillance-point approach scenario.

If a constant location is selected within the minimum turning radius, then the guidance must fly over the surveillance-point and plan an out-and-back pattern to avoid a singularity in the loiter guide-law. This can be easily achieved by inserting waypoint legs autonomously.

If the operator chooses, he/she can select a standoff range (or accept the default range) for surveillance over a hostile target. The seeker line-of-sight commands will also comprehend the offset location to track on the desired location. This is achieved by inserting the offset range vector in the positional component of the loiter guide-law.

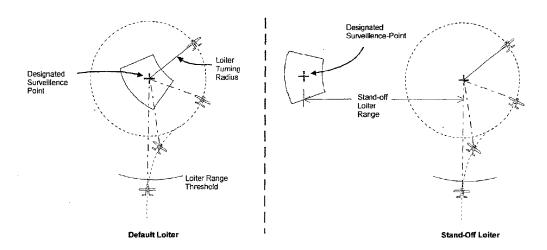


Figure 10 Surveillance-Point Approach Trajectory

The following simplified equations are used to show the basic structure of the LOS Slave mode guidance:

$$\begin{split} & \text{If } (R_{\text{Target}} > \text{Loiter_Threshhold} \,) \, \text{then} \\ & \dot{\psi}_{\text{Cmd}} = K_{\dot{\psi}} \, (\, \lambda_{\text{Horiz}} - \psi_{\text{Heading}} ) \\ & \dot{\gamma}_{\text{Cmd}} = K_{H} \, (H_{\text{CMD}} - H) + K_{\dot{H}} \, \dot{H} + \frac{g}{V} \\ & \text{else} \\ & \dot{\psi}_{\text{Cmd}} = K_{\dot{\psi}} \Delta \psi + K_{\rho} \Big( \rho_{\text{Turn}} - \Big\| \bar{R}_{\text{Target}} + \bar{R}_{\text{S con d-OOT}} \Big\| \Big) \\ & \dot{\gamma}_{\text{Cmd}} = K_{H} \, (H_{\text{CMD}} - H) + K_{\dot{H}} \, \dot{H} + \frac{g}{V} \\ & \text{endif} \end{split}$$
 where 
$$R_{\text{Target}} = \text{Horizontal Range} - \text{to} - \text{Target} \\ & \dot{\psi}_{\text{Cmd}} = \text{Horizontal Turning Rate Command} \\ \Delta \psi = \text{Heading Error Relative to Loiter Path} \\ & \lambda_{\text{Horiz}} = \text{Horizontal Line} - \text{of} - \text{Sight to Target} \\ & \dot{\gamma}_{\text{Cmd}} = \text{Vertical Turning Rate Command} \\ & \psi_{\text{Heading}} = \text{Heading Angle} \end{split}$$

g = Gravity Acceleration Magnitude

 $\rho_{Tura}$  = Loiter Turning Radius

H = Altitude

V = Vehicle Inertial Velocity Magnitude

The above equations show two active horizontal guidance terms when flying the constant turning radius circle. The first term is the damping term which drives the vehicle to align its ground track with the desired circular loiter pattern and is the dominating term. The second term is a positional term to help maintain the constant arc.

### Waypoint Mode with Real-Time Waypoint Editing

The waypoint guidance system is organized as a linked list of waypoints augmented with smooth turn and leg propagation logic at each station. This provides the capability to easily edit the waypoint list from the graphical display both during pre-flight mission planning and while the UAV is in the air.

The operator will now have the ability to insert waypoints visually with a track-ball or mouse. If the operator discovers an unknown hazard in the pre-planned flight-path, then he can either "drag-and-drop" the existing waypoints or he can delete and insert new waypoints as necessary.

By grabbing the joystick, the operator automatically overrides the waypoint mode and enters directional response mode. Waypoint mode can be re-entered by commanding the vehicle back to alignment with the current waypoint leg.

#### Autonomous and Directional Response Landing

The usability of typical UAV systems is strongly dependent upon how much skill and instrumentation is required at landing. Completely autonomous landings with conventional fixed-wing UAV's are only possible with very accurate terminal altitude instrumentation such as a millimeter-wave capture and recovery systems, differential GPS Navigation, or RADAR altimeters.

Most systems rely upon remote piloting at the terminal phase. Landing would present a challenge to the simplification of the remote pilot commands because of the complexity and timing of the terminal flare maneuver. However, the Tilt-Body design provides a solution to both autonomous and simplified-remote command landings. When the vehicle flies at high body tilt angle, a large component of lift is afforded at very low airspeeds. This makes it possible to fly the vehicle at steady-state terminal sink rates which will not harm the structure of the vehicle at impact. With this feature, the pilot needs only to command a landing point, and the vehicle guidance responds by setting up its own terminal leg geometrically. A weight-on-wheels sensor is added to shut off the motor at impact and to command negative lift on the Freewing.

The operator can correct the terminal flight-path if he visually detects an obstruction, or he can land the vehicle purely with the directional response autopilot. In this case, the internal command limits prevent him from slamming the vehicle into the ground with too much vertical velocity.

# 3.2 Typical Mission Profile

The utility of the modes discussed above are demonstrated with a example of how they might be used for a surveillance scenario. The sequence of events correspond to the diagram in figure 11:

- After take-off, the operator points the camera or seeker with the joystick as the UAV
  flies autonomously along either per-planned or real-time inserted wayopints.
- (2) Operator-controlled maneuver to avoid reported hazard along flight path. The mode is invoked automatically by grabbing the joystick.
- (3) By letting go of the joystick (and not yet designating to re-capture waypoint plan), the UAV flies straight-and-level while the operator scans the seeker
- (4) Operator designates a stand-off surveillance of one of the original mission objective points.
- (5) The operator edits the original waypoints to command a return-to-base, flying by the second mission objective point.
- (6) Operator evokes continuous LOS Slave control to examine third target.
- (7) Operator commands a loiter prior to approach in order to coordinate with other mission objectives or vehicles
- (8) Applies the terminal waypoint to establish the run-in heading.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 226 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

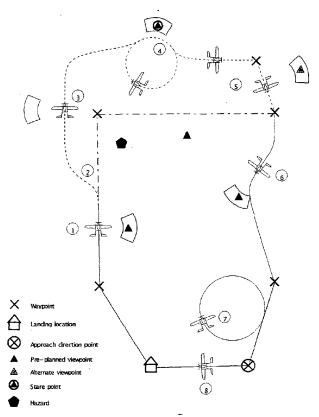


Figure 11: Sample Mission Profile

# 3.3 Systems Engineering Approach

The systems engineering process is modified to develop systems with COTS components by enabling us to evaluate the contributions of each subsystem to the top level requirements as well as the subsystem component interactions in the presence of a synthesized controller.

Rather than beginning with subsystem requirements from systems engineering trade studies, our process begins with cost and performance data from existing production-ready components. We will design modularity into the system by recognizing those de-facto interface standards which exist with the most cost-effective components. The guidance and autopilot compensation is then developed in parallel with the trade studies identifying the subsystems to be used. This allows us to trade-off certain characteristics of subsystems for equivalent top-level performance. For example, the degraded performance of a lower-cost IMU may be acceptable if slightly better actuators are available.

The cost/performance trades will be evaluated by observing their effects on the highest reasonable level of performance requirements. Several candidate systems will then be projected,

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 227 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

and their performance plotted versus cost. The most cost-effective system will then be identified, and the associated performance characteristics become the system specifications. If the resulting performance is less than what would be considered marketable, then the next higher performing candidate system will be chosen. Subsystem allocations will then be completed by recognizing the specifications of those already-procured components. This design approach has several benefits:

- The development cycle-time and associated cost is greatly reduced by avoiding procurement on the subsystem level.
- The design is modular by definition, thereby facilitating future subcomponent upgrades or system capability expansion.
- 3. The development cycle results in a low-cost, production-ready system design.
- 4. In this case, the system design can more effectively take advantage of the Freewing Tilt-Body's unique flying qualities.

### 3.4 Research Plan

We have introduced a guidance design concept and systems engineering approach that we believe can fulfill the list of requirements posed for a usable and versatile UAV system. Throughout phase II and into development, the final ground station and interface may take one of several possible forms. We feel our UAV guidance/autopilot structure will be compatible with existing C4I Common Ground Control Stations and will facilitate the advance of the UAV surveillance community into the realm of Virtual Reality, linking the senses of the operator with the sensors from the remote platform. We intend to show this by performing a simulation-based integration of the above guidance laws and relevant modeling parameters.

We will then perform a series of simulation trade studies and cost analyses to demonstrate the effectiveness of our integrated guidance design with the Freewing airframe. When complete, our results will either position us to begin phase II efforts or they will point toward other development tasks that should be pursued. The following work breakdown structure is proposed:

### 1.0 Industry survey of COTS performance parameters.

We will attempt to collect enough COTS subsystem cost and performance data to simulate at least 3 candidate integrated system designs. We will also collect the data necessary to model the subsystems.

2.0 Update 6DOF simulation to include subsystem models and interface.

In addition to subcomponent models, a set of prototype controller hardware must be integrated with the simulation. This will include a standard COTS joystick and mouse with appropriate driver software. This will not include a prototype of the ground controller interface.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 228 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

3.0 Integrate the directional-response controller into simulation.

This integration effort will include the core multivariable controller structure with the body tilt angle and thrust vector regulator as well as bank-to-turn autopilot.

4.0 Integrate Line-of-Sight Slave mode controller into simulation

5.0 Integrate waypoint-guidance mode controller into simulation

6.0 Assess performance and usability of the high-level controller functions

A simulation-based study will seek to answer the following questions:

- Is this controller intuitive and usable by an untrained pilot?
- It the controller robust and stable under all operating conditions?
- Can the operator over-drive the UAV, or does the software effectively limit his/her commands?
- Can the controller be implemented with existing data-link interfaces?
- 7.0 <u>Perform a cost-performance build-up on the candidate systems and assess optimal cost vs.</u> performance system
- 8.0 Investigate interfaces and expandability of current ground control stations and mission planning modules.

The last effort will be important to establish the basis for phase II planning. We will seek opportunities to acquire government-furnished ground station equipment which would represent the perceived direction of technology.

## 4.0 Related Work

Geneva Aerospace is currently under contract with Freewing Aerial Robotics, Inc. to assess the performance capability and to develop an operational autopilot for the Freewing Tilt-Body series of UAV's. In order to execute this contract, Geneva is also currently developing a Six Degree-of-Freedom simulation which accurately models the Freewing's unique kinematic and aerodynamic properties. These and the other significant development efforts are identified discussed:

# University of Maryland, MATRA BAe and Texas A&M Wind Tunnel Tests

Freewing and its partners have logged over 560 hours of wind tunnel testing for use in the development of a Freewing Tilt-Body aerodynamics model. Researchers at the University of Maryland, Texas A&M University, and most recently, Geneva Aerospace have teamed to analyze the Freewing wind tunnel data and develop a realistic Freewing Tilt-Body vehicle aerodynamics model. Geneva Aerospace has integrated this aerodynamics model into a 6DOF simulation for use in the development of an automatic flight control system for the Freewing UAV. Geneva has also used this aerodynamics model to conduct a comprehensive vehicle performance assessment.

#### Boeing Instrumented Flight Test Series

Freewing has recently teamed with Boeing to conduct a comprehensive instrumented flight test program using the Scorpion Model 100-50. This flight test program is the first in a planned series of test programs to collect real flight test data which will be used to validate the Freewing aerodynamics model as well as the propeller, engine, and actuator models used in Geneva's 6DOF simulation. This flight test program along with the follow-on aerodynamics and simulation model updates will be completed prior to the AF98 Phase I SBIR contract award, providing both technical merit for entrance into a Phase I study effort as well as risk reduction for advancement to a Phase II flight test demonstration program.

#### Geneva Six Degree-of-Freedom Simulation

Geneva is currently developing a generic off-the-shelf six degree-of-freedom simulation to support this and several other design and analysis efforts. The long-term goal of this effort is to provide a validated and accredited core simulation package for missile, UAV, and aircraft development efforts. The simulation is highly modular and written in the C++ object-oriented language.

The Freewing dynamics model and aerodynamic database has been integrated into the generic 6DOF, which is currently being used for on-going performance evaluation and design trades.

### Freewing Tilt-Body Development Program

Most recently Freewing has been in active development of a variant of its Scorpion Tilt-Body in collaboration with Europe's Matra BAe Dynamics. This variant, known as the "Marvel," is to be employed by the French Navy for use aboard its frigates and other surface combatants. This ambitious program is scheduled to demonstrate the suitability of the Scorpion platform in the late 1998 time-frame. The program gained a further boost amid indications that the French Army may consider a 60% scale version for its UAV reconnaissance needs.

### Geneva's Integrated Guidance Systems Design Methodology

The desire for more use of COTS components in modern military applications calls for a modified systems engineering design approach. We feel that this can be done more effectively by focusing on the highest level requirements, and by designing the embedded controller to optimize the interactions between the subsystems. Geneva has developed a methodology which uses the framework of modern robust control theory to synthesize a controller, allowing us to assess the effects of degrading subsystem uncertainties on top-level performance. From there, a comprehensive Cost vs. Performance curve can be developed, whereby cost can truly be treated as an independent design variable. It is the merging of systems engineering, COTS subsystem procurement, and multivariable robust control theory that makes this approach so unique.

### 5.0 Relationship with Phase II Work

As the development of the Freewing aerial vehicle progresses, the guidance, navigation, and ground station systems must develop in parallel. Although an innovative guidance system architecture has been developed from projected mission profiles, several questions regarding the

usability of our design must be answered prior to entering full-scale system development. The results of the phase I research will provide the critical information needed to enter into the full-scale development of the integrated system.

With this information, Freewing and Geneva will propose a phase II integration and test plan with the goal of developing a complete low-cost UAV capable of interfacing with current and future ground stations, payloads, and seekers.

# 6.0 Company Information

Geneva Aerospace is a progressive engineering firm specializing in integrated flight control systems technology. Formed in 1995 and formally founded in early 1997 by several Members of the Group Technical Staff of Raytheon-TI Systems, Geneva's flight control systems team has a proven track record on various military weapon systems programs such as the U.S. military's Joint Standoff Weapon (JSOW), High-Speed Anti-Radiation Missile (HARM), and the Extended Range Guided Munitions (ERGM) weapon. Geneva's staff specializes in design and implementation of inertially guided autonomous glider weapons and maintains leading-edge expertise in robust real-time control system design techniques.

Freewing Aerial Robotics Corporation is one of a new breed of high-tech companies launched in university-based business incubators, in a special kind of public/private partnership, with its R&D partially funded by competitive government technology grants. Consulting and shareholding agreements with other engineers, such as Burt Rutan and John Roncz, expand Company capabilities. A number of Texas A&M University faculty members and graduate students also work extensively with Freewing. Freewing has been selected by European aerospace giant Matra BAe Dynamics as partner and vehicle subcontractor in a UAV proposal to the French government.

# 7.0 Key Personnel

## David Allen Felio - Principal Investigator

Dave Felio has developed autonomously-guided weapon systems as an autopilot and guidance specialist at Texas Instruments Missile Systems Division for the past 11 years. He has had extensive experience developing anti-radiation homing missiles, GPS inertially guided glider weapons, and cannon-launched smart munitions. He is currently a Member of the Group Technical Staff at Raytheon-TI Systems, and has served as the lead G&C systems designer for the Joint Stand-Off Weapon System, RTIS's Interdiction Weapons Division, and several proprietary development programs. Mr. Felio holds a Masters of Mechanical Engineering with an emphasis in control theory from the University of Texas at Arlington, and a Bachelor's Degree in Electrical Engineering from Texas Tech University.

### David Shane Duggan

Dave Duggan has developed missile systems as an autopilot and guidance specialist at Texas Instruments Missile Systems Division for the past 8 years. He has had extensive experience developing anti-radiation homing missiles, GPS inertially guided glider weapons, and precision guided imaging missiles. He is currently a member of the Group Technical Staff at Raytheon-TI Systems, and has served as the lead G&C systems designer of the Unitary variant of the Joint Stand-Off Weapon system for the past 3 years. He currently holds the lead G&C systems functional position over RTIS's Interdiction Weapons Division. Mr. Duggan holds a Bachelor's Degree in Aerospace Engineering from the University of Texas, Arlington.

# 8.0 Facilities

Geneva Aerospace maintains state-of-the art computing platforms and engineering software to support analysis, simulation, and control system design work for Freewing. All hardware integration necessary for the studies will be conducted on-site at the Freewing facility in College Station.

Freewing's research and development laboratory is housed in a 20,000 ft2 complex of four buildings in College Station, Texas. Freewing conducts its flight tests at an airport on the Riverside campus of Texas A&M University, which participates in flight testing as a subcontractor to Freewing.

Freewing has formed a business arrangement with L&L Tooling & Manufacturing, Inc. of Itasca, Texas, to acquire pre-production models of its Scorpion Tilt-Body and to gain production tooling. L&L is a premier maker of composites tooling, whose customer list includes Rockwell, Gulfstream and Bell Helicopter. Freewing's production line for the Scorpion Model 100-50, a 50-pound payload Freewing Tilt-Body UAV, is scheduled to open in 1997 in Texas. Several Scorpions have been produced from the soft production tooling. The final tooling will be capable of producing up to one aircraft per day.

# Bibliography

Porter, R.F., Hall, D.W., Brown J.H., Gregorek, G.M., "Analytical study of the Free-Wing Free-Trimmer Concept", NASA CR-2946, February 1978.

Chen, W. & Barlow, J.B., "Stability, Control and Gust Response Characteristics of an Ultralight freewing Aircraft", AIAA-92-4342, Atmospheric Flight mechanics Meeting, Hilton Head, SC, August 10-12, 1992.

Chen, W. & Barlow, J.B., "An Ultralight Freewing Aircraft Design Study', AIAA-92-4194, AIAA Aircraft Design System Meeting, Hilton Head, SC, August 24-26, 1992.

Chen, W., "Stability, Control and Gust Sensitivity of a Low Wing Loading Freewing Airplane", M.S. Thesis, 1992.

Barlow, J.B. & Chen, W., "Aerodynamic Characteristics and Control Aspects of a Freewing Tilt-Body Airplane", presented at the Twelfth Briston International Conference on RPVs, 9-11 September 1996, Bristol, UK.

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 232 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

APPENDIX C

### U.S. DEPARTMENT OF DEFENSE

# SMALL BUSINESS INNOVATION RESEARCH (SBIR) PROGRAM PROJECT SUMMARY

1. Name of Offerer: Geneva Aerospace, Inc.

2. Home office address: PO Box 613018

11. Other direct costs

Dallas, TX 75261-3018

3. Location where work will be performed: 2215 St. Andrew

Highland Village, TX 75067

none

4. Title of proposed effort: "Examination of a Generalized Guidance and Autopilot Design for UAV

Flight Control Simplification"

5. Topic Number And Title: AF98-179. "Simplified Manual Flight Control"

\$ 93,177 6. Total dollar amount of Proposed Effort 7. Direct material costs COTS Controller Sim. Hardware \$ 10,000 \$10,000 8. Direct labor (specify) Principal Investigator 700 Hours @ \$ 38.00 \$ 26,600 Assistant Investigator 500 Hours @ \$ 31.50 \$ 15,750 b. Total \$ 38,550 \$ 42,350 9. Labor overhead 51% of Direct Labor Costs \$ 21,675 \$ 21,675 10. Travel (if direct charge) a. Transportation to acquire typical system parameters: Rental Car 50 2,000 Airline Tickets b. Per diem or subsistence Hotel 200 Meals 100 c. Estimated total travel 2,350 \$ 2,350

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 233 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

12. Total Costs \$ 76,375 13. General and Administrative (15%) \$ 11,456 14. Fee (7%) \$ 5,346 15. Total Firm Fixed-Price Cost

\$ 93,177

16. Type of contract proposed: Firm-fixed-price.

- a) Has any executive agency of the United States Government performed any review of your accounts or records in connection with any other government prime contract or subcontract within the past twelve months? No.
- b) Will you require the use of any government property in the performance of this proposal? No.
- c) Do you require government contract financing to perform this proposed contract? yes, then specify type as advanced payments or progress payments. Progress Payments

David A. Felio	Date
President	

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 234 of 241 Examiner: Ronnie M. Mancho Art Unit: 3664

Exhibit 10 - Geneva Phase I Contract information for AF98-179
from Air Force SBIR Web site at

http://www.afsbirsttr.com/TechMall/Default.aspx?kwa=AF98-179

Sheet 235 of 241

Serial Number: 11/736,356

Examiner: Ronnie M. Mancho Art Unit: 3664

http://www.afsbirsttr.com/award/AwardDetails...

2 of 3

Filed: 04/17/2007

Air Platforms

11/26/2010 12:04 PM



#### **Program Office**

Air Force Research Laboratory (AFRL/XPP) 1864 4th Street Bldg 15 Rm 225 Wright-Patterson AFB, 45433 Toll Free:

1-800-222-0336

Fax: (937) 255-2219

### AWARD DETAILS

Back to List Printer Friendly

AIR FORCE

Proposal #: 98AL-306 DoD Submission #:

SBIR Phase: Program:

Examination of an Integrated Autopilot Design for Simplified UAV Flight Proposal Title: Control

AF Sol Topic AF98-179 DoD Technology Area:

Solicitation #: 98.1 Gov't Managing Office:

Agency: Gov't Sponsoring Office:

Topic Title: Simplified Manual Flight Control

### AWARD DETAILS

Status: Successful (Invited for Phase II)

Amount: 93177 Contract: F41624-98-C-5058 Start: 5/14/1998 12:00:00 AM End: 2/14/1999 12:00:00 AM

Annual 1998 Report FY:

Transition Success Story written? Impact Story Submitted? No

HUBZone: No TRL Level: Level 3

TRL Analytical and experimental critical function and/or characteristic

Application: proof-o- concept

DTIC Rpt. 3/20/2001 12:00:00 AM DTIC Rpt. AFRL-HE-WP-TR-1999-0017-Date:

Num.:

DTIC Accession Number: B242868

#### FIRM DETAILS

Employees:

Firm: Geneva Aerospace, Inc. Socially & Economically Disadvantaged Business?: No PO Box 613018 Woman Owned?: Address: No Veteran Owned?: No Disabled Veteran Owned?: City: Dallas No ΤX HBCU/MI: No 75261 HBCU/MI Name:

### CONTACT INFORMATION

6

David A Felio Project Manager Name: President Project Manager Title: Project Manager Phone: (972) 317-3124

Project Manager Email:

Corp Official Name: David S. Duggan Corp Official Title: Secretary and V.P. Corp Official Phone: (940) 440-9312

Corp Official Email:

### APPENDIX B

#### Abstract:

In order to be truly versatile, Unmanned Aerial Vehicle (UAV) Systems must be usable to individuals who's training is more focused on the requirements of a given mission or on the usability of the payload, rather than on the aviation of the air vehicle. This

TOPIC/AWARD DATA SEARCH TOPICS SEARCH AWARDS LOGIN Please select the area you work within in relation to the SBIR & STTR programs from the menu on the left. **PUBLICATIONS** SBIR/STTR Advantage Innovation Stories Transition Stories

	Jed Margolin	Serial Number: 11/736,356 Examiner: Ronnie M. Mancho	Filed: 04/17/2007 Art Unit: 3664	Sheet 236 of 24
1				
2		Exhibit 11 - IDS From Duggan P	rovisional Applicatio	n
3		No. 60/480,1	92	

Sheet 236 of 241

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 237 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

First Named

Inventor : Dave Duggan et al.

Appln. No.: 60/480,192

Filed : June 20, 2003

For : METHOD AND APPARATUS FOR

AUTONOMOUS AND SEMI-AUTONOMOUS

COMMAND AND CONTROL OF UNMANNED AIR VEHICLE

Docket No.: G46.12-0001

Group Art Unit: ---

1FW

Examiner: ---

DAY OF Var

#### INFORMATION DISCLOSURE STATEMENT

Commissioner for Patents P.O. Box 1450 Alexandria, VA 22313-1450

I HEREBY CERTIFY THAT THIS PAPER IS BEING SENT BY U.S. MAIL, FIRST CLASS, TO THE COMMISSIONER FOR PATENTS, P.O. BOX 1450, ALEXANDRIA, VA 22313-1450, THIS

PATENT ATTORNEY

Sir:

\a

The patents or publications listed on the enclosed PTO Form-1449 are submitted pursuant to 37 C.F.R. § 1.97. Copies of the patents or publications cited are enclosed.

#### TIME OF FILING

The information disclosure statement is being filed:

- with the application or within three months of the filing date of the application or date of entry into the national stage of an international application or before the mailing date of a first Office action on the merits, whichever event occurs last. In accordance with 37 C.F.R. § 1.97(b), no statement or fee is required.
- after the time period specified in paragraph 1 above, but before the mailing date of a final action under 37 C.F.R. § 1.113 or notice of allowance under 37 C.F.R. § 1.311. Therefore, in accordance with 37 C.F.R. § 1.97(c), submitted herewith is:

(check either A or B below)

A. ___ a statement as specified in 37 C.F.R. § 1.97(e).

Jed Margolin

Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 238 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

-2-

- B. ___ the fee set forth in 37 C.F.R. § 1.17(p) for submission of an information disclosure statement under 37 C.F.R. § 1.97(c).
- after the mailing date of either a final action under 37 C.F.R. § 1.113 or a notice of allowance under 37 C.F.R. § 1.311, whichever occurs first, but before payment of the issue fee. Therefore, Applicant petitions for consideration and submits herewith:
  - A. a statement as specified in 37 C.F.R. § 1.97(e);
  - B. the petition fee set forth in 37 C.F.R. § 1.17(p).

#### STATEMENT

(only used if No. 2(A) or No. 3 above is checked)
The person(s) signing below certify

(check appropriate paragraph)

that each item of information contained in this Information Disclosure Statement was first cited in any communication from a foreign patent office in a counterpart foreign application not more than three months prior to the filing of this statement. 37 C.F.R. § 1.97(e)(1).

OR

that no item of information contained in this Information Disclosure Statement was cited in a communication from a foreign patent office in a counterpart foreign application or, to the knowledge of the person signing the certification after making reasonable inquiry, was known to any individual designated in 37 C.F.R. § 1.56(c) more than three months prior to the filing of this statement. 37 C.F.R. § 1.97(e)(2).

### METHOD OF PAYMENT

X	No fe	ee :	is	requi	red.				
	Attached	is	а	check	in	the	amount	of	\$ 

Jed Margolin Serial Number: 11/736,356 Filed: 04/17/2007 Sheet 239 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

-3-

The Director is authorized to charge any fee deficiency required by this paper or credit any overpayment to Deposit Account No. 23-1123. A duplicate copy of this communication is enclosed.

Respectfully submitted,

WESTMAN, CHAMPLIN & KELLY, P.A.

Christopher L. Holt, Reg. No. 45,844 Suite 1600 - International Centre 900 Second Avenue South

Minneapolis, Minnesota 55402-3319 Phone: (612) 334-3222 Fax: (612) 334-3312

CLH/rkp

>

Jed Margolin

Serial Number: 11/736,356

Filed: 04/17/2007

Sheet 240 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664

AUG 0 3 2004 W

Sheet 1 of 2

FORM PTO-1449	Atty. Docket No.: <b>G46.12-0001</b>	Appl. No.: 10/871,612		
LIST OF PATENTS AND PUBLICATIONS APPLICANT'S INFORMATION DISCLOSURE STATEMENT		First Named Inventor:		
	Dave Duggan et al.			
	Filing Date	Group Art:		
	June 18, 2004			

### U.S. PATENT DOCUMENTS

Examiner Initial	Document No.	Date	Name	Class	Sub Class	Filing Date If Appropriate
AA	5,214,584	05/1993	Dingee et al.	364	423	
AB	5,123,610	06/1992	Oaks	244	3.12	
AC	4,611,771	09/1986	Gibbons et al.	244	3.12	
AD	4,725,956	02/1988	Jenkins	364	434	
AE	5,522,567	06/1996	Kinstler	244	3.15	
AF	5,904,724	05/1999	Margolin	701	120	
AG	4,848,755	09/1989	McNulty et al.	364	434	
АН	4,642,774	02/1987	Centala et al.	364	434	
AI	5,951,609	09/1999	Hanson et al.	701	13	
AJ	5,951,607	09/1999	Senn et al.	701	1	
AK	5,944,762	08/1999	Bessacini et al.	701	27	

### FOREIGN PATENT DOCUMENTS

	Document No.	Date	Country	Class	Sub Class	Translation Yes No
AL						
AM						
AN						

OTHER ART (Including Author, Title, Date, Pertinent Pages, Etc.)

	AO	
	AP	
	AQ	
EXAMIN	VER:	DATE CONSIDERED:

EXAMINER: Initial if citation considered, whether or not citation is in conformance with MPEP 609; draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

Jed Margolin

Serial Number: 11/736,356

Filed: 04/17/2007

Sheet 241 of 241

Examiner: Ronnie M. Mancho Art Unit: 3664



Sheet 2 of 2

FORM PTO-1449	Atty. Docket No.: G46.12-0001	Appl. No.: 10/871,612		
LIST OF PATENTS AND PUBLICATIONS FOR APPLICANT'S INFORMATION DISCLOSURE STATEMENT	First Named Invento	First Named Inventor:		
	Dave Duggan et al.			
	Filing Date	Group Art:		
	June 18, 2004			

#### U.S. PATENT DOCUMENTS

Examiner Initial	Document No.	Date	Name	Class	Sub Class	Filing Date If Appropriate
AR	5,822,515	10/1998	Baylocq	395	185.09	
AS	5,782,429	07/1998	Mead	244	3.11	
AT	5,691,531	11/1997	Harris et al.	244	3.14	
AU	5,048,771	09/1991	Siering	244	3.15	
AV	5,042,743	08/1991	Edwin R. Carney	244	3.11	
AW	5,240,207	08/1993	Eiband et al.	244	190	
AX	5,938,148	08/1999	Orenstein	244	3.15	
AY	5,552,983	09/1996	Thornberg et al.	364	424.01	
AZ	5,181,673	01/1993	Hubricht et al.	244	3.12	
ВА	5,605,307	02/1997	Batchman et al.	244	3.11	
ВВ						

### FOREIGN PATENT DOCUMENTS

	Document No.	Date	Country	Class	Sub Class	Translation Yes No
вс						
BD						
BE						

OTHER ART (Including Author, Title, Date, Pertinent Pages, Etc.)

	BF	
	BG	
	вн	
EXAMIN	NER:	DATE CONSIDERED:

EXAMINER: Initial if citation considered, whether or not citation is in conformance with MPEP 609; draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

Electronic Acknowledgement Receipt				
EFS ID:	8924136			
Application Number:	11736356			
International Application Number:				
Confirmation Number:	3649			
Title of Invention:	System and Method For Safely Flying Unmanned Aerial Vehicles in Civilian Airspace			
First Named Inventor/Applicant Name:	Jed Margolin			
Customer Number:	23497			
Filer:	Jed Margolin			
Filer Authorized By:				
Attorney Docket Number:				
Receipt Date:	29-NOV-2010			
Filing Date:	17-APR-2007			
Time Stamp:	16:40:35			
Application Type:	Utility under 35 USC 111(a)			

# **Payment information:**

# File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Amendment/Req. Reconsideration-After	jm_rpv2_foar_final.pdf	9816788	no	241
1	Non-Final Reject	Jm_,pv2_,out_,mai.pu	41d523e85154415ff727658ec4d74d7fd5e8 7796		

# **Warnings:**

# Information:

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

### New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

# National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

### New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PATENT APPLICATION FEE DETERMINATION RECORD Substitute for Form PTO-875			Δ	Application or Docket Number 11/736,356		Filing Date 04/17/2007		To be Mailed				
APPLICATION AS FILED – PART I (Column 1) (Column 2)						SMALL ENTITY			OTHER THAN OR SMALL ENTITY			
	FOR	N	JMBER FIL	.ED	NUMI	BER EXTRA		RATE (\$)	FEE (\$)		RATE (\$)	FEE (\$)
BASIC FEE (37 CFR 1.16(a), (b), or (c))		or (c))	N/A		N/A			N/A			N/A	
	SEARCH FEE (37 CFR 1.16(k), (i), o	or (m))	N/A		N/A			N/A			N/A	
	EXAMINATION FE (37 CFR 1.16(o), (p),		N/A		N/A			N/A			N/A	
	CAL CLAIMS CFR 1.16(i))		mir	us 20 = *	*			x \$ =		OR	x \$ =	
	EPENDENT CLAIM CFR 1.16(h))	S	m	inus 3 = *			x \$ =			x \$ =		
If the specification and drawings exceed 100 sheets of paper, the application size fee due is \$250 (\$125 for small entity) for each additional 50 sheets or fraction thereof. See 35 U.S.C. 41(a)(1)(G) and 37 CFR 1.16(s).												
	MULTIPLE DEPEN	IDENT CLAIM PR	ESENT (3	7 CFR 1.16(j))								
* If t	he difference in colu	umn 1 is less than	zero, ente	r "0" in column	n 2.			TOTAL			TOTAL	
APPLICATION AS AMENDED - PART II  (Column 1) (Column 2) (Column 3)					SMALL ENTITY				ER THAN ALL ENTITY			
AMENDMENT	11/29/2010	CLAIMS REMAINING AFTER AMENDMENT		HIGHEST NUMBER PREVIOUSI PAID FOR	iLY	PRESENT EXTRA		RATE (\$)	ADDITIONAL FEE (\$)		RATE (\$)	ADDITIONAL FEE (\$)
ME	Total (37 CFR 1.16(i))	* 14	Minus	** 20		= 0		X \$26 =	0	OR	x \$ =	
뷞	Independent (37 CFR 1.16(h))	* 4	Minus	***4		= 0		X \$110 =	0	OR	x \$ =	
\ME	Application Size Fee (37 CFR 1.16(s))											
1	FIRST PRESEN	NTATION OF MULTIF	LE DEPEN	DENT CLAIM (3	7 CFR	1.16(j))				OR		
								TOTAL ADD'L FEE	0	OR	TOTAL ADD'L FEE	
		(Column 1)	_	(Column 2		(Column 3)						
L		CLAIMS REMAINING AFTER AMENDMENT		HIGHEST NUMBER PREVIOUS PAID FOF	₹ SLY	PRESENT EXTRA		RATE (\$)	ADDITIONAL FEE (\$)		RATE (\$)	ADDITIONAL FEE (\$)
	Total (37 CFR 1.16(i))	*	Minus	**		=		x \$ =		OR	x \$ =	
AMENDMENT	Independent (37 CFR 1.16(h))	*	Minus	***		=		x \$ =		OR	x \$ =	
Ш	Application Size Fee (37 CFR 1.16(s))											
AM	FIRST PRESEN	NTATION OF MULTIF	LE DEPEN	DENT CLAIM (3:	37 CFR	1.16(j))				OR		
							• '	TOTAL ADD'L FEE		OR	TOTAL ADD'L FEE	
** If *** I	* If the entry in column 1 is less than the entry in column 2, write "0" in column 3.  ** If the "Highest Number Previously Paid For" IN THIS SPACE is less than 20, enter "20".  *** If the "Highest Number Previously Paid For" IN THIS SPACE is less than 3, enter "3".  The "Highest Number Previously Paid For" (Total or Independent) is the highest number found in the appropriate box in column 1.											

This collection of information is required by 37 CFR 1.16. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address: COMMISSIONER FOR PATENTS P.O. Box 1450 Alexandria, Virginia 22313-1450 www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.		
11/736,356	04/17/2007	Jed Margolin	3649			
23497 JED MARGOL	7590 09/01/201 <b>IN</b>	EXAMINER				
1981 EMPIRE ROAD RENO, NV 89521-7430			MANCHO, RONNIE M			
NEINO, INV 093	021-74JU		ART UNIT	PAPER NUMBER		
			3664			
			MAIL DATE	DELIVERY MODE		
			09/01/2010	PAPER		

Please find below and/or attached an Office communication concerning this application or proceeding.

The time period for reply, if any, is set in the attached communication.

	Application No.	Applicant(s)	
	11/736,356	MARGOLIN, JED	
Office Action Summary	Examiner	Art Unit	
	RONNIE MANCHO	3664	
The MAILING DATE of this communication ap Period for Reply	pears on the cover sheet with the c	correspondence address	
A SHORTENED STATUTORY PERIOD FOR REPL WHICHEVER IS LONGER, FROM THE MAILING Description of time may be available under the provisions of 37 CFR 1. after SIX (6) MONTHS from the mailing date of this communication.  If NO period for reply is specified above, the maximum statutory period Failure to reply within the set or extended period for reply will, by statut Any reply received by the Office later than three months after the mailing earned patent term adjustment. See 37 CFR 1.704(b).	DATE OF THIS COMMUNICATION 136(a). In no event, however, may a reply be tind will apply and will expire SIX (6) MONTHS from the cause the application to become ABANDONE	N. nely filed the mailing date of this communication. D (35 U.S.C. § 133).	
Status			
1) ☐ Responsive to communication(s) filed on 17 A     2a) ☐ This action is <b>FINAL</b> . 2b) ☐ This action is <b>FINAL</b> .  3) ☐ Since this application is in condition for allowed closed in accordance with the practice under	is action is non-final. ance except for formal matters, pro		
Disposition of Claims			
4)  Claim(s) 1-14 is/are pending in the application 4a) Of the above claim(s) is/are withdra 5)  Claim(s) is/are allowed. 6)  Claim(s) 1-14 is/are rejected. 7)  Claim(s) is/are objected to. 8)  Claim(s) are subject to restriction and/o Application Papers  9)  The specification is objected to by the Examin 10)  The drawing(s) filed on is/are: a) accompanion and applicant may not request that any objection to the Replacement drawing sheet(s) including the correction.	awn from consideration.  or election requirement.  er.  cepted or b) □ objected to by the I e drawing(s) be held in abeyance. See	e 37 CFR 1.85(a).	
11)☐ The oath or declaration is objected to by the E	xaminer. Note the attached Office	Action or form PTO-152.	
Priority under 35 U.S.C. § 119			
<ul> <li>12) Acknowledgment is made of a claim for foreign a) All b) Some * c) None of:</li> <li>1. Certified copies of the priority documents</li> <li>2. Certified copies of the priority documents</li> <li>3. Copies of the certified copies of the priority documents</li> <li>* See the attached detailed Office action for a list</li> </ul>	nts have been received. nts have been received in Applicationity documents have been received au (PCT Rule 17.2(a)).	on No ed in this National Stage	
Attachment(s)  1) Notice of References Cited (PTO-892)  2) Notice of Draftsperson's Patent Drawing Review (PTO-948)  3) Information Disclosure Statement(s) (PTO/SB/08)  Paper No(s)/Mail Date 4/2007.	4) Interview Summary Paper No(s)/Mail Da 5) Notice of Informal F 6) Other:	ate	

Application/Control Number: 11/736,356 Page 2

Art Unit: 3664

### **DETAILED ACTION**

# Claim Rejections - 35 USC § 103

- 1. The following is a quotation of 35 U.S.C. 103(a) which forms the basis for all obviousness rejections set forth in this Office action:
  - (a) A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subject matter sought to be patented and the prior art are such that the subject matter as a whole would have been obvious at the time the invention was made to a person having ordinary skill in the art to which said subject matter pertains. Patentability shall not be negatived by the manner in which the invention was made.
- 2. Claims 1-14 are rejected under 35 U.S.C. 103(a) as being unpatentable over Margolin (5904724) in view of Duggan et al (US 2005004723).

Regarding claim 1, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) discloses a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

- (a) a ground station 400 (fig. 1&4) equipped with a synthetic vision system (figs. 1&3; col. 4, lines 1 to col. 5, lines 67);
- (b) an unmanned aerial vehicle 300 (figs. 1&3) capable of supporting said synthetic vision system (305, 306, 307, 311 on aircraft; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67);
- (c) a remote pilot 102 operating said ground station 400 (figs. 1&4; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67);
- (d) a communications link between said unmanned aerial vehicle 300 and said ground station 400;

Art Unit: 3664

e) a system onboard said unmanned aerial vehicle 300 for detecting the presence and position of nearby aircraft (305, 306, 307, 311 on aircraft) and communicating this information to said remote pilot 102 (col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67);

whereas said remote pilot uses said synthetic vision system (305, 306, 307, 311 on aircraft) to control said unmanned aerial vehicle 300 during at least selected phases of the flight of said unmanned aerial vehicle.

Margolin did not disclose that the vehicle is flown using an autonomous control system. However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0329).

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggna abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne having ordinary skill in the art.

Regarding claim 2, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the system of claim 1 whereby said selected phases of the flight of said unmanned aerial vehicle comprise:

Application/Control Number: 11/736,356

Art Unit: 3664

(a) when said unmanned aerial vehicle is within a selected range of an airport or other

designated location and is below a first specified altitude;

(b) when said unmanned aerial vehicle is outside said selected range of an airport or other

Page 4

designated location and is below a second specified altitude.

Regarding claim 3, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col.

5, lines 1-67) in view of Duggan disclose the system of claim 1 further comprising a system

onboard said unmanned aerial vehicle for periodically transmitting the identification, location,

altitude, and bearing of said unmanned aerial vehicle.

Regarding claim 4, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col.

5, lines 1-67) in view of Duggan disclose the system of claim 1 further comprising a system

onboard said unmanned aerial vehicle for providing a communications channel for Air Traffic

Control and the pilots of other aircraft to communicate directly with said remote pilot.

Regarding claim 5, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col.

5, lines 1-67) in view of Duggan disclose a system for safely flying an unmanned aerial vehicle

in civilian airspace comprising:

(a) a ground station equipped with a synthetic vision system;

(b) an unmanned aerial vehicle capable of supporting said synthetic vision system;

(c) a remote pilot operating said ground station;

(d) a communications link between said unmanned aerial vehicle and said ground station;

e) a system onboard said unmanned aerial vehicle for detecting the presence and position

of nearby aircraft and communicating this information to said remote pilot;

Art Unit: 3664

whereas said remote pilot uses said synthetic vision system to control said unmanned aerial vehicle during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system, and

whereas the selected phases of the flight of said unmanned aerial vehicle comprise:

- (a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;
- (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

Margolin did not disclose that the vehicle is flown using an autonomous control system. However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0329).

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggna abstract, sec 0014, 0085, 0086).

Art Unit: 3664

The different embodiments in both prior arts are combinable as it would be obvious to ne having ordinary skill in the art.

Regarding claim 6, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the system of claim 5 further comprising a system onboard said unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and bearing of said unmanned aerial vehicle.

Regarding claim 7, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the system of claim 5 further comprising a system onboard said unmanned aerial vehicle for providing a communications channel for Air Traffic Control and the pilots of other aircraft to communicate directly with said remote pilot.

Regarding claim 8, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose a method for safely flying an unmanned aerial vehicle as part of a unmanned aerial system equipped with a synthetic vision system in civilian airspace comprising the steps of:

- (a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle an autonomous control system is used to fly said unmanned aerial vehicle;
- (b) providing a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot.

Page 7

Art Unit: 3664

Margolin did not disclose that the vehicle is flown using an autonomous control system. However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0329).

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggna abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne having ordinary skill in the art.

Regarding claim 9, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the method of claim 8 whereby said selected phases of the flight of said unmanned aerial vehicle comprise:

- (a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;
- (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

Regarding claim 10, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the method of claim 8 further comprising the step

Art Unit: 3664

of providing a system onboard said unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and bearing of said unmanned aerial vehicle.

Regarding claim 11, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the method of claim 8 further comprising the step of providing a system onboard said unmanned aerial vehicle for providing a communications channel for Air Traffic Control and the pilots of other aircraft to communicate directly with said remote pilot.

Regarding claim 12, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose a method for safely flying an unmanned aerial vehicle as part of a unmanned aerial system equipped with a synthetic vision system in civilian airspace comprising the steps of:

- (a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle an autonomous control system is used to fly said unmanned aerial vehicle;
- (b) providing a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot;

whereas said selected phases of the flight of said unmanned aerial vehicle comprise:

(a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;

Art Unit: 3664

(b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.

Margolin did not disclose that the vehicle is flown using an autonomous control system. However, Duggan teach of a system for safely flying an unmanned aerial vehicle in civilian airspace comprising:

a ground station controlling an unmanned aerial vehicle (sec. 0352, 00353), wherein during phases of a flight of an unmanned aerial vehicle (UAV, sec 0318, 0322, 0353) when a synthetic vision (sec. 0356, 0365, 0388, 0390) is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system (autopilot, sec 0346 to 0350, 0390-0329).

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Margolin as taught by Duggan for the purpose of incorporating an autopilot to ensure smooth transitions (Duggna abstract, sec 0014, 0085, 0086).

The different embodiments in both prior arts are combinable as it would be obvious to ne having ordinary skill in the art.

Regarding claim 13, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the method of claim 12 further comprising the step of providing a system onboard said unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and bearing of said unmanned aerial vehicle.

Regarding claim 14, Margolin (abstract; figs. 1-7; col. 3, lines 8-67; col. 4, lines 1-67; col. 5, lines 1-67) in view of Duggan disclose the method of claim 12 further comprising the step of providing a system onboard said unmanned aerial vehicle for providing a communications

Application/Control Number: 11/736,356 Page 10

Art Unit: 3664

channel for Air Traffic Control and the pilots of other aircraft to communicate directly with said

remote pilot.

Communication

3. Any inquiry concerning this communication or earlier communications from the

examiner should be directed to RONNIE MANCHO whose telephone number is (571)272-6984.

The examiner can normally be reached on Mon-Thurs: 9-5.

If attempts to reach the examiner by telephone are unsuccessful, the examiner's

supervisor, Tran Khoi can be reached on 571-272-6919. The fax phone number for the

organization where this application or proceeding is assigned is 571-273-8300.

Information regarding the status of an application may be obtained from the Patent

Application Information Retrieval (PAIR) system. Status information for published applications

may be obtained from either Private PAIR or Public PAIR. Status information for unpublished

applications is available through Private PAIR only. For more information about the PAIR

system, see http://pair-direct.uspto.gov. Should you have questions on access to the Private PAIR

system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-free). If you would

like assistance from a USPTO Customer Service Representative or access to the automated

information system, call 800-786-9199 (IN USA OR CANADA) or 571-272-1000.

/Ronnie Mancho/

Primary Examiner, Art Unit 3664

/Ronnie Mancho/

Primary Examiner, Art Unit 3664

Application/Control Number: 11/736,356

Page 11

Art Unit: 3664

# Notice of References Cited Application/Control No. 11/736,356 Examiner RONNIE MANCHO Applicant(s)/Patent Under Reexamination MARGOLIN, JED Page 1 of 1

#### U.S. PATENT DOCUMENTS

*		Document Number Country Code-Number-Kind Code	Date MM-YYYY	Name	Classification
*	Α	US-5,904,724	05-1999	Margolin, Jed	701/120
*	В	US-2005/0004723	01-2005	Duggan et al.	701/024
*	С	US-7,765,038	07-2010	Appleby et al.	701/23
*	D	US-7,747,364	06-2010	Roy et al.	701/28
	Е	US-			
	F	US-			
	G	US-			
	Ι	US-			
	-	US-			
	7	US-			
	K	US-			
	┙	US-			
	М	US-			

#### FOREIGN PATENT DOCUMENTS

*		Document Number Country Code-Number-Kind Code	Date MM-YYYY	Country	Name	Classification
	N					
	0					
	Р					
	Ø					
	R					
	Ø					
	Т					

#### **NON-PATENT DOCUMENTS**

*		Include as applicable: Author, Title Date, Publisher, Edition or Volume, Pertinent Pages)
	C	
	<b>V</b>	
	W	
	х	

*A copy of this reference is not being furnished with this Office action. (See MPEP § 707.05(a).)

Dates in MM-YYYY format are publication dates. Classifications may be US or foreign.

#### **EAST Search History**

#### **EAST Search History (Prior Art)**

Ref#	Hits	Search Query	DBs	Default Operator	Plurals	Time Stamp
L13	8	UAV and (synthetic near3 vision) and control and station and communication and sensor and aircraft and remote and pilot and autopilot	US-PGPUB; USPAT; USOCR; FPRS; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2010/08/28 17:26
L14	70	"5438517"	US-PGPUB; USPAT; USOCR; FPRS; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2010/08/28 17:38
L15	2	"5438517" and UAV	US-PGPUB; USPAT; USOCR; FPRS; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2010/08/28 17:38
L16	2	("5438517").PN.	US-PGPUB; USPAT; USOCR; FPRS; EPO; JPO; DERWENT; IBM_TDB	OR	OFF	2010/08/28 17:39
L17	2	("5933120").PN.	US-PGPUB; USPAT; USOCR; FPRS; EPO; JPO; DERWENT; IBM_TDB	OR	OFF	2010/08/28 17:39
L18	2	("7131136").PN.	US-PGPUB; USPAT; USOCR; FPRS; EPO; JPO; DERWENT; IBM_TDB	OR	OFF	2010/08/28 17:40
L19	2	("5153836").PN.	US-PGPUB; USPAT; USOCR; FPRS; EPO; JPO; DERWENT; IBM_TDB	OR	OFF	2010/08/28 17:41

L20	2	("5187485").PN.	US-PGPUB; USPAT; USOCR; FPRS; EPO; JPO; DERWENT; IBM_TDB	OR	OFF	2010/08/28 17:41
L21	2	("5904724").PN.	US-PGPUB; USPAT; USOCR; FPRS; EPO; JPO; DERWENT; IBM_TDB	OR	OFF	2010/08/28 17:43
L22	13	"5904724" and autopilot	US-PGPUB; USPAT; USOCR; FPRS; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2010/08/28 18:04
L23	8033205	701/2, 3, 4, 11, 14, "36", "28"	US-PGPUB; USPAT; USOCR; FPRS; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2010/08/28 18:40
L24	952515	244/158.1, "189", "190"	US-PGPUB; USPAT; USOCR; FPRS; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2010/08/28 18:41
L25	842	701/120	US-PGPUB; USPAT; USOCR; FPRS; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2010/08/28 18:41
L26	602095	23 and 24	US-PGPUB; USPAT; USOCR; FPRS; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2010/08/28 18:41
L27	103	25 and 26	US-PGPUB; USPAT; USOCR; FPRS; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2010/08/28 18:42

#### 8/28/2010 6:42:44 PM

C:\ Documents and Settings\ RMancho\ My Documents\ EAST\ Workspaces\ 8-28-10b.wsp

PTO/SB/08a (09-06) Approved for use through 03/31/2007. OMB 0651-0031

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Unc	<u>ler the Paperwork Reduction Act of 1995.</u>	no perso	ns are required to res	spond to a collection of informati	on unless it contains a valid OMB control number.	
s	ubstitute for form 1449A/PTO	•		Complete if Known		
				Application Number		
I	<b>NFORMATION DISC</b>	CLOS	SURE	Filing Date		
9	STATEMENT BY AP	PLIC	CANT	First Named Inventor	Jed Margolin	
Ì				Art Unit		
	(Use as many sheets as necessary)			Examiner Name		
Sheet	1	of	3	Attorney Docket Number		

	U. S. PATENT DOCUMENTS								
Examiner Initials*	Cite No. ¹	Document Number  Number-Kind Code ^{2 (f known)}	Publication Date MM-DD-YYYY	Name of Patentee or Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear				
		^{US-} 5,153,836	10-06-1992	Fraughton, et al.					
		^{US-} 5,187,485	02-16-1993	Tsui, et al.					
		^{US-} 5,904,724	05-18-1999	Margolin					
		^{US-} Publication Number 20060174221	08-03-2006	Kinsella, et al.	Paragraphs 0018, 0019, and 0042				
		US-							
		US-							
*******		US-							
		US-							
		US-							
		US-							
************		US-							
•••••		US-							
		US-							
		US-							
		US-							
		US-							
		US-							

	FOREIGN PATENT DOCUMENTS										
Examiner Initials*	Cite No. ¹	Foreign Patent Document  Country Code ³ 'Number ⁴ 'Kind Code ⁵ ( <i>if known</i> )	Publication Date MM-DD-YYYY	Name of Patentee or Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear	Т ⁶					
		Country Code Hamber 1 mile Code (at Milestry)			or relevant rigures Appear						
	***********					Щ					

Examiner	/Ronnie Mancho/ (08/28/2010)	Date	
Signature	Thomas Manonos (00, 20, 20, 10)	Considered	

*EXAMINER: Initial if reference considered, whether or not citation is in conformance with MPEP 609. Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant. 1 Applicant's unique citation designation number (optional). 2 See Kinds Codes of USPTO Patent Documents at <a href="https://www.uspto.gov">www.uspto.gov</a> or MPEP 901.04. 3 Enter Office that issued the document, by the two-letter code (WIPO Standard ST.3). 4 For Japanese patent documents, the indication of the year of the reign of the Emperor must precede the serial number of the patent document. 5 Kind of document by the appropriate symbols as indicated on the document under WIPO Standard ST.16 if possible. 6 Applicant is to place a check mark here if English language Translation is attached.

This collection of information is required by 37 CFR 1.97 and 1.98. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 2 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Substitute for	form 1449B/PTO			Complete if Known		
	RMATION DI			Application Number Filing Date First Named Inventor	Jed Margolin	
,	(Use as many sheets as	necessary	)	Art Unit Examiner Name		
Sheet	2	of	3	Attorney Docket Number		

	NON PATENT LITERATURE DOCUMENTS							
Examiner Initials*  Cite No.1  Include name of the author (in CAPITAL LETTERS), title of the article (when appropriate), title of the item (book magazine, journal, serial, symposium, catalog, etc.), date, page(s), volume-issue number(s), publisher, city and/or country where published.								
		Sensing Requirements for Unmanned Air Vehicles, AFRL's Air Vehicles Directorate, Control Sciences Division, Systems Development Branch, Wright-Patterson AFB OH, June 2004, www.afrlhorizons.com/Briefs/Jun04/VA0306.html						
		Presentation: <b>Developing Sense &amp; Avoid Requirements for Meeting an Equivalent Level of Safety</b> given by RUSS WOLFE, Technology IPT Lead, Access 5 Project at UVS Tech 2006. (January 18, 2006)						
		Presentation: Integration into the National Airspace System (NAS) given by JOHN TIMMERMAN of the FAA's Air Traffic Organization (July 12, 2005)						
		Zone Ready for Drone, April 7, 2006 on the web site for the FAA's Air Traffic Organization Employees, www.ato.faa.gov/DesktopDefault.aspx?tabindex=4&tabid=17&itemid=937∣=103						
		Virtual Cockpit WIndow for a Windowless Aerospacecraft NASA Tech Brief, January 2003 page 40. www.nasatech.com/Briefs/Jan03/MSC23096.html						
		Press Release from Rapid Imaging Software, Inc. www.landform.com/pages/PressReleases.htm "On December 13th, 2001, Astronaut Ken Ham successfully flew the X-38 from a remote cockpit"						

Examiner Signature	/Ronnie Mancho/ (08/30/2010)	Date Considered	
-----------------------	------------------------------	--------------------	--

^{*}EXAMINER: Initial if reference considered, whether or not citation is in conformance with MPEP 609. Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

¹ Applicant's unique citation designation number (optional). 2 Applicant is to place a check mark here if English language Translation is attached. This collection of information is required by 37 CFR 1.97 and 1.98. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 2 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Substitute for	form 1449B/PTO			Complete if Known					
	RMATION DI			Application Number Filing Date First Named Inventor	Jed Margolin				
	(Use as many sheets as	necessary	)	Art Unit Examiner Name	-				
Sheet	3	of	3	Attorney Docket Number					

		NON PATENT LITERATURE DOCUMENTS							
Examiner Initials*	Cite No. ¹	Include name of the author (in CAPITAL LETTERS), title of the article (when appropriate), title of the item (book, magazine, journal, serial, symposium, catalog, etc.), date, page(s), volume-issue number(s), publisher, city and/or country where published.	T ²						
		Article: Flying UAVs in Civil Airspace By Using Synthetic Vision JED MARGOLIN, www.jmargolin.com/todo/uavs.htm							
		NTSB Incident Report on crash of Predator on April 25, 2006, northwest of Nogales, NM.  NTSB Identification CHI06MA121							
		Lockheed's Polecat UCAV Demonstrator Crashes Aviation Week & Space Technology, AMY BUTLER, 03/19/2007, page 44							
		The F-22 Continues to Encounter Aviation Week & Space Technology, 02/26/2007, page 18							
		Gulf of Mexico Helo Ops Ready for ADS-B Aviation Week & Space Technology, FRANCES FIORINO, 02/26/2007, page 56							
		Embedded Experts: Fix code bugs or cost lives, RICK MERIT, EE Times, 04/10/2006 www.eetimes.com/showArticle.jhtml?articleID-184429901							
		Entries from the Software Failure Hall of Shame, Part 1, TOM RHINELANDER, July 06, 2006, www.g2zero.com/2006/07/notable_entries_from_the_softw_1.html							
		Hardware-in-the-Loop Simulation, MARTIN GOMEZ, Embedded Systems Design, 11/30/01, www.embedded.com/shoArticle.jhtml?articleID=15201692							
		Supreme Court Decision, Boyle v. United Technologies Corp., 487 U.S. 500 (1988)							
		Basic Concepts of real-time operating systems, DAVID KALINSKY (Nov. 18, 2003) http://linuxdevices.com/articles/AT4627965573.html							

Examiner	/Ronnie Mancho/ (08/30/2010)	Date	
Signature		Considered	

^{*}EXAMINER: Initial if reference considered, whether or not citation is in conformance with MPEP 609. Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

¹ Applicant's unique citation designation number (optional). 2 Applicant is to place a check mark here if English language Translation is attached. This collection of information is required by 37 CFR 1.97 and 1.98. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 2 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

Search Notes

Application/Control No.	Applicant(s)/Pate Reexamination	ent under
11/736,356	MARGOLIN, JE	D
Examiner	Art Unit	
RONNIE MANCHO	3664	

SEARCHED										
Class	Subclass	Date	Examiner							
701	2	8/28/2010	RM							
	3	8/28/2010	RM							
	4	8/28/2010	RM							
	11	8/28/2010	RM							
	14	8/28/2010	RM							
	36	8/28/2010	RM							
	28	8/28/2010	RM							
	120	8/28/2010	RM							
244	158.1	8/28/2010	RM							
	189	8/28/2010	RM							
	190	8/28/2010	RM							

INTERFERENCE SEARCHED										
Class	Subclass	Date	Examiner							

SEARCH NOTES (INCLUDING SEARCH STRATEGY)									
	DATE	EXMR							
EAST	8/28/2010	RM							

Index of Claims

App	lication	n/Contr	ol No.
-----	----------	---------	--------

**RONNIE MANCHO** 

11/736,356 Examiner

Applicant(s)/Patent under Reexamination

MARGOLIN, JED

Art Unit

3664

Rejected Allowed

_	(Through numeral) Cancelled
÷	Restricted

Z	Non-Elected
ı	Interference

Α	Appeal
0	Objected

Clains				D-4					) [	Cla	.: 1				D-1			_
Claim	$\vdash$	_		Date T		Claim					Date						Т	
Final	8/28/10									Final	Original							
1	<b>V</b>										51							Г
2	√										52							Γ
3	<b>V</b>										53							Γ
4	V										54							
5	√								] [		55							Γ
6	$\forall$										56							
7	√										57							
8	√										58							L
9	<b>V</b>										59							L
10	<b>√</b>										60							L
11	√										61							L
12	<b>V</b>										62							L
13	√										63							L
14	√	$\perp$									64							L
15		$\perp$									65							L
16											66							L
17											67						L	L
18											68		_					L
19											69		_					L
20											70			<u> </u>			_	L
21											71		_				_	Ļ
22											72							L
23											73		1					L
24		$\perp$									74		$\bot$	_	_		_	Ļ
25			_								75			<u> </u>	_		<u> </u>	Ļ
26		_									76							Ļ
27		_									77	_	_	_			_	Ļ
28											78	_		_	_		<u> </u>	Ļ
29		_									79		$\bot$					Ļ
30		+	-								80		+	₩	_			╀
31		_									81	_	+	+				╀
32		+									82	_	+					╀
33		+	-								83	-	+	-	┢			╀
35		+									84 85	_	+	+	$\vdash$			╀
36		-									86		+	-	┢			╁
37		+									87	_	+	-				H
38	$\vdash$	+	$\vdash$	$\vdash$	$\vdash$	$\vdash$	-	$\vdash$	{ }		88	$\dashv$	+	+	$\vdash$	$\vdash$	$\vdash$	+
39	$\vdash$	+	+	$\vdash$	$\vdash$	$\vdash$	-	$\vdash$	{ }		89	$\dashv$	+	+	$\vdash$	-	$\vdash$	+
40	$\vdash$	+	1	$\vdash$				<u> </u>			90	$\dashv$	+	+	$\vdash$		$\vdash$	t
41	$\vdash$	+	1	$\vdash$	H			$\vdash$			91	+	+	+	$\vdash$		$\vdash$	t
42	$\vdash$		1								92	+	+	+	$\vdash$		$\vdash$	t
43	$\vdash$	+	+					$\vdash$			93	$\dashv$	+	+	$\vdash$	-	$\vdash$	t
44	+	+	+	$\vdash$				$\vdash$	{ }		94	$\dashv$	+	+	$\vdash$		$\vdash$	t
45	+	+	+	$\vdash$	$\vdash$	$\vdash$		$\vdash$	{ }		95	$\dashv$	+	+	$\vdash$	$\vdash$	$\vdash$	$^{+}$
46	++		1				$\vdash$		{ }		96	+	+	+	$\vdash$		$\vdash$	t
47	$\vdash$	+	1					$\vdash$			97	$\dashv$	+	+			$\vdash$	t
48	+	+	1	$\vdash$				$\vdash$			98	$\dashv$	+	+	$\vdash$		$\vdash$	t
49	+	+	+	$\vdash$	$\vdash$			$\vdash$	{ }		99	-	+	+	$\vdash$		$\vdash$	t
50	+	+	1								100	$\dashv$	+	+	$\vdash$		$\vdash$	t
			-	_		_	_	<u> </u>	ıl		100				_	<u> </u>		_

Cla	Claim			Date						
ज	Original									
Final	igi									
"	ō									
				$\vdash$						
	51 52 53			$\vdash$						
	52									
	53									
	54 55									
	55									
	56									
	57 58									
	58									
	59									
	60									
	61									
	62									
	63									
	63 64									
	65									
	66			Г						
	67									
	68									
	68 69									
	70									
	71 72									
	72									
	73									
	74									
	74 75									
	76 77									
	77									
	78									
	79									
	80									
	81									
	82									
	82 83									
	84			$L^{T}$						
	85									
	86									
	87									
	88									
	89									
	90									
	91									
	92									
	93			$ldsymbol{ldsymbol{ldsymbol{eta}}}$						
	94									
	95									
	96									
	97									
	98		Ш	$\vdash$	Ш	_				
	99			$\vdash$						
	100	1		ı		1		1	1	

	•									
Cla	aim	Date								
Final	Original									
	101 102									
	102									
	103									
	104									
	105									
	106									
	107									
	108									
	109									
	110									
	111			-				_	-	
	112 113			H		$\vdash$		$\vdash$		$\vdash$
	114			H		$\vdash$		-		$\vdash$
	114 115			$\vdash$		$\vdash$		$\vdash$		$\vdash$
	116		H	H						
	117		<u> </u>	H	<u> </u>		<u> </u>	$\vdash$		
	117 118									
	119									
	120									
	120 121									
	122									
	122 123 124									
	124									
	125 126 127									
	126									
	127									
	128 129									
	129									
	130									
	131		_	$\vdash$				_		$\vdash$
	132		_	H	_	_	_	_		$\vdash$
	133 134		_		_		<u> </u>	_	<u> </u>	$\vdash$
	134			$\vdash$				$\vdash$		$\vdash$
	136	$\vdash$	<u> </u>	$\vdash$	-	$\vdash$	-	$\vdash$		$\vdash$
	137		-	H		$\vdash$		$\vdash$		$\vdash$
	138			$\vdash$				$\vdash$		$\vdash$
	139		H	H						
	140			Т						Н
	141									
	142									
	143									
	144									
	145									
	146									
	147									
	148									
	149									$oxed{oxed}$
	150									

### DEPARTMENT OF DEFENSE ACCESS ACKNOWLEDGEMENT / SECRECY ORDER RECOMMENDATION FOR PATENT APPLICATION

Application Serial No: DP11736356

Filing Date:

Date Referred: 05/02/2007

I hereby acknowledge that the Department of Defense reviewers has inspected this application in administration of 35 USC 181 on befalf of the Agencies/Commands specified below. DoD reviewers will not divulge any information from this application for any purpose other than administration of 35 USC 181.

Defense Agency	Recommendation	Reviewer Name	Date Reviewed
Army	Secrecy Not Recommended	Alan Klein	09/04/2007
Air Force	Secrecy Not Recommended	Richard Lambert	10/10/2007
AFRL/VA		J.B. Schroeder	
Navy	Secrecy Not Recommended	Lawana Brady	08/24/2007

Type of Recommendations:	SNR: Secrecy Not Recommended
•	SR: Secrecy Recommended
	NC: No Comment

#### **Instructions to Reviewers:**

- 1. All DoD personnel reviewering this application will be listed on this form regardless of whether they are making a secrecy order recommendation.
- 2. This form will be forwarded to USPTO once all assigned DoD entities have provided their secrecy order recommendation.

#### Time for Completion of Review:

Pursuant to 35 USC 184, the subject matter of this application may be filed in a foreign country for the purposed of filing a patent application without a license anytime after the expriation of six (6) months from filing date unless the application becomes the subject of a secrecy order.

The USPTO publishes patent application at 18 months from the earliest claimed filing date. The USPTO will delay the publication of a patent application made available to a defense agency under 35 USC 181 until no earlier than 6 months from the filing date or 90 days from the date of referral to that agency. This application will be cleared for publication 6 months from the filing date or 90 days from the above Date Referred, whichever is later, unless a response is is provided to the USPTO regarding the necessary recommendations as to the imposition of a secrecy order.

DoD Completion of Review: Final

Forwarded to USPTO: 10/11/2007 By: Luis Marrero

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address: COMMISSIONER FOR PATENTS P.O. Box 1450 Alexandria, Virginia 22313-1450 www.uspto.gov

APPLICATION NUMBER FILING OR 371(c) DATE FIRST NAMED APPLICANT ATTY. DOCKET NO./TITLE
---------------------------------------------------------------------------------------

11/736,356 04/17/2007 Jed Margolin

**CONFIRMATION NO. 3649** 

23497 JED MARGOLIN 1981 EMPIRE ROAD RENO, NV89521-7430

Title: System and Method For Safely Flying Unmanned Aerial Vehicles in Civilian Airspace

Publication No. US-2008-0033604-A1

Publication Date: 02/07/2008

#### NOTICE OF PUBLICATION OF APPLICATION

The above-identified application will be electronically published as a patent application publication pursuant to 37 CFR 1.211, et seq. The patent application publication number and publication date are set forth above.

The publication may be accessed through the USPTO's publically available Searchable Databases via the Internet at www.uspto.gov. The direct link to access the publication is currently http://www.uspto.gov/patft/.

The publication process established by the Office does not provide for mailing a copy of the publication to applicant. A copy of the publication may be obtained from the Office upon payment of the appropriate fee set forth in 37 CFR 1.19(a)(1). Orders for copies of patent application publications are handled by the USPTO's Office of Public Records. The Office of Public Records can be reached by telephone at (703) 308-9726 or (800) 972-6382, by facsimile at (703) 305-8759, by mail addressed to the United States Patent and Trademark Office, Office of Public Records, Alexandria, VA 22313-1450 or via the Internet.

In addition, information on the status of the application, including the mailing date of Office actions and the dates of receipt of correspondence filed in the Office, may also be accessed via the Internet through the Patent Electronic Business Center at www.uspto.gov using the public side of the Patent Application Information and Retrieval (PAIR) system. The direct link to access this status information is currently http://pair.uspto.gov/. Prior to publication, such status information is confidential and may only be obtained by applicant using the private side of PAIR.

Further assistance in electronically accessing the publication, or about PAIR, is available by calling the Patent Electronic Business Center at 1-866-217-9197.

Pre-Grant Publication Division, 703-605-4283	

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address: COMMISSIONER FOR PATENTS P.O. Box 1450 Alexandria, Viginia 22313-1450 www.uspto.gov

APPLICATION NUMBER	FILING OR 371(c) DATE	FIRST NAMED APPLICANT	ATTY. DOCKET NO./TITLE
--------------------	-----------------------	-----------------------	------------------------

11/736,356 04/17/2007 Jed Margolin

**CONFIRMATION NO. 3649** 

23497 JED MARGOLIN 1981 EMPIRE ROAD RENO, NV89521-7430

Date Mailed. 10/25/2007

#### NOTICE OF NEW OR REVISED PROJECTED PUBLICATION DATE

The above-identified application has a new or revised projected publication date. The current projected publication date for this application is 01/31/2008. If this is a new projected publication date (there was no previous projected publication date), the application has been cleared by Licensing & Review or a secrecy order has been rescinded and the application is now in the publication queue.

If this is a revised projected publication date (one that is different from a previously communicated projected publication date), the publication date has been revised due to processing delays in the USPTO or the abandonment and subsequent revival of an application. The application is anticipated to be published on a date that is more than six weeks different from the originally-projected publication date.

More detailed publication information is available through the private side of Patent Application Information Retrieval (PAIR) System. The direct link to access PAIR is currently http://pair.uspto.gov. Further assistance in electronically accessing the publication, or about PAIR, is available by calling the Patent Electronic Business Center at 1-866-217-9197.

Questions relating to this Notice should be directed to the Office of Patent Publication at 1-888-786-0101.

PART 1 - ATTORNEY/APPLICANT COPY



#### United States Patent and Trademark Office

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address: COMMISSIONER FOR PATENTS PO. Box 1450 Alexandria, Vriginia 22313-1450 www.uspto.gov

APPLICATION NUMBER	FILING or 371(c) DATE	GRP ART UNIT	FIL FEE REC'D	ATTY.DOCKET.NO	TOT CLAIMS	IND CLAIMS
11/736.356	04/17/2007	3644	525		14	4

**CONFIRMATION NO. 3649** 

23497 JED MARGOLIN 1981 EMPIRE ROAD RENO, NV89521-7430 **FILING RECEIPT** 

Date Mailed: 05/07/2007

Receipt is acknowledged of this regular Patent Application. It will be considered in its order and you will be notified as to the results of the examination. Be sure to provide the U.S. APPLICATION NUMBER, FILING DATE, NAME OF APPLICANT, and TITLE OF INVENTION when inquiring about this application. Fees transmitted by check or draft are subject to collection. Please verify the accuracy of the data presented on this receipt. If an error is noted on this Filing Receipt, please mail to the Commissioner for Patents P.O. Box 1450 Alexandria Va 22313-1450. Please provide a copy of this Filing Receipt with the changes noted thereon. If you received a "Notice to File Missing Parts" for this application, please submit any corrections to this Filing Receipt with your reply to the Notice. When the USPTO processes the reply to the Notice, the USPTO will generate another Filing Receipt incorporating the requested corrections (if appropriate).

Applicant(s)

Jed Margolin, VC Highlands, NV;

Power of Attorney: None

Domestic Priority data as claimed by applicant

This appln claims benefit of 60/745,111 04/19/2006

Foreign Applications

If Required, Foreign Filing License Granted:

Projected Publication Date: To Be Determined - pending completion of Security Review

Non-Publication Request: No

Early Publication Request: No

** SMALL ENTITY **

Title

System and Method For Safely Flying Unmanned Aerial Vehicles in Civilian Airspace

**Preliminary Class** 

244

#### PROTECTING YOUR INVENTION OUTSIDE THE UNITED STATES

Since the rights granted by a U.S. patent extend only throughout the territory of the United States and have no effect in a foreign country, an inventor who wishes patent protection in another country must apply for a

patent in a specific country or in regional patent offices. Applicants may wish to consider the filing of an international application under the Patent Cooperation Treaty (PCT). An international (PCT) application generally has the same effect as a regular national patent application in each PCT-member country. The PCT process **simplifies** the filing of patent applications on the same invention in member countries, but **does not result** in a grant of "an international patent" and does not eliminate the need of applicants to file additional documents and fees in countries where patent protection is desired.

Almost every country has its own patent law, and a person desiring a patent in a particular country must make an application for patent in that country in accordance with its particular laws. Since the laws of many countries differ in various respects from the patent law of the United States, applicants are advised to seek guidance from specific foreign countries to ensure that patent rights are not lost prematurely.

Applicants also are advised that in the case of inventions made in the United States, the Director of the USPTO must issue a license before applicants can apply for a patent in a foreign country. The filing of a U.S. patent application serves as a request for a foreign filing license. The application's filing receipt contains further information and guidance as to the status of applicant's license for foreign filing.

Applicants may wish to consult the USPTO booklet, "General Information Concerning Patents" (specifically, the section entitled "Treaties and Foreign Patents") for more information on timeframes and deadlines for filing foreign patent applications. The guide is available either by contacting the USPTO Contact Center at 800-786-9199, or it can be viewed on the USPTO website at http://www.uspto.gov/web/offices/pac/doc/general/index.html.

For information on preventing theft of your intellectual property (patents, trademarks and copyrights), you may wish to consult the U.S. Government website, http://www.stopfakes.gov. Part of a Department of Commerce initiative, this website includes self-help "toolkits" giving innovators guidance on how to protect intellectual property in specific countries such as China, Korea and Mexico. For questions regarding patent enforcement issues, applicants may call the U.S. Government hotline at 1-866-999-HALT (1-866-999-4158).

## LICENSE FOR FOREIGN FILING UNDER Title 35, United States Code, Section 184 Title 37, Code of Federal Regulations, 5.11 & 5.15

#### **GRANTED**

The applicant has been granted a license under 35 U.S.C. 184, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" followed by a date appears on this form. Such licenses are issued in all applications where the conditions for issuance of a license have been met, regardless of whether or not a license may be required as set forth in 37 CFR 5.15. The scope and limitations of this license are set forth in 37 CFR 5.15(a) unless an earlier license has been issued under 37 CFR 5.15(b). The license is subject to revocation upon written notification. The date indicated is the effective date of the license, unless an earlier license of similar scope has been granted under 37 CFR 5.13 or 5.14.

This license is to be retained by the licensee and may be used at any time on or after the effective date thereof unless it is revoked. This license is automatically transferred to any related applications(s) filed under 37 CFR 1.53(d). This license is not retroactive.

The grant of a license does not in any way lessen the responsibility of a licensee for the security of the subject matter as imposed by any Government contract or the provisions of existing laws relating to espionage and the national security or the export of technical data. Licensees should apprise themselves of current regulations especially with respect to certain countries, of other agencies, particularly the Office of Defense Trade Controls, Department of State (with respect to Arms, Munitions and Implements of War (22 CFR 121-128)); the Bureau of Industry and Security, Department of Commerce (15 CFR parts 730-774); the Office of Foreign AssetsControl, Department of Treasury (31 CFR Parts 500+) and the Department of Energy.

#### **NOT GRANTED**

No license under 35 U.S.C. 184 has been granted at this time, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" DOES NOT appear on this form. Applicant may still petition for a license under 37 CFR 5.12, if a license is desired before the expiration of 6 months from the filing date of the application. If 6 months has lapsed from the filing date of this application and the licensee has not received any indication of a secrecy order under 35 U.S.C. 181, the licensee may foreign file the application pursuant to 37 CFR 5.15(b).

PTO/SB/05 (02-07)

Approved for use through 02/28/2007. OMB 0651-0032
U.S. Patent and Trademark Office. U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

#### UTILITY PATENT APPLICATION **TRANSMITTAL**

Attorney Docket No.	
First Inventor	Jed Margolin
Title	System and Method For Safely Flying Unmanned Aerial Vehicles in Civilian
Express Mail Label No.	Airspace

(Only for new nonprovisional applications under 37 CFR 1.53(b))	Express Mail Label No.					
APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents.	ADDRESS TO:  Commissioner for Patents P.O. Box 1450 Alexandria VA 22313-1450					
Fee Transmittal Form (e.g., PTO/SB/17)     (Submit an original and a duplicate for fee processing)	ACCOMPANYING APPLICATION PARTS					
2. X Applicant claims small entity status. See 37 CFR 1.27.	Assignment Papers (cover sheet & document(s))  Name of Assignee					
3. X Specification [Total Pages 21 ] Both the claims and abstract must start on a new page						
(For information on the preferred arrangement, see MPEP 608.01(a)) 4. \( \times \)  Drawing(s) (35 U.S.C. 113) [Total Sheets						
5. Oath or Declaration [Total Sheets2] a. X Newly executed (original or copy)	10. 37 CFR 3.73(b) Statement (when there is an assignee) Power of Attorney					
<ul> <li>b. A copy from a prior application (37 CFR 1.63(d))         (for continuation/divisional with Box 18 completed)         i. DELETION OF INVENTOR(S)</li> </ul>	11. English Translation Document (if applicable)					
Signed statement attached deleting inventor(s) name in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).	12. X Information Disclosure Statement (PTO/SB/08 or PTO-1449) Copies of foreign patent documents, publications, & other information					
6. Application Data Sheet. See 37 CFR 1.76	13. Preliminary Amendment					
7. CD-ROM or CD-R in duplicate, large table or Computer Program (Appendix) Landscape Table on CD	14. Return Receipt Postcard (MPEP 503) (Should be specifically itemized)					
8. Nucleotide and/or Amino Acid Sequence Submission (if applicable, items a. – c. are required)	15. Certified Copy of Priority Document(s) (if foreign priority is claimed)					
<ul><li>a. Computer Readable Form (CRF)</li><li>b. Specification Sequence Listing on:</li></ul>	16. Nonpublication Request under 35 U.S.C. 122(b)(2)(B)(i). Applicant must attach form PTO/SB/35 or equivalent.					
i. CD-ROM or CD-R (2 copies); or ii. Paper	17. Other:					
c. Statements verifying identity of above copies						
18. If a CONTINUING APPLICATION, check appropriate box, and suppoper specification following the title, or in an Application Data Sheet under 3						
Continuation Divisional Continua	tion-in-part (CIP) of prior application No.:					
Prior application information: Examiner	Art Unit:					
19. CORRESPONI	JENCE ADDRESS					
The address associated with Customer Number: 23497	OR Correspondence address below					
Name						
Address						
City State Country Telephone	Zip Code Email					
	Date 4-17 07					
Signature  Name (Print/Type)  Signature  Jed Margolin	Registration No.					
(Print/Type) Jed Margolin	(Attorney/Agent)					

This collection of information is required by 37 CFR 1.53(b). The information is required to obtain or retain a benefit by the public which is to file (and by the This collection of information is required by 37 CFR 1.53(b). The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

PTO/SB/01 (02-07)
Approved for use through 02/28/2007. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Attorney Docket

DECLARATION	FOR UTIL		Number							
DES	SIGN		First Named Inver	ntor Jed	l Margolin					
PATENT A	PPLICATIO	ON T	COMPLETE IF KNOWN							
(37 CF	R 1.63)		Application Numb	er						
X Declaration	Declara		Filing Date							
With Initial	Filing (	our or iding o	Art Unit							
Filing	Filing (37 CFR 1.16 (e)) required)				Examiner Name					
I hereby declare that:  Each inventor's residence, mailing address, and citizenship are as stated below next to their name.										
I believe the inventor(s) name	d below to be t	he original and first i				ed and for				
which a patent is sought on the	e invention ent	itiea:								
System and Method For Safely Flying Unmanned Aerial Vehicles in Civilian Airspace										
,		(Title of the	Invention)							
the specification of which										
X is attached hereto										
OR										
was filed on (MM/DD/Y	YYY)		as United State	ae Annlication	Number or PC	CT International				
Trace med on (mms 87)			] as officed State	-55 Application	Namber of FC	71 International				
Application Number		and was amended	on (MM/DD/YYY	Y)		(if applicable).				
I hereby state that I have revie amended by any amendment:			of the above identi	ified specificat	ion, including t	he claims, as				
I acknowledge the duty to di	-		rial to natantahilit	, as defined in	n 27 CED 1 5	6 including for				
continuation-in-part application and the national or PCT intern	ns, material inf	formation which bec	ame available bet	ween the filing						
I hereby claim foreign priority					eign applicatio	n(s) for patent.				
inventor's or plant breeder's ri	ights certificate	e(s), or 365(a) of any	y PCT internationa	al application v	which designat	ted at least one				
country other than the United application for patent, inventor	States of Ame	rica, listed below and eder's rights certifica	d have also identif ate(s), or any PCT	ied below, by international a	checking the tannlication hav	ox, any foreign				
before that of the application of			ito(o), or any r or	intomationare	application hav	ing a ming date				
Prior Foreign Application	0	Foreign Filing	Date F	riority		opy Attached?				
Number(s)	Country	(MM/DD/YY)	Not	Claimed	YES	NO				
				$\sqcup$						
				ᆷ						
Additional forcing and	nlication numb	are are listed an a si	Inniamantal mismit	u doto chest C	TO/SD/SSD ==	toobod barata				
Additional foreign ap	piication numb	era are nated on a st	appiementai priorit	y data sneet P	IOIODIUZB at	tached nereto.				

[Page 1 of 2]
This collection of information is required by 35 U.S.C. 115 and 37 CFR 1.63. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 21 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

PTO/SB/01 (02-07)
Approved for use through 02/28/2007. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

#### **DECLARATION** — Utility or Design Patent Application

correspondence to:	e address sociated with stomer Number:	23497		OR		Correspondence address below	
Name							
Address							
		<u></u>					
City			State			ZIP	
Country	Teleph	ione		Ema	ıil		
		WARNIN	NG:				
Petitioner/applicant is cautioned to avoid submitting personal information in documents filed in a patent application that may contribute to identity theft. Personal information such as social security numbers, bank account numbers, or credit card numbers (other than a check or credit card authorization form PTO-2038 submitted for payment purposes) is never required by the USPTO to support a petition or an application. If this type of personal information is included in documents submitted to the USPTO, petitioners/applicants should consider redacting such personal information from the documents before submitting them to the USPTO. Petitioner/applicant is advised that the record of a patent application is available to the public after publication of the application (unless a non-publication request in compliance with 37 CFR 1.213(a) is made in the application) or issuance of a patent. Furthermore, the record from an abandoned application may also be available to the public if the application is referenced in a published application or an issued patent (see 37 CFR 1.14). Checks and credit card authorization forms PTO-2038 submitted for payment purposes are not retained in the application file and therefore are not publicly available.  I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.							
NAME OF SOLE OR FIRST IN	VENTOR:	$\overline{\prod_{A_{p_i}}}$	etition has t	een filed for this	e unsian	ed inventor	
Given Name (first and middle [if	any])	<u> </u>	onion nac .	Family Name of			
Jed				Margoli	in		
Inventor's Signature  Jed May	golin					Date 4-17-07	
Residence: City	State		Country		Citizen	,	
VC Highlands	NV			USA		USA	
Mailing Address 1981 Empire Rd.							
City	State		Zip			Country	
Reno	NV			89521-7430 USA			
Additional inventors or a legal representative are being named on thesupplemental sheet(s) PTO/SB/02A or 02LR attached hereto.							

#### ABSTRACT OF THE DISCLOSURE

A system and method for safely flying an unmanned aerial vehicle (UAV), unmanned combat aerial vehicle (UCAV), or remotely piloted vehicle (RPV) in civilian airspace uses a remotely located pilot to control the aircraft using a synthetic vision system during at least selected phases of the flight such as during take-offs and landings.

UNITED STATES PATENT APPLICATION FOR PATENT FOR

SYSTEM AND METHOD FOR SAFELY FLYING UNMANNED AERIAL VEHICLES IN CIVILIAN AIRSPACE

**INVENTOR: JED MARGOLIN** 

### SYSTEM AND METHOD FOR SAFELY FLYING UNMANNED AERIAL VEHICLES IN CIVILIAN AIRSPACE

#### CROSS REFERENCES TO RELATED APPLICATIONS

[**001**] This application claims the benefit of U.S. Provisional Application No. 60/745,111 filed on April 19, 2006.

#### **BACKGROUND OF THE INVENTION - Field of Invention**

This invention relates to the field of remotely piloted vehicles (RPVs) and unmanned [002] aerial vehicles (UAVs). RPV is an older term for UAV. UCAV shall mean "Unmanned Combat Aerial Vehicle." UCAV is also sometimes defined as an "Uninhabited Combat Aerial Vehicle." UCAV is a UAV that is intended for use in combat. UAS means "Unmanned Aerial System." UCAS means "Unmanned Combat Air System." ROA means "Remotely Operated Aircraft." The characteristics all these vehicles have in common is that there is no human pilot onboard and although they may be operated autonomously they can also be controlled by a remotely located operator or pilot. The term UAV shall be used as a generic term for such vehicles. "Synthetic Vision" is the current term for three dimensional projected image data presented to the pilot or other observer. Another term for "Synthetic Vision" is "Synthetic Environment." An older term for "Synthetic Vision" is "Virtual Reality." The term "Augmented Reality" (AR) refers to a human/computer interaction in which synthetic, computer generated elements are mixed or juxtaposed with real world elements in such a way that the synthetic elements appear to be part of the real world. A common method used by Augmented Reality systems is to combine and overlay a synthetic vision system with the video from one or more video or infrared cameras. Augmented

Reality is also sometimes referred to as "Enhanced Vision." The term "Remote Pilot" shall mean the same as "Remote Operator." The term "Sense and Avoid" shall mean the same as "See and Avoid."

#### **BACKGROUND OF THE INVENTION – Prior Art**

[003] The use of Synthetic Vision in flying a UAV is taught by U.S. Patent 5,904,724 Method and apparatus for remotely piloting an aircraft issued May 18, 1999 to Margolin (the present Applicant) which is hereby incorporated by reference. From the Abstract:

A method and apparatus that allows a remote aircraft to be controlled by a remotely located pilot who is presented with a synthesized three-dimensional projected view representing the environment around the remote aircraft. According to one aspect of the invention, a remote aircraft transmits its three-dimensional position and orientation to a remote pilot station. The remote pilot station applies this information to a digital database containing a three dimensional description of the environment around the remote aircraft to present the remote pilot with a three dimensional projected view of this environment. The remote pilot reacts to this view and interacts with the pilot controls, whose signals are transmitted back to the remote aircraft. In addition, the system compensates for the communications delay between the remote aircraft and the remote pilot station by controlling the sensitivity of the pilot controls.

[004] The system by which an aircraft periodically transmits its identification, location, altitude, and bearing was taught by U.S. Patent 5,153,836 issued October 10, 1992 to Fraughton et al. and was materially adopted by the FAA as **Automatic Dependent Surveillance-Broadcast** (ADS-B). According the article **Gulf of Mexico Helo Ops Ready for ADS-B** in Aviation Week & Space Technology (02/26/2007, page 56):

By the end of 2010, FAA expects to have the ADS-B system tested and operationally acceptable for the NAS, with Houston Center providing services in the Gulf region. By 2013, all of the U.S. is scheduled to be covered with ground infrastructure.

#### **BACKGROUND OF THE INVENTION – Current Practice**

[005] The current practice in flying UAVs in civilian airspace is typified by the report Sensing Requirements for Unmanned Air Vehicles by AFRL's Air Vehicles Directorate, Control Sciences Division, Systems Development Branch, Wright-Patterson AFB OH, June 2004, which relies on computer-intelligence to use sensors to sense and avoid other aircraft.

[006] According to the presentation entitled Developing Sense & Avoid Requirements for Meeting an Equivalent Level of Safety given by Russ Wolfe, Technology IPT Lead, Access 5 Project at UVS Tech 2006 this had not changed as of January 18, 2006. Access 5 was a national project sponsored by NASA and Industry with participation by the FAA and DOD to introduce high altitude long endurance (HALE) remotely operated aircraft (ROA) to routine flights in the National Airspace System (NAS). Access 5 started in May 2004 but when NASA withdrew its support (and funding) the Industry members decided not to spend their own money and Access 5 was dissolved at the end of 2005.

[007] The presentation Integration into the National Airspace System (NAS) given by John Timmerman of the FAA's Air Traffic Organization (July 12, 2005) essentially says that under current UAS Operations in the NAS UAVs should not harm other aircraft or the public. (Page 3: "While ensuring 'no harm' to other NAS customers and public")

[008] The article **Zone Ready for Drone**, April 7, 2006, on the web site for the FAA's Air Traffic Organization Employees states that,

Since March 29, a temporary flight restriction ... has limited access to the airspace along almost 350 miles of the border, expanding an earlier TFR near Nogales. The restriction is in effect nightly from 6 p.m. to 9 a.m., although that time can be expanded by issuance of a Notice to Airmen. Aircraft wishing to fly in the TFR when it is active must receive authorization from air traffic control prior to entry. Once in, pilots are required to maintain two-way communication with ATC and transmit a discrete transponder code.

The reason for the TFR is to enable Predator UAVs to patrol the border. The article quotes Stephen Glowacki, a Systems Safety and Procedures specialist with the FAA's Air Traffic Organization as saying:

This is an extreme situation that has been presented to us," states Stephen Glowacki, a Systems Safety and Procedures specialist with the FAA's Air Traffic Organization, stressing the nation's security. "We have been working with U.S. Customs and Border Protection to try and answer this situation."

Inserting UASs into the National Airspace System is not a simple feat. According to Glowacki, the technology and certification that will permit unmanned aircraft to "see and avoid" other air traffic is still eight to ten years away. In the mean time, a carefully controlled environment is needed.

[009] The track record of current UAV systems shows two major problem areas:

<u>a.</u> The communications link between the UAV and the ground station is unreliable, even at short ranges.

A recent example is the December 2006 crash of Lockheed Martin's Polecat UAV. When it lost communications with the ground it deliberately crashed itself to avoid flying into civil airspace. (See the article **Lockheed's Polecat UCAV Demonstrator Crashes** in Aviation Week & Space Technology, 03/19/2007, page 44.)

**<u>b.</u>** Autonomous Mode is not always very smart.

On April 25, 2006 the Predator UAV being used by the U.S. Customs and Border Protection agency to patrol the border crashed in Nogales, AZ. According to the NTSB report (NTSB Identification CHI06MA121) when the remote pilot switched from one console to another the Predator was inadvertently commanded to shut off its fuel supply and "With no engine power, the UAV continued to descend below line-of-site communications and further attempts to re-establish contact with the UAV were not successful." In other words, the Predator crashed because the system did not warn the remote pilot he had turned off the fuel supply and it was not smart enough to turn its fuel supply back on. (Note that this is the same Predator discussed in the article **Zone Ready for Drone** previously mentioned.)

#### SUMMARY OF THE INVENTION

[010] It is important when flying a UAV in an airspace shared with other aircraft, both civilian and military, that collisions during all phases of flight (including taking off and landing) not happen. The current method for accomplishing this is to place restrictions on all other traffic in an air corridor representing the path of the intended flight of the UAV, thereby inconveniencing other traffic and disrupting the National Airspace System.

#### Synthetic Vision

[011] One objective of the present invention is to allow UAVs to safely share airspace with other users by using synthetic vision during at least some of the phases of the UAV's flight so that changes required to existing FAA rules and regulations are minimized.

- [012] This may be accomplished by requiring that during selected phases of the flight the UAV be flown by a remote pilot using a Synthetic Vision System such as the one taught by U.S. Patent 5,904,724 Method and apparatus for remotely piloting an aircraft. These selected phases include:
  - (a) When the UAV is within a selected range of an airport or other designated location and is below a first specified altitude. This first specified altitude may be set high enough that, for all practical purposes, it may be considered unlimited.
  - (b) When the UAV is outside the selected range of an airport or other designated location and is below a second specified altitude.
- [013] Each UAV flown under these conditions must be under the direct control of a remote pilot whose sole responsibility is the safe operation of that UAV. The rules will be similar to those for operating piloted aircraft with automatic pilot systems including those with autoland capability.
- [014] UAVs not flying in airspace where the use of a Synthetic Vision System is required may be flown autonomously using an Autonomous Control System (ACS) as long as the following conditions are met:
  - (a) A remote pilot monitors the operation of the UAV at all times.
  - (b) The ACS periodically transmits its identification, location, altitude, and bearing. This information may also be broadcast by UAVs when operated by remote pilots using Synthetic Vision.
- [015] All UAVs must use Radar (either active or passive) or other device to detect the range and altitude of nearby aircraft in order to perform "see and avoid" actions.
- [016] All UAVs must provide a means for Air Traffic Control (ATC) and the pilots of other aircraft to communicate directly with the remote pilot.
- [017] The preferred method for flying a UAV from one airport to another, such as in ferrying UAVs, would be to have the remote pilot at the originating airport be responsible for taking off and flying the UAV to the specified altitude. A remote pilot at the arrival airport would be

responsible for having the UAV descend and land. In between, once the UAV has reached the specified altitude and range the remote pilot monitoring the flight can be at any convenient location.

[018] Synthetic Vision may be enhanced by combining and/or overlaying it with the video from one or more video or infrared cameras or from synthetic aperture radar.

[019] The method described does not require material changes in the present air control system. It would also make UAV flights safer than most existing piloted flights where "see and avoid" is accomplished by looking out small windows providing a limited field of view and hoping you see any nearby aircraft in time to avoid a collision.

#### Communication Link Failures

[020] The exact cause of the failure of the communications link in the Polecat crash mentioned previously has not been made public. Technical details for UAVs are limited because the systems are developed by private industry which generally considers such information proprietary. In addition, these are mostly military programs which limits public disclosure even more. (Indeed, although the Polecat crash took place in December 2006, it was not publicly reported until March 2007.)

[021] One factor that may cause a communication link to fail is if it is a high-bandwidth link since a high-bandwidth link is more susceptible to interference from other signals than is a lower-bandwidth link. The use of a synthetic vision system allows a lower-bandwidth link to be used which improves its reliability

[022] Another factor that affects a digital communications link when digital packets are sent through a network (such as an Internet-style network) is that the latency of the data packets cannot be assured either because the path may change from packet to packet or because packets may be lost. When data packets are lost the destination server usually times out and a request to resend the packet is issued which further increases the latency. Packets may also be lost simply because the path to a server takes longer than the server's timeout period, causing the server to issue an unending series of requests to resend the packet. If a packet is lost, either outright or because the path is longer than the timeout period, transmission of data may stop entirely as most people who use the Internet have experienced.

- [023] Because each data packet may take a different path, data packets may be received out-of-order. Standard Internet browsers such as Firefox and Microsoft Internet Explorer know to reassemble the packets in the correct order. A custom software application, such as that used to control UAVs, must do likewise to avoid becoming confused as to what is happening when.
- [024] Some communications link failures may simply be due to the failure of the system to measure and adapt to the changing latency of the data packets. The importance of having the system measure and adapt to changing latencies is discussed in U.S. Patent 5,904,724 by the present inventor.

#### Minimizing Communications Link Failures

- [025] Communications Link Failures can be minimized by, first of all, properly designing the communications link to prevent the obvious types of failures described above.
- The next step is to provide redundant communications links. In addition to the standard types of communications links, an emergency backup communications link can use the standard commercial cell phone network as long as precautions are taken to keep hackers out. Casual hackers can be kept out by using Caller ID so if the UAV receives a call from an unauthorized number it answers the line and immediately hangs up. The reason this keeps out only casual hackers is because PBXs (Private Branch Exchanges) can be programmed to deliver any Caller ID number the PBX operator desires. Once the UAV User is authenticated the ACS hangs up and calls one or more preprogrammed telephone numbers to establish a link to be used for communications. Because of the time needed to establish this link it may be desirable to keep the emergency backup communications link on hot standby during takeoffs and landings. Keeping this link on hot standby during all phases of flight also provides a backup method for tracking the UAV by using the cell phone tower triangulation method. As with the standard communications links all data must be securely encrypted and the User must be periodically authenticated.

#### What to Do if the Communication Link Fails

[027] If even the emergency backup Communications Link fails there is no choice but to go to the Autonomous Control System (ACS). What ACS does depends on the flight profile of the UAV.

- <u>a.</u> If the UAV is on the runway on takeoff roll and is below V1 (the maximum abort speed of the aircraft) the takeoff is aborted.
- **<u>b.</u>** If the UAV is between V1 and V2 (the minimum takeoff safety speed for the aircraft) the choice is nominally between aborting the takeoff (and overrunning the runway) and taking off. If all other UAV systems are operating properly, taking off is probably the better choice since it may be possible to re-establish the communications link once the UAV is in the air. However, if the UAV is equipped with a tailhook and the runway is equipped with arresting cables a suitable distance before the physical end of the runway, the UAV takeoff may still be safely aborted. The hook and arresting cable method is the standard method used on aircraft carriers for landing aircraft.
- **c.** If the UAV is above V2 the UAV takes off and uses the takeoff profile that is assigned to each particular airport. It then climbs to an altitude high enough to avoid other traffic and, unless the communication link can be firmly established, flies to the nearest airport designated to receive UAVs in distress. Only in extreme cases should the ACS fly the UAV to a designated crash site.

#### Autonomous Mode is not always very smart or even bug-free

As noted in the case of the Predator previously mentioned, it crashed because the system did not warn the remote pilot he had turned off the fuel supply and it was not smart enough to turn its fuel supply back on. This may have been a design oversight or it may have been a software bug. Complex computer programs always have bugs no matter how brilliant or motivated the programmer(s). Treating every software error as a mistake to be punished only leads to paralysis so that no code gets written. After a good faith effort is made to "get it right" the systems must be thoroughly tested. And they must be tested on the ground.

#### **Testing**

[029] Complex systems are difficult to test, especially when one of its parts is a flying machine which, itself, is made up of several systems. Simulation of the individual subsystems is not good enough. A simulation of the entire system is also not good enough because, despite the best efforts, a simulation might not completely characterize the actual hardware and how the different hardware systems act together. The answer is to use Hardware-in-the-Loop simulation where the actual hardware is used with simulated inputs. A good description of Hardware-in-the-Loop simulation can be found in the article **Hardware-in-the-Loop Simulation** by Martin Gomez in Embedded Systems Design (November 30, 2001). The example Mr. Gomez used was an autopilot.

[030] The Ground Station is already on the ground so the proper place to start is with an actual ground station. The simplest configuration is to use an actual ground station with a simulation port connected directly to a computer that simulates the UAV. (See Figure 3). That probably isn't good enough because it only really tests the ground station. The next step is to use a ground station with an actual communication link. (See Figure 4.) This tests the ground station and the communications link.

[031] Since the idea is to test the UAV without actually flying it, the idea of Hardware-inthe-Loop testing is to use as much of the UAVs hardware as possible by using a computer to read the system's output control signals and present the proper sensor input signals. In between is a simulation of the physical model of how the UAV interacts with the physical universe. The UAV lives in an analog universe where space and time are continuously variable, subject only to the Planck Distance and Planck Time. (The Planck length is the scale at which classical ideas about gravity and space-time cease to be valid, and quantum effects dominate. This is the 'quantum of length', the smallest measurement of length with any meaning, roughly equal to  $1.6 \times 10^{-35}$  m. The Planck time is the time it would take a photon traveling at the speed of light to cross a distance equal to the Planck length. This is the 'quantum of time', the smallest measurement of time that has any meaning, and is equal to  $10^{-43}$  seconds.) The UAV's universe is also massively parallel, which is why simulating it with a single computer which is forced to perform different functions sequentially may not always produce accurate results. This can be ameliorated somewhat by oversampling and running the model faster than that required by Nyquist. (The Nyquist rate is the minimum; you don't have to settle for the minimum.)

[032] Ideally each sensor input and each actuator output should have its own processor and all the processors should be linked to a computer that contains the overall physical model of the UAV's universe (the Universe Processor). For example, the Universe Processor knows the location of the UAV, its attitude, its bearing, the air temperature and pressure, local weather, terrain, etc. This assumes that the sensors and actuators are completely characterized. If they are not, then the physical sensors and actuators can be used with devices that provide the proper physical stimulation to the sensors and measure the actual physical results of the actuators. The desired end result is that each device in the UAV flight hardware, especially if it contains software such as the Flight Control Computer, can be operated with its actual hardware and software. When the hardware or software is changed, the old device can be unplugged and the new version installed. This avoids the problem of relying on software that has been ported to hardware other than the hardware it runs on in the flight UAV. For example, the "C" programming language can be difficult to port to different computers because the definition of a "byte" in "C" can be different depending on the computer. Also note that the speed of the link connecting the sensors/actuators to the Universe Processor is determined by the speed of the fastest sensor/actuator, which also sets the minimum update rate of the Universe Processor.

[033] The type of operating system(s) used in simulation and testing is important. In particular, with a non-deterministic Operating System (such as Windows) you cannot count on getting the same result every time because the operating system includes random timing components. From the article "Basic concepts of real-time operating systems" by David Kalinsky (Nov. 18, 2003):

The key difference between general-computing operating systems and real-time operating systems is the need for "deterministic" timing behavior in the real-time operating systems. Formally, "deterministic" timing means that operating system services consume only known and expected amounts of time. In theory, these service times could be expressed as mathematical formulas. These formulas must be strictly algebraic and not include any random timing components. Random elements in service times could cause random delays in application software and could then make the application randomly miss real-time deadlines – a scenario clearly unacceptable for a real-time embedded system.

General-computing non-real-time operating systems are often quite non-deterministic. Their services can inject random delays into application software and thus cause slow responsiveness of an application at unexpected times. If you ask the developer of a non-real-time operating system for the algebraic formula describing the timing behavior of one of its services (such as sending a message from task to task), you will invariably not get an algebraic formula. Instead the developer of the non-real-time operating system (such as Windows, Unix or Linux) will just

give you a puzzled look. Deterministic timing behavior was simply not a design goal for these general-computing operating systems.

This means you may not be able to duplicate a failure. If you cannot duplicate a failure you cannot fix it. And, needless to say, the use of a non-deterministic Operating System in any part of the UAV flight hardware will result in a system that can never be completely trusted.

[034] Failure to do proper ground-based simulation can lead to expensive and/or embarrassing incidents such as this one reported by Aviation Week & Space Technology (02/26/2007, page 18):

The F-22 continues to encounter bumps in its first air expeditionary force deployment to Okinawa. The 12 aircraft from Langley AFB, Va., spent an unscheduled week at Hickam AFB, Hawaii, after the leading four had to abort the trip's last leg. As the Raptors reached the International Date Line, the navigation computers locked up so the aircraft returned to Hickam until a software patch was readied. "Apparently we had built an aircraft for the Western Hemisphere only," says a senior U.S. Air Force official. When the F-22s arrived at Kadena AB, Okinawa, some Japanese citizens held a protest against the aircraft's noise.

Although the F-22 is not a UAV the principle is the same.

[035] Testbeds can be used for more than just verifying that the system works as designed. They can also be used to verify that the system is designed properly for the User.

[036] In military programs, operational procedures can be developed and military personnel can be ordered to follow them. And they will follow them to the best of their ability because their careers are on the line. That doesn't change the fact that people operating poorly designed systems are more likely to make mistakes.

[037] Producing UAVs for the commercial market requires a different mindset. Civilians cannot be ordered to use a system whose design makes mistakes likely or maybe even inevitable. Civilians have the option to not buy the product if they don't like it. They also have the option to sue the manufacturer of a system whose design makes mistakes inevitable. Civilians injured on the ground also have the option to sue the manufacturer of a system whose design makes mistakes inevitable.

- [038] Perhaps the UAV Industry can learn from the Video Game Industry where the standard practice is to hold focus groups early in the game's development using real video game players. Game Designers may not like the players' comments about their game but the players represent the game's ultimate customers. In addition, the video game companies employ people whose sole job is to extensively play the game before it is released and take careful notes of bugs, which are then passed on to the Game Developers. Although it is tempting to cut short the time devoted to testing in order to get the product out the door, a game released with too many bugs will be rejected by the marketplace and will fail.
- [039] UAV manufacturers making UAV systems for the Government are protected from liability under the Supreme Court's 1988 decision in *Boyle v. United Technologies Corp*, 487 U.S. 500 (1988), where the Court held that if a manufacturer made a product in compliance with the government's design and production requirements, but it was defective and caused injury, the victim could not sue the manufacturer.
- [040] Since UAV manufacturers making UAV systems for the civilian market do not have this protection they should consider who their customers really are. Although civilian UAV systems will probably be operated by civilian-rated pilots (at least initially), in a sense the UAV manufacturers are really designing their systems to meet the requirements of the Insurance Industry and doing proper on-ground testing is essential in making UAVs that will fly safely in civilian airspace. Military UAVs should meet the same standard because the crash of a military UAV that injures or kills civilians could ignite a political firestorm that would ground the entire UAV fleet.

### The Reasons For Using Synthetic Vision during at least Takeoffs and Landings

- [041] There are several reasons why the use of synthetic vision during at least takeoffs and landings can minimize the risk to the public.
- <u>a.</u> The ACS must be programmed to deal with every possible problem in every possible situation that might arise. This is probably not possible until computers become sentient.

Even after 100 years of aviation, pilots still encounter situations and problems that have not been seen before. The way they deal with new situations and problems is to use their experience, judgment, and even intuition. Pilots have been remarkably successful in saving passengers and crew

under extremely difficult conditions such as when parts of their aircraft fall off (the top of the fuselage peels off) or multiply-redundant critical controls fail (no rudder control). Computers cannot be programmed to display judgment. They can only be programmed to display judgment-like behavior under conditions that have already been anticipated. UAVs should not be allowed to fly over people's houses until they are at least smart enough to turn on their own fuel supply.

Even so, this assumes the computer program has no bugs.

**<u>b.</u>** Complex computer programs always have bugs no matter how brilliant or motivated the programmer(s). As an example, look at almost every computer program ever written.

(See the article **Embedded Experts: Fix Code Bugs Or Cost Lives** by Rick Merritt in EE Times, April 10, 2006, as well as the article **Entries from the Software Failure Hall of Shame, Part 1** by Tom Rhinelander in **g2zero**, July 6, 2006. g2zero at *www.g2zero.com* is a community dedicated to discussing and advocating ways to improve software quality.)

While adding a sense-and-avoid capability to existing UAV systems is necessary it will increase the code complexity and increase the number of bugs in the software.

**c.** An Unmmaned Combat Aerial Vehicle (UCAV) will have little chance against one flown by an experienced pilot using Synthetic Vision until Artificial Intelligence produces a sentient, conscious Being. At that point, all bets will be off because a superior sentient artificial Being may decide that war is stupid and refuse to participate. It may also decide that humans are obsolete or fit only to be its slaves.

### Acceptable Risk

- [042] Since it is impossible to anticipate every possible problem that might arise and it is impossible to write completely bug-free code it comes down to what is an acceptable risk.
- [043] When a military aircraft is engaged in a military operation, a great deal of risk may be acceptable, especially if it is on a critical mission.

It is unacceptable to expose civilian aircraft flying in civil airspace, as well as the public on the ground, to this same level of risk except under truly exceptional circumstances.

[044] Synthetic Vision puts a human directly in the loop and makes flying a UAV in civilian airspace at least as safe as flying an aircraft with the pilot onboard.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

[045] The invention may best be understood by referring to the following description and accompanying drawings which illustrate the invention. In the drawings:

[046] FIG. 1 is a general illustration showing a circular area of Range 102 around Airport 101.

[047] FIG. 2 is a general illustration showing the airspace around Airport 101 where UAVs must be flown by a remote pilot using synthetic vision. This airspace is represented by the hatched areas.

[048] FIG. 3 shows the simplest system for simulating the UAV system where an actual ground station is connected directly to a simulation computer that simulates the UAV.

[049] FIG. 4 shows a system for simulating the UAV system that includes an actual communications link.

### **DETAILED DESCRIPTION**

[050] In the following description, numerous specific details are set forth to provide a thorough understanding of the invention. However, it is understood that the invention may be practiced without these specific details. In other instances well-known circuits, structures, and techniques have not been shown in detail in order not to obscure the invention.

Figure 1 shows a Distance Range 102 around Airport 101. While a circular area is shown for convenience any area whose shape can be defined may be used such as a square, rectangle, or other polygon. While Figure 1 shows the area around an airport any other designated location may be specified. Figure 2 shows an altitude profile of the airspace surrounding Airport 101. When the UAV is within Distance Range 102 of Airport 101 at an altitude below Selected Altitude 201 the UAV must be flown by a remote pilot using a Synthetic Vision System such as the one taught by U.S. Patent 5,904,724 **Method and apparatus for remotely piloting an aircraft.** When the UAV is outside Distance Range 102, within Distance Range 203, and is below Selected

Altitude 202 the UAV must also be flown by a remote pilot using a Synthetic Vision System. The airspace where the UAV must be flown by a remote pilot using a Synthetic Vision System is represented by the hatched areas in Figure 2.

- [052] Each UAV flown under these conditions must be under the direct control of a remote pilot whose sole responsibility is the safe operation of that UAV. The rules will be similar to those for operating piloted aircraft with automatic pilot systems including those with autoland capability.
- [053] UAVs flying beyond Distance Range 102, within Distance Range 203, and above Altitude 202 may be flown autonomously using an Autonomous Control System (ACS) as long as the following conditions are met:
  - (a) A remote pilot must monitor the operation of the UAV at all times. A remote pilot may monitor several UAVs simultaneously once it is established that this practice may be safely performed by a single pilot. For example, it may be preferable to have two remote pilots work as a team to monitor ten UAVS than to have each remote pilot separately monitor a group of five UAVs.
  - (b) The ACS must periodically transmit its identification, location, altitude, and bearing. This may be done through the use of a speech synthesis system on a standard aircraft communications frequency. This is for the benefit of pilots flying aircraft sharing the airspace. It may also be done through an appropriate digital system such as the one taught in U.S. Patent 5,153,836 Universal dynamic navigation, surveillance, emergency location, and collision avoidance system and method adopted by the FAA as ADS-B. This information may also be broadcast by UAVs when operated by remote pilots using Synthetic Vision.
- [054] All UAVs must use radar (either active or passive) to detect the range and altitude of nearby aircraft in order to perform "see and avoid" actions. An example of a passive radar system is taught by U. S. Patent 5,187,485 Passive ranging through global positioning system. Other devices for detecting the range and altitude of nearby aircraft may also be used.

[055] All UAVs must provide a means for Air Traffic Control (ATC) and the pilots of other aircraft to communicate directly with the remote pilot. This may be accomplished by having the communication link between the remote pilot and the UAV relay communications with a standard aircraft transceiver onboard the UAV.

[056] Distance Range 203 extends to where it meets the area covered by another designated location such as another airport. The entire area covered by Distance Range 203 is termed a Designated Area. Another type of Designated Area is a large body of open water where the minimum safe altitude is determined by the height of a large ship riding the crest of a large wave.

[057] The preferred method for flying a UAV from one airport to another, such as in ferrying UAVs, would be to have the remote pilot at the originating airport be responsible for taking off and flying the UAV to the specified altitude. A remote pilot at the arrival airport would be responsible for having the UAV descend and land. This is similar to the longstanding practice of using Harbor Pilots to direct the movement of ships into and out of ports. In between the originating airport and destination airport, once the UAV has reached the specified altitude and range the remote pilot monitoring the flight can be at any convenient location.

[058] Long delays in the communications link (such as through geosynchronous satellites) make flying the UAV by direct control using synthetic vision more difficult and should be avoided.

[059] The method described does not require material changes in the present air control system. It would also make UAV flights safer than most existing piloted flights where "see and avoid" is accomplished by looking out small windows providing a limited field of view and hoping you see any nearby aircraft in time to avoid a collision.

[060] While preferred embodiments of the present invention have been shown, it is to be expressly understood that modifications and changes may be made thereto.

### **CLAIMS**

### What is claimed is:

- 1. A system for safely flying an unmanned aerial vehicle in civilian airspace comprising:
  - (a) a ground station equipped with a synthetic vision system;
  - (b) an unmanned aerial vehicle capable of supporting said synthetic vision system;
  - (c) a remote pilot operating said ground station;
  - (d) a communications link between said unmanned aerial vehicle and said ground station;
  - (e) a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot;

whereas said remote pilot uses said synthetic vision system to control said unmanned aerial vehicle during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system.

- 2. The system of claim 1 whereby said selected phases of the flight of said unmanned aerial vehicle comprise:
  - (a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;
  - (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.
- 3. The system of claim 1 further comprising a system onboard said unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and bearing of said unmanned aerial vehicle.
- 4. The system of claim 1 further comprising a system onboard said unmanned aerial vehicle for providing a communications channel for Air Traffic Control and the pilots of other aircraft to communicate directly with said remote pilot.

- 5. A system for safely flying an unmanned aerial vehicle in civilian airspace comprising:
  - (a) a ground station equipped with a synthetic vision system;
  - (b) an unmanned aerial vehicle capable of supporting said synthetic vision system;
  - (c) a remote pilot operating said ground station;
  - (d) a communications link between said unmanned aerial vehicle and said ground station;
  - (e) a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot;

whereas said remote pilot uses said synthetic vision system to control said unmanned aerial vehicle during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle said unmanned aerial vehicle is flown using an autonomous control system, and

whereas the selected phases of the flight of said unmanned aerial vehicle comprise:

- (a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;
- (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.
- 6. The system of claim 5 further comprising a system onboard said unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and bearing of said unmanned aerial vehicle.
- 7. The system of claim 5 further comprising a system onboard said unmanned aerial vehicle for providing a communications channel for Air Traffic Control and the pilots of other aircraft to communicate directly with said remote pilot.

- 8. A method for safely flying an unmanned aerial vehicle as part of a unmanned aerial system equipped with a synthetic vision system in civilian airspace comprising the steps of:
  - (a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle an autonomous control system is used to fly said unmanned aerial vehicle;
  - (b) providing a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot.
- 9. The method of claim 8 whereby said selected phases of the flight of said unmanned aerial vehicle comprise:
  - (a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;
  - (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.
- 10. The method of claim 8 further comprising the step of providing a system onboard said unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and bearing of said unmanned aerial vehicle.
- 11. The method of claim 8 further comprising the step of providing a system onboard said unmanned aerial vehicle for providing a communications channel for Air Traffic Control and the pilots of other aircraft to communicate directly with said remote pilot.

- 12. A method for safely flying an unmanned aerial vehicle as part of a unmanned aerial system equipped with a synthetic vision system in civilian airspace comprising the steps of:
  - (a) using a remote pilot to fly said unmanned aerial vehicle using synthetic vision during at least selected phases of the flight of said unmanned aerial vehicle, and during those phases of the flight of said unmanned aerial vehicle when said synthetic vision system is not used to control said unmanned aerial vehicle an autonomous control system is used to fly said unmanned aerial vehicle;
  - (b) providing a system onboard said unmanned aerial vehicle for detecting the presence and position of nearby aircraft and communicating this information to said remote pilot;

whereas said selected phases of the flight of said unmanned aerial vehicle comprise:

- (a) when said unmanned aerial vehicle is within a selected range of an airport or other designated location and is below a first specified altitude;
- (b) when said unmanned aerial vehicle is outside said selected range of an airport or other designated location and is below a second specified altitude.
- 13. The method of claim 12 further comprising the step of providing a system onboard said unmanned aerial vehicle for periodically transmitting the identification, location, altitude, and bearing of said unmanned aerial vehicle.
- 14. The method of claim 12 further comprising the step of providing a system onboard said unmanned aerial vehicle for providing a communications channel for Air Traffic Control and the pilots of other aircraft to communicate directly with said remote pilot.

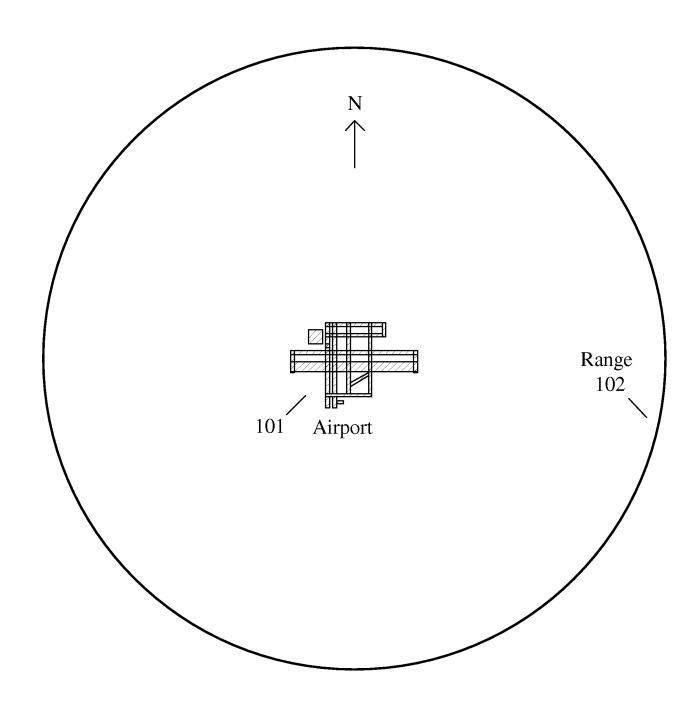


Fig. 1



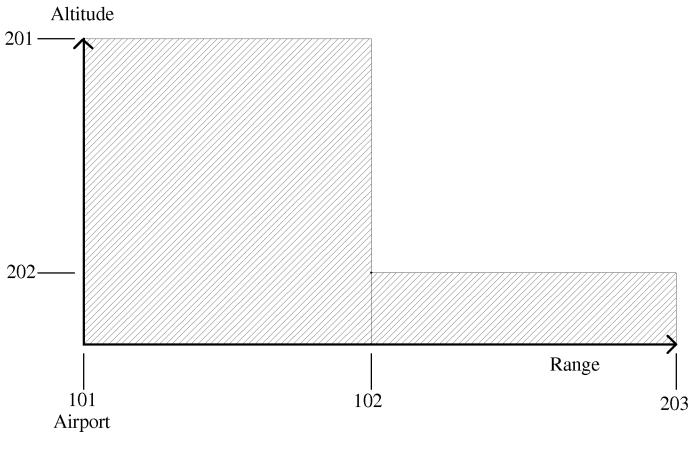


Fig. 2

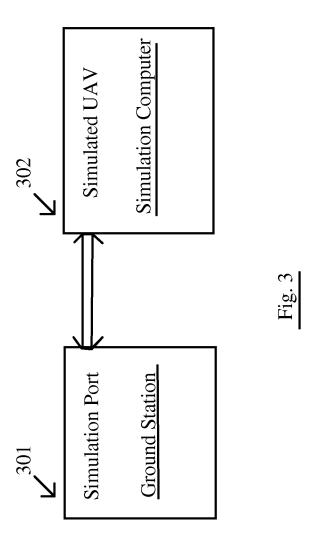

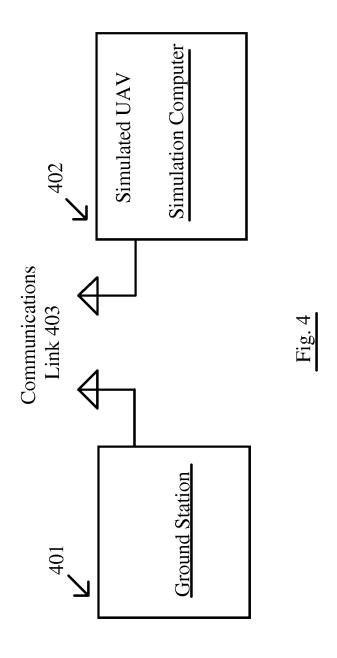

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Sub	ostitute for form 1449A/PTO			Complete if Known			
				Application Number			
IN	NFORMATION DISC	CLC	SURE	Filing Date			
	TATEMENT BY AP			First Named Inventor	Jed Margolin		
Ŭ	THE THE THE TENT	_		Art Unit			
	(Use as many sheets as nec	essary	)	Examiner Name			
Sheet	1	of	3	Attorney Docket Number			

			U.S. PATENT	DOCUMENTS	
Examiner Initials*	Cite No. ¹	Document Number Number-Kind Code ^{2 (f known)}	Publication Date MM-DD-YYYY	Name of Patentee or Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear
		^{US-} 5,153,836	10-06-1992	Fraughton, et al.	
		^{US-} 5,187,485	02-16-1993	Tsui, et al.	
		^{US-} 5,904,724	05-18-1999	Margolin	THE MAN THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PR
		^{US-} Publication Number 20060174221	08-03-2006	Kinsella, et al.	Paragraphs 0018, 0019, and 0042
		US-			
	İ	US-			
		US-			
		US-			
***************************************	**********	US-			

	FOREIGN PATENT DOCUMENTS											
Examiner Initials*	Cite No.1			Name of Patentee or Applicant of Cited Document	Pages, Columns, Lines, nt Where Relevant Passages							
IIIIIIII	110.	Country Code ³ Number ⁴ Kind Code ⁵ ( <i>if known</i> )	WIWI-DE-TTTT	Applicant of Oilea Document	or Relevant Figures Appear	<u> </u>						
			***************************************		***************************************							
				***************************************								
	***********			***************************************	***************************************							

Examiner	Date	
Signature	Considered	

*EXAMINER: Initial if reference considered, whether or not citation is in conformance with MPEP 609. Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant. 1 Applicant's unique citation designation number (optional). 2 See Kinds Codes of USPTO Patent Documents at <a href="https://www.ussto.gov">www.ussto.gov</a> or MPEP 901.04. 3 Enter Office that issued the document, by the two-letter code (WIPO Standard ST.3). 4 For Japanese patent documents, the indication of the year of the reign of the Emperor must precede the serial number of the patent document. 5 Kind of document by the appropriate symbols as indicated on the document under WIPO Standard ST.16 if possible. 6 Applicant is to place a check mark here if English language Translation is attached.

This collection of information is required by 37 CFR 1.97 and 1.98. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 2 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

	Substitute for	form 1449B/PTO			And Control of the Control	Complete if Known
	INFOF	RMATION DI	SCLO	SURE	Application Number Filing Date	
	STATI	EMENT BY A	<b>APPLI</b>	CANT	First Named Inventor	Jed Margolin
ł					Art Unit	
	(	(Use as many sheets as	necessary	)	Examiner Name	
abla	Sheet	2	of	3	Attorney Docket Number	

		NON PATENT LITERATURE DOCUMENTS	
Examiner Initials*	Cite No. ¹	Include name of the author (in CAPITAL LETTERS), title of the article (when appropriate), title of the item (book, magazine, journal, serial, symposium, catalog, etc.), date, page(s), volume-issue number(s), publisher, city and/or country where published.	T ²
		Sensing Requirements for Unmanned Air Vehicles, AFRL's Air Vehicles Directorate, Control Sciences Division, Systems Development Branch, Wright-Patterson AFB OH, June 2004, www.afrlhorizons.com/Briefs/Jun04/VA0306.html	
		Presentation: <b>Developing Sense &amp; Avoid Requirements for Meeting an Equivalent Level of Safety</b> given by RUSS WOLFE, Technology IPT Lead, Access 5 Project at UVS Tech 2006. (January 18, 2006)	
		Presentation: Integration into the National Airspace System (NAS) given by JOHN TIMMERMAN of the FAA's Air Traffic Organization (July 12, 2005)	
		Zone Ready for Drone, April 7, 2006 on the web site for the FAA's Air Traffic Organization Employees, www.ato.faa.gov/DesktopDefault.aspx?tabindex=4&tabid=17&itemid=937∣=103	
		Virtual Cockpit WIndow for a Windowless Aerospacecraft NASA Tech Brief, January 2003 page 40. www.nasatech.com/Briefs/Jan03/MSC23096.html	
		Press Release from Rapid Imaging Software, Inc. www.landform.com/pages/PressReleases.htm "On December 13th, 2001, Astronaut Ken Ham successfully flew the X-38 from a remote cockpit "	

Examiner	Date	
Signature	Considered	

^{*}EXAMINER: Initial if reference considered, whether or not citation is in conformance with MPEP 609. Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

¹ Applicant's unique citation designation number (optional). 2 Applicant is to place a check mark here if English language Translation is attached. This collection of information is required by 37 CFR 1.97 and 1.98. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 2 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Substitute for	form 1449B/PTO			Complete if Known			
	RMATION DI			Application Number Filing Date First Named Inventor	Jed Margolin		
	(Use as many sheets as	necessary	)	Art Unit Examiner Name	-		
Sheet	3	of	3	Attorney Docket Number			

		NON PATENT LITERATURE DOCUMENTS	
Examiner Initials*	Cite No.1	Include name of the author (in CAPITAL LETTERS), title of the article (when appropriate), title of the item (book, magazine, journal, serial, symposium, catalog, etc.), date, page(s), volume-issue number(s), publisher, city and/or country where published.	T ²
		Article: Flying UAVs in Civil Airspace By Using Synthetic Vision JED MARGOLIN, www.jmargolin.com/todo/uavs.htm	
		NTSB Incident Report on crash of Predator on April 25, 2006, northwest of Nogales, NM.  NTSB Identification CHI06MA121	
		Lockheed's Polecat UCAV Demonstrator Crashes Aviation Week & Space Technology, AMY BUTLER, 03/19/2007, page 44	
		The F-22 Continues to Encounter Aviation Week & Space Technology, 02/26/2007, page 18	
		Gulf of Mexico Helo Ops Ready for ADS-B Aviation Week & Space Technology, FRANCES FIORINO, 02/26/2007, page 56	
		Embedded Experts: Fix code bugs or cost lives, RICK MERIT, EE Times, 04/10/2006 www.eetimes.com/showArticle.jhtml?articleID-184429901	
		Entries from the Software Failure Hall of Shame, Part 1, TOM RHINELANDER, July 06, 2006, www.g2zero.com/2006/07/notable_entries_from_the_softw_1.html	
		Hardware-in-the-Loop Simulation, MARTIN GOMEZ, Embedded Systems Design, 11/30/01, www.embedded.com/shoArticle.jhtml?articleID=15201692	
		Supreme Court Decision, Boyle v. United Technologies Corp., 487 U.S. 500 (1988)	
	<u> </u>	Basic Concepts of real-time operating systems, DAVID KALINSKY (Nov. 18, 2003) http://linuxdevices.com/articles/AT4627965573.html	

Examiner	Date	
Signature	Considered	

^{*}EXAMINER: Initial if reference considered, whether or not citation is in conformance with MPEP 609. Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

¹ Applicant's unique citation designation number (optional). 2 Applicant is to place a check mark here if English language Translation is attached. This collection of information is required by 37 CFR 1.97 and 1.98. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 2 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

### Sensing Requirements for Unmanned Air Vehicles

Engineers develop requirements and metrics to ensure integration of future autonomous unmanned aircraft into manned airspace.

### AFRL's Air Vehicles Directorate, Control Sciences Division, Systems Development Branch, Wright-Patterson AFB OH

Engineers from the Air Vehicles Directorate transferred unmanned air vehicle (UAV) sensing system requirements for airspace operations to civilian UAV users and developers. These requirements represent design goals on which to base future sensing subsystem designs, filling an omission in UAV technology planning. Directorate engineers are continuing to develop the technologies that will enable future UAVs to coexist with manned aircraft in both military and civilian airspace. Incorporating these requirements will ensure that engineers design future UAVs to detect possible conflicts, such as midair collisions or runway incursions, and take action to avoid them.

Present UAVs cannot detect manned aircraft and conflict situations and, therefore, they cannot share airspace with manned aircraft. To overcome this obstacle, UAVs need to sense the presence of other aircraft in their operating environment (see figure on next page). In other words, UAVs need to at least replicate a human pilot's ability to see and avoid problems before they will be accepted into the national air space (NAS). Since some aircraft do not have air traffic transponders, UAVs must use onboard sensors to detect aircraft and coordinate that information with available transponder information. With this level of capability, UAVs and operators will have the situational awareness of the airspace around the vehicle to ensure safety at the same level as manned aircraft.

With this goal in mind, directorate engineers worked with Northrop Grumman Corporation (NGC) engineers to establish, iterate, and finalize sensing system performance requirements for the broad range of future Air Force missions. During this collaborative process, directorate engineers noted that many mission elements were similar to civilian airspace operations tasks, and that the requirements they were developing were directly applicable to civilian UAV technology. They also found no report that defined and expressed these requirements for nonmilitary use. To help fill this void, directorate engineers coordinated their research results with the American Institute for Aeronautics and Astronautics UAV airspace operations' focal point, North Atlantic Treaty Organization's Standards Committees, the National Aeronautics and Space Administration, and industry organizations working the same topics from the civilian side. Incorporation of the directorate's technology into civilian requirements' definitions and standards will directly impact airspace operations' sensing systems for current and future UAVs.

The coordinated effort of directorate and NGC engineers that resulted in the sensing system requirements represents the first stage of work on the Autonomous Flight Control Sensing Technology (AFCST) program. This program's long-term goal is to develop the upfront portion of the UAV virtual pilot capability. During this first phase, NGC engineers analyzed midair and near-midair collision data, along with runway incursion data, to generate lessons learned. Then, the NGC engineers combined the lessons learned from aircraft mishap data with sensing performance specifications and good engineering judgment to establish conventions for operating aircraft in the NAS. Next, they examined

airspace tasks for operation in NAS and grouped them into deconfliction, collision avoidance, autonomous landing, and ground operations. The UAV functional requirements resulting from this effort are shown in the table.

As shown in the table, the threshold values represent the nearterm requirements (year 2007), while objective values are far-term requirements (year 2013). Engineers consider the forward vision threshold values equivalent to or slightly better than human performance. Federal Aviation Administration data indicates the dominant cause for midair collision is when an aircraft is overtaken by a faster aircraft because a pilot's position in the cockpit limits rear visibility. In the UAV, rear visibility is not restricted because designers can locate sensors anywhere on the aircraft. Objective values contain UAV rear vision capability to improve safety in this scenario.

Directorate and NGC engineers are currently working on the second phase of AFCST—the preliminary design of the sensor hardware architecture. The AFCST design strategy for all UAV situational awareness functions is to minimize hardware and software quantity and maximize use of multifunction sensors and common image processing software components. Most of the design efforts are completed satisfactorily. NGC engineers are continuing detailed sensor reliability analyses, capturing the individual and combined effects of sensor field-of-view coverage, sensor failure rates, and exposure rates.

During the final stage of the AFCST program, engineers will run simulations emphasizing landing and collision avoidance-tasks with demanding sensing and processing requirements. The engineers will develop landing and see-and-avoid strategies of operation as well as a detailed software architecture design. The simulations should determine if the preferred electrooptic/ infrared and radar sensors meet the specifications identified in the first phase of the AFCST program and the number of false alarms and false negatives that will be encountered. The engineers will also compare various image-processing solutions to determine the most reliable. The ideal system design will be free of nuisance faults caused by system error and will include software designed to minimize such faults. Reliability analysis studies will eventually combine software reliabilities with hardware reliabilities to meet the overall UAV system reliability.

In the near future, directorate and NGC engineers plan to publish the results of the detailed sensor reliability analysis. Program managers are also planning a follow-on hardware-in-the-loop simulation effort to address and demonstrate the integrated system design. In this realistic simulation, engineers will study concepts such as the integration of AFCST sensors with instrument flight rules avionics for see-and-avoid maneuvers, landing, and automated traffic collision avoidance. Real-time simulation will stress the detailed sensor architecture design, allowing the engineers to assess its adequacy and determine its readiness for technology transition to flight test. These efforts will ensure the safe incorporation of UAVs into the NAS.

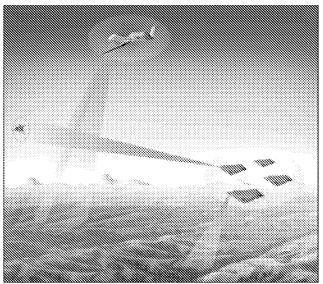


Figure. UAV senses presence of other aircraft

unctional Requirements	Threshold Values	Objective Values		
Field of View	Azimuth: 60° Elevation: 30°	4 π steradians		
Field of Regard	Azimuth: +/-100` Elevation: +30', -90`	4 π steradians		
Ranging	0.5 ft CEP*@ 100 ft 700 ft CEP*@ 6 nm	0.25 ft CEP*@ 100 ft 770 ft CEP*@ 13.2 nm		
lmaging	Varies from 30 ft to 3 nm	Varies from 30 lt to 13.2 nm 60 Hz		
Data Rate	30 Hz			
Weather Capability	Visual Meteorological Capability	Visual and Instrument Meteorological Capability		
Criticality	Safety Critical	Safety Critical		
Emission Constraints	Various Federal Aviation Administration Limitations	Various Federal Avlation Administration Limitations		

Table. Near- and far-term UAV sensing requirement

Mr. Tom Molnar and Mr. Bruce Clough, of the Air Force Research Laborator y's Air Vehicles Directorate, and Mr. Won-Zon Chen, of Northrop Grumman Corporation, wrote this article. For more information contact TECH CONNECT at (800) 203-6451 or place a request at <a href="http://www.afrl.af.mil/techconn/index.htm">http://www.afrl.af.mil/techconn/index.htm</a>. Reference document VA-03-06

DISTRIBUTION A
PUBLIC RELEASE
HOME | ABOUT AFRL | CONTACT US | DISCLAIMER
The information within this website is hosted by ABP International

### Developing Sense & Avoid Requirements for Meeting an Equivalent Level of Safety


UVS Tech 2006 Salon-de-Provence, France 17-19 January 2006

Presenter: Russell Wolfe
Access 5 Technology IPT Lead
Modern Technology Solutions, Inc











### **UAS Collision Avoidance Initiatives** NASA Dryden Flight Research Center



**ERAST**: 1993 - 2003


- Sensor Requirements
- Sensor Concept Development
- Flight Test Demonstrations
- Cooperative
- E0/IR
- Radar







- Requirements Development
- Safety Analysis
- Simulation Tools
- Flight Test Demonstrations
- Standards Development

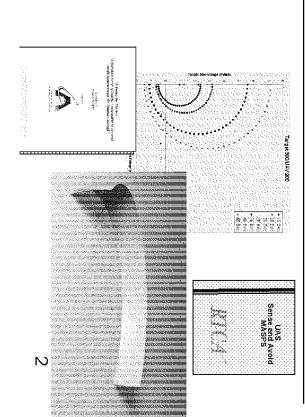




### Collision Avoidance Work Package **ACCESS 5**

### Work Package Objectives:

- Define Equivalent Level of Safety (ELOS) for Sense and Avoid.
- Develop collision avoidance (CA) requirements for Unmanned Aircraft Systems (UAS); validated through analysis, simulation, and flight demonstration.
- Provide inputs to the FAA and RTCA Special Committee 203 "Unmanned Aircraft Systems"

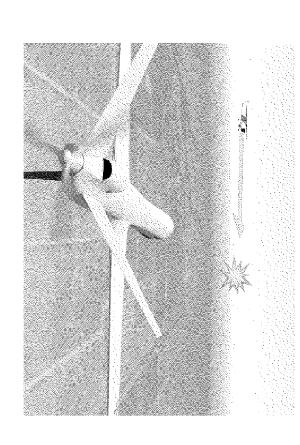

### Team Members:

- NASA Dryden & Langley
- Northrop Grumman
- Lockheed Martin (Ft. Worth)
- MITRE

- Modern Technology Solutions
- Aurora Flight Sciences
- Federal Aviation Administration



## ACCESS 5 Collision Avoidance Work Package 5 Major Task Areas


- <u>CA Task 1</u>: Define ELOS for See & Avoid



<u>CA Task 2:</u>
 Develop CA Requirements




CA Task 3: Perform CA Safety Analysis



<u>CA Task 4:</u> **Develop CA Simulation Tool** 




<u>CA Task 5:</u>
 Perform CA Flight Test





## Collision Avoidance Work Package


Task Relationships

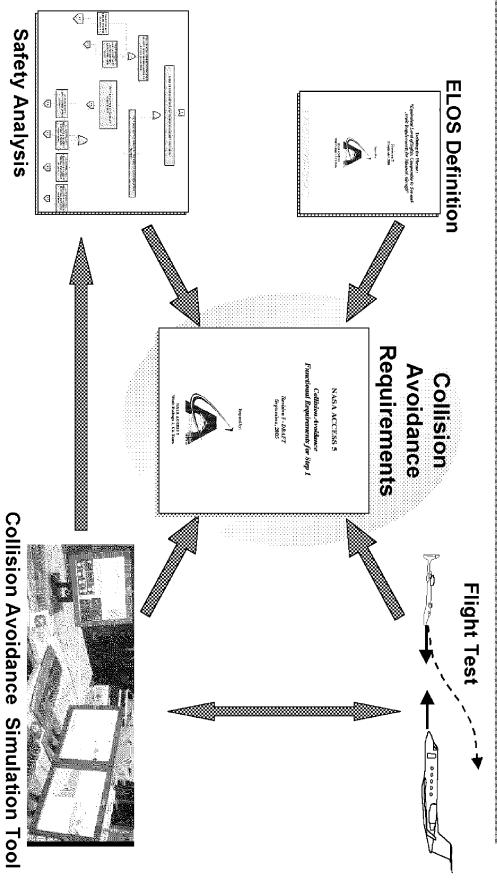




## Task 1: ELOS Definition Document


- Objective: To present a recommended approach for defining an equivalent level of safety, as it pertains to see and avoid
- <u>Deliverable Content:</u>
- Current regulatory / operational environment
- 14 CFR 91.113(b), Right of Way Rules
- 14 CFR 91.111, Operating near other aircraft
- Basis for having to meet an Equivalent Level of
- 14 CFR 21.21(b), Certification Procedures
  FAA Order 8110.4C, Equivalent Level of Safety Findings
- Potential Approaches & Methodologies for defining ELOS
- 1) Statistical Approach
- 2) Performance / Rule Based Approach
- Recommended Definition and Measures of Performance for Sense and Avoid ELOS
- Status: Delivered to FAA on 23 Nov 2004

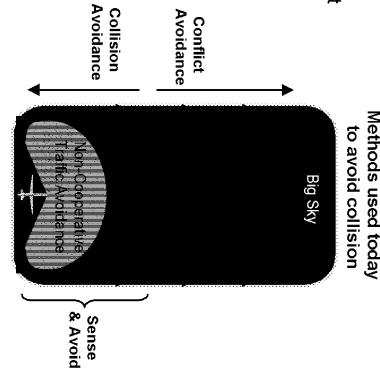




### Task 1: ELOS Definition Document Definition and Measures of Performance

- avoid collisions." conflicting traffic and the ability to take the appropriate action necessary to capability to provide situational awareness with adequate time to detect <u>Definition</u>: "Equivalent level of safety to manned aircraft see-and-avoid" is the
- Measures of Performance:

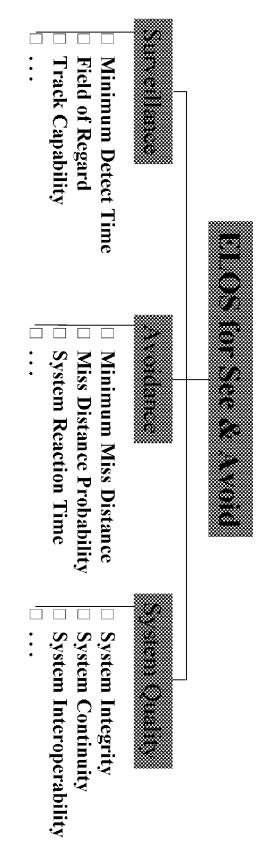




# Task 2: Develop Collision Avoidance Reqmts

- performance requirements for HALE UAS. <u>Objective</u>: To develop the collision avoidance operational, functional, and
- Deliverable Content:
- Notional CA Subsystem Description
- Subsystem Architecture
- Interfaces
- Operational Requirements
- Functional Analysis
- List of Collision Avoidance Functions
- Functional Flow Block Diagram
- Functional Requirements
- Performance Requirements
- Design Guidelines
- Performance Trade-offs
- Verification Method (Analysis, Inspection, Simulation/Modeling, Demo, Test)
- Status: Intend to release Revision 6.0 in February 2006 (All previous revisions have included FAA input and review)





# Task 2: Develop Collision Avoidance Reqmts Collision Avoidance Functions

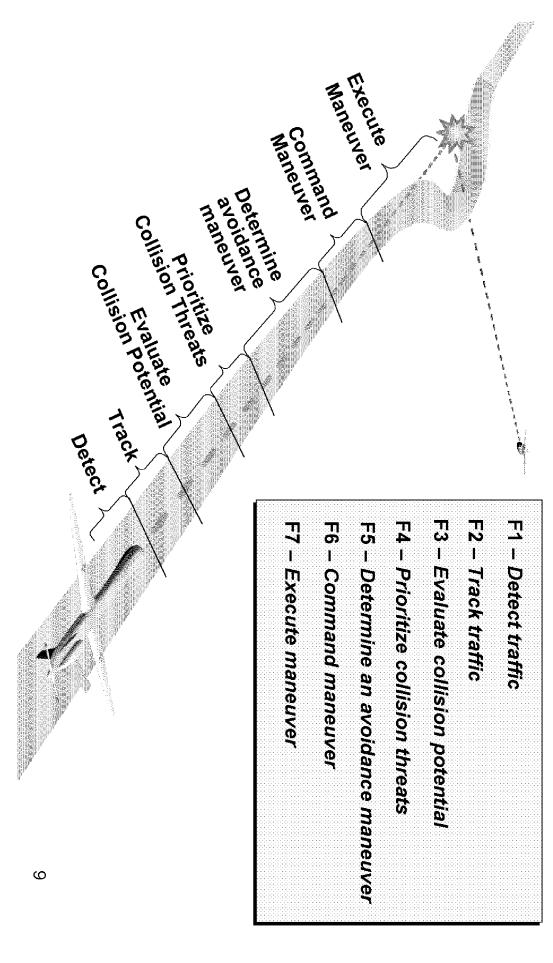



### Task 2: Develop Collision Avoidance Reqmts Functional Flow Block Diagram

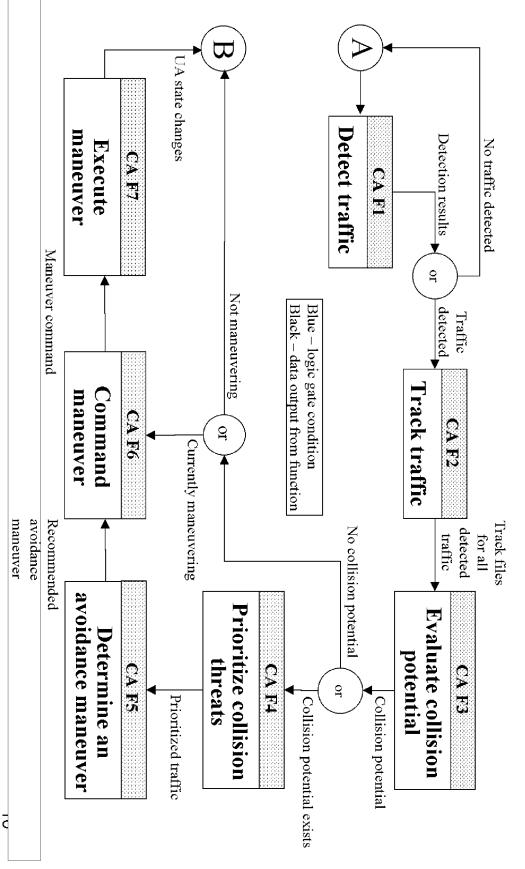



# Task 2: Develop Collision Avoidance Reqmts

Function 1: Detect Traffic Requirements (Example)

# Detect Traffic - The UAS shall detect traffic within its surveillance volume.

- F1.1: Minimum Detect Time The CAS shall detect traffic with sufficient time remaining for successful performance of all required collision avoidance functions
- F1.2: Detection Range The CAS shall detect cooperative traffic at a range of at least xx nautical miles. (see Table F1.2)
- azimuth FOR of at least +/-110° referenced from the flight path of the UA F1.3: Azimuth Field of Regard - The CAS shall detect cooperative traffic within an
- elevation FOR of at least +/-15° referenced from the flight path of the UA. F1.4: Elevation Field of Regard - The CAS shall detect cooperative traffic within an
- volume at a rate that supports the track probability guideline (see F2.3). F1.5: Detection Probability - The CAS shall detect cooperative traffic in the surveillance
- F1.6: Detection Rate The average CAS detection rate shall be equal to or greater than xx hertz. (see Table F1.6)
- F1.7: Detection Accuracy The CAS shall detect cooperative traffic with an accuracy of TBD ft for range determinations, and TBD ft for altitude determinations
- all detected traffic F1.8: False Detection/Nuisance - False detections shall account for less than TBD% of



## Task 3: Perform Safety Analysis

- avoidance for UAS Objective: To develop a method for evaluating the safety of collision
- Establish equivalent level of safety to manned aircraft using event/fault trees and logic risk ratios P(collision UAS)

Risk Ratio =  $\frac{1}{P(\text{collision manned AC})} \le 1$ 

### Accomplishments:


- Developed visual acquisition model based on Lincoln Lab's SEE1 model
- Developed surveillance error models for GPS/ADS-B
- for the primary event tree probabilities Performed multiple assessments using results from the CA simulation tool
- Supported requirements development in the areas of Surveillance Maneuver times, etc. Effectiveness, Detection Accuracies, Detection times, Reaction times
- Status: Currently finalizing final report and lessons learned




## Task 3: Perform Safety Analysis

Generic Event/Fault Tree for Collision Probability Estimation


provide a consistent basis for comparison: Generic Event/Fault Tree established to

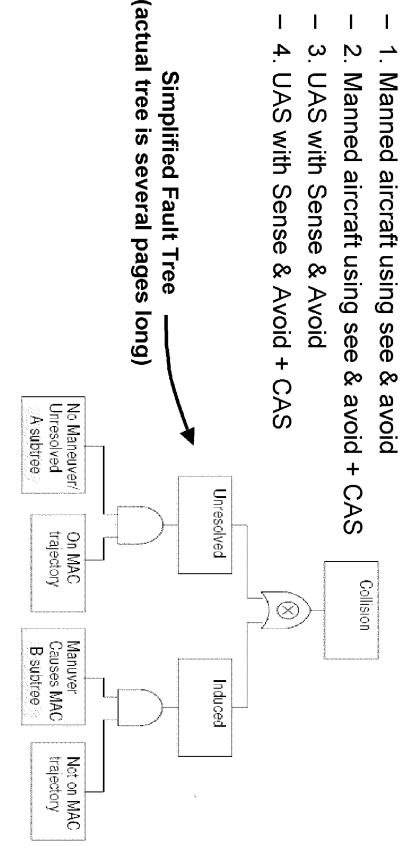





# Task 4: Develop CA Simulation Tool

- via Simulation as well as support the CA Flight Test activities Objective: To assess the validity of the proposed CA Functional Requirements
- Allows characterization of:
- Ownship Vehicle Dynamics
- CA Equipment and Software
- **Encounter Scenarios**
- Accomplishments:
- Duplicated Tech Demo Scenarios
- Flight Test Risk Reduction
- Improve Probability of Obtaining Useful Data
- Validated Against the System Integration Lab (SIL)
- Flight Test Risk Reduction
- CCA Component Models
- Sensitivity Analyses performed
- Status: Currently analyzing flight test data and validating the CA simulation tool.

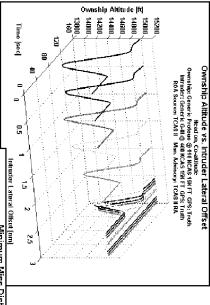






## Task 4: Develop CA Simulation Tool






- MATLAB™/Simulink® Simulation Environment
- Multi-Vehicle Simulation (4 Aircraft Max)
- Generic Aircraft Models Represent Any Fixed Wing Aircraft
- Each Aircraft = 1 Parameter File
- Scripts Trim & Initialize Aircraft to Any Encounter Geometry
- Modular Components
- Blocks Can be Copied and/or Swapped Out for Software Upgrades (e.g. CA Sensors, Maneuver Advisory)
- Capable of Batch Runs for Parametric Variation Studies
- Uses Microsoft Excel Input Dataset
- Multiple Plot Outputs Available
- PC Portable (< 37 MB)</li>
- Can Run in Both Fast Sim-Time & Soft Real-Time



## Task 5: Perform CA Flight Test

 Objective: To collect cooperative collision avoidance data to validate the CA simulation tool

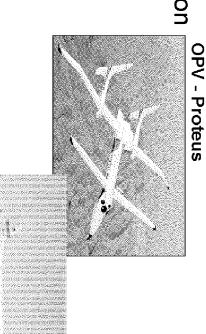

### <u>Accomplishments:</u>

- Developed Interface Control Document
- Developed System Integration Lab (SIL)
- Developed CA algorithms
- Developed CA software and human interface tool
- Intruder Gulfstream III
- Procured CA sensors and integrated them onto Proteus platform
- Developed CA scenarios and test cards
- Post-processed flight data and prepared for data analysis effort
- Status: Successfully completed over 50 collision scenarios during the last two weeks of September 2005



## Task 5: Perform CA Flight Test

### Test Scenarios

			6 -500 180 0	0 180		°°°°°°°°°°°°°°°°°°°°°°°°°°°°°°°°°°°°°°		3 0 0 500	<u> </u>	2 0 10 0	1 0 0 0	Rate (degrees) (fpm)	Scenario Climb All Climb	
	Commission of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of th	/	÷	decontroncidatelijk dijenome	<b>}</b>	rumamamamamamamamamamamamamamamamamamama	at 1 (B) to be completely that the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the control of the c	escondige.	Antonio Comerciano de Caracteria de Caracteria de Caracteria de Caracteria de Caracteria de Caracteria de Cara El Caracteria de Caracteria de Caracteria de Caracteria de Caracteria de Caracteria de Caracteria de Caracteria	designan	$\label{eq:continuous} \text{ or more } \{j\}$		PICTORIAL	ons consequences sections have necessarines non root conferences sections in the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the conference of the con
Link Delay 0 0 0 0 2 0 2	4 2 0 4 0	TGC & AGA TRT	Configuration		<ul> <li>Head-on, descending</li> </ul>	<ul> <li>Head-on, co-altitude</li> </ul>	<ul> <li>Abeam, co-altitude</li> </ul>	<ul> <li>Co heading, Intruder climbing</li> </ul>	<ul> <li>Low aspect, co-altitude</li> </ul>	<ul> <li>Co heading, Intruder overtaking</li> </ul>	collision geometries:	<ul> <li>l'est scenarios included multiple</li> </ul>	H	

- collision geometries: Test scenarios included multiple
- Co heading, Intruder overtaking
- Low aspect, co-altitude
- Co heading, Intruder climbing
- Abeam, co-altitude
- Head-on, co-altitude
- Head-on, descending


					C	Configuration	ration		
				TG	GC & AGA	3A		TR	T
(Commented comments)		Buffer	6	4	2	0	4	0	0
		Link Delay	0	0	0	0	2	0	2
	Scenario								
<ol> <li>Co-Heading, Co-Alt, Intruder Overtaking</li> </ol>	o-Alt, Intruder	Overtaking				1		2	
2. Low Aspect, Co-Alt	o-Alt					1		2	
3. Co-Heading, Intruder Climbing	ıtruder Climbin	3				1		2	
4. Abeam, Co-Alt			1	1	1	2	1	1	1
5. Head-On, Co-Alt	A It		1	1	1	2	1	1	1
6. Head-On, Descending	cending		1	1	_	2	1		



# Next Steps

- Analysis and Flight Test Activities Document the results and lessons learned from the Safety
- Complete validating the CA Simulation tool
- Derive practical values/ranges for the TBDs in the performance requirements
- Utilize the validated CA Simulation tool
- Utilize the safety analysis results
- Begin Non-cooperative Collision Avoidance Activities
- Derive unique Non-cooperative performance requirements
- Perform Trade Studies and Concept Assessments
- Conduct Non-cooperative Simulation Runs and Flight Demos
- Support RTCA SC-203 on developing the Sense & Avoid Minimum Aviation System Performance Standards (MASPS)

# QUESTIONS?

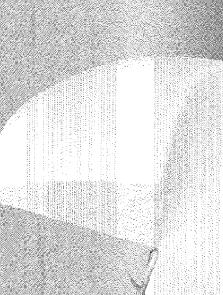



Russell Wolfe Modern Technology Solutions, Inc. Russell.C.Wolfe @mtsi-va.com (703) 212-8870 x126 **April 7 –** The desolate landscape of the southwestern U.S. border with Mexico is widely known for illegal and unseen nocturnal activity. Now, the Department of Homeland Security is keeping watch from restricted airspace between 14,000 and 16,000 feet that extends from Organ Pipe Cactus National Monument in Arizona to New Mexico's Potrillo Mountains. Their unprecedented vantage point is the result of close cooperation with the FAA and the controllers who will keep the sky clear for a remote roving eye.

Since March 29, a temporary flight restriction (view the pdf) has limited access to the airspace along almost 350 miles of the border, expanding an earlier TFR near Nogales. The restriction is in effect nightly from 6 p.m. to 9 a.m., although that time can be expanded by issuance of a Notice to Airmen. Aircraft wishing to fly in the TFR when it is active must receive authorization from air traffic control prior to entry. Once in, pilots are required to maintain two-way communication with ATC and transmit a discrete transponder code.

Though not stated outright in the NOTAM that created the restriction, the reason behind the TFR is no secret. For some time both the White House and the Department of Homeland Security have advocated the use of unmanned aerial systems to increase the Secure Border Initiative's surveillance capability. The TFR makes it possible to fit the operation of those UASs into airspace traditionally occupied by manned military and civilian aircraft.



Predator-B, UAS. Photo: General Atomics Aeronautical Systems

"This is an extreme situation that has been presented to us," states Stephen Glowacki, a Systems Safety and Procedures specialist with the FAA's Air Traffic Organization, stressing the nation's security. "We have been working with U.S. Customs and Border Protection to try and answer this situation."

Inserting UASs into the National Airspace System is not a simple feat. According to Glowacki, the technology and certification that will permit unmanned aircraft to "see and avoid" other air traffic is still eight to ten years away. In the mean time, a carefully controlled environment is needed.

Until the advent of this TFR and its smaller forerunner, border surveillance using UASs was limited to airspace in restricted military areas. Tests conducted there helped develop the procedures now being used to safely conduct flights within the TFRs in New Mexico and Arizona.

Keeping a Homeland Security UAS separated from manned aircraft not participating in its mission requires positive control of aircraft movement within the restricted airspace. In the weeks leading up to the original TFR's issuance, ATC personnel at Albuquerque ARTCC and Tucson ATCT were briefed on procedures for handling UAS operations in airspace that includes non-participating aircraft. IFR control standards are applied and no change in separation minima is involved.

Controllers maintain communication with all manned aircraft operating in the TFR, while simultaneously monitoring the path of the UAS and talking to its ground-based pilot. The controllers' focus is on keeping non-participating aircraft away from the UAS, which flies under an IFR clearance within the TFR boundaries. Should the need arise to temporarily re-direct the UAS, the directions are delivered through secure communication with its pilot.

Although the TFR's Notice to Airmen states that ATC may provide flight advisories concerning UAS operation in the TFR, doing so is neither desired nor expected to be necessary. Only aircraft with ATC permission are allowed to enter the TFR, making it possible to control non-participating aircraft in ways

that eliminate the need for such an advisory.

The TFR was not created without opposition. Even though the impact of its presence is expected to be minimal, the Aircraft Owners and Pilots Association feels that long-term operations are inappropriate for temporary restrictions. The TFR is in effect until Feb. 28, 2007. At the local level, airport management at Nogales International Airport reported a drop in business after the first, smaller TFR was created in January. However, because the restrictions are at an altitude well above that flown by aircraft using the airport, pilots may have been avoiding the area out of fear based on misunderstanding the restriction's boundaries.

ATO's Glowacki points out that the TFR was designed to cause the least amount of impact to pilots. The restricted airspace is relatively narrow vertically and is active primarily at night. Aircraft that operate at night are required to have all the equipment needed to communicate with ATC and transmit a discrete beacon code. All that is required for a pilot to enter the airspace, beyond that equipment, is permission from ATC. By flying above or below the restricted altitudes, pilots don't have to worry about what's going on in the TFR.

"It has been an amazing and ingenious way of temporarily resolving an incredible situation," Glowacki says. "Airspace studies and known aviation operations were reviewed and balanced against national security needs."

Now the challenge is to ensure safety while a relatively new technology is introduced to the NAS. Long-term TFRs like those along the southern border allow DHS time to carefully plan missions, without interruption or unexpected changes to the rules that govern them. However, fine tuning may be needed as the program continues. TFRs are flexible enough to be changed quickly based on anything new that is learned, unlike more rigid airspace restrictions such as Air Defense Identification Zones.

As Glowacki says, "the TFR is the best tool to fit the situation."

### **Related Information:**

• Temporary Flight Restriction (PDF)

http://www.ato.faa.gov

Close Window




Rapid Flow Modeling with...

# "Virtual Cockpit Window" for a Windowless Aerospacecraft

A software system processes navigational and sensory information in real time to generate a three-dimensional-appearing image of the external environment for viewing by crewmembers of a windowless aerospacecraft. The design of the particular aerospacecraft (the X-38) is such that the addition of a real transparent cockpit window to the airframe would have resulted in unacceptably large increases in weight and cost.

When exerting manual control, an aircrew needs to see terrain, obstructions, and other features around the aircraft in order to land safely. The X-38 is capable of automated landing, but even when this capability is utilized, the crew still needs to view the external environment: From the very beginning of the United States space program, crews have expressed profound dislike for windowless vehicles. The well-being of an aircrew is considerably promoted by a three-dimensional view of terrain and obstructions. The present software system was developed to satisfy the need for such a view. In conjunction with a computer and display equipment that weigh less than would a real transparent window, this software system thus provides a "virtual cockpit window."

The key problem in the development of this software system was to create a realistic three-dimensional perspective view that is updated in real time. The problem was solved by building upon a pre-existing commercial program — LandForm C3 — that combines the speed of flight-simulator software with the power of geographic-information-system software to generate real-time, three-dimensional-appearing displays of terrain and other features of flight environments. In the development of the present software, the pre-existing program was modified to enable it to utilize real-time information on the position and attitude of the aerospacecraft to generate a view of the external world as it would appear to a person looking out through a window in the aerospacecraft. The development included innovations in realistic horizon-limit modeling, three-dimensional stereographic display, and interfaces for utilization of data from inertial-navigation devices, Global Positioning System receivers, and laser rangefinders. Map and satellite imagery from the

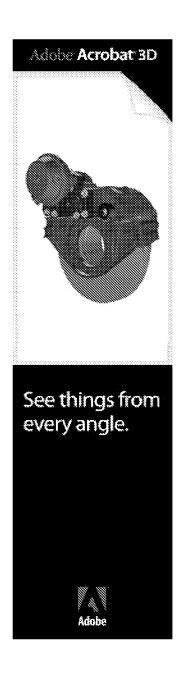

National Imagery and Mapping Agency can also be incorporated into displays.

After further development, the present software system and the associated display equipment would be capable of providing a data-enriched view: In addition to terrain and obstacles as they would be seen through a cockpit window, the view could include flight paths, landing zones, aircraft in the vicinity, and unobstructed views of portions of the terrain that might otherwise be hidden from view. Hence, the system could also contribute to safety of flight and landing at night or under conditions of poor visibility.

In recent tests, so precise was the software modeling that during the initial phases of the flight the software running on a monitor beside the video camera produced nearly identical views.

This work was done by Michael F. Abernathy of Rapid Imaging Software, Inc., for **Johnson Space Center**. For further information, please contact Michael F. Abernathy, Rapid Imaging Software, Inc., 1318 Ridgecrest Place S.E., Albuquerque, NM 87108.

MSC-23096


**Laboratory Vibration** - Vibration & noise design / testing for nanotech and R&D facilities. <a href="www.va-consult.com">www.va-consult.com</a>
Advertise on this site

HOME | ABOUT NTB | LINKS | CONTACT US | FEEDBACK | PRIVACY
All information property of ABP International

2 of 2 4/16/06 5:01 PM



### LandForm Situation Awareness Software

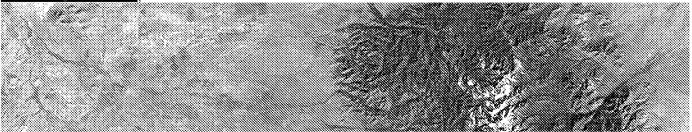

80008

Products

Downloads

Osta Sources

Press Walesage

Abost Us

Costact

CHents

Suppost

See what the press and the industry are saying about LandForm 3D Real-Time Terrain Modeler Products.

Joint FAA/NASA/RIS Flight Test Utilizes SmartCam3D/SmartTopo technology

### March 2nd, 2006 - Ellington Field Houston, TX



The FAA, NASA, and RIS conducted a flight test of a 3 panel version of SmartCam3D aboard an FAA aircraft today. The test will study ways in which aviation data types can be used to support advanced pilot displays, including as part of a UAV Glass Cockpit using SmartCam3D. The SmartTopo technology is being studied for its utility in runway approach inspection. You can download a video of the flight from this location as a QuickTime movie.

http://landform.com/NASA.FAA.RIS V3.mov


Here is a link to the QuickTime player in case you don't already have it on your machine, you can download it.

http://www.apple.com/quicktime/download/win.html

NASA Tele-Operates SCOUT Nover using SmartCam3D September 15th, 2005 - Meteor Crater, AZ

1 of 3 4/16/06 5:02 PM



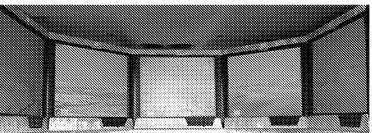

NASA remotely operated the SCOUT rover using SmartCam3D in a 5 panel configuration at Meteor Crater this week. The ACES advanced cockpit evaluation system was used for test and performed beautifully operating the vehicle over the course of several miles. The ACES uses SmartCam3D in a panoramic display mode which provides the operator with a 180 degree field of view.

# USAF UAV BattleLab and AFRL Evaluate SmartCam3D on Predator September 1st, 2005 - Indian Springs AFAF, AZ



The USAF UAV BattleLab and AFRL are conducting a study of the human effectiveness benefits of SmartCam3D for USAF Predator aircrews, in support of USAF Air Combat Command. These studies involve installing SmartCam3D in Predator Ground Control Segments and flying numerous sorties using the technology.

# NDIA Awards SmartCam3D Top5 Software of the Year April 19th, 2005 - Salt Lake City, UT



The National Defense Industries Association identifies SmartCam3D as one of the TOP5 US software programs of the year. Mike Abernathy from RIS and Francisco Delgado from NASA accepted the dual awards for this program.

### SmartCam3D is Awarded NASA JSC Exceptional Software of the Year

### June 2004 - Houston, TX

Dr. Janis White and Rapid Imaging Software, Inc. received the NASA Johnson Space Center Exceptional Software of the Year award for the SmartCam3D situation awareness software system. The award was presented by General Howell in a ceremony Houston, Texas. The SmartCam3D software was also first runner up for NASA agency-wide software of the year. Well done, Janis and team!

LandForm() Guides X-38 Pilot in Successful Flight!

December 13th, 2001 - Edwards Air Force Base, CA

2 of 3 4/16/06 5:02 PM




On December 13th, 2001, Astronaut Ken Ham successfully flew the X-38 from a remote cockpit using LandForm VisualFlight as his primary situation awareness display in a flight test at Edwards Air Force Base, California. This simulates conditions of a real flight for the windowless spacecraft, which will eventually become NASA's Crew Return Vehicle for the ISS. We believe that this is the first test of a hybrid synthetic vision system which combines nose camera video with a LandForm synthetic vision display. Described by astronauts as "the best seat in the house", the system will ultimately make space travel safer by providing situation awareness during the landing phase of flight.

Read more about LandForm in this AviationWeek article

### LandForm® Develops New Map Projection for Planetary Exploration September 29th, 2000 - Albuquerque, NM

Rapid Imaging Software announced the development of a new map projection which will aid astronauts in navigating earth, as well as other moons and planets. The new method to display maps is very beneficial to astronauts and planetary explorers because it displays the surface of the planet with minimum distortion nearest the spacecraft path, making landing site selection much more intuitive.

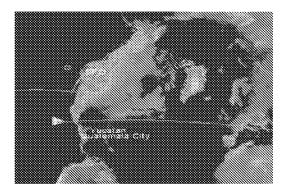

Since planets tend to be spherical in shape, any mapping algorithm must distort the curved surface in order to display it on a flat map. Traditional Plate Caree' (or Plane Charts) distort least near the equator which is the central axis of the map. The new projection called LandForm Orbital Projection uses the line of the satellite orbit, instead of the equator, as the maps central axis with the result that the satellite appears to move in a more or less straight down the center of the chart. This provides the viewer with a much more natural understanding of the terrain near the path of the satellite.

## Landform C3 Demonstrates Real-time Networked Flight Visualization July 9th, 1999 - NASA Johnson Space Center, Houston, TX.

NASA engineers in Houston watched the X-38 flight test live as it occurred at Edwards, AFB using the LandForm C3 software. LandForm displayed the flight of the vehicle above terrain in real-time via a network link.

3 of 3 4/16/06 5:02 PM

### Flying UAVs in Civil Airspace By Using Synthetic Vision

Jed Margolin

### **Introduction**

Companies and Government are starting to deal with the problem of safely flying UAVs in civil airspace, especially now that they are beginning to see the potential civilian uses for UAVs.

What makes any solution difficult is that it has to work within the existing system run by the FAA which operates the national airspace system and has been slow to adopt technological advances.

The companies involved (AeroVironment, Aurora Flight Sciences, Boeing, General Atomics, Lockheed Martin, and Northrop Grumman) are taking the problem/opportunity seriously enough to spend some of their own money on a solution.

Unfortunately, they do not seem to realize that this is an opportunity to improve the national airspace system for all users and not just UAV operators.

The solution discussed in this report requires the use of Synthetic Vision as taught by my U.S. Patent 5,904,724 **Method and apparatus for remotely piloting an aircraft**.

### Current Activity

From Aviation Week & Space Technology, 08/02/2004, page 54 Michael A. Dornheim Los Angeles

### UAV Safety Access 5 Project Seeks To Fly Drones in Civil Airspace

To carry out quick-reaction civil missions like wildfire spotting, UAVs must be part of the FAA system. Challenge is to make safety for others on the ground and in the air affordable.

-

•

.

In early 2002 six manufacturers--AeroVironment, Aurora Flight Sciences, Boeing, General Atomics, Lockheed Martin and Northrop Grumman--formed the UAV National Industry Team (Unite) to gain access for high-altitude long-endurance (HALE) drones. HALE aircraft were chosen because they fly above most commercial traffic, usually over sparsely populated areas, and present the lowest-risk initial step. Dann is also president and co-founder of Unite.

Unite approached NASA in August 2002 because it was running the Environmental Research Aircraft and Sensor Technology drone program, and the two signed a joint sponsored research agreement. This formed Access 5, so-called because of the original optimistic goal of gaining airspace access in five years. The FAA became involved as an adviser, and the Defense Dept. joined the discussion. By February

2003, Unite members had contributed \$3-4 million and NASA had a similar amount in its budget, Bauer said.

Steps 1 and 2 are funded with \$101 million from NASA that became available in May, covering the five years from Fiscal 2004-08, and Unite will make in-kind contributions worth at least \$25 million.

Access5 has their own web site at www.access5.org.

They are planning on spending \$126 million (\$101 million from NASA and \$25 million from Unite) for the Fiscal period 2004-08 to apply a band aid to a system that has been broken for a long time.

From Aviation Week & Space Technology, 09/13/2004, page 59 (Inside Avionics):

### NORTHROP GRUMMAN IS WORKING

Aviation Week & Space Technology 09/13/2004, page 59 Edited by Bruce D. Nordwall

NORTHROP GRUMMAN IS WORKING with the U.S. Air Force to fuse data from a variety of sensors as a basis for collision-avoidance systems for unmanned aerial vehicles. The concept is to create an autonomous "see and avoid" system that would permit UAVs and manned aircraft to operate safely in the same airspace. Work under this contract from the Air Force Research Laboratory in Dayton, Ohio, aims to verify, through simulation, a sensing architecture designed under a previous award. The concept is to combine data from electro-optical charge-coupled-device cameras and mid-wave infrared sensors to create an integrated view of the environment, which the UAV's flight control system could use to adjust the aircraft's vector to avoid a midair collision. The simulation model will be based on the attributes of radar, traffic-alert and collision avoidance systems (TCAS) and automatic dependent surveillance-broadcast. Separately, the company is working with NASA, the Defense Dept., the Homeland Security Dept. and six industry partners to develop the policy and procedures to give UAVs access to U.S. airspace within five years.

From Aviation Week & Space Technology, 03/01/2004, 05:08:05 PM:

### **UAVs Increase in Importance**

By Steven J. Zaloga

UAVs remain the most dynamic segment of the aerospace market. They stole the limelight from more established technologies at the 2003 Paris air show. Nevertheless, they are still a relatively small segment of the aerospace market, about \$1.25 billion in research and production funding in 2003. What attracts so much attention is the potential for a major expansion.

And, at the end of the article:

### **CIVILIAN UAV APPLICATIONS**

UAVs have been used extensively for civilian scientific research, but this has not transitioned to much serial production. Scientific applications can be easily

envisioned for UAVs such as environmental monitoring, weather/atmospheric data collection, oceanographic data collection, agricultural monitoring and high-altitude geological mapping of magnetic, radiological and gravimetric data. Some of these research applications could become commercial. For example, the U.S. Defense Dept. has discussed contracting private firms to operate research UAVs over the Pacific to collect weather data.

From Aviation Week & Space Technology, 08/02/2004, page 50:

# General Atomics, Northrop Grumman Set To Battle Over Pentagon UAV Projects

David A. Fulghum Farnborough

Competition flares for a new category of survivable, high-altitude jet UAVs Running Hot

Competition has just caught fire for a new category of unmanned aircraft, with an estimated market of \$16-45 billion over the next 10-15 years.

General Atomics Aeronautical Systems started the blaze with the still unannounced construction start of an all-jet Predator C, and Northrop Grumman is fanning the flames with advanced planning for a competing aircraft that's expected to be a departure in design from the more sophisticated Global Hawk.

According to an article in Aerospace Daily & Defense Report 10/13/2004 09:13:12 AM "Use Of UAVs In War On Terror Expanding, Weatherington Says":

"The DOD plans to spend \$2.2 billion on UAVs in fiscal year 2005 and \$13 billion total from FY '04 through FY '09, with strike UAVs accounting for half of that number. Annual UAV spending is projected to reach about \$3 billion by FY '08-09. The Pentagon's latest UAV roadmap (DAILY, June 3) is expected to be released early next year."

### **My Proposed Solution**

### **Definitions**

Unmanned Aerial Vehicle (UAV) is an aerial vehicle without an onboard human pilot.

### Problem

Flying (including taking off and landing) a UAV in an airspace shared with other independent aircraft, both civilian and military, which are not under the direct control of the entity controlling the UAV, and avoiding midair collisions during all phases of flight.

### Proposal

- 1. UAVs flying beyond a specified range from a Terminal Control Area (TCA) or other designated area and flying above a specified altitude may be flown autonomously using an Autonomous Control System (ACS) as long as the following conditions are met:
  - (a) A remote operator must monitor the operation of the UAV at all times. A remote operator may monitor several UAVs simultaneously once it is established that this practice may be safely performed by a single operator. For example, it may be preferable to have two remote operators to work as a team to monitor ten UAVS than to have each remote operator separately monitor a group of five UAVs.
  - **(b)** The ACS must use radar (either active or passive) to detect the range and altitude of nearby aircraft in order to perform "see and avoid" actions. An example of a passive radar system is taught by <a href="Reference 2">Reference 2</a> [U. S. Patent 5,187,485 **Passive ranging through global positioning system**].
  - (c) The ACS must periodically transmit its identification, location, altitude, and bearing. This may be done through the use of a speech synthesis system on a standard aircraft communications frequency. This is for the benefit of pilots flying aircraft sharing the airspace. It may also be done through an appropriate digital system such as the one taught in <a href="Reference 3">Reference 3</a> [U.S. Patent 5,153,836 Universal dynamic navigation, surveillance, emergency location, and collision avoidance system and method.]
  - (d) The ACS must provide a means for the pilots of other aircraft to communicate directly with the remote operator. This may be accomplished by having the communication link between the remote operator and the UAV relay communications with a standard aircraft transceiver onboard the UAV.
- **2.** UAVs flying below a specified altitude or within a specified range from a TCA or other designated area (at any altitude) must be flown using a synthetic vision system as taught in <u>Reference 1</u> [U.S. Patent 5,904,724 **Method and apparatus for remotely piloting an aircraft**].

Each UAV flown under these conditions must be under the direct control of a remote operator/pilot whose sole responsibility is the safe operation of that UAV. The rules will be similar to those for operating piloted aircraft with automatic pilot systems including those with autoland capability.

The preferred method for flying a UAV from one airport to another, such as in ferrying UAVs, would be to have the remote operator/pilot at the originating airport be responsible for taking off and flying the UAV to the specified altitude. A remote operator/pilot at the arrival airport would be responsible for having the UAV descend and land. In between, once the UAV has reached the specified altitude the remote operator monitoring the flight can be at any convenient location.

Long delays in the communications link (such as through geosynchronous satellites) make flying

the UAV by direct control using synthetic vision more difficult and should be avoided.

The method described does not require any changes in the present air control system. It would also make UAV flights safer than most existing piloted flights where "see and avoid" is accomplished by looking out small windows providing a limited field of view and hoping you see any nearby aircraft in time to avoid a collision.

### Patent References

[Ref 1] U.S. Patent 5,904,724 Method and apparatus for remotely piloting an aircraft, Jed Margolin, May 18, 1999. <u>Link to patent at USPTO website</u>

The patent teaches the use of synthetic vision to remotely pilot an aircraft.

[Ref 2] U. S. Patent 5,187,485 Passive ranging through global positioning system, Tsui, et al., February 16, 1993. Assignee: The United States of America as represented by the Secretary of the Air Force. <u>Link to patent at USPTO website</u>

The patent teaches a method for determining the distance from a target to an observation station, using four GPS satellites as radiation sources, and a GPS receiver at the observation station to form a bistatic radar system, wherein an angle of arrival (AOA) of the target to the observation station has been measured first.

[Ref 3] U.S. Patent 5,153,836 Universal dynamic navigation, surveillance, emergency location, and collision avoidance system and method, Fraughton, et al., October 6, 1992. Link to patent at USPTO website

Each vehicle continuously transmits its location, identification, and other information, so everybody with the appropriate receiver knows where everybody else is. {The patent is 135 pages long.}

Jed Margolin San Jose, CA May 8, 2005

### NTSB Identification: CHI06MA121

14 CFR Public Use

Accident occurred Tuesday, April 25, 2006 in Nogales, AZ Aircraft: General Atomics Predator B, registration: None Injuries: 1 Uninjured.

This is preliminary information, subject to change, and may contain errors. Any errors in this report will be corrected when the final report has been completed.

On April 25, 2006, at approximately 0341 mountain standard time, an unregistered Predator B aircraft, collided with the terrain approximately 30 statute miles northwest of Nogales, Arizona. The unmanned aerial vehicle (UAV) was registered to the U.S. Customs and Border Protection agency. The public use flight was operating in visual meteorological conditions. An instrument flight rules flight plan had been filed and activated for the flight. The UAV sustained substantial damage. There were no injuries to persons on the ground. The flight originated from the Libby Army Airfield (HFU), Sierra Vista, Arizona.

The flight was being flown from a ground control station (GCS) located at HFU. The GCS contains two nearly identical consoles, pilot payload operator (PPO)-1, and PPO-2. During a routine mission, a certified pilot controls the UAV from the PPO-1 console and the camera payload operator (typically a U.S. Border Patrol Agent) controls the camera from PPO-2. The aircraft controls (flaps, stop/feather, throttle, and speed lever) on PPO-1 and PPO-2 are identical. However, when control of the UAV is being accomplished from PPO-1, the controls at PPO-2 are used to control the camera.

The pilot reported that during the flight the console at PPO-1 "locked up", prompting him to switch control of the UAV to PPO-2. Checklist procedures state that prior to switching operational control between the two consoles, the pilot must match the control positions on the new console to those on the console, which had been controlling the UAV. The pilot stated in an interview that he failed to do this. The result was that the stop/feather control in PPO-2 was in the fuel cutoff position when the switch over from PPO-1 to PPO-2 occurred. As a result, the fuel was cut off to the UAV when control was transferred to PPO-2.

The pilot stated that after the switch to the other console, he noticed the UAV was not maintaining altitude but did not know why. As a result he decided to shut down the GCS so that the UAV would enter its lost link procedure, which called for the UAV to climb to 15,000 feet above mean sea level and to fly a predetermined course until contact could be established. With no engine power, the UAV continued to descend below line-of-site communications and further attempts to re-establish contact with the UAV were not successful.

Index for Apr2006 | Index of months

### **Lockheed's Polecat UCAV Demonstrator Crashes**

Aviation Week & Space Technology 03/19/2007, page 44
Amy Butler
Washington


### Polecat UAV has been labeled a total loss after December crash

Printed headline: Roadkill

Lockheed Martin's Polecat unmanned aerial vehicle demonstrator has crashed months after accomplishing only three flight tests.

The incident takes the steam out of the company's strategy to fund its own project to keep pace with--and potentially surpass--work at Northrop Grumman and Boeing on government-funded *UAV* programs. Northrop Grumman and Boeing have been beneficiaries of the Pentagon's multibillion-dollar on-again off-again program to develop a combat UAV for the Navy and Air Force. And, both companies have flying demonstrators of varying maturity as a result of this support.

Lockheed Martin has no major government funding for its UAV efforts. But, company officials said that with Polecat they hoped to surpass the knowledge base of the nascent UAVs at rival companies and secure a foothold in the next-wave of Pentagon purchasing in this area-particularly for the Air Force's future bomber.

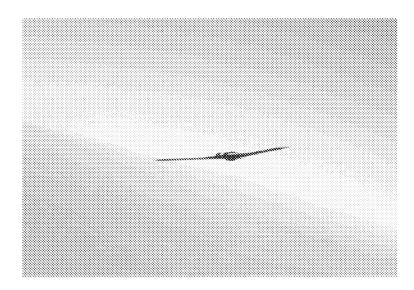

Lockheed Martin officials took months to acknowledge the crash of its Polecat UAV development aircraft. Credit: LOCKHEED MARTIN

THE POLECAT CRASH occurred Dec. 18, 2006, at the Air Force's Nevada Test and Training Range. Lockheed Martin officials say they could not discuss the crash any earlier due to a thenongoing Air Force-led investigation that was only recently completed. The company notes that it had no formal customers for Polecat, but was restricted by government rules from discussing the incident since it occurred on a federal test range.

The 90-ft. wingspan demonstrator, which cost them more than \$30 million to develop, was declared a total loss as a result of the crash. The company is attributing the incident to an "irreversible unintentional failure in the flight termination ground equipment," though it was unable to say whether human error or a technical malfunction was a cause. The aircraft was, however, "in full control and performing well" when its automatic "fail-safe flight termination mode" activated, according to a Lockheed Martin statement. A company official says a failsafe, which prevented operators from recovering control of the UAV, initiated "in seconds," rendering them powerless as the aircraft dove to the ground.

"The fail-safe mode is designed to irreversibly terminate flight to ensure that systems do not deviate from the range into civilian airspace," according to a company statement. "There was an irreversible unintentional failure in the flight termination ground equipment at the Nevada Test and Training Range. We believe the test range has corrected the potential for a similar circumstance to occur again." Company officials say the Polecat validated rapid prototyping methods and that aerodynamic performance was "better than expected." They add, the flight termination software "performed exactly as expected."

The incident is an embarrassment for Lockheed Martin, which has been criticized for ignoring the UAV business and focusing too much on its booming manned fighter work on the F-22 and F-35. The company's efforts to conduct *UAV* testing fizzled after the termination of its DarkStar UAV program; one of its prototypes crashed in April 1996.

Yet, the company is not alone when it comes to embarrassing UAV incidents. Early in the development of the Global Hawk, a Northrop Grumman UAV, operators at one test range inadvertently engaged a self-destruct code that was picked up by a prototype UAV flying at a different range. The aircraft's extraordinarily high altitude gave it line-of-sight to both range sites. So, the *UAV* wound up in a self-destruct spiral and was declared a total loss.

For Lockheed Martin, Polecat's unveiling was the high point of the aeronautics sector's news briefings during last year's Farnborough air show in the U.K. (AW&ST July 24, 2006, p. 64). Frank Cappuccio, executive vice president for Lockheed Martin Skunk Works, showed a video clip during that briefing to reporters of the early Polecat flights. He touted the air vehicle as a demonstrator for new technologies in the areas of composites, fabrication and twisting strut designs to morph the UAV's wings in flight.

Polecat was the first public attempt by a company to demonstrate the effectiveness of a tailless Horton-wing design at altitudes in excess of 60,000 ft. The design, similar to the B-2's, is inherently stealthy because it lacks a tail. Skunk Works had wanted to experiment with it in high altitudes where the air is thin. Yet, with only three flights under its belt, the aircraft never climbed above 15,000 ft. to prove itself at high altitudes as planned.

Contrail suppression is also a problem the company hoped to tackle via its work on Polecat. Despite its high altitude, the U-2 has been plagued by contrails during its decades of operation. And, effective visible contrail suppression will augment the stealth qualities afforded through design and coatings. Polecat was not coated with stealthy materials, but the tailless design and angled engine inlets provided stealthy qualities to the demonstrator.

Frank Mauro, director of Lockheed Martin's unmanned systems at Skunk Works, said last year that work on Polecat would feed into the company's evolving designs for the Air Force long-range strike aircraft concept as well as needs beyond Northrop Grumman's Global Hawk for a future high-altitude UAV for intelligence collection. "Many lessons learned on this project will be applicable to future efforts, including Long Range Strike," according to the company statement.

The aircraft was designed to hoist 1,000 lb. of payload. It was powered by two FJ44-3E Williams International engines. Work began on Polecat in 2003 and it was ready for flight 18 months later.

News Breaks Americas

### The F-22 continues to encounter

Aviation Week & Space Technology 02/26/2007, page 18

The F-22 continues to encounter bumps in its first air expeditionary force deployment to Okinawa. The 12 aircraft from Langley AFB, Va., spent an unscheduled week at Hickam AFB, Hawaii, after the leading four had to abort the trip's last leg. As the Raptors reached the International Date Line, the navigation computers locked up so the aircraft returned to Hickam until a software patch was readied. "Apparently we had built an aircraft for the Western Hemisphere only," says a senior U.S. Air Force official. When the F-22s arrived at Kadena AB, Okinawa, some Japanese citizens held a protest against the aircraft's noise.

### Gulf of Mexico Helo Ops Ready for ADS-B

Aviation Week & Space Technology 02/26/2007, page 56
Frances Fiorino
Washington

HAI members and FAA work to adapt next-gen 'backbone' in Gulf of Mexico

Printed headline: Helo Ops Ready for ADS-B

Helicopter operators are moving closer to reaping the benefits of ADS-B--a system that will "take the National Air Space and extend it out over the Gulf of Mexico."

At least that's how Vincent Capezzuto likes to describe the capability of Automatic Dependent Surveillance-Broadcast, which the FAA calls "the backbone" of the Next-Generation Air Transportation System. Capezzuto is FAA program manager for the FAA's national ADS-B office. For Gulf of Mexico operators, ADS-B means real-time ATC surveillance, communications and weather data--which, in effect, translate to conducting safe, low-altitude IFR operations in the gulf.


That's in sharp contrast to current operating conditions in the region, an area roughly 994 mi. (1,600 km.) east to west and 559 mi. from north to south, with a surface area spanning 579,153 sq. mi. Thousands of rigs offshore mine oil and gas riches round-the-clock in water with an average depth of 1,615 meters.

Approximately 650 helicopters and 2,000 pilots operate 7,500 shore-to-platform trips daily to fulfill their primary mission of ferrying personnel and equipment to thousands of platforms located about 150-200 mi. out from the Texas, Louisiana, Mississippi coastline. And all of this is accomplished while flying below 5,000 ft.

Once the flights leave the shore, "They operate in an environment devoid of the normal infrastructure found over land," says Helicopter Assn. International President Matt Zuccaro.

Radars cannot be installed on oil platforms, Capezzuto says. "It's a very harsh environment. Electromechanical devices don't like the salt water."

And Houston Center, which provides coverage of what is now classified as Oceanic airspace, can't see or talk to the helicopter operators--and as a result cannot provide direct surveillance, adds Zuccaro. Nor can pilots obtain real-time weather services.

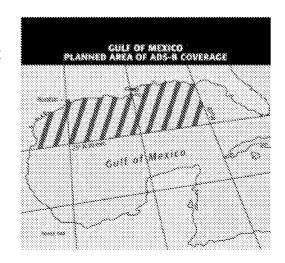

But that will change. Under a May 2006 Memorandum of Agreement (MOA) with the FAA, the Gulf region, Louisville, Ky., Juneau, Alaska, and Philadelphia were selected to participate in "Segment One" ADS-B implementation. This involves initial installation of ground infrastructure that will support the system--and for which the FAA requested \$80 million in the Fiscal 2007 budget.

Implementation committees are now assessing ground infrastructure and equipment and fielding of services. Zuccaro says the first platform site, conducted this month, was successful. Certain oil platforms will house ADS-B receivers. Under ADS-B, satellites provide GPS information to the aircraft avionics, which emit the data to ground-based receivers. Then these would couple the information to shore--in this case, Houston Center controller automation platforms. Eventually, weather-sensing devices will be installed on the platforms.

By the end of 2010, FAA expects to have the ADS-B system tested and operationally acceptable for the NAS, with Houston Center providing services in the Gulf region. By 2013, all of the U.S. is scheduled to be covered with ground infrastructure.

The avionics installation will take longer, says Capezzuto, because we will be dealing with a larger aircraft population--20,000 or more general aircraft and about 35,000 transport aircraft, all of which will have to be retro- or forward-fitted with ADS-B equipment (AW&ST Feb. 17, 2006, p. 52).

Subsequent program phases include HAI members voluntarily equipping aircraft with traffic display capability so pilots can self-separate from other aircraft. This ability, according to Capezzuto, leads to shared pilot-controller situational awareness, and therefore enhanced safety.

"The Gulf is probably the perfect implementation area for ADS-B. It's a clean slate. There's nothing down there," says Zuccaro. "Segment One is 'the true test' of ADS-B implementation in an area without support or infrastructure."

The Gulf of Mexico's area of coverage will extend to 25 deg. N. Lat. in the Gulf (see map). In about 5-10 years, it will extend to 26 deg. N. Lat., based on planned expansion of oil platform infrastructure, according to the FAA.

Zuccaro says that in the next decade activities in the gulf are expected to grow 25%, move into deeper water and extend toward the Florida coastline.

"This is a win-win situation for all stakeholders," says Capezzuto. "The operators not only get [ADS-B] service, [they also] provide FAA with data required to validate the service and get it certified."

ADS-B's precision is also seen as a way to improve capacity in the future NAS via streamlining separation standards. "Today's established standards--3 mi. to terminal and 5 mi. en route--are based on the traditional radars' infrastructure," says Capezzuto. "The reality is, everyone puts a little buffer around it . . . and the FAA is interested in removing those buffers. Its hope is to project forward as air traffic increases and start looking at reducing those separation standards," he says.

To accomplish that wouldn't require more air traffic controllers, Capezzuto says. Rather, ADS-B would increase situational awareness of pilots by putting information in the cockpit, and controllers can then shift more toward air traffic management function.

The nation's more crowded airspace of the future could and would be kept safe under current infrastructure, but ATC would not be able to accommodate traffic at the times airlines want to fly, says Capezzuto. And the Next-Gen system must be able to handle future growth.

Under the MOA, the FAA will fund, install and operate the ADS-B network in the gulf. The helicopter industry and platform operators will prove platform space for installation of system equipment. HAI's efforts in a 20-year period to provide transportation of personnel to the platform, along with power and telecommunications as well as the voluntary installation of the avionics equipment for their IFR fleet, is valued at more than \$100 million.

The minimum equipment required on the aircraft would be a transmitter, which would allow ATC to "see" and control the aircraft. The next upgrade, the display unit, would open up available uplink data so pilots can visually monitor traffic on the panel and self-separate. When that will occur will depend on the completion of the evaluation of transmitters and equipment operation.

Louisville, Philadelphia and Juneau were selected for Segment One because they all pose a unique set of problems. Each Tracon or Center has different computer interfaces with the NAS, which would require the FAA to build and test new infrastructure to interface with various automation platforms.

The challenge at Philadelphia, a UPS hub, is in validating ADS-B within terminal airspace that has a high RF interference environment. The New York-Philadelphia region is rife with various types of radars and other devices that emit RF energy, says Capezzuto.

Louisville, UPS's main hub, is a "petri dish" in which the FAA will validate separation standards involving a large number of UPS aircraft operating within certain timeframes, similar to most major hubs.

Juneau offers the challenge of a mixture of equipment including multiple types of transponder devices, not to mention robust mountainous areas where radars are especially challenged.

Some general aviation sectors are exercising caution in fully embracing ADS-B. The National Business Aviation Assn. is in support of the system, but wants the FAA to set a firm plan for certification of equipment. The Aircraft Owners and Pilots Assn. also supports implementation of ADS-B, but is concerned about the affordability of equipment.

### Find this article at:

http://www.aviationnow.com/publication/awst/loggedin/AvnowStoryDisplay.do?fromChannel=awst&pubKe y=awst&issueDate=2007-02-26&story=xml/awst_xml/2007/02/26/AW_02_26_2007_p56-01.xml&headline=Gulf+of+Mexico+Helo+Ops+Ready+for+ADS-B

### Embedded experts: Fix code bugs or cost lives

Rick Merritt

(04/10/2006 10:00 AM EDT)

URL: <a href="http://www.eetimes.com/showArticle.jhtml?articleID=184429901">http://www.eetimes.com/showArticle.jhtml?articleID=184429901</a>

San Jose, Calif. — The Therac 25 was supposed to save lives by zapping tumors with targeted blasts of radiation. Instead, the device delivered massive overdoses that killed three patients and injured several others because of software glitches by a lone programmer whose code was never properly inspected and tested.

The Therac 25 was just one of dozens of examples cited by speakers at last week's Embedded Systems Conference here to drive home a point: People's lives as well as millions of dollars in investments often depend on software engineering, but too many projects fail for lack of good programming discipline and management support.

And the problems may get worse as programmers face the additional challenges of handling multicore devices. Indeed, an annual survey of several thousand embedded engineers polled recently by EE Times and Embedded Systems Design magazine showed that the need for better software debug tools is a major concern, with test and debug taking up more time than any step in a project development.

"This is the only industry left where we can ship products with known defects and not get sued. How long do you think that will last?" asked Jack Ganssle, a consultant and author who presented a class on lessons learned from embedded-software disasters.

"We aren't afraid of software, but we need to be, because one wrong bit out of 100 million can cause people to die," said Ganssle, who said he has worked on more than 100 embedded projects, including the White House security system.

"As embedded systems grow in complexity, the software becomes an ever more important piece. Right now, 50 percent of our DSP spending is on the software side," said Gerald McGuire, general manager of the DSP group at Analog Devices Inc. (Norwood, Mass.), which employs more than 200 software engineers.

As software grows in importance, it is not necessarily becoming more reliable. According to one report, 80 percent of software projects fail because they are over budget, late, missing key features or a combination of factors. Another report suggests that large software systems of more than a million lines of code may have as many as 20,000 errors, 1,800 of them still unresolved after a year.

"We can't get rid of faults," said Lorenzo Fasanelli, a senior embedded-software specialist for Ericsson Labs in Italy. But engineers can speak up about faults, learn from them and rewrite code to proactively find and minimize them, he added.

"We cannot advance the state of the art without studying failure," said Kim Fowler, an author and systems architect who delivered an ESC talk called "Fantastic Failures."

### War stories

There are plenty of failures from which to learn. Ganssle cited another radiation system that killed 28 people in a series of tests in Panama in May 2001 before the U.S. Food and Drug Administration shut down the company that made it. Inspections of software after the crash of a U.S. Army Chinook helicopter revealed 500 errors, including 50 critical ones, in just the first 17 percent of code tested.

"Why did they inspect software only after people died?" asked Ganssle, who said a court case on the crash is still in litigation.

Some pacemakers have stimulated hearts to beat at rates of 190 beats a minute, prompting companies to provide software updates delivered to the implanted devices using capacitive coupling. Unfortunately, other pacemaker patients have had their devices inadvertently reprogrammed when walking through metal detectors. In 2003, the pacemaker of a woman in Japan was accidentally reprogrammed by her rice cooker.

A Thai politician had to have police bust the windows on his BMW 745i after a software glitch caused the electric doors and windows to freeze in a locked state, trapping him inside. Ford recalled some models of its 2000 Explorer because lights and wipers would not work in some circumstances. And the 2004 Pontiac Grand Prix faced a software recall for a leap-year fault.

Part of the problem lies in poor engineering discipline, such as a lack of adequate testing, improper error handling and inherently sloppy languages. Management issues, including a demand for ever more features in compressed schedules, and tight budgets are also to blame.

"We need to test everything up front and integrate testing into the design process. Then we need to believe the data we get when we do test," said Ganssle.

When engineers make a change because of a failed test, they often neglect to go back to the beginning of the test suite to make sure the changes haven't introduced new errors, said Dave Stewart, chief technology officer of Embedded Research Solutions Inc. (Annapolis, Md.) in an ESC session on the top problems in real-time software design.

Engineers need to create error-handling modes in their programs, and the modes must exist as just another state for their systems and treat errors as one of many possible inputs, Stewart added.

Fasanelli of Ericsson gave a detailed prescription for how to find, report and minimize faults in embedded software. Programmers must make it a standard practice to classify all inputs and states of a system and note any illegal inputs or edge states, whether or not they affect a program's ability to run, he said.

In addition, programs should routinely track and report their own performance, idle times and memory integrity. Creating such debug features may affect a system's cost, but that will be offset by reduced maintenance, Fasanelli said.

"Exception handling is particularly hard to test because it's hard to generate the exceptions. These tend to be the most poorly tested parts of code," said Ganssle.

### Riding a rough C

Ironically, today's most popular programming languages, C and C++, are among the most error prone. That's because C compilers have plenty of latitude to compile and link — without providing any diagnostics — code that can produce serious run-time errors, especially when ported to a new processor.

"There are a lot of little goodies in C that programmers are not fully aware of," said Dan Saks, an author who has documented nearly 40 "gotchas" he presented in a session at ESC. "The lesson is to understand what you can assume and what you can't."

For instance, C doesn't define the number of bits in a byte, though header files can query a processor and adjust the program if the CPU does not support the usual 8-bit byte. Likewise, the common practice of subtracting pointers can result in creating a character of an undefined type, said Saks, president of consulting firm Saks & Associates (Springfield, Ohio).

"The use of C is really criminal," said Ganssle. "C will compile a telephone directory, practically. I guess we use C because we think debugging is fun."

For every 1,000 lines of code, C can generate 500 errors in a worst case, 167 errors on average or 12.5 mistakes for automatically generated code, said Ganssle. That compares with 50 errors worst case, 25 average and 4.8 for auto-generated code using the Ada language, he said. The Spark language emerging from Europe is even better, generating just four errors on average per 1,000 lines of code, he claimed.

C is used in half the development projects done today, according to the results from the 2006 Embedded Market Survey, the 14th such annual poll of engineers working on embedded-design projects. The survey showed that the C++ programming language is gaining in acceptance, however.

ESD editor-in-chief Jim Turley, who presented the annual embedded-market survey results last week, said fully half of the respondents cited C as their primary programming language. Nonetheless, support for C was down from the 2005 survey, albeit only by 3 percent. By contrast, the C++ language gained this year, coming in at 28 percent, and respondents predicted a 4 percent increase in C++ adoption next year.

The survey showed that relatively few engineers — just a few percent — use Java. Matlab, LabView and UML are used about as frequently for embedded projects, although Java garners more attention because of its use in the graphical user interface portion of many systems.

"Almost every language is losing ground to C++," said Turley, who suggested that many design teams have evaluated Java but found it lacking in performance and development tools.

Asked about tool selection, 53 percent of embedded engineers said the quality of the debugger was their most important criterion in choosing a development suite. Only about 13 percent said open-source content is an important selection criterion.

When it comes to operating systems, however, open-source OSes such as Linux are gaining significant support. Fully 20 percent of respondents said they use an open-source OS, with many design teams relying on a commercially distributed form of Linux.

Turley said that one reading of the operating system responses would suggest Linux is gaining support quickly, since "just five years ago the very term 'open source' didn't mean anything." However, other survey questions showed that a declining number of respondents, compared with the 2005 survey, are considering Linux, prompting Turley to conclude that "that the charm of Linux has cooled."

Management must take its share of the blame for the software situation. "Often we are in an overconstrained situation. We have too many features to deliver in too short a time frame," said Fowler at his "Fantastic Failures" session. "The problem is, adding features requires lots of regression testing. The thing to do is ask whether the feature can be saved for the next upgrade — [otherwise] you are just setting yourself up for failure.

"We as engineers need to come up with persuasive ways to warn management" by relating stories of past failures or the implications of long feature lists and tight budgets and schedules, he added.

Tired engineers were a factor in several aerospace disasters in which programmers worked 60- to 80-hour weeks in the months before a launch, Ganssle said.

Skimpy budgeting is another factor in failures, as seen most clearly in civil-engineering disasters. In 1940, officials found a way to build the Tacoma Narrows Bridge for half an initial estimate and did so, but the bridge famously collapsed in high winds after just four months in service. Likewise, the MGM Grand Hotel in Las Vegas saved \$200,000 by not using sprinklers but paid out more than \$200 million in court and rebuilding costs after a disastrous fire, Ganssle said.

In the confines of a software project, "spending \$2,000 on tools might save you \$100,000 in programming effort," said Stewart of Embedded Research Solutions.

### Multicore effort

Activity on the ESC show floor demonstrated that embedded-software tool vendors are increasingly dealing with issues arising from multicore and multithreading architectures. Both Mentor Graphics Corp. and Green Hills Software Inc. said they have added support for the MIPS32 34K multithreading processor core family, for example. Green Hills, which announced its support for Texas Instruments Inc.'s DaVinci architecture earlier this year, rolled out MIPS32 34K support with its Multi development tools. Green Hills also added support for the single-core MIPS32 24KE family.

QNX Software Systems Ltd. last week announced support for DaVinci, which combines ARM and DSP cores in order to support digital audio and video applications. To help maximize performance, QNX will support an interface layer between the cores based on Tl's DSP/BIOS Link technology. This makes it possible to offload media processing to the DSP, freeing up the ARM core for other applications.

The Ottawa company launched a multicore initiative last fall, said Dave Curley, vice president of marketing at QNX. Using the company's Neutrino real-time operating system (RTOS) and the

Momentics IDE, this initiative supports asymmetric, symmetric and bound multiprocessing (BMP). The latter capability, Curley said, is unique, and it lets programmers assign threads to a given processor.

"One of the challenges of multicore is to understand how to work in a multithreaded environment," Curley said. "With BMP, you can tie legacy code to one processor without a rewrite."

QNX's Multi-Core Expedite Program, announced last week, provides 120-day free evaluations of the QNX Neutrino multicore technology development kit and dual-core Intel Pentium processor extreme edition.

Virtutech Inc., a provider of virtual platforms for early software development, claimed last week to have the first simulation model of the Freescale Semiconductor Inc. MPC8641D dual-core processor. Wind River is using this simulation model in its engineering department to develop multicore versions of its own products.

"Multicore is a complete revolution for software people," said Paul McLellan, vice president of marketing at Virtutech (San Jose). "You turn off interrupts for one core, but another core carries on." He noted that Virtutech's Simics environment lets users freeze the entire system when a breakpoint is hit, unlike real hardware, where processors would take some period of time to shut down.

ARM Ltd. said in a press release that its new RealView 3.0 development suite adds a debug engine with "multicore DSP awareness." Bryn Perry, general manager for development systems at ARM, clarified that ARM has the "potential" to support DSP debugging. ARM is working with DSP processor vendors but has not yet announced support for a specific digital signal processor Perry said.

As of today, RealView can connect ARM and DSP debuggers and synchronize them. But some customers want a single debug view of the entire system, and for that ARM needs to partner with DSP vendors, Perry noted.

The MIPS32 34K family is technically not a multicore solution, but it's touted as a multitasking architecture that can provide the benefits of multicore. Mentor Graphics announced last week that its Nucleus RTOS and Eclipse-based Edge tool suite now support that family. In the 34K device, one instance of the Nucleus Plus RTOS runs in each of two virtual processing elements (VPEs). The Nucleus Plus on the first VPE initializes the second and controls all peripheral resources.

— Additional reporting by Richard Goering and David Lammers

http://www.g2zero.com/2006/07/notable entries from the softw 1.html

July 06, 2006

### **Entries from the Software Failure Hall of Shame, Part 1**

If your organization is lucky and competent enough to have a popular or high profile software project or offering, it may be only a latent defect or unknown security vulnerability away from global notoriety. There are hundreds of examples of software-related failures, some minor and some catastrophic and resulting in the loss of millions of dollars and even deaths.

The point is that in hindsight, organizations responsible for buggy software projects would have preferred to invest in improved quality tools and processes rather than face the backlash, market loss, and business disruption caused by the defects.

Examples of some of the more notable software failures from a wide variety of industries include:

- The Toyota Prius engine management flaw. In October of 2005, the Toyota Motor Company voluntarily recalled 75,000 of its hybrid vehicles because a software glitch that may have shut down the engine. Given the high price of gasoline at the time and the rising interest from consumers in hybrid vehicles, the recall could have been a major blow to the manufacturer. However, due to Toyotas quick response, most consumers never experienced the flaw, and while the company may have suffered slightly from the negative publicity, it managed to avoid having its defect become permanently associated with the vehicle line or with hybrid safety.
- Failing Sony televisions. As in the Toyota example, Sony wasn't sure how many of its
  400,000 LCD and rear-projection TVs would show signs of a software defect, but the
  company decided it had to upgrade each of the sets. The software bug and remediation
  effort, reported in February of 2006, meant that in many cases Sony would have to send a
  technician to manually update the TVs. By proactively addressing the issue, Sony has so far
  managed to avoid intense media scrutiny or customer backlash.
- Incredibly cheap US Airways tickets. In April of 2005, the ticketing system for US Airways issued incorrect fares for several hours. Some tickets were offered for under \$2. The system was quickly fixed, but the airline felt compelled to honor the drastically reduced fares. While this may have been the right decision from a public relations standpoint, the loss of revenue certainly didn't help the company as it struggled to work its way out of bankruptcy.
- Numerous FAA issues. In November 2005, the Federal Aviation Administration rolled out software patches to Boston and other airports to improve ground-based radar systems. The software it was replacing had a defect that didn't allow the system to see two planes approaching each other on the runways. In another example, a software failure from a backup system that was designed to handle planned server downtime resulted in a three-hour loss of air traffic control communication between over 800 planes, with five near misses.
- The Marines' Osprey crashes. In December 2000, the US Marine Corps' new hybrid plane-helicopter, known as the V-22 Osprey, crashed, killing four Marines. The accident was

the result of a failure in a hydraulic line, compounded by a software error. The report on the accident stated that the software defect caused "rapid and significant changes to prop-rotor pitch," which were compounded as the pilot continued to reset the system as trained, resulting in an increasingly unstable aircraft. While the Osprey program continues, this and other crashes leads many to believe that the V-22 is an inherently flawed aircraft.

- The Mars Climate Orbiter loss. In 1999, NASA lost contact with one of its well-publicized unmanned spacecraft, the Mars Orbiter. During the subsequent investigation into its loss, many issues that lead to its demise were uncovered. However, the final cause was later determined to be a result of a problem within a software application that was responsible for converting differing units of measurement. Specifically, "The 'root cause' of the loss of the spacecraft was the failed translation of English units into metric units in a segment of ground-based, navigation-related mission software." Other recent successes, such as the longer than expected life of the two new Martian robot rovers, have pushed the Orbiter loss to the periphery, although you can bet that NASA software engineers will always check their conversion code for all future spacecraft.
- The destruction of an Ariane 5 rocket. In 1996, a new version of the Ariane rocket exploded on its maiden flight. This was exactly the opposite outcome that the European rocket consortium responsible for the rocket had hoped for, as its fiery demise was and is the type of high profile disaster story that the media latches onto. The panel that investigated the explosion's cause determined that a faulty computer program was to blame. The loss was attributed to software that shut down because of an internal variable exceeding a limit imposed by the underlying code.
- The USS Yorktown ends up adrift. With all the threats to modern military ships, from missiles to mines to more exotic weapons, the least appealing way to have a ship disabled would be an internal software glitch. But that is just what happened to a prototype US Navy ship in the fall of 1997. When attempting to adjust a valve setting, a sailor entered a zero into a database field. The result? The ship was out of action for two hours. The fault was traced to an internal system, running on 27 remote terminals with Windows NT front ends, which did not have the proper data field level validation. For the Navy and the software company that wrote the computer code, the embarrassment was tempered only by the fact that the error occurred during testing, not during a military engagement.

Interesting, this, like many other software failures, often spawns a variety of damaging urban legends, in this case impacting the reputation of Microsoft. A common version of the story among IT professionals is that a Windows bug disabled a Navy ship. While Microsoft has been at the center of many reports and discussion of software quality, in this instance, a contractor's sloppy programming, not its software, was to blame.

• The WMF bug. There are many instances in which Microsoft software has failed; particularly security vulnerabilities that have given the company a reputation for buggy code. The ways the vendor has reacted to it real and reported software defects in its high profile flagship products like Windows and Office illustrate how the issue of responding to software defects is now a major challenge. In late 2005, a security vulnerability in a ubiquitous component of Windows became widely discussed in the trade press and technical forum and blog world. Since the code was present even in up-to-date products and the potential for malicious exploitation was believed to be high, the desire for a quick patch was strong.

When the official patch was seen as taking too long to arrive, a non-Microsoft developer took it upon himself to write, and then release his own patch. The non-official patch garnered major IT industry publicity when some security firms suggested companies test and then install it in lieu of the official remedy.

What is so intriguing about this event is that the Microsoft response was not slow, but due to the global spread of information and exploit code, many felt that waiting two weeks was too long. Now, not only the defects, but the reaction to a software problem, requires serious attention by software providers.

About the author: Tom Rhinelander is an analyst with the <u>New Rowley Group</u>. He has written and worked extensively with industry vendors and user companies on a wide variety of technology issues, including the improvement of software quality.

Posted by Admin on July 6, 2006 10:03 AM | Permalink

# Embedded.com

### Hardware-in-the-Loop Simulation

By Martin Gomez, Courtesy of Embedded Systems Design Nov 30 2001 (8:21 AM)

URL: <a href="http://www.embedded.com/showArticle.jhtml?articleID=15201692">http://www.embedded.com/showArticle.jhtml?articleID=15201692</a>

Expensive, fragile, and unique systems are hard to test. You know the first releases of the software embedded in them will fail, but how? Hardware-in-the-loop simulation can substantially lower the cost of finding out.

Perhaps you've encountered a situation similar to this: you've created a system using an embedded computer, and you've started testing it by feeding it artificial inputs. If the inputs were analog signals, perhaps you wired a potentiometer, or a power supply, into the inputs to allow you to enter any value you like. While varying the inputs, you measured the outputs, to determine if they were appropriate for the present value of the input.

So far, this is not a particularly challenging scenario for an embedded software engineer, even if armed only with a voltmeter and a power supply. Suppose, however, that the embedded system you're testing is a bit more sophisticated. There are plenty of systems, after all, in which the output is not simply a function of the present inputs, but is instead a function of the present inputs and some combination of past inputs. Equally common are systems in which the outputs are both numerous and each a function of several inputs.

How do you conduct meaningful tests of such a system? In many cases, you can put breakpoints into the software so that it pauses after each cycle through the calculations. You can compare the actual outputs against the value you expected, given all the present and past inputs. You're still faced with the challenge, however, of giving it combinations of inputs that make sense, both relative to one another, and relative to their past values. After all, of all the possible combinations of inputs, only some are "legal." How do you generate those legal test vectors?


You may have additional challenges. How do the digital delays in your software affect the operation of the actual system? You can't easily measure such effects if you insert breakpoints with a debugger. To further complicate things, perhaps your system includes a peripheral, sensor, or actuator, which itself has an embedded computer in it. Can you stop it to measure the output while it's stationary? Probably not. It's part of the "world" as far as your embedded system is concerned, and you'll have to deal with it in real time.

### An example

Many airplanes, missiles, and unmanned aerial vehicles have sophisticated autopilots. In most modern applications, autopilots are implemented in software. The inputs to a typical autopilot might be the airplane's current airspeed, the desired or commanded airspeed, the pitch angle (the angle of the nose above or below the horizontal), normal acceleration (commonly known as "g-force"),

and pitch rate (the angular velocity at which the nose is rising or falling). The output (simplistically) might be the deflection of the elevator (the flap-like surface that pushes up or down on the tail). The control law written into the software is designed (in this example) to hold the airspeed at a desired value. In other words, if the airplane is flying too slowly, the autopilot will try to lower the nose by deflecting the elevator downwards, and vice versa. Note that the laws of physics will enforce certain relationships between airspeed, pitch rate, and so on. For example, pitch rate is the time derivative of pitch angle, pitch rate times airspeed equals normal acceleration, and so on.

The relationship between these five inputs and the output is non-trivial. For one thing, the controls engineer is very likely to include an integrator into the control law. This means that if the actual airspeed differs from the desired airspeed, the difference is integrated over time, and a deflection proportional to the integral is applied to the elevator output. This complicates testing. If you turn the system on in the lab with any fixed value of the airspeed other than the commanded one, the elevator will slowly ramp up or down until it reaches the end of its travel. Therefore, you cannot easily measure the elevator deflection and compare it to what you thought it ought to be, because it's constantly changing.

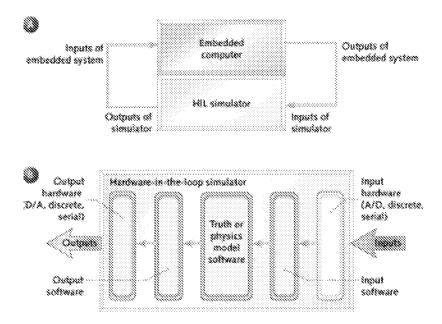

### Figure 1

- a) Block diagram of embedded system connected to a hardware- in-the-loop simulator;
- b) Components of a simple hardware-in-the-loop simulator

A powerful tool often used in this situation is a hardware-in-the-loop simulator (HILS). A HILS is a device that fools your embedded system into thinking that it's operating with real-world inputs and outputs, in real-time. In the autopilot example, it fools the aircraft into thinking it's flying. Figure 1a shows a simple block diagram of an embedded system being tested using a HILS. Figure 1b shows the components of a simple HILS.

The outputs of the embedded system-the elevator deflection, to continue the previous example-are measured by the simulator's electronics. Let's postpone discussion of how that's done, because it's

a major architectural decision in the design of a HILS. For now, let's assume that the simulator simply measures the voltage that the autopilot computer would send to the elevator servo, if it were in actual operation.

The software running on the HILS calculates what the airplane's reaction to that elevator deflection would be. It must therefore include a physics model (also known as a "truth model"), which "knows" the airplane's mass, moment of inertia, and aerodynamic characteristics, as well as the equations of motion. The results of that calculation-the new value of the airspeed, pitch, pitch rate, and normal acceleration-are turned into analog signals, and fed back to the embedded computer. I'm using analog signals in this example, but there is no reason why they can't be serial data streams. Indeed, many aerospace applications use MIL-1553, ARINC-429, RS-422, or other protocols for box-to-box connections. Figure 2 shows the block diagram of the resulting system. Note that the commanded airspeed is a user input; it is not driven by the simulator. When testing the autopilot, the test engineer would drive this input to "tell the autopilot what to do," and use the simulator's data logging features to determine how well it did it.

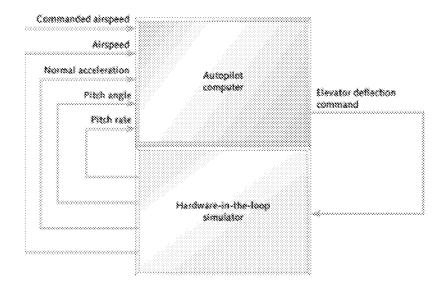


Figure 2 Autopilot being tested using a HILS

### Why "hardware-in-the-loop"?

Now that we have PCs on every engineer's desktop, simulation has become a common tool. Many engineers will either write a custom program to simulate the behavior of their product, or use an off-the-shelf tool. For instance, the controls engineer who designs the autopilot's control algorithm will very likely simulate it in MATLAB, or with a custom C program running much faster than the real system on his PC. Similarly, many embedded software engineers first test the embedded code by running a reasonable facsimile of it on a desktop PC before porting it to the final 8-bit microcontroller (or whatever). They "fake" the embedded system's I/O and environment with custom code executing on their PC. There are three key differences between such a simulation and a HILS. First, the output of simulations are just squiggly lines plotted on a graph, not hardware signals. Second, the HILS runs in real time, and third, in a HILS the embedded software runs on the "real" hardware that you will eventually build into your product, not a workstation.

### Digitizing and iteration rate

An experienced embedded software engineer, upon looking at Figure 2, will immediately jump to the correct conclusion: the HILS software has to iterate faster than the system under test, and the analog signals have to be digitized with a higher resolution than the system under test uses. How much faster? Hint: it's not just twice as fast. That myth is due to an incomplete reading of the sampling theorem. The "twice the rate of the highest frequency component" rule requires that you take each sample and multiply it by a scaled and shifted sin(wt)/wt function.1 In practice, try iterating five to 10 times as fast as the embedded system iterates. Given the fast computers you can buy nowadays, it's seldom worth doing all the extra math required by the sampling theorem. There are exceptions to this, but fortunately, I've never had to deal with one. Your controls engineer will doubtless express strong opinions on the subject.

### Implementation

Now that we understand what a HILS is, and why you might need one, how do you make one? Unfortunately, "make" is the key word-I've never seen an off-the-shelf HILS for sale, although as we'll see, a couple of products come close. In the mid '90s, I led a team that designed a HILS from scratch for our company's internal use. It cost slightly over \$100,000 to design and build the first unit. It had approximately 100 inputs and outputs and could iterate a fairly sophisticated model at 70Hz. The second identical unit cost about \$25,000 to build. This was considered a bargain compared to the multi-million dollar unmanned aerial vehicles (UAVs) we were developing-if the HILS prevented the crash of just one UAV, the company would get its money's worth. There was another, even more valuable benefit: a HILS allows software to be developed and tested without waiting for all of the actual hardware to be built (or in this case, built and flown).

Start with the signal list of your embedded product. This is a list that includes all the inputs and outputs that the embedded system has and describes their range, resolution, and sample rate. (As an aside, a signal list is not a bad place to start any embedded project, since it forces the software and hardware folks to have a long, sincere chat.) Table 1 is a typical example.

Table 1 Signal list for the autopilot example

Signal Name	Range (V)	Range (physical units)	Resolution (units)	Sample Rate (Hz)	Input or Output
Airspeed	0-10	0-200 (m/s)	0.1 m/s	5	Input
Commanded _airspeed	0-10	0-250 (m/s)	0.25 m/s	10	Input
Pitch_rate	0-10	-2-2 (rad/s)	0.004 rad/s	10	Input
Pitch	0-10	0-2p (rad)	0.006 rad	10	Input
Norm_accel	0-10	-10-10 (g)	0.02 g	10	Input
Elev_cmd	0-5	-25-25 (deg)	0.05 deg	10	Output

Table 2 Signal list for a HILS to test the autopilot

Signal Name	Range (V)	Range (physical units)	Resolution (units)	Sample Rate (Hz)	Input or Output
Airspeed	0-10	0-250 (m/s)	0.06 m/s	50	Output
Commanded _airspeed	0-10	0-300 (m/s)	0.08 m/s	50	Output
Pitch_rate	0-10	-2.5-2.5 (rad/s)	0.001 rad/s	50	Output
Pitch	0-10	0-2p (rad)	0.002 rad	50	Output
Norm_accel	0-10	-15-15 (g)	0.008 g	50	Output
Elev_cmd	0-5	-30-30 (deg)	0.02 deg	50	Input

The HILS's signal list should end up being a "mirror image" of our embedded system's signal list. Table 2 shows that. Note that the simulator's inputs and outputs have a slightly wider range than the autopilot's outputs and inputs, and that they have better resolution.

The choice of hardware platform is dictated by a host of factors. Is there legacy software you want to reuse? For instance, do you already have a simulation up and running that simply lacks the hardware I/O? Are there ruggedness or environmental issues? How much I/O is available? By and large, a HILS is a laboratory device, so environmentals are often not a driving factor. These tools are usually operated by knowledgeable staff-the developers of the embedded system's hardware and software-so ease of use is also a secondary concern.

I've seen simulators built on PC, VMEBus, and proprietary platforms. Each has its advantages; to recommend one here would be meaningless. As with many such decisions, logistical, political, and administrative factors carry at least as much weight as the technical issues, and these vary from one organization to the next.

Two somewhat off-the-shelf platforms are worth mentioning: dSpace and National Instruments' LabView. dSpace (www.dSpace.de) provides what is essentially a PC chassis with one or more of Texas Instruments' DSPs plugged into the backplane. The PC runs the user interface and data logging code, and the DSP runs your simulation and the analog I/O. If you need to run a very fast hardware-in-the-loop simulation, the number-crunching power of a DSP will fit the bill. There are plenty of applications that have to iterate at a kilohertz or more. A Pentium, PowerPC, or other general-purpose processor is hard-pressed to compete with a dedicated DSP at such rates. dSpace has connections to MATLAB and Simulink, which your controls engineer will appreciate. These connections allow a simulation to be written in MATLAB on the PC and then run in real time on the DSP with much less hand-coding than if you wrote it from scratch in C.

LabView (www.ni.com) is a popular front-end for a large family of analog and digital I/O boards. Using a graphical user interface, you can build virtual instruments, and then connect them to simulate the world that your device-under-test lives in.

I refer to dSpace and LabView as "somewhat off-the-shelf" because you still have to customize them to your embedded system's I/O, and you still have to write the simulation code, albeit at a higher level than if you were doing it strictly in C.

### Usability

One issue to consider, regardless of the platform, is reusability. Yours may not be the last project to use a HILS. Perhaps many of the requirements are common across projects. All will require analog I/O, discrete I/O, a fast processor, and so on. Why not try to make the common parts, well, common? In my HILS, this was taken a step further. The I/O portions of the code, as well as the interprocess communication mechanism, were common across all versions of the simulator, and were borrowed from the UAV flight computer's software, which was, in turn, shared by the ground station software. The same HILS was used to test four vastly different UAVs, with only minor changes to its software.

The details of reusability are best left to another article, but I must stress one key element: I/O drives a simulator design. No matter what you're simulating and testing, you will have to read the

device-under-test's outputs and drive its inputs. They won't be the same from project to project, so your simulator's design should be reconfigurable. Consider designing the simulator such that the mapping of hardware channels to internal software variables is configurable. For example, on our current project, channel 3 of the HILS's D/A converter might drive the embedded system's airspeed input. On the next project, it might drive a pressure input, or a temperature input, and so on. It would be nice, therefore, if the I/O portions of the simulator's code were table-driven, so that you didn't have to recode them. To extend this wish list, remember that the calibration of the HILS's I/O will vary from project to project too. On today's project, the airspeed signal might be mapped as follows: 1V = 0 knots and 8V = 150 knots. Next time, you may have to test a system with a very different calibration. Again, this can be table-driven. If you do this thoroughly, all you need to do to adapt the HILS's I/O to the next project is change the table. If your simulator hardware also allows itself to be reconfigured (SBS/GreenSpring's IndustryPacks work wonders for this), your simulator will earn its keep across many projects.

### **Architecture**

When designing a hardware-in-the-loop simulator, an important question is "how much hardware do we put in the loop?" At a minimum, the embedded system's computer has to be in the loop, since its software is being tested. In many cases, however, that will not be enough. As with many design decisions in our profession, this one requires hardware versus software trade-offs. If you want the embedded software to see real inputs, to "think" that it's operating in the real world, and to have the world react properly to its outputs, you have to either include or simulate any hardware that stands between the embedded system and that world.

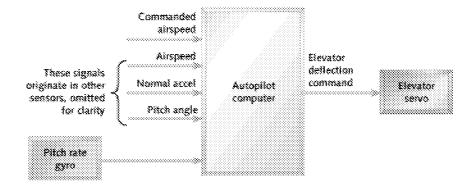


Figure 3 Block diagram of simple autopilot under test

This is best illustrated by continuing with our autopilot example. Let us consider what other components are built into our autopilot system in addition to the computer that runs our embedded software. In Figure 3, we've expanded the previous block diagram by including a sensor (the pitch rate gyro) and an actuator (the elevator servo). We'll omit the other sensors for simplicity.

The pitch rate gyro consists of a sensor that measures the aircraft's rate of rotation about one axis, in this case the pitch axis. How it works is not relevant to this discussion, but let's assume that the gyro's behavior can be characterized as follows:

- It has no noise in the frequency band of interest.
- Its output is mostly linear-it produces a voltage proportional to the pitch rate.

- Its only nonlinearity is a small bias-the output is a small non-zero number when the actual pitch rate is zero.
- To compensate for the bias (which would cause an autopilot to perpetually try to correct a non-existent rotation), the manufacturer has included a high-pass filter. This allows the pitch rate due to turbulence or maneuvers to pass, but blocks the DC bias.
- Its bandwidth is more than enough to sense the rotation of our hypothetical airplane.

The elevator servo is a bit more complicated. It consists of a motor, which uses cables and pulleys to deflect the elevator up and down. It also has a feedback mechanism, consisting of a potentiometer that tells a servo amplifier the elevator's current position. The servo amplifier will command the motor to deflect the elevator until it's at the position the autopilot commands. Let's assume that the elevator servo can be characterized as follows (and yes, all of these assumptions may stretch your imagination a bit, but bear with me-this article is about HILS design, not autopilot design):

- It is mostly linear-it produces a deflection proportional to the input voltage.
- It has a bit of a deadband-in other words, it doesn't actually move until the commanded deflection differs from the present deflection by a small amount.
- It has a finite slew rate-it can only move so many degrees per second.
- It has a finite small-signal bandwidth-if asked to move back and forth a degree or so, it can only do it so fast.
- It has a great deal of torque, so much so that there's no question of it being capable of deflecting the elevator under any conceivable load.

Our hypothetical controls engineer does not think he can write a model of the elevator servo with enough fidelity to do the job. Even if he could, it has enough non-linear behavior (finite slew rate, deadband) that it would take quite a bit of effort to model it in software. He does think, however, that the gyro can be adequately modeled. Depending on how much the servo costs, it might then make sense to include an actual servo in the hardware-in-the-loop simulation, and to model the gyro in software. Figure 4 shows the block diagram of this configuration.

Figure 4 Block diagram of a mix of real and simulated components

### View full size image

Before you scoff at the notion of including expensive hardware in a software simulation, consider the relative costs. We're assuming that this HILS is a tool, not a product, so we're only going to make a handful of them-we're not considering mass production. Thus the labor to implement a servo model in software might cost more than simply including the servo hardware in the simulation. (This philosophy is admittedly biased by my career in the U.S. When I worked in Argentina, salaries were very low and hardware was frightfully expensive, so the decision there might have been different.)

As shown in Figure 4, the HILS must now read the deflection of the servo from the feedback pot, rather than from the autopilot computer's output, as it did in Figure 2. This allows the servo's hardware to display all of the characteristics we're interested in: slew rate, bandwidth, deadband, and so on.

However, because we chose not to incorporate an actual gyro into the simulation, we must include software to model one. Not only is this a fairly easy device to model (given the simplifying assumptions we made about its behavior), but it's a lot cheaper than the alternative. Remember, the gyro senses rotation, so to physically stimulate it would require that you purchase or build a device that will rotate the gyro under command from your HILS. You can buy such a machine-known as a rate table or gimbal-from a number of companies, for a small fortune.

A portion of the software, therefore, will be devoted to turning the simulated airplane's pitch rate (the "truth model") into a sensor output, given the behavior we've assumed for the gyro. It may be wise to make this a modular block of code, since you can then use the simulator to test various sensors, without changing the simulation code itself. The HILS would then have a block of software for every sensor (and, if we choose to model the actuators, for every actuator).

Both of these decisions-to model the sensor in software, and to incorporate the actuator hardware-involve trade-offs. For one thing, no software model is perfect. The equations that govern even a simple device can be very complex, and there will always be effects-hopefully small-that the model either doesn't incorporate or calculates inaccurately. On the other hand, including the hardware in the simulation is no panacea either. Does the device work the same on your lab bench as it will in real life? We assumed our servo would have a huge amount of torque, but in real life the torque is finite and the load is large, because the actuator has to move a massive object and overcome aerodynamic forces. Thus it will not move the same in flight as it does in the lab.

### Data logging

The purpose of the HILS is to test an embedded system. The proof that the embedded system passed its test is that its outputs were correct for the inputs that it was given. The HILS ought, therefore, to provide data logging capabilities. One easy way to do that, if the required throughput is not excessive compared to the computer's throughput, is the following: at the end of every cycle, write the simulation's state to a file. By "state" I mean all the inputs to your simulation, its outputs, and any internal values it generates that are used to calculate the next cycle's outputs. If a hard disk is too slow to keep up with your real-time requirements, a RAM disk may be large enough to do the job. In this case, you might want to incorporate a means of starting and stopping data logging (much like the trigger mechanism on a scope or logic analyzer) so that you don't fill the data log with meaningless data. At the end of the test, transfer the file to a program such as Excel or MATLAB and analyze the results. You did build Ethernet into your simulator, didn't you? The volume of data generated can easily exceed what you'd happily transfer with floppy disks. This is an area where an off-the-shelf environment like dSpace or LabView can save you some development effort.

### Limitations of a HILS

Lest you leave with the impression that a HILS is a silver bullet, let's list what it can't do. It cannot easily stop-if you pause the hardware-in-the-loop simulator, all the components that it's attached to, including the embedded program in your system-under-test, keep running. We could, of course, put breakpoints or a pause-on-command feature in our embedded software, but that's rather intrusive. If we did that, we would not be testing what we intend to ship. Even then, in the autopilot example above, the elevator servo has a dumb analog control loop built in. It won't stop just because the simulator or our embedded software stops.

A HILS cannot tell you what's going on inside your embedded software; it's not a replacement for an in-circuit emulator, a logic analyzer, or a software debugger. It can only read the embedded system's outputs. When the embedded software goes awry, there may or may not be enough information contained in those few outputs to determine what portion of the software was executing, or what the values of the internal variables were.

### Other applications

The vast majority of embedded software engineers work in fields other than aerospace. However, with a little imagination, you can see how a HILS can be applied in other areas. For instance, machine control and motion control are two areas where it's hard to completely test the software before the expensive, fragile, and often unique machine is built.

Before I joined the aerospace field, I designed software for vacuum equipment used in the production of semiconductors. These were million-dollar machines equipped with pumps, valves, robot arms, and vacuum chambers. It would have been relatively straightforward, had I known about hardware-in-the-loop simulation back then, to sense the state of the pump and valve commands coming out of the embedded computer, and then calculate what the pressures in the various chambers would do. We had no such capability, however. Instead, I wrote the software, and tested it as best I could using more manual methods. When the machine was finally coming together mechanically on the shop floor, the schedule was starting to get tight. There were many hardware tests that needed to be performed. Problems with the hardware had to be fixed. Everybody knows "software is much easier than hardware," so it's okay to leave software testing until the very end, right? There ensued a few weeks of late nights, three shifts per day, twice-daily Gantt charts, hourly visits to the shop floor by anxious managers, and all-around misery.

Avoiding the all-too-frequent integration crunch is reason enough to invest in a hardware-in-the-loop simulator. esp

**Martin Gomez** is a software engineer at Johns Hopkins University's Applied Physics Lab, where he is presently developing flight software for the STEREO spacecraft. He has been working in the field of embedded software development for 17 years. Martin has a BS in aerospace engineering, an M.Eng. in electrical engineering, and is a part time graduate student in Applied Physics at JHU. He may be reached at <a href="martin.gomez@jhuapl.edu">martin.gomez@jhuapl.edu</a>.

### References

1. Proakis, John G. and Dimitris G. Manolakis. *Digital Signal Processing: Principles, Algorithms, and Applications, 2nd Edition.* New York: MacMillan, 1992.

Return to December 2001 Table of Contents

Copyright 2005 © CMP Media LLC



http://caselaw.findlaw.com

### **U.S. Supreme Court**

### BOYLE v. UNITED TECHNOLOGIES CORP., 487 U.S. 500 (1988)

487 U.S. 500

### BOYLE, PERSONAL REPRESENTATIVE OF THE HEIRS AND ESTATE OF BOYLE v. UNITED TECHNOLOGIES CORP. CERTIORARI TO THE UNITED STATES COURT OF APPEALS FOR THE FOURTH CIRCUIT No. 86-492.

### Argued October 13, 1987 Reargued April 27, 1988 Decided June 27, 1988

David A. Boyle, a United States Marine helicopter copilot, drowned when his helicopter crashed off the Virginia coast. Petitioner, the personal representative of the heirs and estate of Boyle, brought this diversity action in Federal District Court against the Sikorsky Division of respondent corporation (Sikorsky), alleging, inter alia, under Virginia tort law, that Sikorsky had defectively designed the helicopter's copilot emergency escape-hatch system. The jury returned a general verdict for petitioner, and the court denied Sikorsky's motion for judgment notwithstanding the verdict. The Court of Appeals reversed and remanded with directions that judgment be entered for Sikorsky. It found that, as a matter of federal law, Sikorsky could not be held liable for the allegedly defective design because Sikorsky satisfied the requirements of the "military contractor defense."

### Held:

1. There is no merit to petitioner's contention that, in the absence of federal legislation specifically immunizing Government contractors, federal law cannot shield contractors from liability for design defects in military equipment. In a few areas involving "uniquely federal interests," state law is pre-empted and replaced, where necessary, by federal law of a content prescribed (absent explicit statutory directive) by the courts. The procurement of equipment by the United States is an area of uniquely federal interest. A dispute such as the present one, even though between private parties, implicates the interests of the United States in this area. Once it is determined that an area of uniquely federal interest is implicated, state law will be displaced only where a "significant conflict" exists between an identifiable federal policy or interest and the operation of state law, or the application of state law would frustrate specific objectives of federal legislation. Here, the state-imposed duty of care that is the asserted basis of the contractor's liability is precisely contrary to the duty imposed by the Government contract. But even in this situation, it would be unreasonable to say that there is

always a "significant conflict" between state law and a federal policy or interest. In search of a limiting principle to identify when a significant [487 U.S. 500, 501] conflict is present, the Court of Appeals relied on the rationale of Feres v. United States, 340 U.S. 135. This produces results that are in some respects too broad and in some respects too narrow. However, the discretionary function exception to the Federal Tort Claims Act does demonstrate the potential for, and suggest the outlines of, "significant conflict" between federal interest and state law in this area. State law is displaced where judgment against the contractor would threaten a discretionary function of the Government. In sum, state law which imposes liability for design defects in military equipment is displaced where (a) the United States approved reasonably precise specifications; (b) the equipment conformed to those specifications; and (c) the supplier warned the United States about dangers in the use of the equipment known to the supplier but not to the United States. Pp. 504-513.

2. Also without merit is petitioner's contention that since the Government contractor defense formulated by the Court of Appeals differed from the instructions given by the District Court to the jury, the Seventh Amendment guarantee of jury trial requires a remand for trial on the new theory. If the evidence presented in the first trial would not suffice, as a matter of law, to support a jury verdict under the properly formulated defense, judgment could properly be entered for respondent at once, without a new trial. It is unclear from the Court of Appeals' opinion, however, whether it was in fact deciding that no reasonable jury could, under the properly formulated defense, have found for petitioner on the facts presented, or rather was assessing on its own whether the defense had been established. The latter would be error, since whether the facts established the conditions for the defense is a question for the jury. The case is remanded for clarification of this point. Pp. 513-514.

792 F.2d 413, vacated and remanded.

SCALIA, J., delivered the opinion of the Court, in which REHNQUIST, C. J., and WHITE, O'CONNOR, and KENNEDY, JJ., joined. BRENNAN, J., filed a dissenting opinion, in which MARSHALL and BLACKMUN, JJ., joined, post, p. 515. STEVENS, J., filed a dissenting opinion, post, p. 531.

Louis S. Franecke reargued the cause for petitioner. With him on the briefs was John O. Mack.

Philip A. Lacovara reargued the cause for respondent. With him on the briefs were Lewis T. Booker, W. Stanfield Johnson, and William R. Stein.

Deputy Solicitor General Ayer reargued the cause for the United States as amicus curiae urging affirmance. With him on the brief were Solicitor General Fried, Assistant [487 U.S. 500, 502] Attorney General Willard, Deputy Assistant Attorneys General Spears and Willmore, and Christopher J. Wright. *

[ Footnote * ] Briefs of amici curiae urging reversal were filed for Edwin Lees Shaw by Joel D. Eaton and Robert L. Parks; and for Joan S. Tozer et al. by Michael J. Pangia.

Briefs of amici curiae urging affirmance were filed for the Chamber of Commerce of the United States by Herbert L. Fenster, Raymond B. Biagini, and Robin S. Conrad; for the Defense Research Institute, Inc., by James W. Morris III, Ann Adams Webster, and Donald F. Pierce; for Grumman Aerospace Corp. by James M. FitzSimons, Frank J. Chiarchiaro, Charles M. Shaffer, Jr., L. Joseph Loveland, and Gary J. Toman; for the National Security Industrial Association et al. by Kenneth S. Geller and Andrew L. Frey; and for the

Product Liability Advisory Council, Inc., et al. by Michael Hoenig, David B. Hamm, William H. Crabtree, and Edward P. Good.

Briefs of amici curiae were filed for the Association of Trial Lawyers of America by Robert L. Habush, Dale Haralson, and Denneen L. Peterson; for Bell Helicopter Textron Inc. by R. David Broiles, George Galerstein, and James W. Hunt; and for UNR Industries, Inc., by Joe G. Hollingsworth.

JUSTICE SCALIA delivered the opinion of the Court.

This case requires us to decide when a contractor providing military equipment to the Federal Government can be held liable under state tort law for injury caused by a design defect.

I

On April 27, 1983, David A. Boyle, a United States Marine helicopter copilot, was killed when the CH-53D helicopter in which he was flying crashed off the coast of Virginia Beach, Virginia, during a training exercise. Although Boyle survived the impact of the crash, he was unable to escape from the helicopter and drowned. Boyle's father, petitioner here, brought this diversity action in Federal District Court against the Sikorsky Division of United Technologies Corporation (Sikorsky), which built the helicopter for the United States. [487 U.S. 500, 503]

At trial, petitioner presented two theories of liability under Virginia tort law that were submitted to the jury. First, petitioner alleged that Sikorsky had defectively repaired a device called the servo in the helicopter's automatic flight control system, which allegedly malfunctioned and caused the crash. Second, petitioner alleged that Sikorsky had defectively designed the copilot's emergency escape system: the escape hatch opened out instead of in (and was therefore ineffective in a submerged craft because of water pressure), and access to the escape hatch handle was obstructed by other equipment. The jury returned a general verdict in favor of petitioner and awarded him \$725,000. The District Court denied Sikorsky's motion for judgment notwithstanding the verdict.

The Court of Appeals reversed and remanded with directions that judgment be entered for Sikorsky. 792 F.2d 413 (CA4 1986). It found, as a matter of Virginia law, that Boyle had failed to meet his burden of demonstrating that the repair work performed by Sikorsky, as opposed to work that had been done by the Navy, was responsible for the alleged malfunction of the flight control system. Id., at 415-416. It also found, as a matter of federal law, that Sikorsky could not be held liable for the allegedly defective design of the escape hatch because, on the evidence presented, it satisfied the requirements of the "military contractor defense," which the court had recognized the same day in Tozer v. LTV Corp., 792 F.2d 403 (CA4 1986). 792 F.2d, at 414-415.

Petitioner sought review here, challenging the Court of Appeals' decision on three levels: First, petitioner contends that there is no justification in federal law for shielding Government contractors from liability for design defects in military equipment. Second, he argues in the alternative that even if such a defense should exist, the Court of Appeals' formulation of the conditions for its application is inappropriate. Finally, petitioner contends that the Court of Appeals erred in not remanding for a jury determination of whether the elements [487 U.S. 500, 504] of the defense were met in this case. We granted certiorari, 479 U.S. 1029 (1986).

II

Petitioner's broadest contention is that, in the absence of legislation specifically immunizing Government contractors from liability for design defects, there is no basis for judicial recognition of such a defense. We disagree. In most fields of activity, to be sure, this Court has refused to find federal pre-emption of state law in the absence of either a clear statutory prescription, see, e. g., Jones v. Rath Packing Co., 430 U.S. 519, 525 (1977); Rice v. Santa Fe Elevator Corp., 331 U.S. 218, 230 (1947), or a direct conflict between federal and state law, see, e. g., Florida Lime & Avocado Growers, Inc. v. Paul, 373 U.S. 132, 142–143 (1963); Hines v. Davidowitz, 312 U.S. 52, 67 (1941). But we have held that a few areas, involving "uniquely federal interests," Texas Industries, Inc. v. Radcliff Materials, Inc., 451 U.S. 630, 640 (1981), are so committed by the Constitution and laws of the United States to federal control that state law is pre-empted and replaced, where necessary, by federal law of a content prescribed (absent explicit statutory directive) by the courts - so-called "federal common law." See, e. g., United States v. Kimbell Foods, Inc., 440 U.S. 715, 726–729 (1979); Banco Nacional v. Sabbatino, 376 U.S. 398, 426–427 (1964); Howard v. Lyons, 360 U.S. 593, 597 (1959); Clearfield Trust Co. v. United States, 318 U.S. 363, 366–367 (1943); D'Oench, Duhme & Co. v. FDIC, 315 U.S. 447, 457–458 (1942).

The dispute in the present case borders upon two areas that we have found to involve such "uniquely federal interests." We have held that obligations to and rights of the United States under its contracts are governed exclusively by federal law. See, e. g., United States v. Little Lake Misere Land Co., 412 U.S. 580, 592 -594 (1973); Priebe & Sons, Inc. v. United States, 322 U.S. 407, 411 (1947); National Metropolitan Bank v. United States, 323 U.S. 454, [487 U.S. 500, 505] 456 (1945); Clearfield Trust, supra. The present case does not involve an obligation to the United States under its contract, but rather liability to third persons. That liability may be styled one in tort, but it arises out of performance of the contract - and traditionally has been regarded as sufficiently related to the contract that until 1962 Virginia would generally allow design defect suits only by the purchaser and those in privity with the seller. See General Bronze Corp. v. Kostopulos, 203 Va. 66, 69-70, 122 S. E. 2d 548, 551 (1961); see also Va. Code 8.2-318 (1965) (eliminating privity requirement).

Another area that we have found to be of peculiarly federal concern, warranting the displacement of state law, is the civil liability of federal officials for actions taken in the course of their duty. We have held in many contexts that the scope of that liability is controlled by federal law. See, e. g., Westfall v. Erwin, 484 U.S. 292, 295 (1988); Howard v. Lyons, supra, at 597; Barr v. Matteo, 360 U.S. 564, 569 -574 (1959) (plurality opinion); id., at 577 (Black, J., concurring); see also Yaselli v. Goff, 12 F.2d 396 (CA2 1926), aff'd, 275 U.S. 503 (1927) (per curiam); Spalding v. Vilas, 161 U.S. 483 (1896); Bradley v. Fisher, 13 Wall. 335 (1872). The present case involves an independent contractor performing its obligation under a procurement contract, rather than an official performing his duty as a federal employee, but there is obviously implicated the same interest in getting the Government's work done. 1

We think the reasons for considering these closely related areas to be of "uniquely federal" interest apply as well to [487 U.S. 500, 506] the civil liabilities arising out of the performance of federal procurement contracts. We have come close to holding as much. In Yearsley v. W. A. Ross Construction Co., 309 U.S. 18 (1940), we rejected an attempt by a landowner to hold a construction contractor liable under state law for the erosion of 95 acres caused by the contractor's work in constructing dikes for the Government. We said

that "if [the] authority to carry out the project was validly conferred, that is, if what was done was within the constitutional power of Congress, there is no liability on the part of the contractor for executing its will." Id., at 20-21. The federal interest justifying this holding surely exists as much in procurement contracts as in performance contracts; we see no basis for a distinction.

Moreover, it is plain that the Federal Government's interest in the procurement of equipment is implicated by suits such as the present one - even though the dispute is one between private parties. It is true that where "litigation is purely between private parties and does not touch the rights and duties of the United States," Bank of America Nat. Trust & Sav. Assn. v. Parnell, 352 U.S. 29, 33 (1956), federal law does not govern. Thus, for example, in Miree v. DeKalb County, 433 U.S. 25, 30 (1977), which involved the question whether certain private parties could sue as third-party beneficiaries to an agreement between a municipality and the Federal Aviation Administration, we found that state law was not displaced because "the operations of the United States in connection with FAA grants such as these . . . would [not] be burdened" by allowing state law to determine whether third-party beneficiaries could sue, id., at 30, and because "any federal interest in the outcome of the [dispute] before us `[was] far too speculative, far too remote a possibility to justify the application of federal law to transactions essentially of local concern." Id., at 32-33, quoting Parnell, supra, at 33-34; see also Wallis v. Pan American Petroleum [487 U.S. 500, 507] Corp., 384 U.S. 63, 69 (1966). 2 But the same is not true here. The imposition of liability on Government contractors will directly affect the terms of Government contracts: either the contractor will decline to manufacture the design specified by the Government, or it will raise its price. Either way, the interests of the United States will be directly affected.

That the procurement of equipment by the United States is an area of uniquely federal interest does not, however, end the inquiry. That merely establishes a necessary, not a sufficient, condition for the displacement of state law. 3 Displacement will occur only where, as we have variously described, a "significant conflict" exists between an identifiable "federal policy or interest and the [operation] of state law," Wallis, supra, at 68, or the application of state law would "frustrate specific objectives" of federal legislation, Kimbell Foods, 440 U.S., at 728. The conflict with federal policy need not be as sharp as that which must exist for ordinary pre-emption when Congress legislates "in a field which the States have traditionally occupied." Rice v. Santa Fe Elevator Corp., 331 U.S., at 230. Or to put the point differently, the [487 U.S. 500, 508] fact that the area in question is one of unique federal concern changes what would otherwise be a conflict that cannot produce pre-emption into one that can. 4 But conflict there must be. In some cases, for example where the federal interest requires a uniform rule, the entire body of state law applicable to the area conflicts and is replaced by federal rules. See, e. g., Clearfield Trust, 318 U.S., at 366 -367 (rights and obligations of United States with respect to commercial paper must be governed by uniform federal rule). In others, the conflict is more narrow, and only particular elements of state law are superseded. See, e. g., Little Lake Misere Land Co., 412 U.S., at 595 (even assuming state law should generally govern federal land acquisitions, particular state law at issue may not); Howard v. Lyons, 360 U.S., at 597 (state defamation law generally applicable to federal official, but federal privilege governs for statements made in the course of federal official's duties).

In Miree, supra, the suit was not seeking to impose upon the person contracting with the Government a duty contrary to the duty imposed by the Government contract. Rather, it was the contractual duty itself that the private plaintiff (as third-party beneficiary) sought to enforce. Between Miree [487 U.S. 500, 509] and the present case, it is easy to conceive of an intermediate situation, in which the duty sought to be imposed on

the contractor is not identical to one assumed under the contract, but is also not contrary to any assumed. If, for example, the United States contracts for the purchase and installation of an air-conditioning unit, specifying the cooling capacity but not the precise manner of construction, a state law imposing upon the manufacturer of such units a duty of care to include a certain safety feature would not be a duty identical to anything promised the Government, but neither would it be contrary. The contractor could comply with both its contractual obligations and the state-prescribed duty of care. No one suggests that state law would generally be pre-empted in this context.

The present case, however, is at the opposite extreme from Miree. Here the state-imposed duty of care that is the asserted basis of the contractor's liability (specifically, the duty to equip helicopters with the sort of escape-hatch mechanism petitioner claims was necessary) is precisely contrary to the duty imposed by the Government contract (the duty to manufacture and deliver helicopters with the sort of escape-hatch mechanism shown by the specifications). Even in this sort of situation, it would be unreasonable to say that there is always a "significant conflict" between the state law and a federal policy or interest. If, for example, a federal procurement officer orders, by model number, a quantity of stock helicopters that happen to be equipped with escape hatches opening outward, it is impossible to say that the Government has a significant interest in that particular feature. That would be scarcely more reasonable than saying that a private individual who orders such a craft by model number cannot sue for the manufacturer's negligence because he got precisely what he ordered.

In its search for the limiting principle to identify those situations in which a "significant conflict" with federal policy or interests does arise, the Court of Appeals, in the lead case [487 U.S. 500, 510] upon which its opinion here relied, identified as the source of the conflict the Feres doctrine, under which the Federal Tort Claims Act (FTCA) does not cover injuries to Armed Services personnel in the course of military service. See Feres v. United States, 340 U.S. 135 (1950). Military contractor liability would conflict with this doctrine, the Fourth Circuit reasoned, since the increased cost of the contractor's tort liability would be added to the price of the contract, and "[s]uch pass-through costs would . . . defeat the purpose of the immunity for military accidents conferred upon the government itself." Tozer, 792 F.2d, at 408. Other courts upholding the defense have embraced similar reasoning. See, e. g., Bynum v. FMC Corp., 770 F.2d 556, 565-566 (CA5 1985); Tillett v. J. I. Case Co., 756 F.2d 591, 596-597 (CA7 1985); McKay v. Rockwell Int'l Corp., 704 F.2d 444, 449 (CA9 1983), cert. denied, 464 U.S. 1043 (1984). We do not adopt this analysis because it seems to us that the Feres doctrine, in its application to the present problem, logically produces results that are in some respects too broad and in some respects too narrow. Too broad, because if the Government contractor defense is to prohibit suit against the manufacturer whenever Feres would prevent suit against the Government, then even injuries caused to military personnel by a helicopter purchased from stock (in our example above), or by any standard equipment purchased by the Government, would be covered. Since Feres prohibits all service-related tort claims against the Government, a contractor defense that rests upon it should prohibit all service-related tort claims against the manufacturer - making inexplicable the three limiting criteria for contractor immunity (which we will discuss presently) that the Court of Appeals adopted. On the other hand, reliance on Feres produces (or logically should produce) results that are in another respect too narrow. Since that doctrine covers only service-related injuries, and not injuries caused by the military to civilians, it could not be invoked to prevent, for example, a civilian's suit against the manufacturer of fighter planes, based on a state [487 U.S. 500, 511] tort theory, claiming harm from what is alleged to be needlessly high levels of noise produced by the jet engines. Yet we think that the character of the jet engines the Government orders for its fighter planes cannot be regulated by state

tort law, no more in suits by civilians than in suits by members of the Armed Services.

There is, however, a statutory provision that demonstrates the potential for, and suggests the outlines of, "significant conflict" between federal interests and state law in the context of Government procurement. In the FTCA, Congress authorized damages to be recovered against the United States for harm caused by the negligent or wrongful conduct of Government employees, to the extent that a private person would be liable under the law of the place where the conduct occurred. 28 U.S.C. 1346(b). It excepted from this consent to suit, however,

"[a]ny claim . . . based upon the exercise or performance or the failure to exercise or perform a discretionary function or duty on the part of a federal agency or an employee of the Government, whether or not the discretion involved be abused." 28 U.S.C. 2680(a).

We think that the selection of the appropriate design for military equipment to be used by our Armed Forces is assuredly a discretionary function within the meaning of this provision. It often involves not merely engineering analysis but judgment as to the balancing of many technical, military, and even social considerations, including specifically the trade-off between greater safety and greater combat effectiveness. And we are further of the view that permitting "second-guessing" of these judgments, see United States v. Varig Airlines, 467 U.S. 797, 814 (1984), through state tort suits against contractors would produce the same effect sought to be avoided by the FTCA exemption. The financial burden of judgments against the contractors would ultimately be passed through, substantially if not totally, to the [487 U.S. 500, 512] United States itself, since defense contractors will predictably raise their prices to cover, or to insure against, contingent liability for the Government-ordered designs. To put the point differently: It makes little sense to insulate the Government against financial liability for the judgment that a particular feature of military equipment is necessary when the Government produces the equipment itself, but not when it contracts for the production. In sum, we are of the view that state law which holds Government contractors liable for design defects in military equipment does in some circumstances present a "significant conflict" with federal policy and must be displaced. 5

We agree with the scope of displacement adopted by the Fourth Circuit here, which is also that adopted by the Ninth Circuit, see McKay v. Rockwell Int'l Corp., supra, at 451. Liability for design defects in military equipment cannot be imposed, pursuant to state law, when (1) the United States approved reasonably precise specifications; (2) the equipment conformed to those specifications; and (3) the supplier warned the United States about the dangers in the use of the equipment that were known to the supplier but not to the United States. The first two of these conditions assure that the suit is within the area where the policy of the "discretionary function" would be frustrated - i. e., they assure that the design feature in question was considered by a Government officer, and not merely by the contractor itself. The third condition is necessary because, in its absence, the displacement of state tort law would create some incentive for the manufacturer to withhold knowledge of risks, since conveying that knowledge might disrupt the contract but withholding it would produce no liability. We adopt this provision lest our effort to protect [487 U.S. 500, 513] discretionary functions perversely impede them by cutting off information highly relevant to the discretionary decision.

We have considered the alternative formulation of the Government contractor defense, urged upon us by petitioner, which was adopted by the Eleventh Circuit in Shaw v. Grumman Aerospace Corp., 778 F.2d 736, 746 (1985), cert. pending, No. 85-1529. That would preclude suit only if (1) the contractor did not

participate, or participated only minimally, in the design of the defective equipment; or (2) the contractor timely warned the Government of the risks of the design and notified it of alternative designs reasonably known by it, and the Government, although forewarned, clearly authorized the contractor to proceed with the dangerous design. While this formulation may represent a perfectly reasonable tort rule, it is not a rule designed to protect the federal interest embodied in the "discretionary function" exemption. The design ultimately selected may well reflect a significant policy judgment by Government officials whether or not the contractor rather than those officials developed the design. In addition, it does not seem to us sound policy to penalize, and thus deter, active contractor participation in the design process, placing the contractor at risk unless it identifies all design defects.

### III

Petitioner raises two arguments regarding the Court of Appeals' application of the Government contractor defense to the facts of this case. First, he argues that since the formulation of the defense adopted by the Court of Appeals differed from the instructions given by the District Court to the jury, the Seventh Amendment guarantee of jury trial required a remand for trial on the new theory. We disagree. If the evidence presented in the first trial would not suffice, as a matter of law, to support a jury verdict under the properly formulated defense, judgment could properly be entered for the respondent at once, without a new trial. And that is so even though (as petitioner claims) respondent failed to [487 U.S. 500, 514] object to jury instructions that expressed the defense differently, and in a fashion that would support a verdict. See St. Louis v. Praprotnik, 485 U.S. 112, 118 -120 (1988) (plurality opinion of O'CONNOR, J., joined by REHNQUIST, C. J., WHITE, and SCALIA, JJ.); Ebker v. Tan Jay Int'l, Ltd., 739 F.2d 812, 825-826, n. 17 (CA2 1984) (Friendly, J.); 9 C. Wright & A. Miller, Federal Practice and Procedure 2537, pp. 599-600 (1971).

It is somewhat unclear from the Court of Appeals' opinion, however, whether it was in fact deciding that no reasonable jury could, under the properly formulated defense, have found for the petitioner on the facts presented, or rather was assessing on its own whether the defense had been established. The latter, which is what petitioner asserts occurred, would be error, since whether the facts establish the conditions for the defense is a question for the jury. The critical language in the Court of Appeals' opinion was that "[b]ecause Sikorsky has satisfied the requirements of the military contractor defense, it can incur no liability for . . . the allegedly defective design of the escape hatch." 792 F.2d, at 415. Although it seems to us doubtful that the Court of Appeals was conducting the factual evaluation that petitioner suggests, we cannot be certain from this language, and so we remand for clarification of this point. If the Court of Appeals was saying that no reasonable jury could find, under the principles it had announced and on the basis of the evidence presented, that the Government contractor defense was inapplicable, its judgment shall stand, since petitioner did not seek from us, nor did we grant, review of the sufficiency-of-the-evidence determination. If the Court of Appeals was not saying that, it should now undertake the proper sufficiency inquiry.

Accordingly, the judgment is vacated and the case is remanded.

So ordered.

### **Footnotes**

[ Footnote 1 ] JUSTICE BRENNAN'S dissent misreads our discussion here to "intimat[e] that the immunity [of federal officials] . . . might extend . . . [to] nongovernment employees" such as a Government contractor. Post, at 523. But we do not address this issue, as it is not before us. We cite these cases merely to demonstrate that the liability of independent contractors performing work for the Federal Government, like the liability of federal officials, is an area of uniquely federal interest.

[ Footnote 2 ] As this language shows, JUSTICE BRENNAN'S dissent is simply incorrect to describe Miree and other cases as declining to apply federal law despite the assertion of interests "comparable" to those before us here. Post, at 521-522.

[ Footnote 3 ] We refer here to the displacement of state law, although it is possible to analyze it as the displacement of federal-law reference to state law for the rule of decision. Some of our cases appear to regard the area in which a uniquely federal interest exists as being entirely governed by federal law, with federal law deigning to "borro[w]," United States v. Little Lake Misere Land Co., 412 U.S. 580, 594 (1973), or "incorporat[e]" or "adopt" United States v. Kimbell Foods, Inc., 440 U.S. 715, 728, 729, 730 (1979), state law except where a significant conflict with federal policy exists. We see nothing to be gained by expanding the theoretical scope of the federal pre-emption beyond its practical effect, and so adopt the more modest terminology. If the distinction between displacement of state law and displacement of federal law's incorporation of state law ever makes a practical difference, it at least does not do so in the present case.

[ Footnote 4 ] Even before our landmark decision in Clearfield Trust Co. v. United States, 318 U.S. 363 (1943), the distinctive federal interest in a particular field was used as a significant factor giving broad pre-emptive effect to federal legislation in that field:

"It cannot be doubted that both the state and the federal [alien] registration laws belong `to that class of laws which concern the exterior relation of this whole nation with other nations and governments.' Consequently the regulation of aliens is . . . intimately blended and intertwined with responsibilities of the national government . . . . And where the federal government, in the exercise of its superior authority in this field, has enacted a complete scheme of regulation and has therein provided a standard for the registration of aliens, states cannot, inconsistently with the purpose of Congress, conflict or interfere with, curtail or complement, the federal law, or enforce additional or auxiliary regulations." Hines v. Davidowitz, 312 U.S. 52, 66 -67 (1941) (citation omitted).

[ Footnote 5 ] JUSTICE BRENNAN's assumption that the outcome of this case would be different if it were brought under the Death on the High Seas Act, Act of Mar. 30, 1920, ch. 111, 1 et seq., (1982 ed., Supp. IV), 41 Stat. 537, codified at 46 U.S.C. App. 761 et seq., is not necessarily correct. That issue is not before us, and we think it inappropriate to decide it in order to refute (or, for that matter, to construct) an alleged inconsistency. [487 U.S. 500, 515]

JUSTICE BRENNAN, with whom JUSTICE MARSHALL and JUSTICE BLACKMUN join, dissenting.

Lieutenant David A. Boyle died when the CH-53D helicopter he was copiloting spun out of control and plunged into the ocean. We may assume, for purposes of this case, that Lt. Boyle was trapped under water and drowned because respondent United Technologies negligently designed the helicopter's escape hatch. We may further assume that any competent engineer would have discovered and cured the defects, but that they inexplicably escaped respondent's notice. Had respondent designed such a death trap for a commercial

firm, Lt. Boyle's family could sue under Virginia tort law and be compensated for his tragic and unnecessary death. But respondent designed the helicopter for the Federal Government, and that, the Court tells us today, makes all the difference: Respondent is immune from liability so long as it obtained approval of "reasonably precise specifications" - perhaps no more than a rubber stamp from a federal procurement officer who might or might not have noticed or cared about the defects, or even had the expertise to discover them.

If respondent's immunity "bore the legitimacy of having been prescribed by the people's elected representatives," we would be duty bound to implement their will, whether or not we approved. United States v. Johnson, <u>481 U.S. 681, 703</u> (1987) (dissenting opinion of SCALIA, J.). Congress, however, has remained silent - and conspicuously so, having resisted a sustained campaign by Government contractors to legislate for them some defense. <u>1</u> The Court - unelected and unaccountable to the people - has unabashedly stepped into [487 U.S. 500, 516] the breach to legislate a rule denying Lt. Boyle's family the compensation that state law assures them. This time the injustice is of this Court's own making.

Worse yet, the injustice will extend far beyond the facts of this case, for the Court's newly discovered Government contractor defense is breathtakingly sweeping. It applies not only to military equipment like the CH-53D helicopter, but (so far as I can tell) to any made-to-order gadget that the Federal Government might purchase after previewing plans - from NASA's Challenger space shuttle to the Postal Service's old mail cars. The contractor may invoke the defense in suits brought not only by military personnel like Lt. Boyle, or Government employees, but by anyone injured by a Government contractor's negligent design, including, for example, the children who might have died had respondent's helicopter crashed on the beach. It applies even if the Government has not intentionally sacrificed safety for other interests like speed or efficiency, and, indeed, even if the equipment is not of a type that is typically considered dangerous; thus, the contractor who designs a Government building can invoke the defense when the elevator cable snaps or the walls collapse. And the defense is invocable regardless of how blatant or easily remedied the defect, so long as the contractor missed it and the specifications approved by the Government, however unreasonably dangerous, were "reasonably precise." Ante, at 512.

In my view, this Court lacks both authority and expertise to fashion such a rule, whether to protect the Treasury of the United States or the coffers of industry. Because I would leave that exercise of legislative power to Congress, where our Constitution places it, I would reverse the Court of Appeals and reinstate petitioner's jury award.

I

Before our decision in Erie R. Co. v. Tompkins, 304 U.S. 64 (1938), federal courts sitting in diversity were generally free, in the absence of a controlling state statute, to fashion [487 U.S. 500, 517] rules of "general" federal common law. See, e. g., Swift v. Tyson, 16 Pet. 1 (1842). Erie renounced the prevailing scheme: "Except in matters governed by the Federal Constitution or by Acts of Congress, the law to be applied in any case is the law of the State." 304 U.S., at 78. The Court explained that the expansive power that federal courts had theretofore exercised was an unconstitutional "invasion of the authority of the State and, to that extent, a denial of its independence." Id., at 79 (citation omitted). Thus, Erie was deeply rooted in notions of federalism, and is most seriously implicated when, as here, federal judges displace the state law that would ordinarily govern with their own rules of federal common law. See, e. g., United States v. Standard

### Oil Co., 332 U.S. 301, 307 (1947). 2

In pronouncing that "[t]here is no federal general common law," 304 U.S., at 78, Erie put to rest the notion that the grant of diversity jurisdiction to federal courts is itself authority to fashion rules of substantive law. See United States v. Little Lake Misere Land Co., 412 U.S. 580, 591 (1973). As the author of today's opinion for the Court pronounced for a unanimous Court just two months ago, "`"we start with the assumption that the historic police powers of the States were not to be superseded . . . unless that was the clear and manifest purpose of Congress.'"" Puerto Rico Dept. of Consumer Affairs v. Isla Petroleum Corp., 485 U.S. 495, 500 (1988) (citations omitted). Just as "[t]here is no federal pre-emption in vacuo, without a constitutional text or a federal statute to assert it," id., at 503, federal common law cannot supersede state law in vacuo out of no [487 U.S. 500, 518] more than an idiosyncratic determination by five Justices that a particular area is "uniquely federal."

Accordingly, we have emphasized that federal common law can displace state law in "few and restricted" instances. Wheeldin v. Wheeler, 373 U.S. 647, 651 (1963). "[A]bsent some congressional authorization to formulate substantive rules of decision, federal common law exists only in such narrow areas as those concerned with the rights and obligations of the United States, interstate and international disputes implicating conflicting rights of States or our relations with foreign nations, and admiralty cases." Texas Industries, Inc. v. Radcliff Materials, Inc., 451 U.S. 630, 641 (1981) (footnotes omitted). "The enactment of a federal rule in an area of national concern, and the decision whether to displace state law in doing so, is generally made not by the federal judiciary, purposefully insulated from democratic pressures, but by the people through their elected representatives in Congress." Milwaukee v. Illinois, 451 U.S. 304, 312 -313 (1981). See also Wallis v. Pan American Petroleum Corp., 384 U.S. 63, 68 (1966); Miree v. DeKalb County, 433 U.S. 25, 32 (1977). State laws "should be overridden by the federal courts only where clear and substantial interests of the National Government, which cannot be served consistently with respect for such state interests, will suffer major damage if the state law is applied." United States v. Yazell, 382 U.S. 341, 352 (1966).

II

Congress has not decided to supersede state law here (if anything, it has decided not to, see n. 1, supra) and the Court does not pretend that its newly manufactured "Government contractor defense" fits within any of the handful of "narrow areas," Texas Industries, supra, at 641, of "uniquely federal interests" in which we have heretofore done so, 451 U.S., at 640. Rather, the Court creates a new category of "uniquely federal interests" out of a synthesis of two whose origins predate Erie itself: the interest in administering the "obligations to and rights of the United States under its contracts," ante, [487 U.S. 500, 519] at 504, and the interest in regulating the "civil liability of federal officials for actions taken in the course of their duty," ante, at 505. This case is, however, simply a suit between two private parties. We have steadfastly declined to impose federal contract law on relationships that are collateral to a federal contract, or to extend the federal employee's immunity beyond federal employees. And the Court's ability to list 2, or 10, inapplicable areas of "uniquely federal interest" does not support its conclusion that the liability of Government contractors is so "clear and substantial" an interest that this Court must step in lest state law does "major damage." Yazell, supra, at 352.

A

The proposition that federal common law continues to govern the "obligations to and rights of the United States under its contracts" is nearly as old as Erie itself. Federal law typically controls when the Federal Government is a party to a suit involving its rights or obligations under a contract, whether the contract entails procurement, see Priebe & Sons v. United States, 332 U.S. 407 (1947), a loan, see United States v. Kimbell Foods, Inc., 440 U.S. 715, 726 (1979), a conveyance of property, see Little Lake Misere, supra, at 591-594, or a commercial instrument issued by the Government, see Clearfield Trust Co. v. United States, 318 U.S. 363, 366 (1943), or assigned to it, see D'Oench, Duhme & Co. v. FDIC, 315 U.S. 447, 457 (1942). Any such transaction necessarily "radiate[s] interests in transactions between private parties." Bank of America Nat. Trust & Sav. Assn. v. Parnell, 352 U.S. 29, 33 (1956). But it is by now established that our power to create federal common law controlling the Federal Government's contractual rights and obligations does not translate into a power to prescribe rules that cover all transactions or contractual relationships collateral to Government contracts.

In Miree v. DeKalb County, supra, for example, the county was contractually obligated under a grant agreement with the Federal Aviation Administration (FAA) to "restrict [487 U.S. 500, 520] the use of land adjacent to . . . the Airport to activities and purposes compatible with normal airport operations including landing and takeoff of aircraft." Id., at 27 (citation omitted). At issue was whether the county breached its contractual obligation by operating a garbage dump adjacent to the airport, which allegedly attracted the swarm of birds that caused a plane crash. Federal common law would undoubtedly have controlled in any suit by the Federal Government to enforce the provision against the county or to collect damages for its violation. The diversity suit, however, was brought not by the Government, but by assorted private parties injured in some way by the accident. We observed that "the operations of the United States in connection with FAA grants such as these are undoubtedly of considerable magnitude," id., at 30, and that "the United States has a substantial interest in regulating aircraft travel and promoting air travel safety," id., at 31.

Nevertheless, we held that state law should govern the claim because "only the rights of private litigants are at issue here," id., at 30, and the claim against the county "will have no direct effect upon the United States or its Treasury," id., at 29 (emphasis added).

Miree relied heavily on Parnell, supra, and Wallis v. Pan American Petroleum Corp., supra, the former involving commercial paper issued by the United States and the latter involving property rights in federal land. In the former case, Parnell cashed certain bonds guaranteed by the Government that had been stolen from their owner, a bank. It is beyond dispute that federal law would have governed the United States' duty to pay the value bonds upon presentation; we held as much in Clearfield Trust, supra. Cf. Parnell, supra, at 34. But the central issue in Parnell, a diversity suit, was whether the victim of the theft could recover the money paid to Parnell. That issue, we held, was governed by state law, because the "litigation [was] purely between private parties and [did] not touch the rights and duties of the United States." 352 U.S., at 33 (emphasis added). [487 U.S. 500, 521]

The same was true in Wallis, which also involved a Government contract - a lease issued by the United States to a private party under the Mineral Leasing Act of 1920, 30 U.S.C. 181 et seq. (1982 ed. and Supp. IV) - governed entirely by federal law. See 384 U.S., at 69. Again, the relationship at issue in this diversity case was collateral to the Government contract: It involved the validity of contractual arrangements between the lessee and other private parties, not between the lessee and the Federal Government. Even though a federal statute authorized certain assignments of lease rights, see id., at 69, 70, and n. 8, and imposed certain conditions on their validity, see id., at 70, we held that state law, not federal common law,

governed their validity because application of state law would present "no significant threat to any identifiable federal policy or interest," id., at 68.

Here, as in Miree, Parnell, and Wallis, a Government contract governed by federal common law looms in the background. But here, too, the United States is not a party to the suit and the suit neither "touch[es] the rights and duties of the United States," Parnell, supra, at 33, nor has a "direct effect upon the United States or its Treasury," Miree, 433 U.S., at 29. The relationship at issue is at best collateral to the Government contract. 3 We have no greater power to displace state law governing the collateral relationship in the Government procurement realm than we had to dictate federal rules governing equally collateral relationships in the areas of aviation, Government-issued commercial paper, or federal lands.

That the Government might have to pay higher prices for what it orders if delivery in accordance with the contract exposes [487 U.S. 500, 522] the seller to potential liability, see ante, at 507, does not distinguish this case. Each of the cases just discussed declined to extend the reach of federal common law despite the assertion of comparable interests that would have affected the terms of the Government contract - whether its price or its substance - just as "directly" (or indirectly). Ibid. Third-party beneficiaries can sue under a county's contract with the FAA, for example, even though - as the Court's focus on the absence of "direct effect on the United States or its Treasury," 433 U.S., at 29 (emphasis added), suggests - counties will likely pass on the costs to the Government in future contract negotiations. Similarly, we held that state law may govern the circumstances under which stolen federal bonds can be recovered, notwithstanding Parnell's argument that "the value of bonds to the first purchaser and hence their salability by the Government would be materially affected." Brief for Respondent Parnell in Bank of America Nat'l Trust & Sav. Assn. v. Parnell, O. T. 1956, No. 21, pp. 10-11. As in each of the cases declining to extend the traditional reach of federal law of contracts beyond the rights and duties of the Federal Government, "any federal interest in the outcome of the question before us 'is far too speculative, far too remote a possibility to justify the application of federal law to transactions essentially of local concern." Miree, supra, at 32-33, quoting Parnell, 352 U.S., at 33 -34.

B

Our "uniquely federal interest" in the tort liability of affiliates of the Federal Government is equally narrow. The immunity we have recognized has extended no further than a subset of "officials of the Federal Government" and has covered only "discretionary" functions within the scope of their legal authority. See, e. g., Westfall v. Erwin, 484 U.S. 292 (1988); Howard v. Lyons, 360 U.S. 593 (1959); Barr v. Matteo, 360 U.S. 564, 571 (1959) (plurality); Yaselli v. Goff, 12 F.2d 396 (CA2 1926), aff'd, 275 U.S. 503 (1927) (per curiam); Spalding v. Vilas, 161 U.S. 483 (1896). Never before [487 U.S. 500, 523] have we so much as intimated that the immunity (or the "uniquely federal interest" that justifies it) might extend beyond that narrow class to cover also nongovernment employees whose authority to act is independent of any source of federal law and that are as far removed from the "functioning of the Federal Government" as is a Government contractor, Howard, supra, at 597.

The historical narrowness of the federal interest and the immunity is hardly accidental. A federal officer exercises statutory authority, which not only provides the necessary basis for the immunity in positive law, but also permits us confidently to presume that interference with the exercise of discretion undermines congressional will. In contrast, a Government contractor acts independently of any congressional enactment.

Thus, immunity for a contractor lacks both the positive law basis and the presumption that it furthers congressional will.

Moreover, even within the category of congressionally authorized tasks, we have deliberately restricted the scope of immunity to circumstances in which "the contributions of immunity to effective government in particular contexts outweigh the perhaps recurring harm to individual citizens," Doe v. McMillan, 412 U.S. 306, 320 (1973); see Barr, supra, at 572-573, because immunity "contravenes the basic tenet that individuals be held accountable for their wrongful conduct," Westfall, supra, at 295. The extension of immunity to Government contractors skews the balance we have historically struck. On the one hand, whatever marginal effect contractor immunity might have on the "effective administration of policies of government," its "harm to individual citizens" is more severe than in the Government-employee context. Our observation that "there are . . . other sanctions than civil tort suits available to deter the executive official who may be prone to exercise his functions in an unworthy and irresponsible manner," Barr, 360 U.S., at 576; see also id., at 571, offers little deterrence to the Government contractor. On the other hand, a grant of immunity to Government [487 U.S. 500, 524] contractors could not advance "the fearless, vigorous, and effective administration of policies of government" nearly as much as does the current immunity for Government employees. Ibid. In the first place, the threat of a tort suit is less likely to influence the conduct of an industrial giant than that of a lone civil servant, particularly since the work of a civil servant is significantly less profitable, and significantly more likely to be the subject of a vindictive lawsuit. In fact, were we to take seriously the Court's assertion that contractors pass their costs - including presumably litigation costs - through, "substantially if not totally, to the United States," ante, at 511, the threat of a tort suit should have only marginal impact on the conduct of Government contractors. More importantly, inhibition of the Government official who actually sets Government policy presents a greater threat to the "administration of policies of government," than does inhibition of a private contractor, whose role is devoted largely to assessing the technological feasibility and cost of satisfying the Government's predetermined needs. Similarly, unlike tort suits against Government officials, tort suits against Government contractors would rarely "consume time and energies" that "would otherwise be devoted to governmental service." 360 U.S., at 571.

In short, because the essential justifications for official immunity do not support an extension to the Government contractor, it is no surprise that we have never extended it that far.

 $\mathbf{C}$ 

Yearsley v. W. A. Ross Construction Co., 309 U.S. 18 (1940), the sole case cited by the Court immunizing a Government contractor, is a slender reed on which to base so drastic a departure from precedent. In Yearsley we barred the suit of landowners against a private Government contractor alleging that its construction of a dam eroded their land without just compensation in violation of the Takings Clause of the Fifth Amendment. We relied in part on the observation that the plaintiffs failed to state a Fifth Amendment claim [487 U.S. 500, 525] (since just compensation had never been requested, much less denied) and at any rate the cause of action lay against the Government, not the contractor. See id., at 21 ("[T]he Government has impliedly promised to pay [the plaintiffs] compensation and has afforded a remedy for its recovery by a suit in the Court of Claims") (citations omitted). It is therefore unlikely that the Court intended Yearsley to extend anywhere beyond the takings context, and we have never applied it elsewhere.

Even if Yearsley were applicable beyond the unique context in which it arose, it would have little relevance here. The contractor's work "was done pursuant to a contract with the United States Government, and under the direction of the Secretary of War and the supervision of the Chief of Engineers of the United States, . . . as authorized by an Act of Congress." Id., at 19. See also W. A. Ross Construction Co. v. Yearsley, 103 F.2d 589, 591 (CA8 1939) (undisputed allegation that contractor implemented "stabilized bank lines as set and defined by the Government Engineers in charge of this work for the Government"). In other words, unlike respondent here, the contractor in Yearsley was following, not formulating, the Government's specifications, and (so far as is relevant here) followed them correctly. Had respondent merely manufactured the CH-53D helicopter, following minutely the Government's own in-house specifications, it would be analogous to the contractor in Yearsley, although still not analytically identical since Yearsley depended upon an actual agency relationship with the Government, see 309 U.S., at 22 ("The action of the agent is 'the act of the government'") (citation omitted), which plainly was never established here. See, e. g., Bynum v. FMC Corp., 770 F.2d 556, 564 (CA5 1985). Cf. United States v. New Mexico, 455 U.S. 720, 735 (1982). But respondent's participation in the helicopter's design distinguishes this case from Yearsley, which has never been read to immunize the discretionary acts of those who perform service contracts for the Government. [487 U.S. 500, 526]

### Ш

In a valiant attempt to bridge the analytical canyon between what Yearsley said and what the Court wishes it had said, the Court invokes the discretionary function exception of the Federal Tort Claims Act (FTCA), 28 U.S.C. 2680(a). The Court does not suggest that the exception has any direct bearing here, for petitioner has sued a private manufacturer (not the Federal Government) under Virginia law (not the FTCA). Perhaps that is why respondent has three times disavowed any reliance on the discretionary function exception, even after coaching by the Court, <u>4</u> as has the Government. <u>5</u> [487 U.S. 500, 527]

Notwithstanding these disclaimers, the Court invokes the exception, reasoning that federal common law must immunize Government contractors from state tort law to prevent erosion of the discretionary function exception's policy of foreclosing judicial "`second-guessing'" of discretionary governmental decisions. Ante, at 511, quoting United States v. Varig Airlines, 467 U.S. 797, 814 (1984). The erosion the Court fears apparently is rooted not in a concern that suits against Government contractors will prevent them from designing, or the Government from commissioning the design of, precisely the product the Government wants, but in the concern that such suits might preclude the Government from purchasing the desired product at the price it wants: "The financial burden of judgments against the contractors," the Court fears, "would ultimately be passed through, substantially if not totally, to the United States itself." Ante, at 511.

Even granting the Court's factual premise, which is by no means self-evident, the Court cites no authority for the proposition that burdens imposed on Government contractors, but passed on to the Government, burden the Government in a way that justifies extension of its immunity. However substantial such indirect burdens may be, we have held in other contexts that they are legally irrelevant. See, e. g., South Carolina v. Baker, <u>485 U.S. 505, 521 (1988)</u> (our cases have "completely foreclosed any claim that the nondiscriminatory imposition of costs on private entities that pass them on to . . . the Federal Government unconstitutionally burdens . . . federal functions").

Moreover, the statutory basis on which the Court's rule of federal common law totters is more unstable than

any we have ever adopted. In the first place, we rejected an analytically similar attempt to construct federal common law out of the FTCA when we held that the Government's waiver [487 U.S. 500, 528] of sovereign immunity for the torts of its employees does not give the Government an implied right of indemnity from them, even though the "[t]he financial burden placed on the United States by the Tort Claims Act [could conceivably be] so great that government employees should be required to carry part of the burden." United States v. Gilman, 347 U.S. 507, 510 (1954). So too here, the FTCA's retention of sovereign immunity for the Government's discretionary acts does not imply a defense for the benefit of contractors who participate in those acts, even though they might pass on the financial burden to the United States. In either case, the most that can be said is that the position "asserted, though the product of a law Congress passed, is a matter on which Congress has not taken a position." Id., at 511 (footnote omitted).

Here, even that much is an overstatement, for the Government's immunity for discretionary functions is not even "a product of" the FTCA. Before Congress enacted the FTCA (when sovereign immunity barred any tort suit against the Federal Government) we perceived no need for a rule of federal common law to reinforce the Government's immunity by shielding also parties who might contractually pass costs on to it. Nor did we (or any other court of which I am aware) identify a special category of "discretionary" functions for which sovereign immunity was so crucial that a Government contractor who exercised discretion should share the Government's immunity from state tort law. 6

Now, as before the FTCA's enactment, the Federal Government is immune from "[a]ny claim . . . based upon the exercise or performance [of] a discretionary function," including presumably any claim that petitioner might have brought against the Federal Government based upon respondent's negligent design of the helicopter in which Lt. Boyle died. [487 U.S. 500, 529] There is no more reason for federal common law to shield contractors now that the Government is liable for some torts than there was when the Government was liable for none. The discretionary function exception does not support an immunity for the discretionary acts of Government contractors any more than the exception for "[a]ny claim [against the Government] arising out of assault," 2680(h), supports a personal immunity for Government employees who commit assaults. Cf. Sheridan v. United States, ante, at 400. In short, while the Court purports to divine whether Congress would object to this suit, it inexplicably begins and ends its sortilege with an exception to a statute that is itself inapplicable and whose repeal would leave unchanged every relationship remotely relevant to the accident underlying this suit.

Far more indicative of Congress' views on the subject is the wrongful-death cause of action that Congress itself has provided under the Death on the High Seas Act (DOHSA), Act of Mar. 30, 1920, ch. 111, 1 et seq., 41 Stat. 537, codified at 46 U.S.C. App. 761 et seq. (1982 ed., Supp. IV) - a cause of action that could have been asserted against United Technologies had Lt. Boyle's helicopter crashed a mere three miles further off the coast of Virginia Beach. It is beyond me how a state-law tort suit against the designer of a military helicopter could be said to present any conflict, much less a "significant conflict," with "federal interests . . . in the context of Government procurement," ante, at 511, when federal law itself would provide a tort suit, but no (at least no explicit) Government-contractor defense, 7 against the same [487 U.S. 500, 530] designer for an accident involving the same equipment. See Pet. for Cert. in Sikorsky Aircraft Division, United Technologies Corp. v. Kloss, O. T. 1987, No. 87-1633, pp. 3-6 (trial court holds that family of marine can bring a wrongful-death cause of action under the DOHSA against United Technologies for the negligent design of a United States Marine Corps CH-53D helicopter in which he was killed when it crashed 21 miles offshore), cert. denied, 486 U.S. 1008 (1988).

### IV

At bottom, the Court's analysis is premised on the proposition that any tort liability indirectly absorbed by the Government so burdens governmental functions as to compel us to act when Congress has not. That proposition is by no means uncontroversial. The tort system is premised on the assumption that the imposition of liability encourages actors to prevent any injury whose expected cost exceeds the cost of prevention. If the system is working as it should, Government contractors will design equipment to avoid certain injuries (like the deaths of soldiers or Government employees), which would be certain to burden the Government. The Court therefore has no basis for its assumption that tort liability will result in a net burden on the Government (let alone a clearly excessive net burden) rather than a net gain.

Perhaps tort liability is an inefficient means of ensuring the quality of design efforts, but "[w]hatever the merits of the policy" the Court wishes to implement, "its conversion into law is a proper subject for congressional action, not for any creative power of ours." Standard Oil, 332 U.S., at 314 -315. It is, after all, "Congress, not this Court or the other federal courts, [that] is the custodian of the national purse. By the same token [Congress] is the primary and most often the exclusive arbiter of federal fiscal affairs. And these comprehend, as we have said, securing the treasury or the Government against financial losses however inflicted . . . ." Ibid. (emphasis added). See also Gilman, supra, [487 U.S. 500, 531] at 510-512. If Congress shared the Court's assumptions and conclusion it could readily enact "A BILL [t]o place limitations on the civil liability of government contractors to ensure that such liability does not impede the ability of the United States to procure necessary goods and services," H. R. 4765, 99th Cong., 2d Sess. (1986); see also S. 2441, 99th Cong., 2d Sess. (1986). It has not.

Were I a legislator, I would probably vote against any law absolving multibillion dollar private enterprises from answering for their tragic mistakes, at least if that law were justified by no more than the unsupported speculation that their liability might ultimately burden the United States Treasury. Some of my colleagues here would evidently vote otherwise (as they have here), but that should not matter here. We are judges not legislators, and the vote is not ours to cast.

### I respectfully dissent.

[ Footnote 1 ] See, e. g., H. R. 4765, 99th Cong., 2d Sess. (1986) (limitations on civil liability of Government contractors); S. 2441, 99th Cong., 2d Sess. (1986) (same). See also H. R. 2378, 100th Cong., 1st Sess. (1987) (indemnification of civil liability for Government contractors); H. R. 5883, 98th Cong., 2d Sess. (1984) (same); H. R. 1504, 97th Cong., 1st Sess. (1981) (same); H. R. 5351, 96th Cong., 1st Sess. (1979) (same).

[ Footnote 2 ] Not all exercises of our power to fashion federal common law displace state law in the same way. For example, our recognition of federal causes of action based upon either the Constitution, see e. g., Bivens v. Six Unknown Fed. Narcotics Agents, 403 U.S. 388 (1971), or a federal statute, see Cort v. Ash, 422 U.S. 66 (1975), supplements whatever rights state law might provide, and therefore does not implicate federalism concerns in the same way as does pre-emption of a state-law rule of decision or cause of action. Throughout this opinion I use the word "displace" in the latter sense.

[Footnote 3] True, in this case the collateral relationship is the relationship between victim and tortfeasor,

rather than between contractors, but that distinction makes no difference. We long ago established that the principles governing application of federal common law in "contractual relations of the Government . . . are equally applicable . . . where the relations affected are noncontractual or tortious in character." United States v. Standard Oil Co., 332 U.S. 301, 305 (1947).

[ Footnote 4 ] "QUESTION: [Would it be] a proper judicial function to craft the contours of the military contractor defense . . . even if there were no discretionary function exemption in the Federal Tort Claims Act?

"MR. LACOVARA: I think, yes. . . . [I]t ought not to make a difference to the contractor, or to the courts, I would submit, whether or not the Government has a discretionary function exception under the Federal Tort Claims Act. . . .

"QUESTION: I think your position would be the same if Congress had never waived its sovereign immunity in the Federal Tort Claims Act. . . .

"MR. LACOVARA: That's correct. . . .

"QUESTION: Now wait. I really don't understand that. It seems to me you can make the argument that there should be preemption if Congress wanted it, but how are we to perceive that's what Congress wanted if in the Tort Claims Act, Congress had said the Government itself should be liable for an ill designed helicopter? Why would we have any reason to think that Congress wanted to preempt liability of a private contractor for an ill designed helicopter?

. . . . .

"QUESTION: . . . [Y] our preemption argument, I want to be sure I understand it - does not depend at all on the Federal Tort Claims Act, as I understand it. . . .

"MR. LACOVARA: That's correct." Tr. of Oral Arg. 33-35 (reargument Apr. 27, 1988).

[ Footnote 5 ] "QUESTION: Does the Government's position depend at all on the discretionary function exemption in the Federal Tort Claims Act?

"MR. AYER: Well, that's a hard question to answer. . . . I think my answer to you is, no, ultimately it should not." Id., at 40-41.

[ Footnote 6 ] Some States, of course, would not have permitted a stranger to the contract to bring such a tort suit at all, but no one suggested that this rule of state tort law was compelled by federal law.

[ Footnote 7 ] But cf. Tozer v. LTV Corp., 792 F.2d 403 (CA4 1986) (applying defense in DOHSA case), cert. pending, No. 86-674; Shaw v. Grumman Aerospace Corp., 778 F.2d 736 (CA11 1985) (same), cert. pending, No. 85-1529; Koutsoubos v. Boeing Vertol, Division of Boeing Co., 755 F.2d 352 (CA3) (same), cert. denied, 474 U.S. 821 (1985); McKay v. Rockwell Int'l Corp., 704 F.2d 444 (CA9 1983) (same), cert. denied, 464 U.S. 1043 (1984).

JUSTICE STEVENS, dissenting.

When judges are asked to embark on a lawmaking venture, I believe they should carefully consider whether they, or a legislative body, are better equipped to perform the task at hand. There are instances of so-called interstitial lawmaking that inevitably become part of the judicial process. <u>1</u> But when we are asked to create an entirely new doctrine - to answer "questions of policy on which Congress has not spoken," United States v. Gilman, <u>347 U.S. 507</u>, <u>511</u> (1954) - we have a special duty to identify the proper decisionmaker before trying to make the proper decision. [487 U.S. 500, 532]

When the novel question of policy involves a balancing of the conflicting interests in the efficient operation of a massive governmental program and the protection of the rights of the individual - whether in the social welfare context, the civil service context, or the military procurement context - I feel very deeply that we should defer to the expertise of the Congress. That is the central message of the unanimous decision in Bush v. Lucas, 462 U.S. 367 (1983); 2 that is why I joined the majority in Schweiker v. Chilicky, ante, p. 412, 3 a case decided only three days ago; and that is why I am so distressed by the majority's decision today. For in this case, as in United States v. Gilman, supra: "The selection of that policy which is most advantageous to the whole involves a host of considerations that must be weighed and appraised. That function is more appropriately for those who write the laws, rather than for those who interpret them." Id., at 511-513.

### I respectfully dissent.


[ Footnote 1 ] "I recognize without hesitation that judges do and must legislate, but they can do so only interstitially; they are confined from molar to molecular motions. A common-law judge could not say I think the doctrine of consideration a bit of historical nonsense and shall not enforce it in my court. No more could a judge exercising the limited jurisdiction of admiralty say I think well of the common-law rules of master and servant and propose to introduce them here en bloc." Southern Pacific Co. v. Jensen, 244 U.S. 205, 221 (1971) (Holmes, J., dissenting).

[ Footnote 2 ] "[W]e decline to create a new substantive legal liability without legislative aid and as at the common law, because we are convinced that Congress is in a better position to decide whether or not the public interest would be served by creating it." 462 U.S., at 390 (internal quotation omitted).

[ Footnote 3 ] "Congressional competence at `balancing governmental efficiency and the rights of [individuals],' Bush, 462 U.S., at 389 , is no more questionable in the social welfare context than it is in the civil service context. Cf. Forrester v. White, 484 U.S. 219, 223 -224 (1988)." Ante, at 425. [487 U.S. 500, 533]

Company | Privacy Policy | Disclaimer

Copyright © 1994-2007 FindLaw





Click here to learn about this Sponsor:

american arium

It's hard to compete without the right tools

home | news | articles | polls | forum | events | links | products | search

Articles & white papers about Linux based embedded applications ...

Keywords: Match: All keywords 🗶 Sort by: Newest first 💌

### Basic concepts of real-time operating systems

by David Kalinsky (Nov. 18, 2003)

### The fundamentals

To most people, embedded systems are not recognizable as computers. Instead, they are hidden inside everyday objects that surround us and help us in our lives. Embedded systems typically do not interface with the outside world through familiar personal computer interface devices such as a mouse, keyboard and graphic user interface. Instead, they interface with the outside world through unusual interfaces such as sensors, actuators and specialized communication links.

Real-time and embedded systems operate in constrained environments in which computer memory and processing power are limited. They often need to provide their services within strict time deadlines to their users and to the surrounding world. It is these memory, speed and timing constraints that dictate the use of real-time operating systems in embedded software.

### Basic kernel services

In the discussion below, we will focus on the "kernel" ? the part of an operating system that provides the most basic services to application software running on a processor.

The "kernel" of a real-time operating system ("RTOS") provides an "abstraction layer" that hides from application software the hardware details of the processor (or set of processors) upon which the application software will run. This is shown in Figure 1.





Figure 1: An RTOS Kernel provides an Abstraction Layer between Application Software and Embedded Hardware

In providing this "abstraction layer" the RTOS kernel supplies five main categories of basic services to application software, as seen in Figure 2.



Got a HOT tip? please tell us!

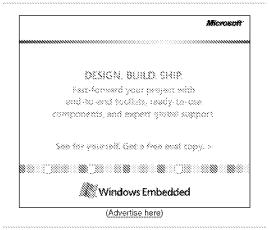

### Reference Guides

- Embedded Linux distros
- Real-time Linux
- · Embedded graphics
- Embedded Java
   Linux Devices Showcase
- Little Linux systems

Check out the latest Linux-powered...




Figure 2: Basic Services Provided by a Real-Time Operating System Kernel

The most basic category of kernel services, at the very center of Figure 2, is Task Management. This set of services allows application software developers to design their software as a number of separate "chunks" of software -- each handling a distinct topic, a distinct goal, and perhaps its own real-time deadline. Each separate "chunk" of software is called a "task." Services in this category include the ability to launch tasks and assign priorities to them. The main RTOS service in this category is the scheduling of tasks as the embedded system is in operation. The Task Scheduler controls the execution of application software tasks, and can make them run in a very timely and responsive fashion. [Later, we will see the details of how this is done.]

The second category of kernel services, shown at the top of Figure 2, is Intertask Communication and Synchronization. These services make it possible for tasks to pass information from one to another, without danger of that information ever being damaged. They also make it possible for tasks to coordinate, so that they can productively cooperate with one another. Without the help of these RTOS services, tasks might well communicate corrupted information or otherwise interfere with each other.

Since many embedded systems have stringent timing requirements, most RTOS kernels also provide some basic Timer services, such as task delays and time-outs. These are shown on the right side of Figure 2.


Many (but not all) RTOS kernels provide Dynamic Memory Allocation services. This category of services allows tasks to "borrow" chunks of RAM memory for temporary use in application software. Often these chunks of memory are then passed from task to task, as a means of quickly communicating large amounts of data between tasks. Some very small RTOS kernels that are intended for tightly memory-limited environments, do not offer Dynamic Memory Allocation services.

Many (but not all) RTOS kernels also provide a "Device I/O Supervisor" category of services. These services, if available, provide a uniform framework for organizing and accessing the many hardware device drivers that are typical of an embedded system. [For more information on this, please visit: the device drivers page at the Kalinsky Associates Website]

In addition to kernel services, many RTOSs offer a number of optional add-on operating system components for such high-level services as file system organization, network communication, network management, database management, user-interface graphics, etc. Although many of these add-on components are much larger and much more complex than the RTOS kernel, they rely on the presence of the RTOS kernel and take advantage of its basic services. Each of these add-on components is included in an embedded system only if its services are needed for implementing the embedded application, in order to keep

- · Single board computers
- Embedded processors
- · Embedded Linux books

### 2006 Embedded Linux market snapshot:







mobile phones!

other cool gadgets



...in our 2007 Embedded Linux Market Survey

Linux-Watch headlines:

Dear Mr. Gates: save Vista.

Are GPLv3 and Apache 2

Gibbon" plans

open-source it

incompatible?

controversy

release

Labs test bench

anyone care?

Shuttleworth tips Ubuntu "Gutsy

· Clearing up the Novell ClearType

RHEL Server 5 on the eWEEK

Debian 4.0 finally arrives... does

· SCO, Pamela Jones, and money

Radiant Data launches 64-bit

Linux HA replicating file system

SUSE Linux now available on

• Reactions to Debian's v4.0

### **BREAKING NEWS**

- 10 from iBM: Unix tasks, Time Base, LAMP, NFS, ActionScript 3.0
- Report from the Embedded Systems Conference 2007
   Sun acquires Java-based mobile phone OS
- Mobile TV consensus emerging in Europe?
- Compact Panel PC fits industrial embedded apps
- Server device deemed "best
   Linux based and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional and additional additional and additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additional additiona
- Linux-based product"
   Embedded software pioneer stars in free webcasts
- Chip-on-film mobile Linux core ships
- First UMPC with Linux
- pre-installed?
   Anatomy of a next-gen
- Linux-based network carnera 
  Is the embedded industry dead?
- Initiative targets COM Express interoperability
- Palm fesses up to Linux Treo olans
- OTA DTV standard targets mobile devices
- Internet TV confab woos device specialists

More ...

### **CAREER CENTER**

Sun x64 workstations

Search more than 60,000 tech jobs. Search by keywords, skill, job title, and location.

<u>Check it out today!</u>



"Website of the Year"

### Don't miss the...




"Great Gadget Smack-Down"

### SUBMISSIONS...

Want to submit news, events, articles, resource links, product listings? Contact us here.

Also visit our sister site:



Sign up for LinuxDevices.com's...

program memory consumption to a minimum.

In this paper, we will focus on the basic RTOS kernel services for task management, intertask communication and synchronization, and dynamic memory allocation.

### RTOSs vs. general-purpose operating systems

Many non-real-time operating systems also provide similar kernel services. The key difference between general-computing operating systems and real-time operating systems is the need for " deterministic " timing behavior in the real-time operating systems. Formally, "deterministic" timing means that operating system services consume only known and expected amounts of time. In theory, these service times could be expressed as mathematical formulas. These formulas must be strictly algebraic and not include any random timing components. Random elements in service times could cause random delays in application software and could then make the application randomly miss real-time deadlines? a scenario clearly unacceptable for a real-time embedded system.

General-computing non-real-time operating systems are often quite non-deterministic. Their services can inject random delays into application software and thus cause slow responsiveness of an application at unexpected times. If you ask the developer of a non-real-time operating system for the algebraic formula describing the timing behavior of one of its services (such as sending a message from task to task), you will invariably not get an algebraic formula. Instead the developer of the non-real-time operating system (such as Windows, Unix or Linux) will just give you a puzzled look. Deterministic timing behavior was simply not a design goal for these general-computing operating systems.

On the other hand, real-time operating systems often go a step beyond basic determinism. For most kernel services, these operating systems offer constant **load-independent** timing: In other words, the algebraic formula is as simple as:  $T(message_send) = constant$ , irrespective of the length of the message to be sent, or other factors such as the numbers of tasks and queues and messages being managed by the RTOS.

### Task scheduling

Most RTOSs do their scheduling of tasks using a scheme called "priority-based preemptive scheduling." Each task in a software application must be assigned a priority, with higher priority values representing the need for quicker responsiveness. Very quick responsiveness is made possible by the "preemptive" nature of the task scheduling. "Preemptive" means that the scheduler is allowed to stop any task at any point in its execution, if it determines that another task needs to run immediately.

The basic rule that governs priority-based preemptive scheduling is that at every moment in time, "The Highest Priority Task that is Ready to Run, will be the Task that Must be Running." In other words, if both a low-priority task and a higher-priority task are ready to run, the scheduler will allow the higher-priority task to run first. The low-priority task will only get to run after the higher-priority task has finished with its current work.

What if a low-priority task has already begun to run, and then a higher-priority task becomes ready? This might occur because of an external world trigger such as a switch closing. A priority-based preemptive scheduler will behave as follows: It will allow the low-priority task to complete the current assembly-language instruction that it is executing. [But it won?t allow it to complete an entire line of high-level language code; nor will it allow it to continue running until the next clock tick.] It will then immediately stop the execution of the low-priority task, and allow the higher-priority task to run. After the higher-priority task has finished its current work, the low-priority task will be allowed to continue running. This is shown in Figure 3, where the higher-priority task is called "Mid-Priority Task."

Maria news feed

Of course, while the mid-priority task is running, an even higher-priority task might become ready. This is represented in Figure 3 by "Trigger_2" causing the "High-Priority Task" to become ready. In that case, the running task ("Mid-Priority Task") would be preempted to allow the high-priority task to run. When the high-priority task has finished its current work, the mid-priority task would be allowed to continue. And after both the high-priority task and the mid-priority task complete their work, the low-priority task would be allowed to continue running. This situation might be called "nested preemption."

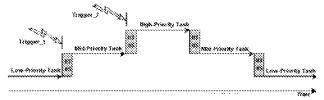


Figure 3: Timeline for Priority-based Preemptive Scheduling Examples

Each time the priority-based preemptive scheduler is alerted by an external world trigger (such as a switch closing) or a software trigger (such as a message arrival), it must go through the following 5 steps:

- Determine whether the currently running task should continue to run. If not ?
- Determine which task should run next.
- Save the environment of the task that was stopped (so it can continue later).
- Set up the running environment of the task that will run next.
- Allow this task to run.

These 5 steps together are called "task switching."

### Fixed-time task switching

The time it takes to do task switching is of interest when evaluating an operating system. A simple general-computing (non-preemptive) operating system might do task switching only at timer tick times, which might for example be ten milliseconds apart. Then if the need for a task switch arises anywhere within a 10-millisecond timeframe, the actual task switch would occur only at the end of the current 10-millisecond period. Such a delay would be unacceptable in most real-time embedded systems.

In more sophisticated preemptive task schedulers, the scheduler may need to search through arrays of tasks to determine which task should be made to run next. If there are more tasks to search through, the search will take longer. Such searches are often done by general-computing operating systems, thus making them non-deterministic. Real-time operating systems, on the other hand, avoid such searches by using incrementally updated tables that allow the task scheduler to identify the task that should run next in a rapid fixed-time fashion.

These two types of timing behavior for task switching can be seen in Figure 4.

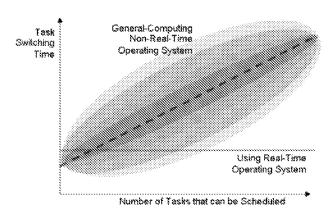


Figure 4: Task Switching Timing

In this figure, we see that for a general-computing (non-real-time) operating system, the task switching time generally rises as a software system includes more tasks that can be scheduled. However, the actual time for a task switch is not the time shown by the dashed red line. Instead, in any given task switch instance, it might be well above or well below the time shown by the dashed red line. The shaded regions surrounding the dashed red line simply show the likelihood of the actual task switch time being that far above or below the dashed red line.

On the other hand, the horizontal solid green line shows the task switching time characteristic of a real-time operating system. It is constant, independent of any load factor such as the number of tasks in a software system.

Please note that in some instances, such as the leftmost area of the graph, the task switching time might in special cases be quicker for a general-computing non-real-time operating system, than for a real-time operating system. This does not detract from the appropriateness of a real-time operating system for real-time embedded applications. For, in fact, the term "real-time" does not mean "as fast as possible" but rather "real-time" demands consistent, repeatable, known timing performance. Although a non-real-time operating system might do some faster task switching for small numbers of tasks, it might equally well introduce a long time delay the next time it does the same task switch. The strength of a real-time operating system is in its known, repeatable timing performance, which is also typically faster than that of a non-deterministic task scheduler in situations of large numbers of tasks in a software system. Most often, the real-time operating system will exhibit task-switching times much faster than its non-real-time competitor when the number of tasks grows above 5 or 10.

### Intertask communication and synchronization

Most operating systems, including RTOSs, offer a variety of mechanisms for communication and synchronization between tasks. These mechanisms are necessary in a preemptive environment of many tasks, because without them the tasks might well communicate corrupted information or otherwise interfere with each other.

For instance, a task might be preempted when it is in the middle of updating a table of data. If a second task that preempts it reads from that table, it will read a combination of some areas of newly-updated data plus some areas of data that have not yet been updated. [New Yorkers would call this a "mish-mash."] These updated and old data areas together may be incorrect in combination, or may not even make sense. An example is a data table containing temperature measurements that begins with the contents "10 C." A task begins updating this table with the new value "99 F", writing into the table character-by-character. If that task is preempted in the middle of the update, a second task that preempts it

could possibly read a value like "90 C" or "99 C." or "99 F", depending on precisely when the preemption took place. The partially updated values are clearly incorrect, and are caused by delicate timing coincidences that are very hard to debug or reproduce consistently.

An RTOS's mechanisms for communication and synchronization between tasks are provided to avoid these kinds of errors. Most RTOSs provide several mechanisms, with each mechanism optimized for reliably passing a different kind of information from task to task.

Probably the most popular kind of communication between tasks in embedded systems is the passing of data from one task to another. Most RTOSs offer a message passing mechanism for doing this, as seen in Figure 5. Each message can contain an array or buffer of data.



Figure 5: Intertask Message Communication

If messages can be sent more quickly than they can be handled, the RTOS will provide message queues for holding the messages until they can be processed. This is shown in Figure 6.

Another kind of communication between tasks in embedded systems is the passing of what might be called "synchronization information" from one task to another. "Synchronization information" is like a command, where some commands could be positive, and some negative. For example, a negative command to a task would be something like "Please don?t print right now, because my task is using the printer." Or more generally, "I want to lock the . . . for my own use only." A positive command would be something like "I?ve detected a cardiac emergency, and I want you to help me handle it." Or more generally, "Please join me in handling . . ."

Most RTOSs offer a semaphore or mutex mechanism for handling negative synchronization (sometimes called "mutual exclusion"). These mechanisms allow tasks to lock certain embedded system resources for their use only, and subsequently to unlock the resource when they?re done.

For positive synchronization, different RTOSs offer different mechanisms. Some RTOSs offer event-flags, while others offer signals. And yet others rely on message passing for positive synchronization as well as data passing duties.

### Determinism and high-speed message passing

Intertask message communication is another area where different operating systems show different timing characteristics. Most operating systems actually copy messages twice as they transfer them from task to task via a message queue. See Figure 6. The first copying is from the message-sender task to an operating system-owned "secret" area of RAM memory (implementing the "message queue"); and the second copying is from the operating system?s "secret" RAM area to the message-receiver task. Clearly this is non-deterministic in its timing, as these copying activities take longer as message length increases.



Figure 6: Message Transfer via Message Queue

An approach that avoids this non-determinism and also accelerates performance, is to have the operating system copy a pointer to the message and deliver that pointer to the message-receiver task without moving the message contents at all. In order to avoid access collisions, the operating system then needs to go back to

the message-sender task and obliterate its copy of the pointer to the message. For large messages, this eliminates the need for lengthy copying and eliminates non-determinism.

### **Dynamic memory allocation**

Determinism of service times is also an issue in the area of dynamic allocation of RAM memory. Many general-computing non-real-time operating systems offer memory allocation services from what is termed a "Heap." The famous "malloc" and "free" services known to C-language programmers work from a heap. Tasks can temporarily borrow some memory from the operating system?s heap by calling "malloc", and specifying the size of memory buffer needed. When this task (or another task) is finished with this memory buffer it can return the buffer to the operating system by calling "free." The operating system will then return the buffer to the heap, where its memory might be used again, perhaps as part of a larger buffer. Or perhaps it may in the future be broken into several smaller buffers.

Heaps suffer from a phenomenon called "External Memory Fragmentation" that may cause the heap services to degrade. This fragmentation is caused by the fact that when a buffer is returned to the heap, it may in the future be broken into smaller buffers when "malloc" requests for smaller buffer sizes occur. After a heap undergoes many cycles of "malloc"s and "free"s, small slivers of memory may appear between memory buffers that are being used by tasks. These slivers are so small that they are useless to tasks. But they are trapped between buffers that are being used by tasks, so they can?t be coagulated ("glued") together into bigger, useful buffer sizes. Over time, a heap will have more and more of these slivers. This will eventually result in situations where tasks will ask for memory buffers ("malloc") of a certain size, and they will be refused by the operating system --- even though the operating system has enough available memory in its heap. The problem: That memory is scattered in small slivers distributed in various separate parts of the heap. In operating system terminology, the slivers are called "fragments", and this problem is called "external memory fragmentation."

This fragmentation problem can be solved by so-called "garbage collection" (defragmentation) software. Unfortunately, "garbage collection" algorithms are often wildly non-deterministic? injecting randomly-appearing random-duration delays into heap services. These are often seen in the memory allocation services of general-computing non-real-time operating systems.

This puts the embedded system developer who wants to use a general-computing non-real-time operating system into a quandry: Should the embedded system be allowed to suffer occasional randomly-appearing random-duration delays if / when "garbage collection" kicks in?... Or, alternatively, should the embedded system be allowed to fragment its memory until application software "malloc" requests to the heap are refused even though a sufficient total amount of free memory is still available? Neither alternative is acceptable for embedded systems that need to provide service continually for long periods of time.

Real-time operating systems, on the other hand, solve this quandry by altogether avoiding both memory fragmentation and "garbage collection", and their consequences. RTOSs offer non-fragmenting memory allocation techniques instead of heaps. They do this by limiting the variety of memory chunk sizes they make available to application software. While this approach is less flexible than the approach taken by memory heaps, they do avoid external memory fragmentation and avoid the need for defragmentation. For example, the "Pools" memory allocation mechanism allows application software to allocate chunks of memory of perhaps 4 or 8 different buffer sizes per pool. Pools totally avoid external memory fragmentation, by not permitting a buffer that is returned to the pool to be broken into smaller buffers in the future. Instead, when a buffer is returned the pool, it is put onto a "free buffer list" of buffers of its own size that are available for future re-use at their original buffer size. This is shown in Figure 7.

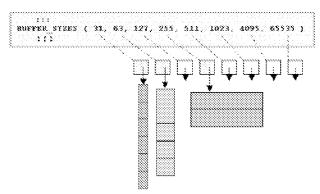


Figure 7: A Memory Pool's Free Buffer Lists

Memory is allocated and de-allocated from a pool with deterministic, often constant, timing.

### Summary

Real-time and embedded systems are used in many applications such as airborne computers, medical instruments and communication systems. Embedded systems are characterized by limited processor memory, limited processing power, and unusual interfaces to the outside world. Real-time requirements impose stringent time deadlines for delivering the results of embedded processing.

RTOS kernels hide from application software the low-level details of system hardware, and at the same time provide several categories of services to application software. These include: task management with priority-based preemptive scheduling, reliable intertask communication and synchronization, non-fragmenting dynamic memory allocation, and basic timer services.

The issue of timing determinism is important in differentiating general-computing operating systems from real-time operating systems. This issue crops up in many parts of operating system kernels, such as task schedulers, dynamic memory allocation and intertask message communication. While general-computing operating systems often offer non-deterministic services in these areas, fully deterministic solutions are needed for real-time and embedded systems. A number of real-time operating systems implement these solutions in their compact high-performance kernels.



**About the author:** David Kalinsky is a popular lecturer and seminar leader on technologies for embedded software. He regularly presents classes at the Embedded Systems Conferences in the US and Europe, on topics such as "Architectural Design of Device I/O Drivers," and "Principles of High-Availability Embedded Systems Design." During the past 15 years, David has built high-tech training programs for a number of Silicon Valley companies on the

development of real-time and embedded systems. Before that, he was involved in the design of embedded medical and aerospace systems. David holds a Ph.D. in nuclear physics from Yale. He can be reached at <a href="mailto:david@kalinskyassociates.com">david@kalinskyassociates.com</a>. An <a href="mailto:online.sample.lecture">online.sample.lecture</a>, <a href="mailto:course.list">course.list</a>, <a href="mailto:schedule">schedule</a>, and <a href="mailto:price.list">price.list</a> are available on the Kalinsky Associates Website.

Copyright ? 2004, D. Kalinsky Associates; all rights reserved. Reproduced by LinuxDevices.com with permission.

### **Related Stories:**

- Introducing MediaLinux -- a new real-time Linux approach
- The Real-time Linux Software Quick Reference Guide
- 34 papers on real-time Linux -- proceedings of the 4th Real-time Linux Workshop
- 28 talks on real-time Linux
- Update: Real-time Linux sub-kernels, benchmarks, and . . . contention
- Kevin Dankwardt on Real Time and Linux (Part 1)
- Kevin Dankwardt on Real Time and Linux (Part 2)
- Kevin Dankwardt on Real Time and Linux (Part 3)
- Real-time Linux -- what is it, why do you want it, how do you do it?
- Comparing real-time Linux alternatives
- Fundamentals of Real-time Linux Software Design

...For further information

sovestisement marketplace

Ads By Google

Eroe. Windows Vista @
Get a Free Copy of Microsoft Vista® Act Now - Free Offer Ends Today!
www.FreeSoftwareGifts.com
Free Windows XP Upgrade
Get a Free Windows Vista 2007 Offer Expires Today!
www.alwaysfreegifts.com

Pure DOS
This CD Has All DOS Functions With Modern User Interface!

www.spotmau.com Operating System Course
Move your career forward with an accredited online degree!

www.CourseAdvisor.com

Fix Windows Errors

Download a Free Scan and Fix PC Errors Instantly!

www.TuneupAdvisor.com


assenseses: aponsored links

Find our how to our your company's message here

home | news | articles | polls | forum | events | links | products | search | aboutus | contactus

Use of this site is governed by our <u>Terms of Use</u> and <u>Privacy Policy</u>. Except where otherwise specified, the contents of this site are copyright © 1999-2007 <u>Ziff Davis Publishing Holdings Inc.</u> All Rights Reserved. Reproduction in whole or in part without permission is prohibited. Linux is a registered trademark of Linus Torvalds. All other marks are the property of their respective owners.

**ZOFF DAVIS** NEDA

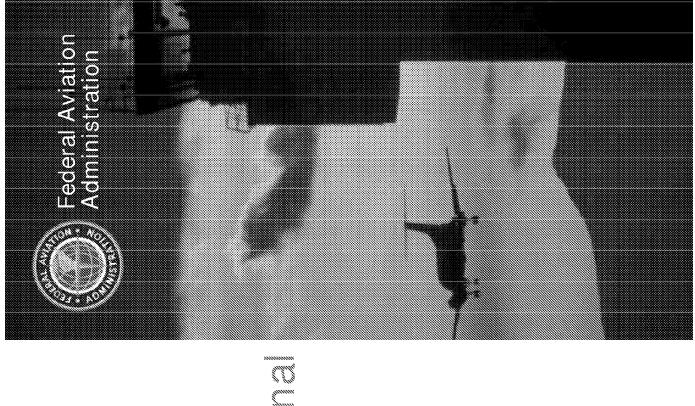

### 


Presented to: Access5


By: John Timmerman


Date: July 12, 2005

## STATE OF SOLVE

- ➤ Unmanned Aircraft Systems (UAS) historically called by various terms:
  - Drone/ROA/RPV/UAV/Model/R-C
    - Includes:
- Unmanned Aircraft (UA)
- Aircraft Control Station
- Command & Control Link/s
- ➤ Operated or flown by a "pilot"

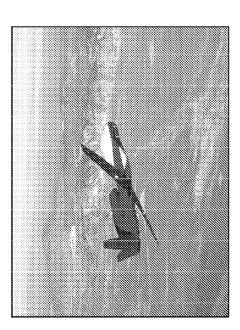

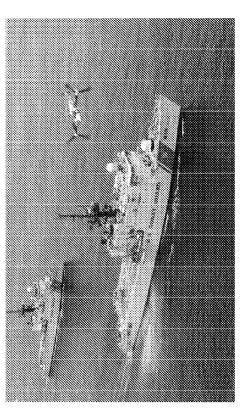













## Current UAS Operations in the NAS

- ➤ Within "segregated" airspace
- Includes Special Use Airspace (SUA) & Air Traffic Control Assigned Airspace (ATCAA)
- Primarily by DOD
- "Public" UAS through Certificate of Authorization (COA) process
- Includes initial "trials" in support of DHS
- "Civil" UAS using experimental / type certification process
- "Model" aircraft with guidance from AC 91-57, dated June 1981
- Variety of other operations believed to be occurring by both the public and
- Some based on interpretations of "model" aircraft guidance
- Others with a lack of knowledge of aviation environment requirements
- ➤ While ensuring "no harm" to other NAS customers and public

# Expected Changes - Next 5-10 years

- ➤ Many UAS's transitioning from R&D to operational status
- Routine UAS flight both VFR and IFR and in all airspace classes
- ➤ Wider scale development and uses for UAS
- R&D activities in public and civil sectors continue to grow
- New uses and applications innovative customers and providers
- ✓ Increased demands on the NAS
- Greater numbers and diversity of requests to operate in the NAS
- UAS operations "mushrooming" in an increasingly busy NAS
- Additional airspace and access requested for UAS flight
- Including security and surveillance
- Border and harbor patrol
- Broad spectrum of law enforcement activities
- Pressure for quicker access "file and fly"
- Conflicting interests among aviation stakeholders
- International efforts to "harmonize out of the box"


### 2015 and Beyond


- ✓ UAS operations dominate some aviation sectors
- Particularly those "dirty, dull or dangerous"
- Commercial UAS applications steadily grow
- Driven by "business cases" for reduced costs
- Consumers becoming increasingly receptive to reduced human presence in aircraft cockpits A
- Passenger flights with a single "supervisory" pilot
- Cargo operations without an on-board pilot
- ➤ Increased "cooperation" needed between aviation segments to efficiently manage finite airspace resources
- Increased expectations for higher levels of safety

め

## 

## A Safe NAS for A

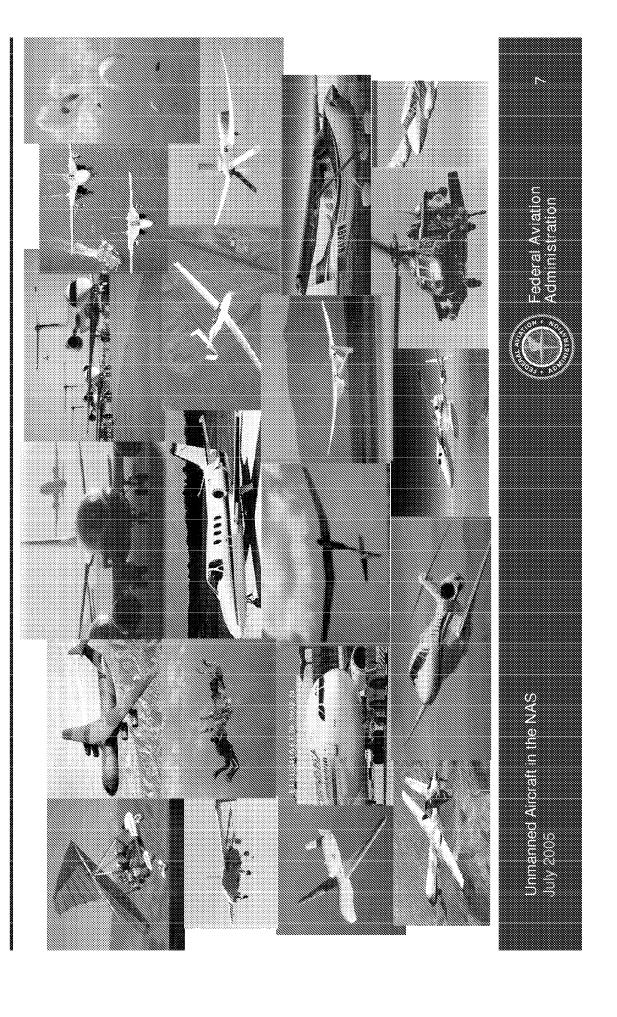

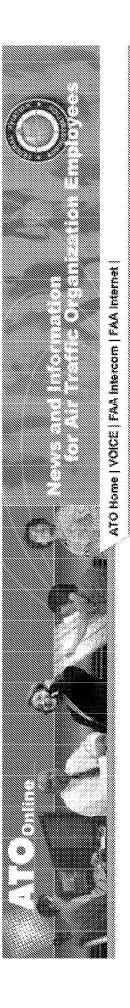

# 

( ) Federal Aviation

Electronic Patent Application Fee Transmittal							
Electronic Patent F	4h		e Hallsi	ıııllaı			
Application Number:							
Filing Date:							
Title of Invention:	System and Method For Safely Flying Unmanned Aerial Vehicles in Civilian Airspace				erial Vehicles in		
First Named Inventor/Applicant Name:	Je	d Margolin					
Filer:	Je	d Margolin					
Attorney Docket Number:							
Filed as Small Entity							
Utility Filing Fees							
Description		Fee Code	Quantity	Amount	Sub-Total in USD(\$)		
Basic Filing:							
Utility filing Fee (Electronic filing)		4011	1	75	75		
Utility Search Fee		2111	1	250	250		
Utility Examination Fee		2311	1	100	100		
Pages:							
Claims:							
Independent claims in excess of 3		2201	1	100	100		
Miscellaneous-Filing:							
Petition:							

Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Patent-Appeals-and-Interference:				
Post-Allowance-and-Post-Issuance:				
Extension-of-Time:				
Miscellaneous:				
	Tota	al in USE	) (\$)	525

Electronic Acknowledgement Receipt					
EFS ID:	1690779				
Application Number:	11736356				
International Application Number:					
Confirmation Number:	3649				
Title of Invention:	System and Method For Safely Flying Unmanned Aerial Vehicles in Civilian Airspace				
First Named Inventor/Applicant Name:	Jed Margolin				
Customer Number:	23497				
Filer:	Jed Margolin				
Filer Authorized By:					
Attorney Docket Number:					
Receipt Date:	17-APR-2007				
Filing Date:					
Time Stamp:	16:58:27				
Application Type:	Utility				
Payment information:	•				

### Payment information:

Submitted with Payment	yes
Payment was successfully received in RAM	\$ 525
RAM confirmation Number	641
Deposit Account	

### File Listing:

Document Number	Document Description	File Name	File Size(Bytes)	Multi Part /.zip	Pages (if appl.)
--------------------	----------------------	-----------	------------------	---------------------	---------------------

NPL Documents	jm_rpv2_npl_02.pdf	2520004	no	19			
I							
Warnings: Information:							
NPL Documents	jm_rpv2_npl_01.pdf	176784	no	3			
ISPTO supplied IDS fillable form							
Information Disclosure Statement (IDS) Filed	jm_rpv2_ids.pdf	240456	no	3			
Warnings:							
Drawings	jm_rpv2_dwgs.pdf	16492	no	4			
Claims	jm_rpv2_claims.pdf	20788	no	4			
Specification	jm_rpv2_spec.pdf	107647	no	16			
Abstract	jm_rpv2_abstract.pdf	9346	no	1			
Oath or Declaration filed	jm_rpv2_decl.pdf	212345	no	2			
Transmittal of New Application	jm_rpv2_xmit.pdf	120403	no	1			
	Transmittal of New Application	Transmittal of New Application jm_rpv2_xmit.pdf	Transmittal of New Application jm_rpv2_xmit.pdf 120403	Transmittal of New Application jm_rpv2_xmit.pdf 120403 no			

Information:					
10	NPL Documents	jm_rpv2_npl_04.pdf	476572	no	2
Warnings:				1	
Information:					
11	NPL Documents	jm_rpv2_npl_05.pdf	74142	no	2
Warnings:				<u> </u>	
Information:					
12	NPL Documents	jm_rpv2_npl_06.pdf	588716	no	3
Warnings:				l	
Information:					
13	NPL Documents	jm_rpv2_npl_07.pdf	34338	no	5
Warnings:				ll	
Information:					
14	NPL Documents	jm_rpv2_npl_08.pdf	13255	no	1
Warnings:					
Information:					
15	NPL Documents	jm_rpv2_npl_09.pdf	136223	no	3
Warnings:				'	
Information:		-			
16	NPL Documents	jm_rpv2_npl_10.pdf	10678	no	1
Warnings:				l	
Information:					
17	NPL Documents	jm_rpv2_npl_11.pdf	60845	no	3
Warnings:					
Information:					
18	NPL Documents	jm_rpv2_npl_12.pdf	46142	no	5
Warnings:					

Information:						
19	NPL Documents	jm_rpv2_npl_13.pdf	34534	no	3	
Warnings:						
Information:						
20	NPL Documents	jm_rpv2_npl_14.pdf	167348	no	10	
Warnings:						
Information:						
21	NPL Documents	jm_rpv2_npl_15.pdf	102786	no	19	
Warnings:						
Information:						
22	NPL Documents	jm_rpv2_npl_16.pdf	347502	no	9	
Warnings:						
Information:						
23	NPL Documents	jm_rpv2_npl_03.pdf	1652727	no	8	
Warnings:						
Information:						
24	Fee Worksheet (PTO-06)	fee-info.pdf	8486	no	2	
Warnings:				ı	<u> </u>	
Information:						
		Total Files Size (in bytes):	7-	178559		

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

### New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

### National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

### New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

Approved for use through 7/31/2006. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number Application or Docket Number PATENT APPLICATION FEE DETERMINATION RECORD 11/736,356 Substitute for Form PTO-875 APPLICATION AS FILED - PART I OTHER THAN OR SMALL ENTITY SMALL ENTITY (Column 1) (Column 2) FEE (\$) NUMBER FILED NUMBER EXTRA RATE (\$) FEE (\$) RATE (\$) FOR BASIC FEE N/A N/A 75 N/A N/A (37 CFR 1.16(a), (b), or (c)) SEARCH FEE N/A N/A N/A 250 N/A (37 CFR 1.16(k), (i), or (m)) **EXAMINATION FEE** N/A N/A 100 N/A N/A (37 CFR 1.16(o), (p), or (q)) **TOTAL CLAIMS** 14 X\$ 25= X\$50= OR (37 CFR 1.16(i)) minus 20 = INDEPENDENT CLAIMS 1 X\$100= 100 X\$200= 4 (37 CFR 1.16(h)) minus 3 If the specification and drawings exceed 100 sheets of paper, the application size fee due is APPLICATION SIZE FFF \$250 (\$125 for small entity) for each additional 50 sheets or fraction thereof. See (37 CFR 1.16(s)) 35 U.S.C. 41(a)(1)(G) and 37 CFR N/A N/A MULTIPLE DEPENDENT CLAIM PRESENT (37 CFR 1.16(j)) TOTAL TOTAL 525 If the difference in column 1 is less than zero, enter "0" in column 2. APPLICATION AS AMENDED - PART II OTHER THAN SMALL ENTITY (Column 3) SMALL ENTITY OR (Column 1) (Column 2) HIGHEST ADDI-ADDI-PRESENT CLAIMS REMAINING NUMBER RATE (\$) TIONAL RATE (\$) TIONAL ⋖ PREVIOUSLY **EXTRA** AFTER AMENDMENT FEE (\$) FEE (\$) **AMENDMENT** PAID FOR OR Total X Minus X (37 CFR 1.16(i)) Independent = = Minus = X Х OR (37 CFR 1.16(h)) Application Size Fee (37 CFR 1.16(s)) FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j)) N/A OR N/A TOTAL TOTAL OR ADD'T FEE ADD'T FEE OR (Column 1) (Column 2) (Column 3) HIGHEST ADDI-ADDI-PRESENT **CLAIMS REMAINING** NUMBER RATE (\$) TIONAL RATE (\$) TIONAL Ω AFTER AMENDMENT **PREVIOUSLY EXTRA** FEE (\$) FEE (\$) PAID FOR **AMENDMENT** OR Total Minus = = х X (37 CFR 1.16(i)) Independent Minus X = Х = OR (37 CFR 1.16(h) Application Size Fee (37 CFR 1.16(s)) FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j)) N/A OR N/A TOTAL TOTAL OR ADD'T FEE ADD'T FEE

If the entry in column 1 is less than the entry in column 2, write "0" in column 3.

This collection of information is required by 37 CFR 1.16. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If the "Highest Number Previously Paid For" IN THIS SPACE is less than 20, enter "20".

If the "Highest Number Previously Paid For" IN THIS SPACE is less than 3, enter "3".

The "Highest Number Previously Paid For" (Total or Independent) is the highest number found in the appropriate box in column 1.